


Test Site	WZ-SR6	Test Engineer	Edith Yu
Test Date	2025-02-24	Test Band	Band 12/17

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
1.4	699.7	30 ~ 10000	-41.14	≤ -13.00	Pass
1.4	707.5	30 ~ 10000	-35.36	≤ -13.00	Pass
1.4	715.3	30 ~ 10000	-41.27	≤ -13.00	Pass
3	700.5	30 ~ 10000	-42.71	≤ -13.00	Pass
3	707.5	30 ~ 10000	-35.82	≤ -13.00	Pass
3	714.5	30 ~ 10000	-35.74	≤ -13.00	Pass
5	701.5	30 ~ 10000	-42.40	≤ -13.00	Pass
5	707.5	30 ~ 10000	-35.53	≤ -13.00	Pass
5	713.5	30 ~ 10000	-35.87	≤ -13.00	Pass
10	704.0	30 ~ 10000	-42.51	≤ -13.00	Pass
10	707.5	30 ~ 10000	-43.13	≤ -13.00	Pass
10	711.0	30 ~ 10000	-42.98	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9 kHz to 30 MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

1.4MHz Channel Bandwidth


Low Channel

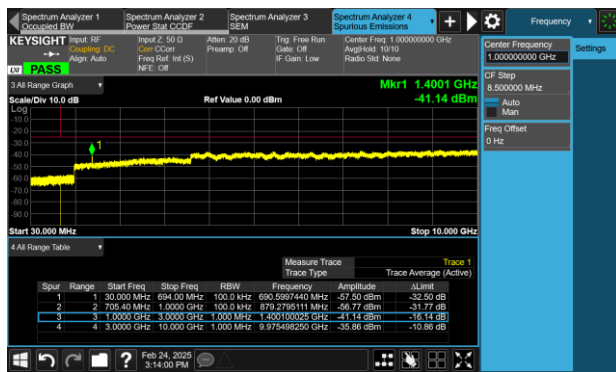

Middle Channel

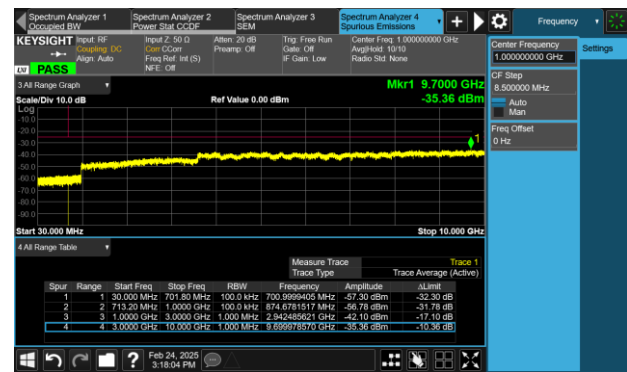


High Channel

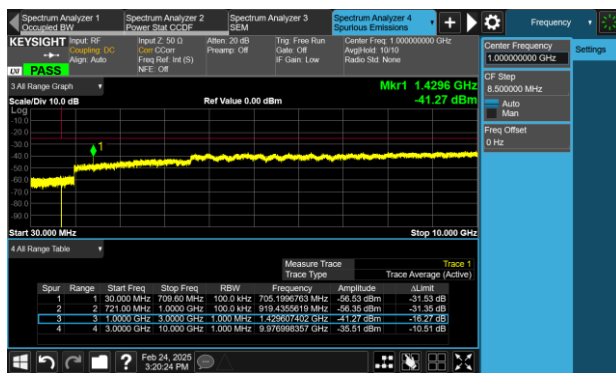


3MHz Channel Bandwidth


Low Channel

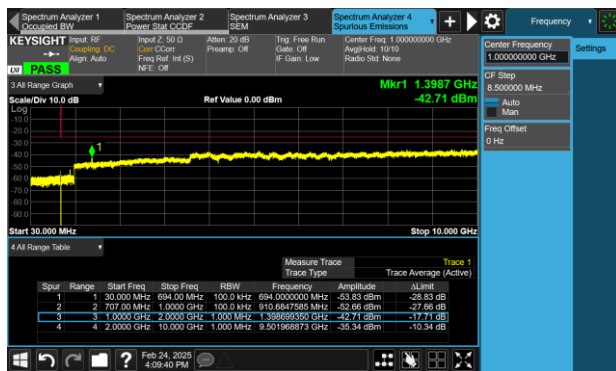

Middle Channel

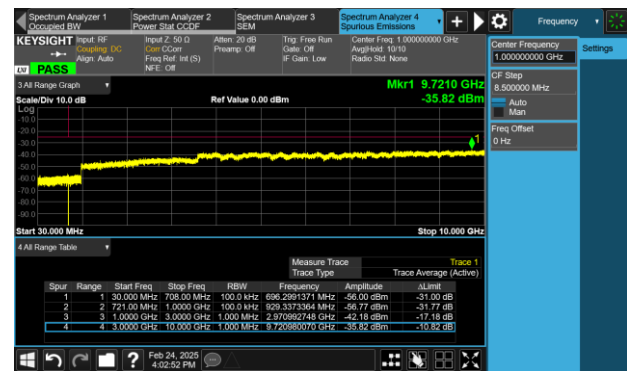


High Channel

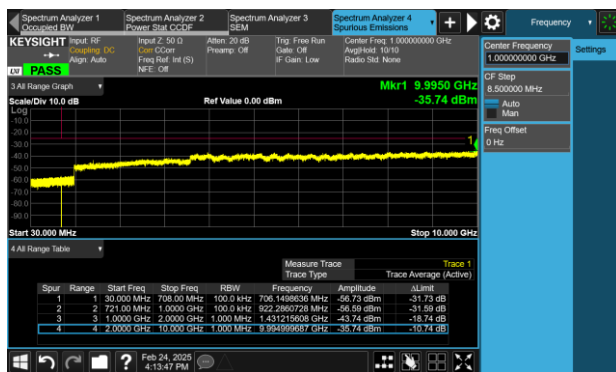


5MHz Channel Bandwidth


Low Channel

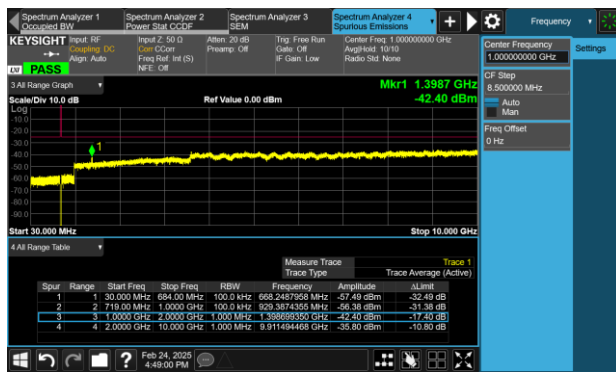

Middle Channel

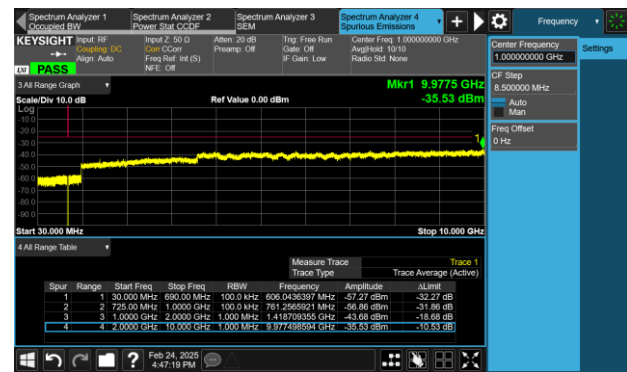


High Channel

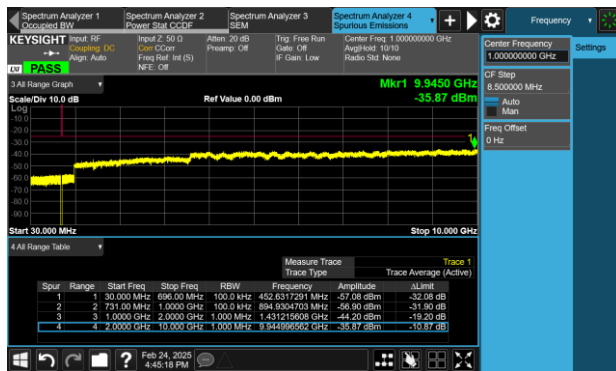


10MHz Channel Bandwidth


Low Channel

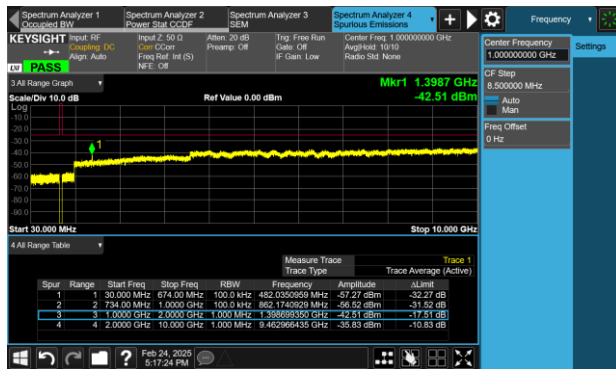

Middle Channel

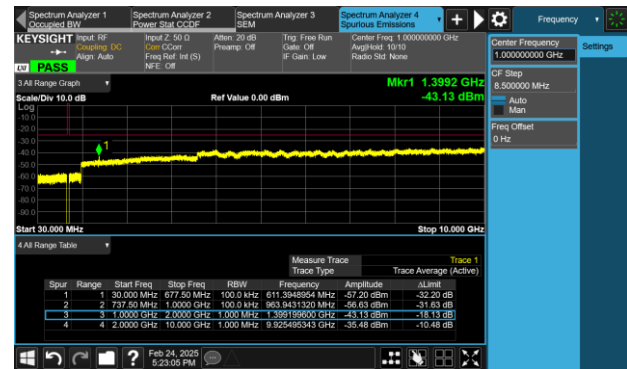

High Channel

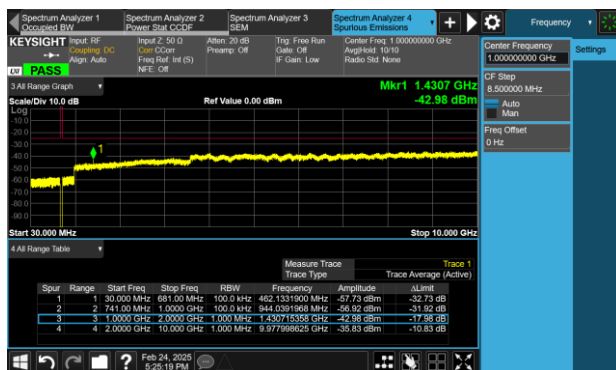

A.7 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-23 ~ 2025-03-03	Test Band	Band 2/25

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
119.434	11.6	16.2	27.8	82.3	-54.5	Quasi-peak	Horizontal
145.236	9.1	18.0	27.1	82.3	-55.2	Quasi-peak	Horizontal
32.328	15.1	17.4	32.5	82.3	-49.8	Quasi-peak	Vertical
61.816	15.6	18.0	33.6	82.3	-48.7	Quasi-peak	Vertical
7403.900	56.2	8.7	64.9	82.3	-17.4	Peak	Horizontal
9253.500	47.1	13.3	60.4	82.3	-21.9	Peak	Horizontal
5552.600	52.9	4.3	57.2	82.3	-25.1	Peak	Vertical
7403.900	53.4	8.7	62.1	82.3	-20.2	Peak	Vertical
Middle Channel							
119.628	11.6	16.2	27.8	82.3	-54.5	Quasi-peak	Horizontal
143.975	10.1	18.0	28.1	82.3	-54.2	Quasi-peak	Horizontal
32.037	14.1	17.4	31.5	82.3	-50.8	Quasi-peak	Vertical
61.913	16.6	18.0	34.6	82.3	-47.7	Quasi-peak	Vertical
7403.900	53.5	8.7	62.2	82.3	-20.1	Peak	Horizontal
9253.500	43.2	13.3	56.5	82.3	-25.8	Peak	Horizontal
7403.900	54.1	8.7	62.8	82.3	-19.5	Peak	Vertical
17915.000	36.2	21.5	57.7	82.3	-24.6	Peak	Vertical
High Channel							
120.792	11.5	16.3	27.8	82.3	-54.5	Quasi-peak	Horizontal
144.169	9.1	18.0	27.1	82.3	-55.2	Quasi-peak	Horizontal
32.328	15.1	17.4	32.5	82.3	-49.8	Quasi-peak	Vertical
60.943	15.1	18.1	33.2	82.3	-49.1	Quasi-peak	Vertical
7657.200	51.5	8.9	60.4	82.3	-21.9	Peak	Horizontal
9573.100	42.5	13.9	56.4	82.3	-25.9	Peak	Horizontal
7658.900	49.8	8.9	58.7	82.3	-23.6	Peak	Vertical
9573.100	37.3	13.9	51.2	82.3	-31.1	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-23 ~ 2025-03-03	Test Band	Band 4/66

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
119.725	11.1	16.2	27.3	82.3	-55.0	Quasi-peak	Horizontal
144.169	8.1	18.0	26.1	82.3	-56.2	Quasi-peak	Horizontal
31.940	15.1	17.4	32.5	82.3	-49.8	Quasi-peak	Vertical
60.846	15.6	18.1	33.7	82.3	-48.6	Quasi-peak	Vertical
6842.900	50.3	7.3	57.6	82.3	-24.7	Peak	Horizontal
8554.800	47.9	10.6	58.5	82.3	-23.8	Peak	Horizontal
5132.700	42.9	4.2	47.1	82.3	-35.2	Peak	Vertical
6842.900	52.1	7.3	59.4	82.3	-22.9	Peak	Vertical
Middle Channel							
61.913	7.1	18.0	25.1	82.3	-57.2	Quasi-peak	Horizontal
119.822	11.3	16.2	27.5	82.3	-54.8	Quasi-peak	Horizontal
32.037	15.2	17.4	32.6	82.3	-49.7	Quasi-peak	Vertical
61.913	16.2	18.0	34.2	82.3	-48.1	Quasi-peak	Vertical
6980.600	53.9	7.5	61.4	82.3	-20.9	Peak	Horizontal
8726.500	47.6	11.5	59.1	82.3	-23.2	Peak	Horizontal
6980.600	51.4	7.5	58.9	82.3	-23.4	Peak	Vertical
8726.500	42.8	11.5	54.3	82.3	-28.0	Peak	Vertical
High Channel							
120.016	11.2	16.2	27.4	82.3	-54.9	Quasi-peak	Horizontal
145.818	9.1	18.1	27.2	82.3	-55.1	Quasi-peak	Horizontal
32.231	15.7	17.4	33.1	82.3	-49.2	Quasi-peak	Vertical
61.331	16.1	18.0	34.1	82.3	-48.2	Quasi-peak	Vertical
7118.300	54.8	8.4	63.2	82.3	-19.1	Peak	Horizontal
8896.500	43.7	11.7	55.4	82.3	-26.9	Peak	Horizontal
7116.600	54.4	8.4	62.8	82.3	-19.5	Peak	Vertical
8896.500	40.0	11.7	51.7	82.3	-30.6	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-23 ~ 2025-03-03	Test Band	Band 12/17

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
120.210	12.2	16.2	28.4	82.3	-53.9	Quasi-peak	Horizontal
144.363	10.2	18.0	28.2	82.3	-54.1	Quasi-peak	Horizontal
62.495	16.3	17.9	34.2	82.3	-48.1	Quasi-peak	Vertical
144.751	14.2	18.0	32.2	82.3	-50.1	Quasi-peak	Vertical
1399.200	47.8	-6.4	41.4	82.3	-40.9	Peak	Horizontal
2799.200	42.3	-1.4	40.9	82.3	-41.4	Peak	Horizontal
1400.000	47.7	-6.4	41.3	82.3	-41.0	Peak	Vertical
3498.400	38.9	-0.1	38.8	82.3	-43.5	Peak	Vertical
Middle Channel							
119.919	12.1	16.2	28.3	82.3	-54.0	Quasi-peak	Horizontal
143.587	9.1	18.0	27.1	82.3	-55.2	Quasi-peak	Horizontal
62.592	16.9	17.9	34.8	82.3	-47.5	Quasi-peak	Vertical
143.781	14.6	18.0	32.6	82.3	-49.7	Quasi-peak	Vertical
7120.000	37.8	8.5	46.3	82.3	-36.0	Peak	Horizontal
8731.200	36.3	11.5	47.8	82.3	-34.5	Peak	Horizontal
7344.000	36.9	8.9	45.8	82.3	-36.5	Peak	Vertical
8881.600	37.4	11.6	49.0	82.3	-33.3	Peak	Vertical
High Channel							
120.113	11.6	16.2	27.8	82.3	-54.5	Quasi-peak	Horizontal
143.393	8.6	17.9	26.5	82.3	-55.8	Quasi-peak	Horizontal
61.719	15.1	18.0	33.1	82.3	-49.2	Quasi-peak	Vertical
144.266	14.1	18.0	32.1	82.3	-50.2	Quasi-peak	Vertical
1431.200	48.8	-6.5	42.3	82.3	-40.0	Peak	Horizontal
8732.800	37.3	11.6	48.9	82.3	-33.4	Peak	Horizontal
1431.200	49.7	-6.5	43.2	82.3	-39.1	Peak	Vertical
8928.800	36.2	11.9	48.1	82.3	-34.2	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Appendix B - Test Setup Photograph

Refer to "R25S1016023-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1016023-UE" file.