


802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)


Reference Level



Low Band Edge

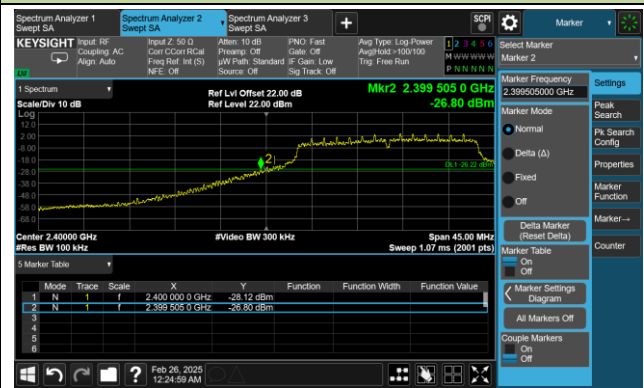


Spurious Emission

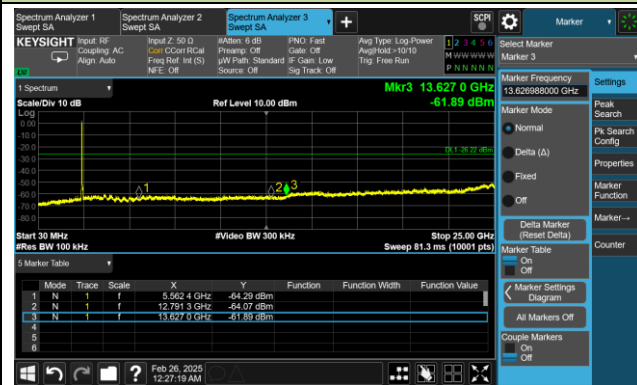


Channel 06 (2437MHz)

Reference Level

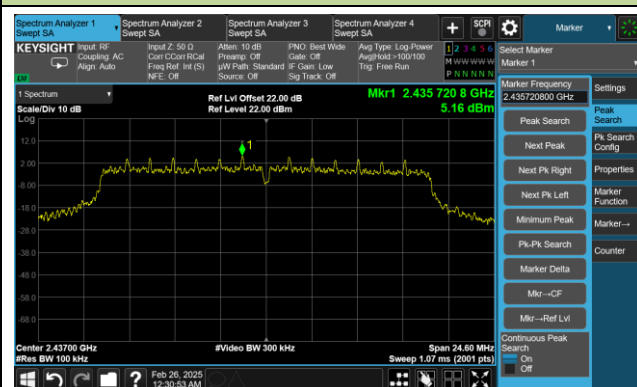

Spurious Emission

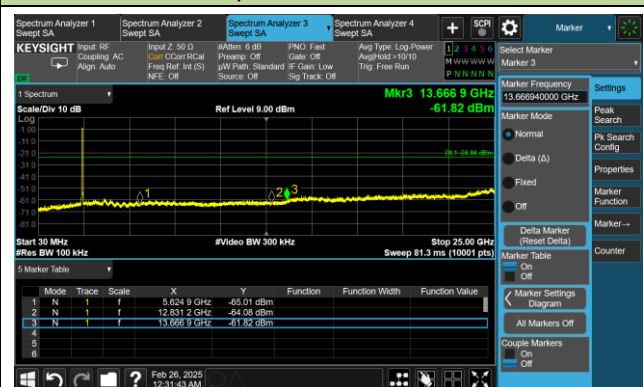


802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level



High Band Edge

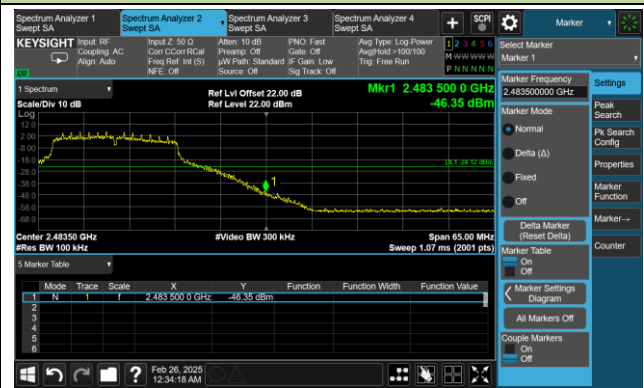

Spurious Emission

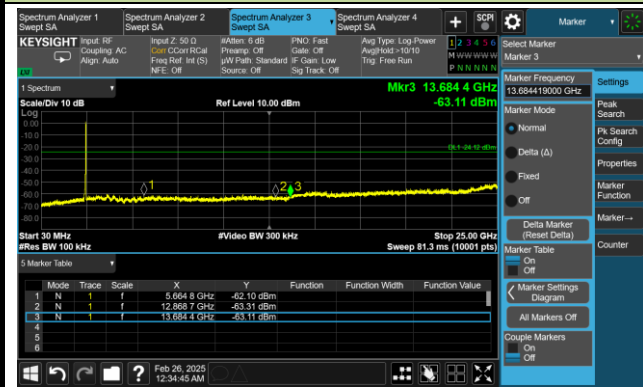


802.11n-HT40 Out-of-Band Emissions

Channel 03 (2422MHz)


Reference Level



Low Band Edge

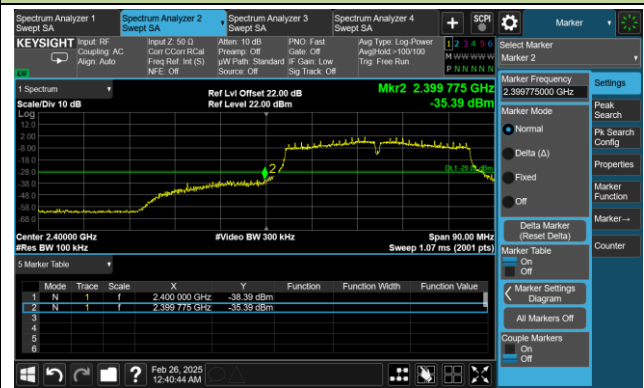

Spurious Emission

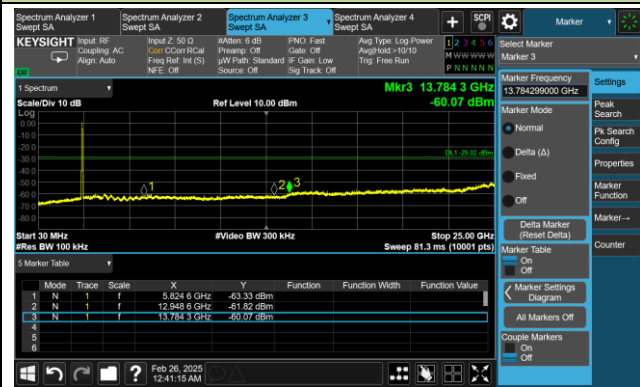


Channel 06 (2437MHz)

Reference Level



Spurious Emission

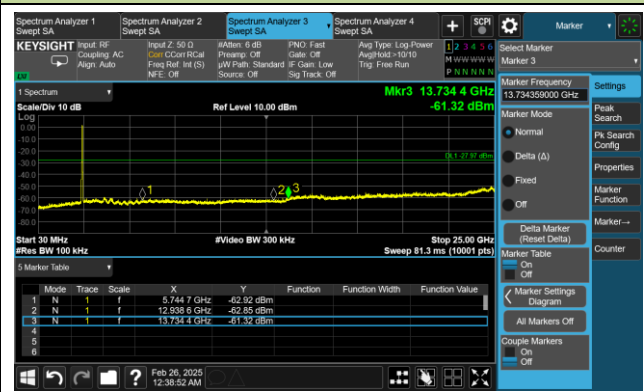


802.11n-HT40 Out-of-Band Emissions

Channel 09 (2452MHz)


Reference Level



High Band Edge

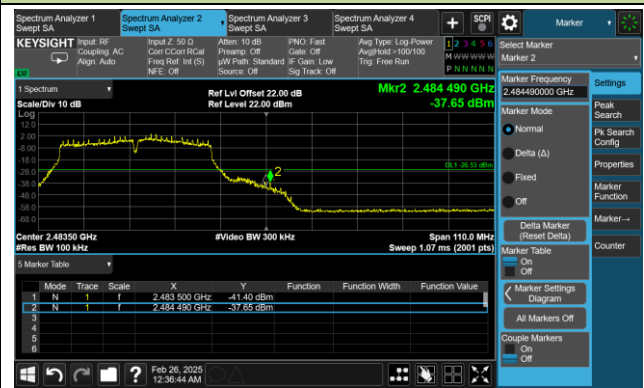

Spurious Emission

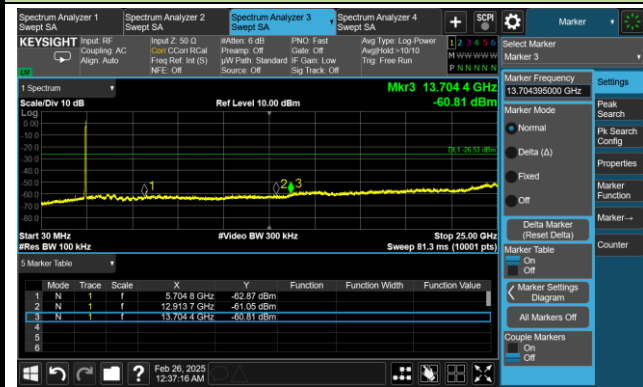

A.6 Radiated Spurious Emission Test Result

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-02-26	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3901.9	41.2	-1.4	39.8	74.0	-34.2	Peak	Horizontal
	4828.4	41.4	0.0	41.4	74.0	-32.6	Peak	Horizontal
	11779.7	43.0	4.8	47.8	74.0	-26.2	Peak	Horizontal
	4002.2	40.8	-1.3	39.5	74.0	-34.5	Peak	Vertical
	4823.3	46.0	0.0	46.0	74.0	-28.0	Peak	Vertical
	11415.9	42.2	5.4	47.6	74.0	-26.4	Peak	Vertical
06	4007.3	41.1	-1.2	39.9	74.0	-34.1	Peak	Horizontal
	4874.3	43.4	0.0	43.4	74.0	-30.6	Peak	Horizontal
	11419.3	42.6	5.4	48.0	74.0	-26.0	Peak	Horizontal
	3985.2	40.8	-1.4	39.4	74.0	-34.6	Peak	Vertical
	4874.3	46.4	0.0	46.4	74.0	-27.6	Peak	Vertical
	11511.1	41.6	5.3	46.9	74.0	-27.1	Peak	Vertical
11	4085.5	40.4	-1.6	38.8	74.0	-35.2	Peak	Horizontal
	4828.4	41.3	0.0	41.3	74.0	-32.7	Peak	Horizontal
	11733.8	42.6	4.8	47.4	74.0	-26.6	Peak	Horizontal
	3997.1	42.6	-1.3	41.3	74.0	-32.7	Peak	Vertical
	4923.6	43.8	0.0	43.8	74.0	-30.2	Peak	Vertical
	12257.4	43.8	4.8	48.6	74.0	-25.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-02-26	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3986.9	41.4	-1.4	40.0	74.0	-34.0	Peak	Horizontal
	4772.3	42.7	0.0	42.7	74.0	-31.3	Peak	Horizontal
	11849.4	43.2	4.9	48.1	74.0	-25.9	Peak	Horizontal
	3835.6	40.3	-1.3	39.0	74.0	-35.0	Peak	Vertical
	4826.7	42.4	0.0	42.4	74.0	-31.6	Peak	Vertical
	11393.8	42.3	5.5	47.8	74.0	-26.2	Peak	Vertical
06	3966.5	40.6	-1.5	39.1	74.0	-34.9	Peak	Horizontal
	4748.5	41.3	-0.2	41.1	74.0	-32.9	Peak	Horizontal
	11269.7	42.0	5.4	47.4	74.0	-26.6	Peak	Horizontal
	3849.2	41.2	-1.4	39.8	74.0	-34.2	Peak	Vertical
	4876.0	41.3	0.0	41.3	74.0	-32.7	Peak	Vertical
	11388.7	42.4	5.5	47.9	74.0	-26.1	Peak	Vertical
11	4065.1	42.2	-1.6	40.6	74.0	-33.4	Peak	Horizontal
	4774.0	41.9	0.0	41.9	74.0	-32.1	Peak	Horizontal
	12094.2	43.5	5.2	48.7	74.0	-25.3	Peak	Horizontal
	3932.5	41.1	-1.5	39.6	74.0	-34.4	Peak	Vertical
	4818.2	40.6	0.0	40.6	74.0	-33.4	Peak	Vertical
	11517.9	41.5	5.2	46.7	74.0	-27.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-02-26	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	3839.0	40.0	-1.3	38.7	74.0	-35.3	Peak	Horizontal
	4857.3	41.5	0.1	41.6	74.0	-32.4	Peak	Horizontal
	11987.1	41.9	5.1	47.0	74.0	-27.0	Peak	Horizontal
	3871.3	41.8	-1.5	40.3	74.0	-33.7	Peak	Vertical
	4816.5	41.9	0.0	41.9	74.0	-32.1	Peak	Vertical
	11686.2	42.4	4.8	47.2	74.0	-26.8	Peak	Vertical
06	4014.1	41.5	-1.4	40.1	74.0	-33.9	Peak	Horizontal
	4852.2	41.9	0.0	41.9	74.0	-32.1	Peak	Horizontal
	11453.3	43.1	5.3	48.4	74.0	-25.6	Peak	Horizontal
	3927.4	39.8	-1.4	38.4	74.0	-35.6	Peak	Vertical
	4865.8	41.3	0.1	41.4	74.0	-32.6	Peak	Vertical
	11575.7	41.7	5.2	46.9	74.0	-27.1	Peak	Vertical
11	3856.0	40.4	-1.5	38.9	74.0	-35.1	Peak	Horizontal
	4762.1	42.3	-0.1	42.2	74.0	-31.8	Peak	Horizontal
	11438.0	42.5	5.3	47.8	74.0	-26.2	Peak	Horizontal
	3856.0	40.3	-1.5	38.8	74.0	-35.2	Peak	Vertical
	4825.0	41.4	0.0	41.4	74.0	-32.6	Peak	Vertical
	11422.7	41.7	5.4	47.1	74.0	-26.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-02-26	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4017.5	40.8	-1.4	39.4	74.0	-34.6	Peak	Horizontal
	4938.9	41.6	0.1	41.7	74.0	-32.3	Peak	Horizontal
	11602.9	42.6	5.0	47.6	74.0	-26.4	Peak	Horizontal
	4097.4	41.1	-1.7	39.4	74.0	-34.6	Peak	Vertical
	4870.9	41.1	0.0	41.1	74.0	-32.9	Peak	Vertical
	11592.7	41.8	5.1	46.9	74.0	-27.1	Peak	Vertical
06	3730.2	40.9	-1.8	39.1	74.0	-34.9	Peak	Horizontal
	4721.3	42.4	-0.1	42.3	74.0	-31.7	Peak	Horizontal
	11713.4	42.3	4.8	47.1	74.0	-26.9	Peak	Horizontal
	3983.5	41.2	-1.4	39.8	74.0	-34.2	Peak	Vertical
	4825.0	41.3	0.0	41.3	74.0	-32.7	Peak	Vertical
	11912.3	42.4	4.9	47.3	74.0	-26.7	Peak	Vertical
09	4019.2	40.6	-1.5	39.1	74.0	-34.9	Peak	Horizontal
	4906.6	41.1	0.1	41.2	74.0	-32.8	Peak	Horizontal
	11621.6	42.1	5.0	47.1	74.0	-26.9	Peak	Horizontal
	4054.9	40.9	-1.7	39.2	74.0	-34.8	Peak	Vertical
	4806.3	41.3	0.0	41.3	74.0	-32.7	Peak	Vertical
	11276.5	42.3	5.3	47.6	74.0	-26.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC2	Test Date	2025-02-28
Temperature	19.9 °C	Humidity	28.4 %
Limit	FCC_Part 15.209_RE(3m)	Test Engineer	Bob Zhang
Factor	VULB 9163_07097	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

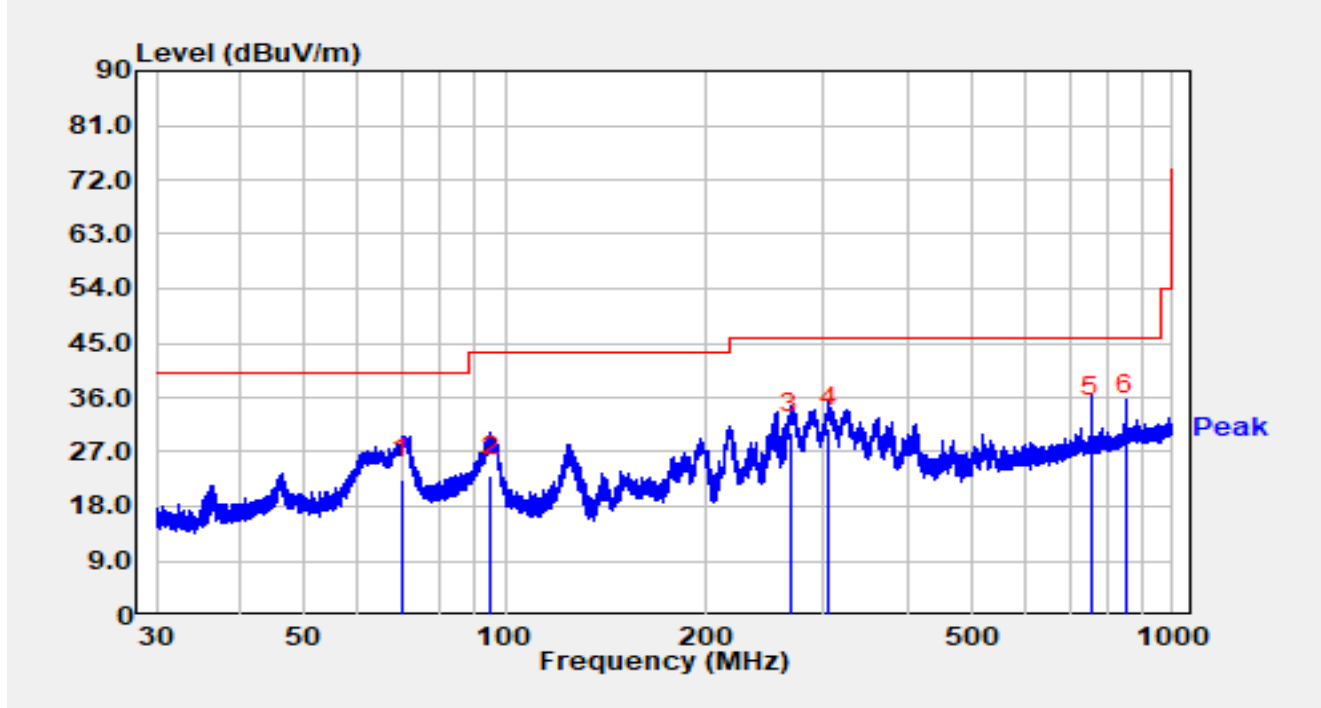


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		69.869	7.30	15.28	22.58	-17.42	40.00	QP
2		95.260	6.30	16.73	23.03	-20.47	43.50	QP
3		267.921	10.80	19.28	30.08	-15.92	46.00	QP
4		305.894	10.80	20.14	30.94	-15.06	46.00	QP
5		756.448	4.60	28.17	32.77	-13.23	46.00	QP
6	*	850.737	4.01	28.99	33.00	-13.00	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2025-02-28
Temperature	19.9 °C	Humidity	28.4 %
Limit	FCC_Part 15.209_RE(3m)	Test Engineer	Bob Zhang
Factor	VULB 9163_07097	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

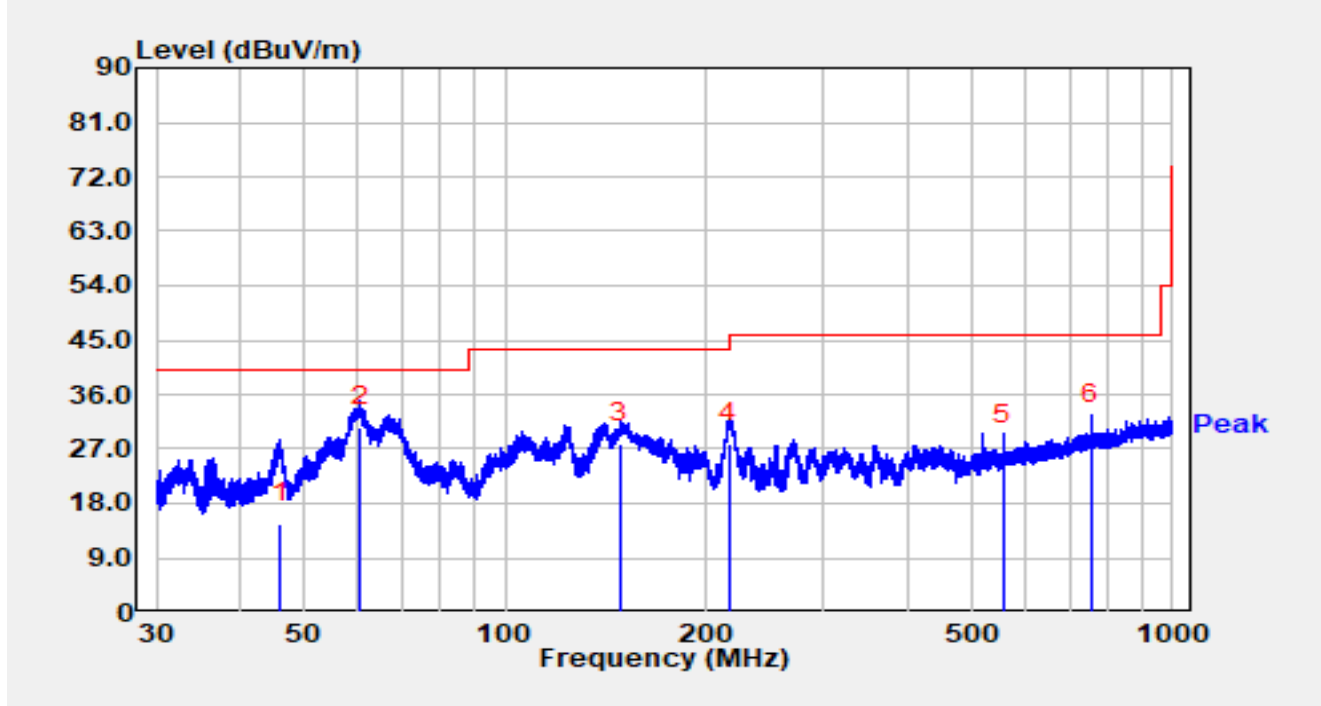


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		46.081	-4.80	19.44	14.64	-25.36	40.00	QP
2	*	60.556	12.80	17.79	30.59	-9.41	40.00	QP
3		148.493	14.10	13.83	27.93	-15.57	43.50	QP
4		216.631	10.50	17.47	27.97	-18.03	46.00	QP
5		556.774	2.50	25.07	27.57	-18.43	46.00	QP
6		756.182	2.80	28.17	30.97	-15.03	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.7 Radiated Restricted Band Edge Test Result

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

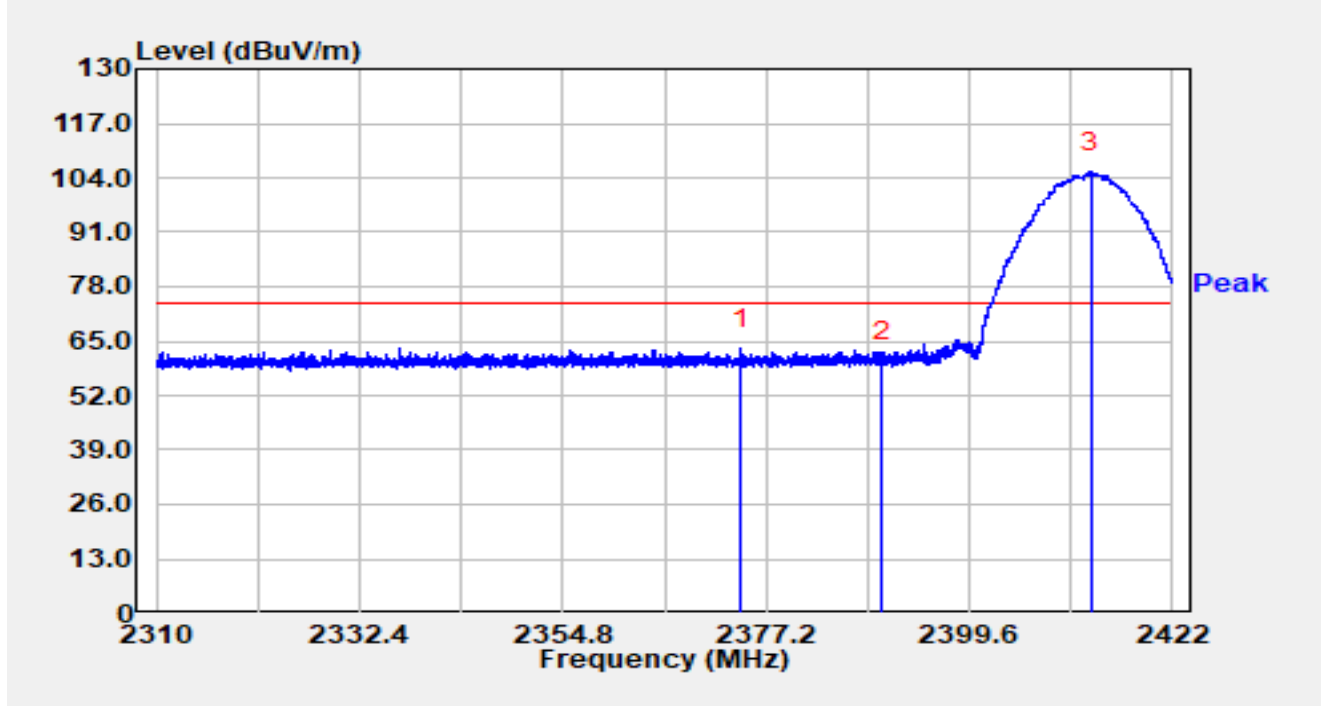


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2374.366	26.37	36.75	63.12	-10.88	74.00	Peak
2		2390.000	23.11	36.83	59.94	-14.06	74.00	Peak
3		2412.962	68.28	36.98	105.26	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

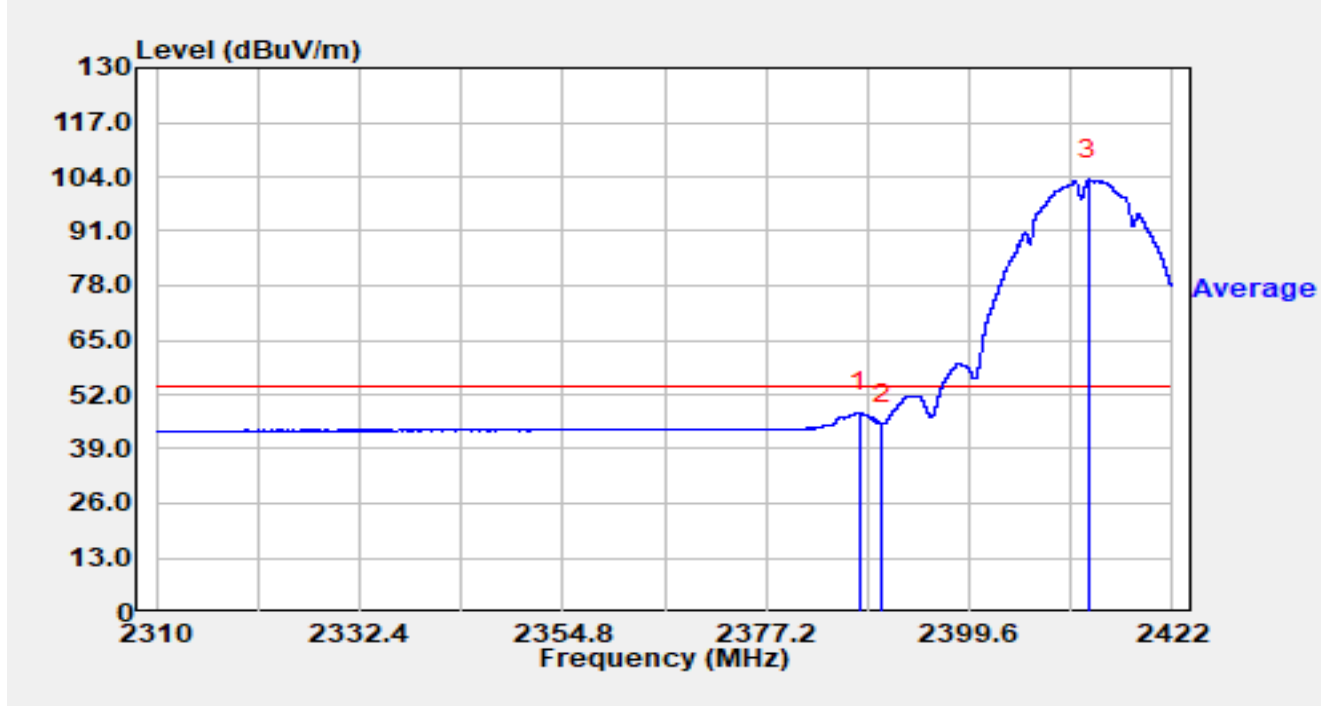


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.448	10.97	36.82	47.78	-6.22	54.00	Average
2		2390.000	8.11	36.83	44.94	-9.06	54.00	Average
3		2412.771	66.44	36.98	103.42	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

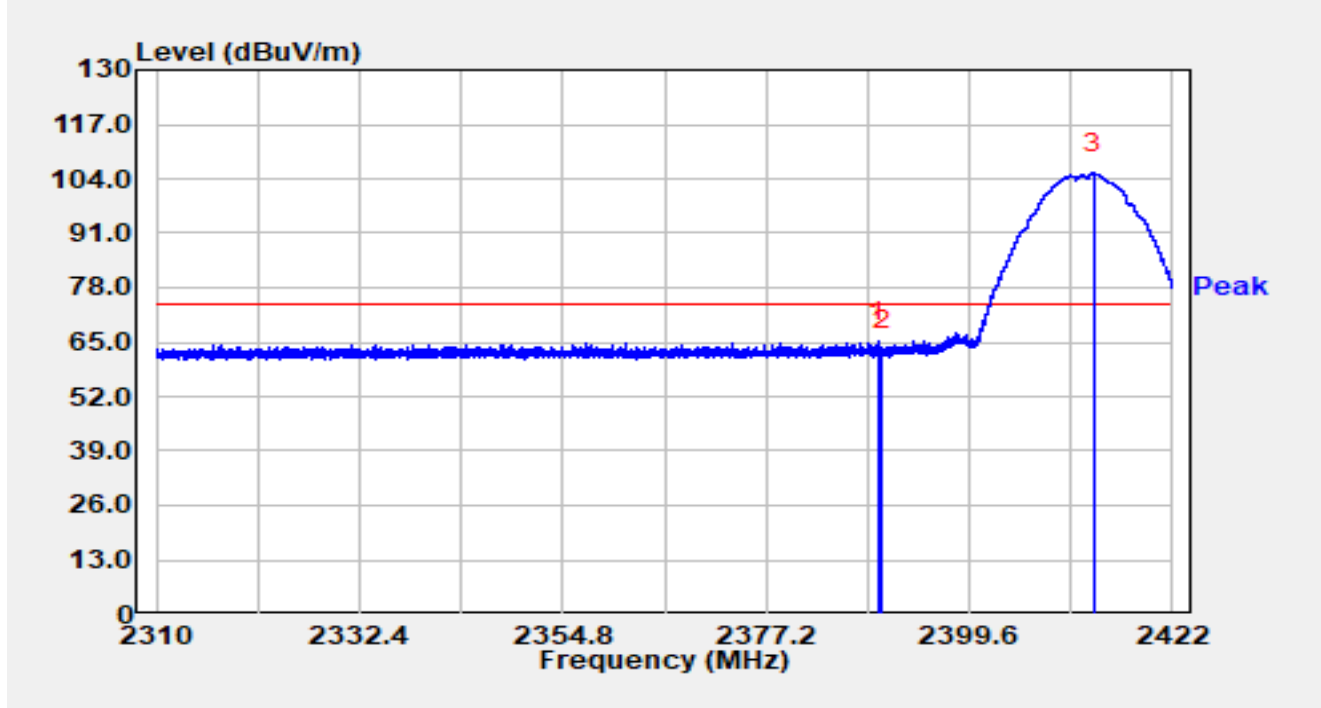


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.520	28.36	36.83	65.19	-8.81	74.00	Peak
2		2390.000	26.08	36.83	62.91	-11.09	74.00	Peak
3		2413.253	68.31	36.98	105.29	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

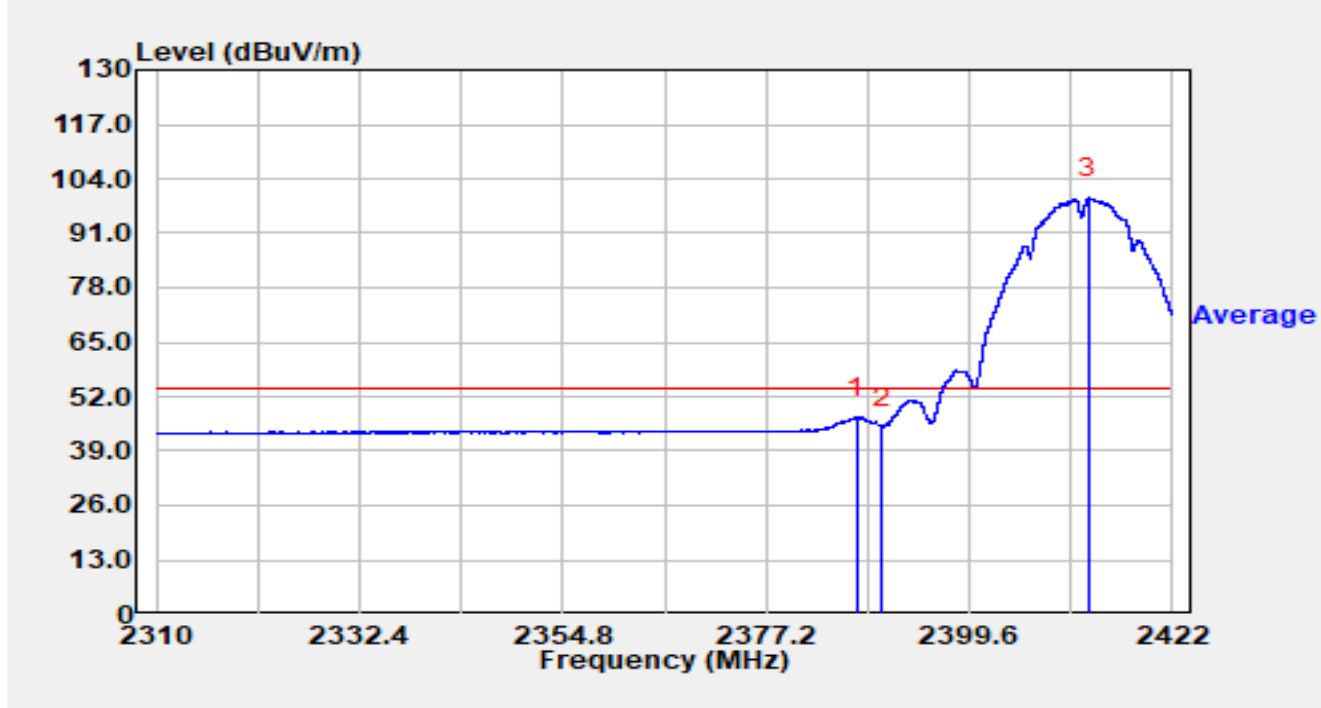


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.146	10.20	36.82	47.02	-6.98	54.00	Average
2		2390.000	7.80	36.83	44.63	-9.37	54.00	Average
3		2412.738	62.52	36.98	99.50	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

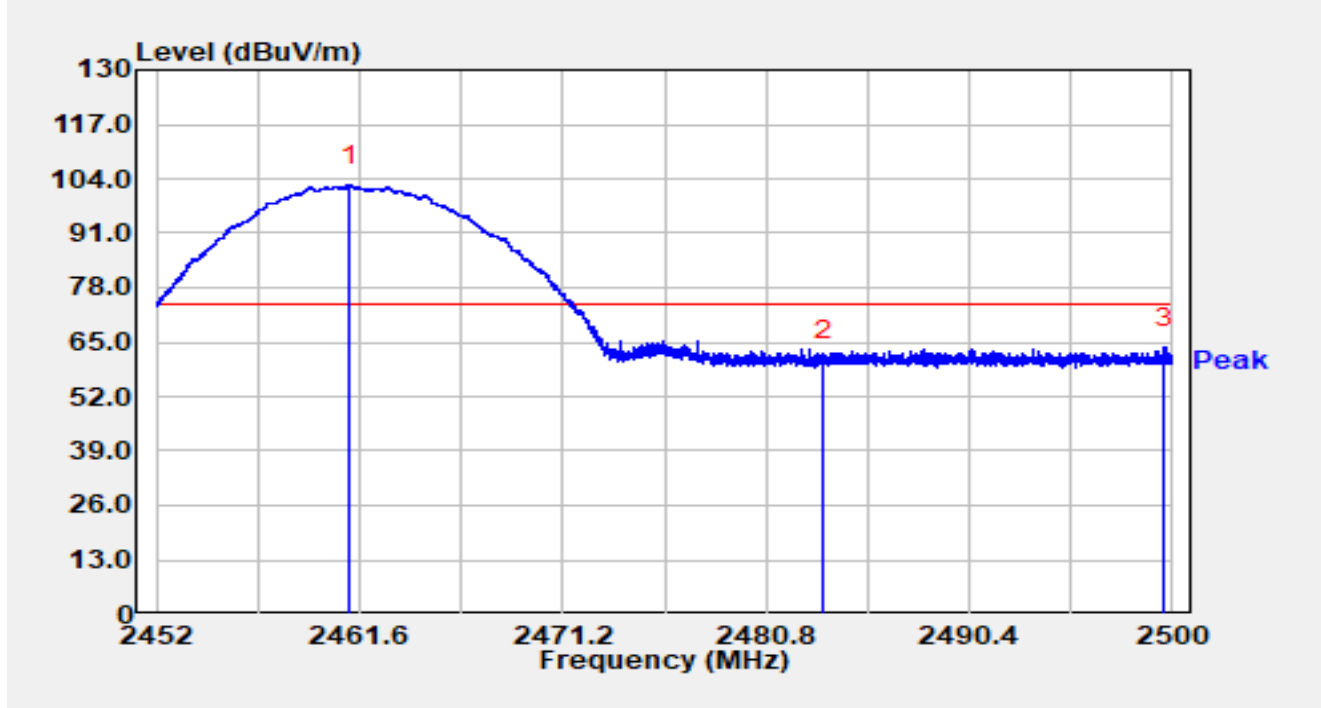


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.106	65.53	37.00	102.53	N/A	N/A	Peak
2		2483.500	23.42	37.05	60.47	-13.53	74.00	Peak
3	*	2499.635	26.61	37.08	63.69	-10.31	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

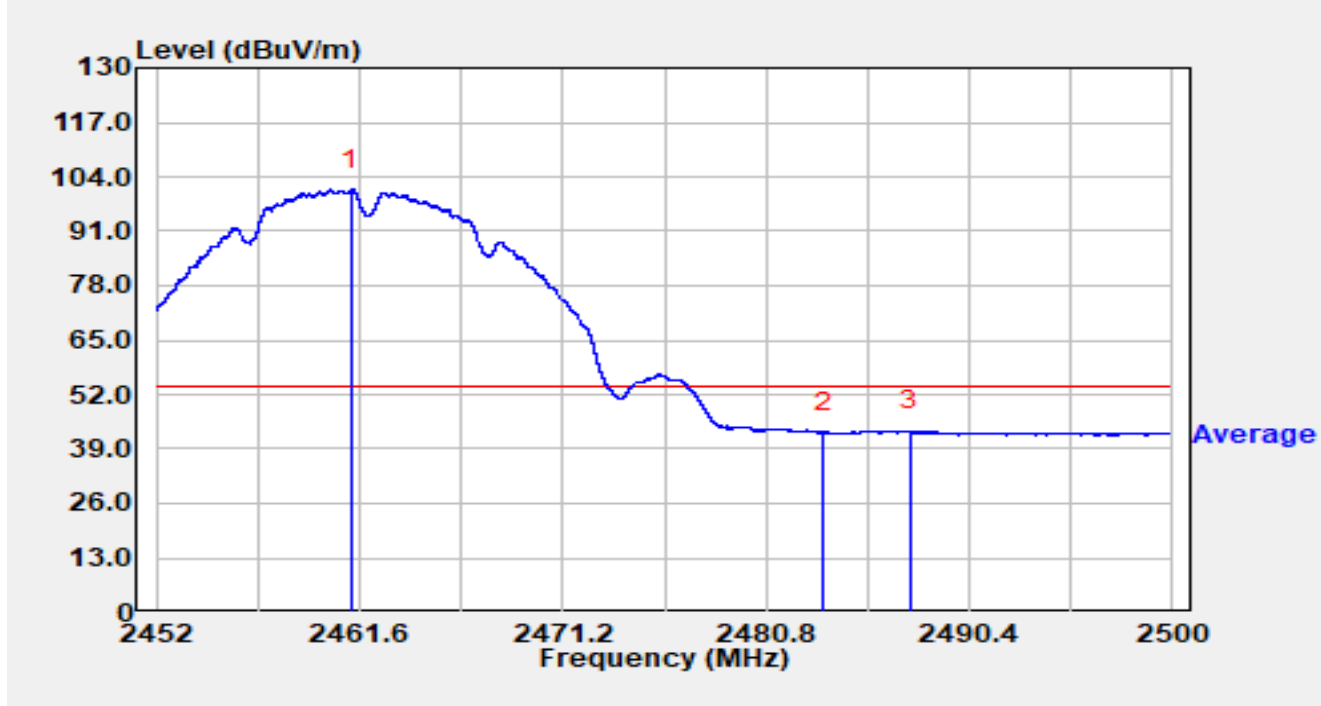


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.221	63.99	37.00	100.99	N/A	N/A	Average
2		2483.500	5.94	37.05	42.99	-11.01	54.00	Average
3	*	2487.621	6.24	37.06	43.31	-10.69	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

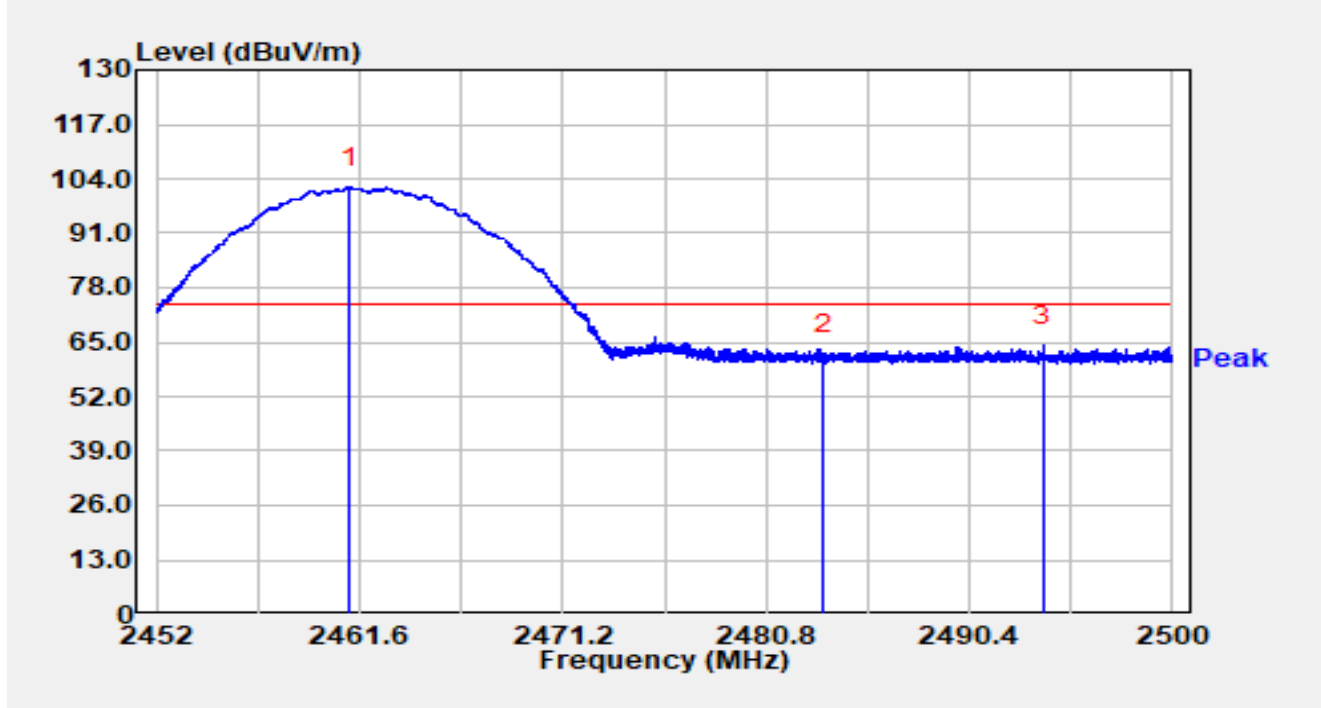


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.120	65.00	37.00	102.00	N/A	N/A	Peak
2		2483.500	25.13	37.05	62.18	-11.82	74.00	Peak
3	*	2493.904	27.04	37.08	64.12	-9.88	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2462MHz		

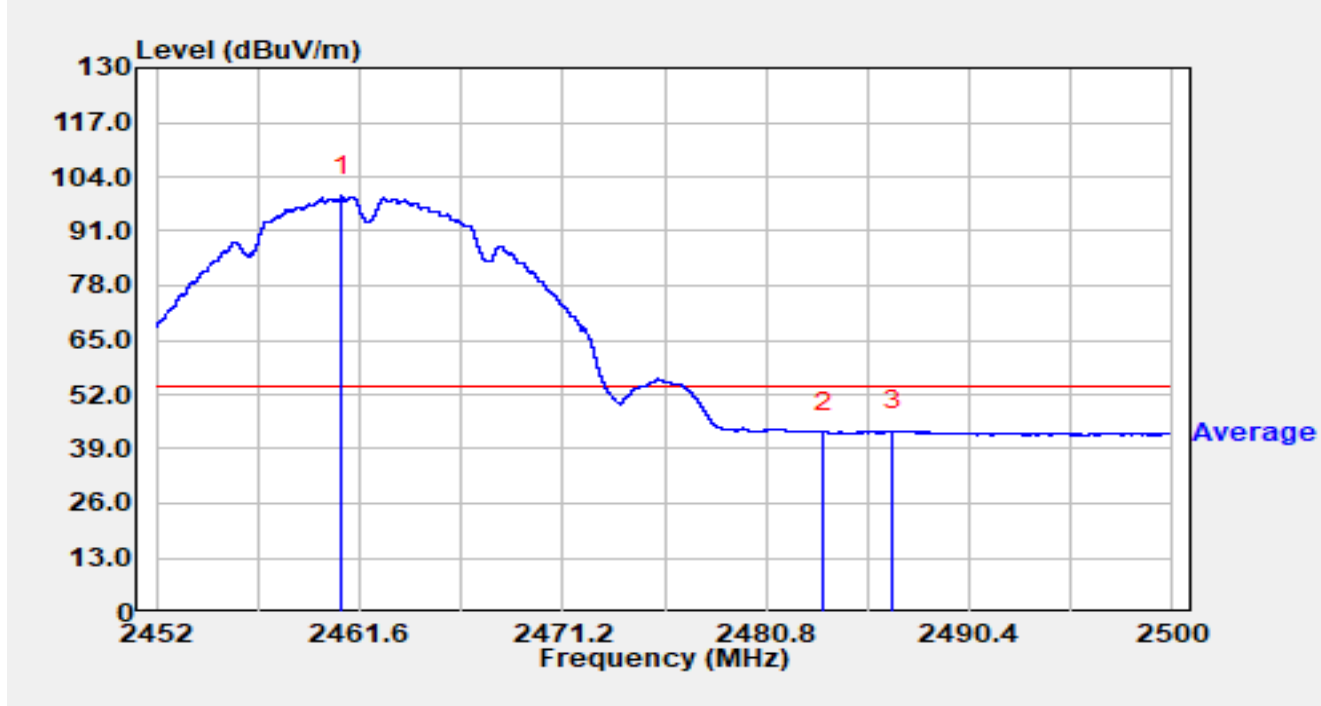


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2460.774	62.56	37.00	99.56	N/A	N/A	Average
2		2483.500	5.99	37.05	43.04	-10.96	54.00	Average
3	*	2486.795	6.21	37.06	43.27	-10.73	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

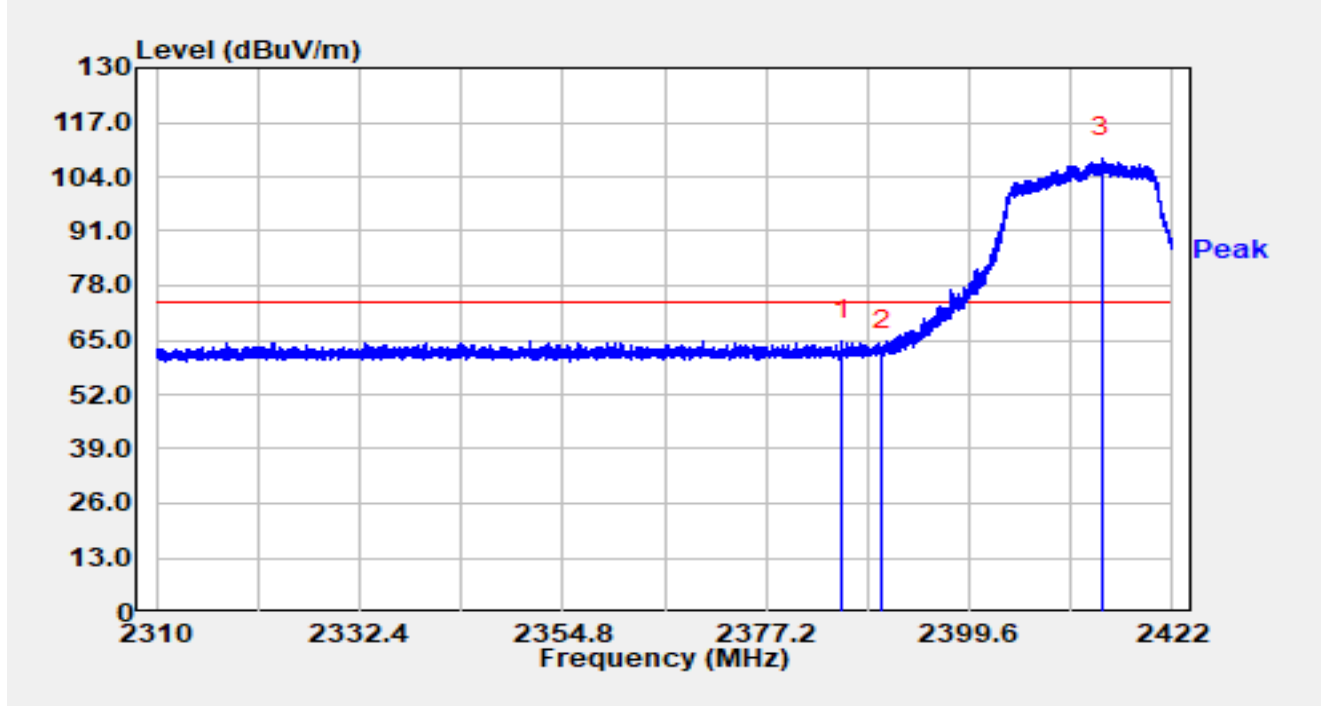


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.555	28.04	36.81	64.85	-9.15	74.00	Peak
2		2390.000	25.87	36.83	62.70	-11.30	74.00	Peak
3		2414.205	71.49	36.98	108.48	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

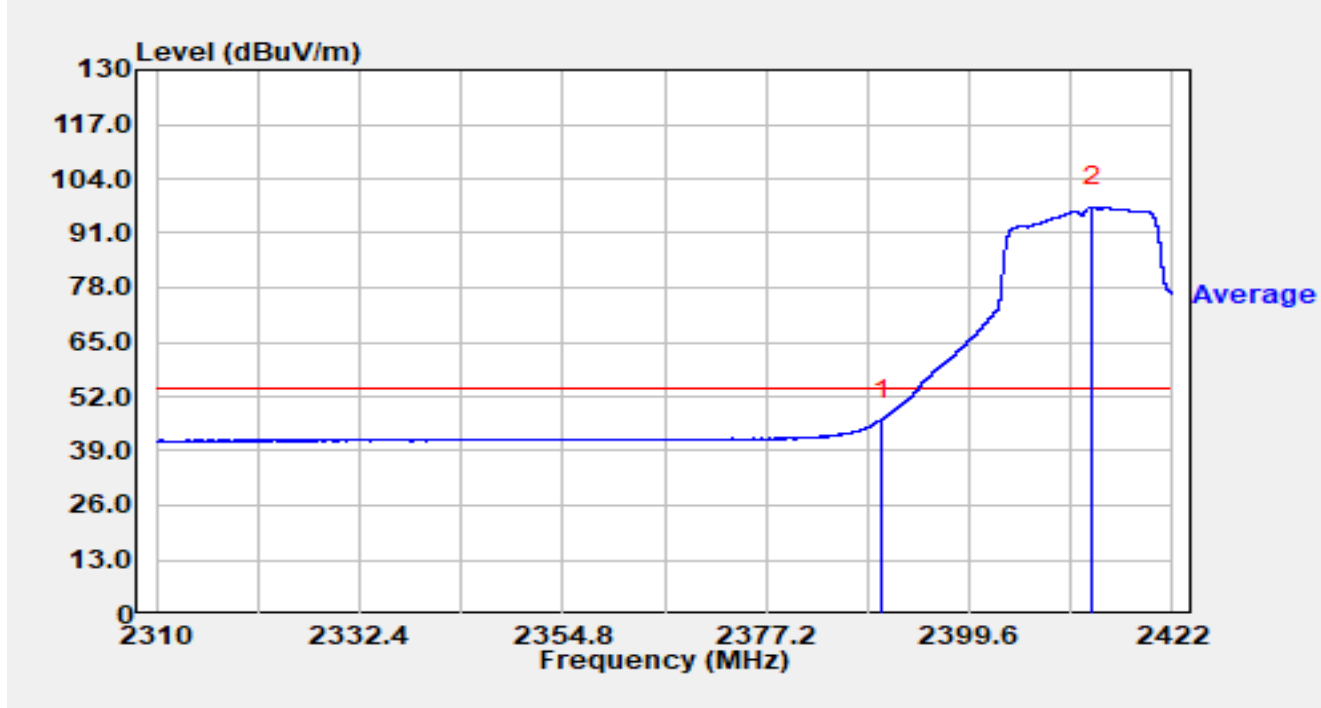


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	9.67	36.83	46.50	-7.50	54.00	Average
2		2413.208	60.22	36.98	97.20	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

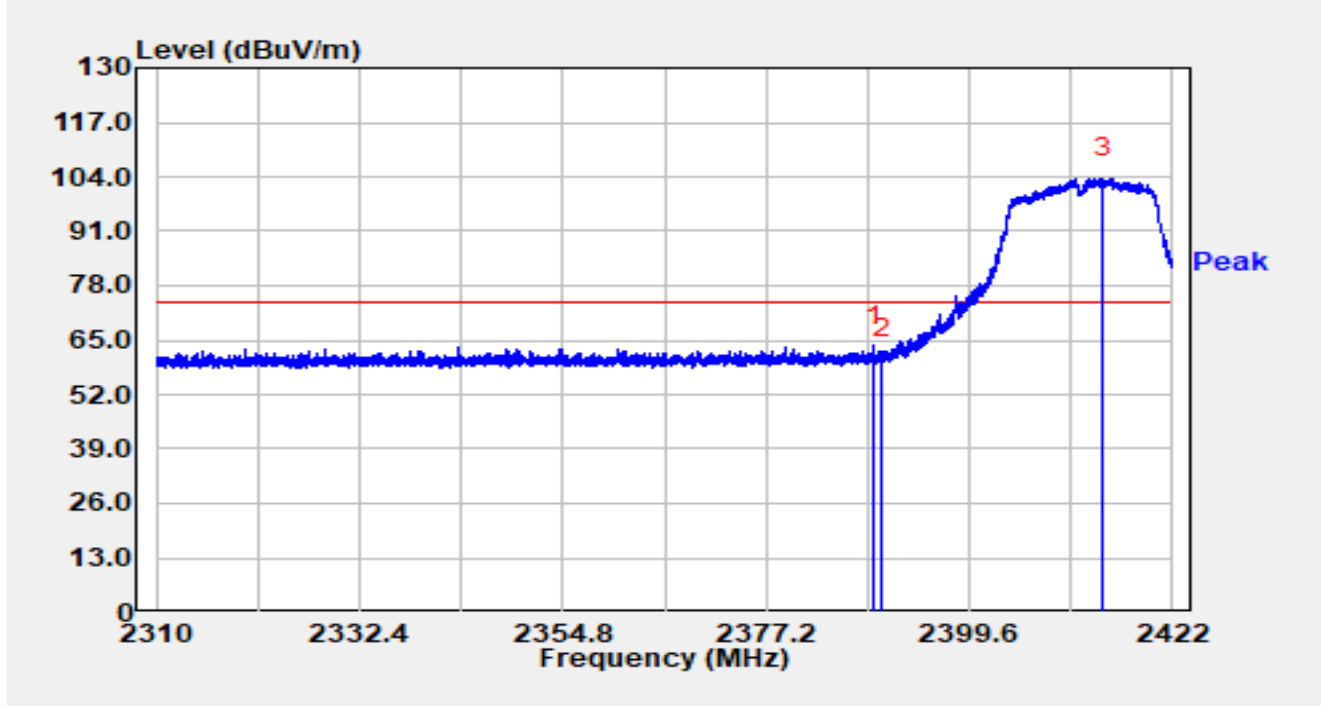


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.106	26.76	36.83	63.58	-10.42	74.00	Peak
2		2390.000	23.94	36.83	60.77	-13.23	74.00	Peak
3		2414.283	66.66	36.98	103.64	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

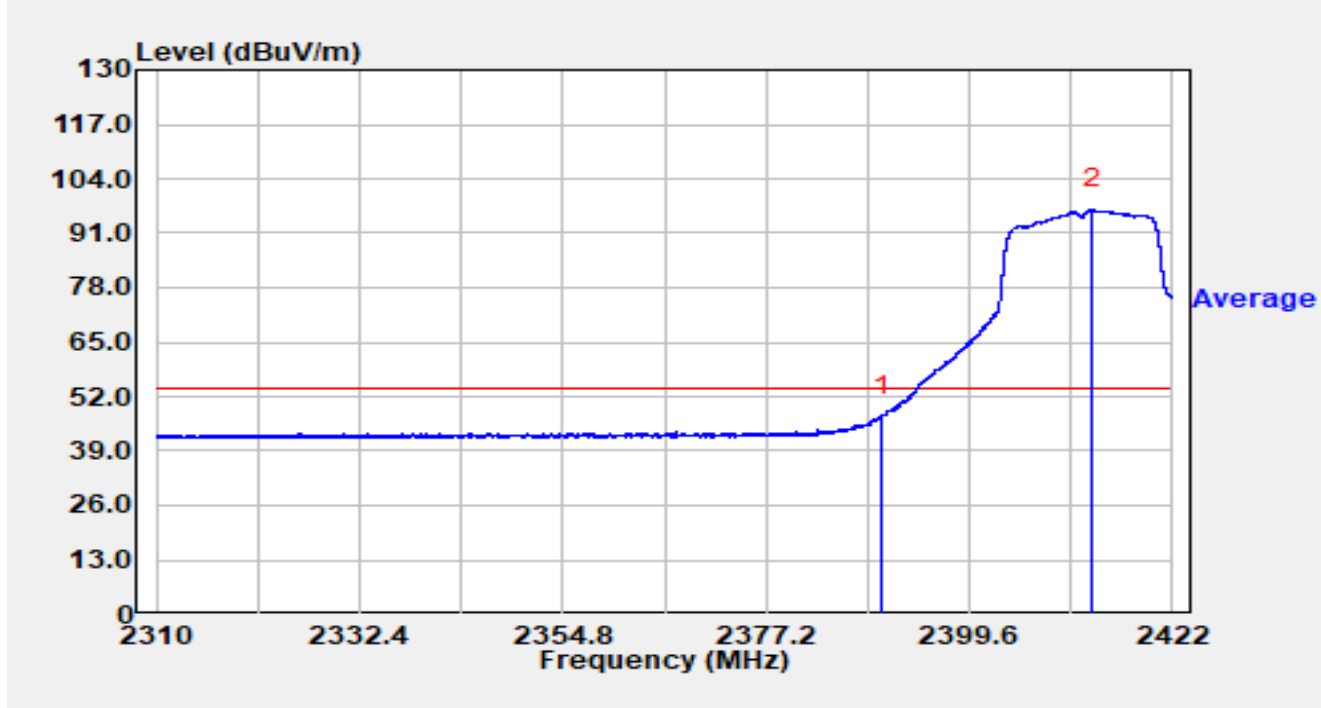


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	10.32	36.83	47.16	-6.84	54.00	Average
2		2413.130	59.72	36.98	96.70	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

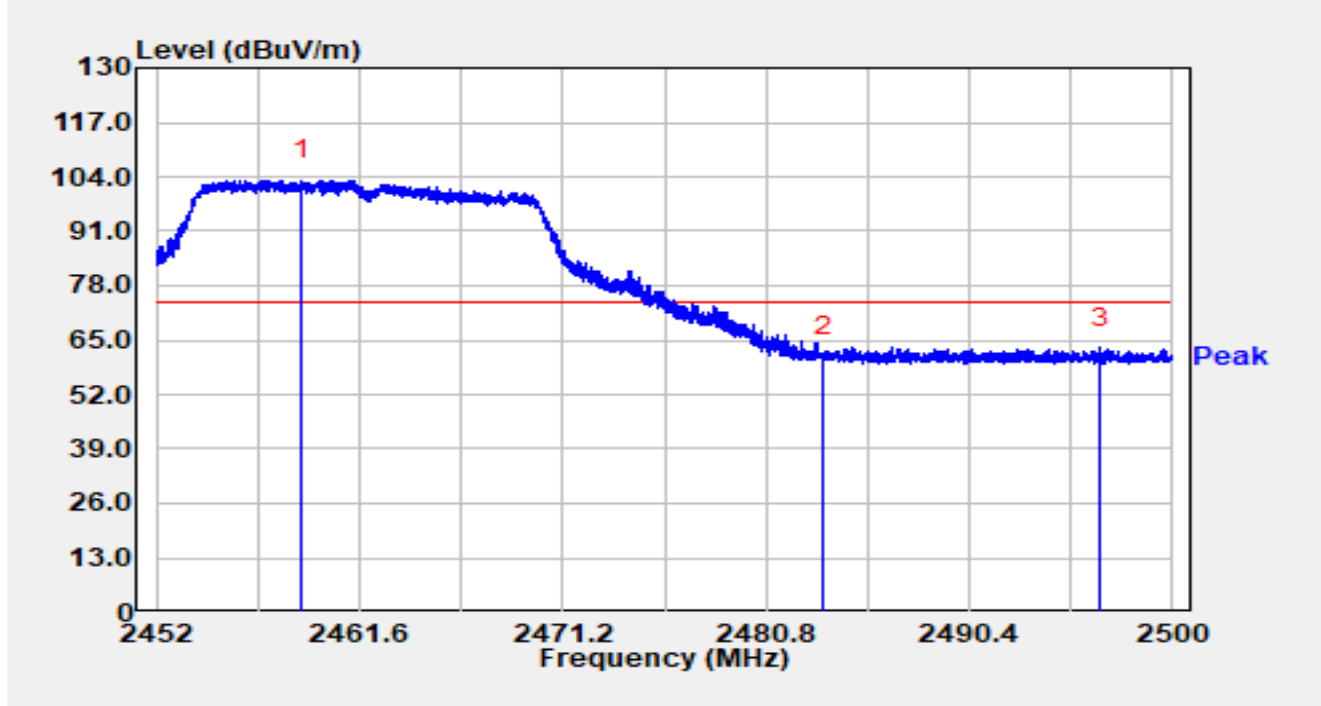


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.845	66.27	36.99	103.26	N/A	N/A	Peak
2		2483.500	24.09	37.05	61.14	-12.86	74.00	Peak
3	*	2496.592	26.12	37.08	63.20	-10.80	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

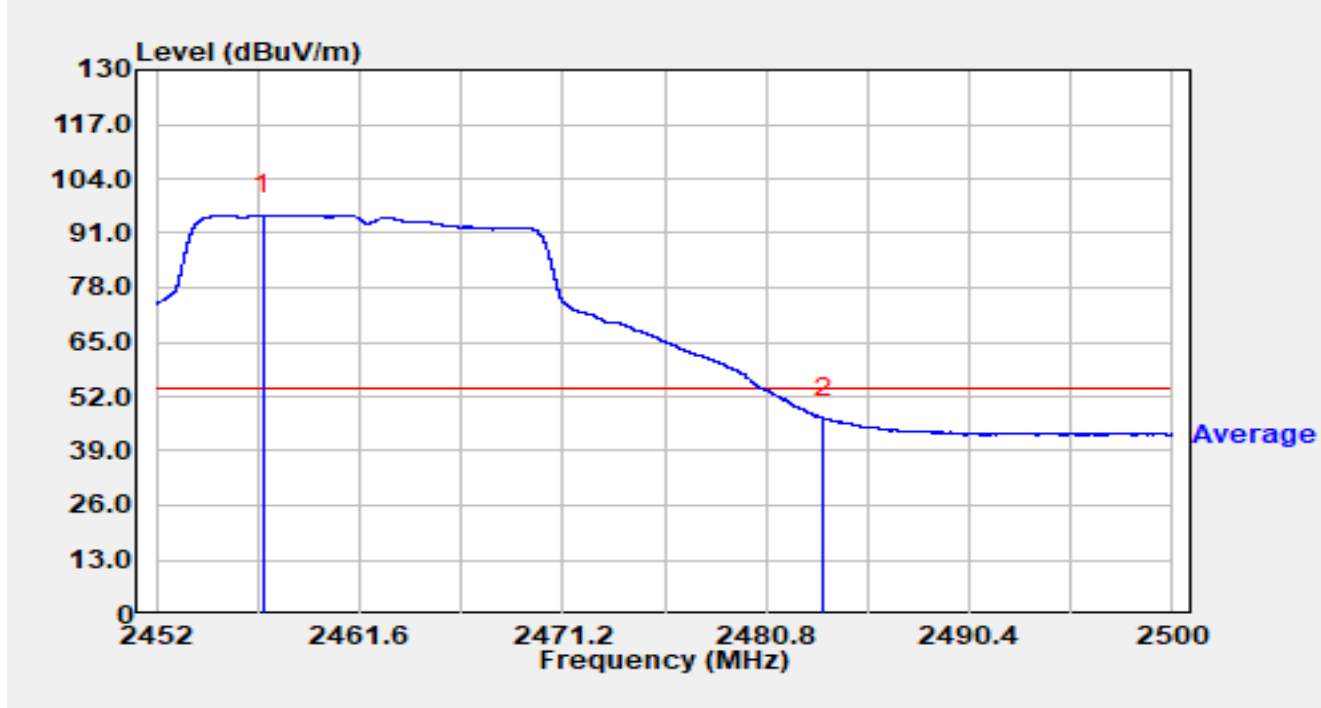


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.064	58.33	36.99	95.33	N/A	N/A	Average
2	*	2483.500	9.82	37.05	46.87	-7.13	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

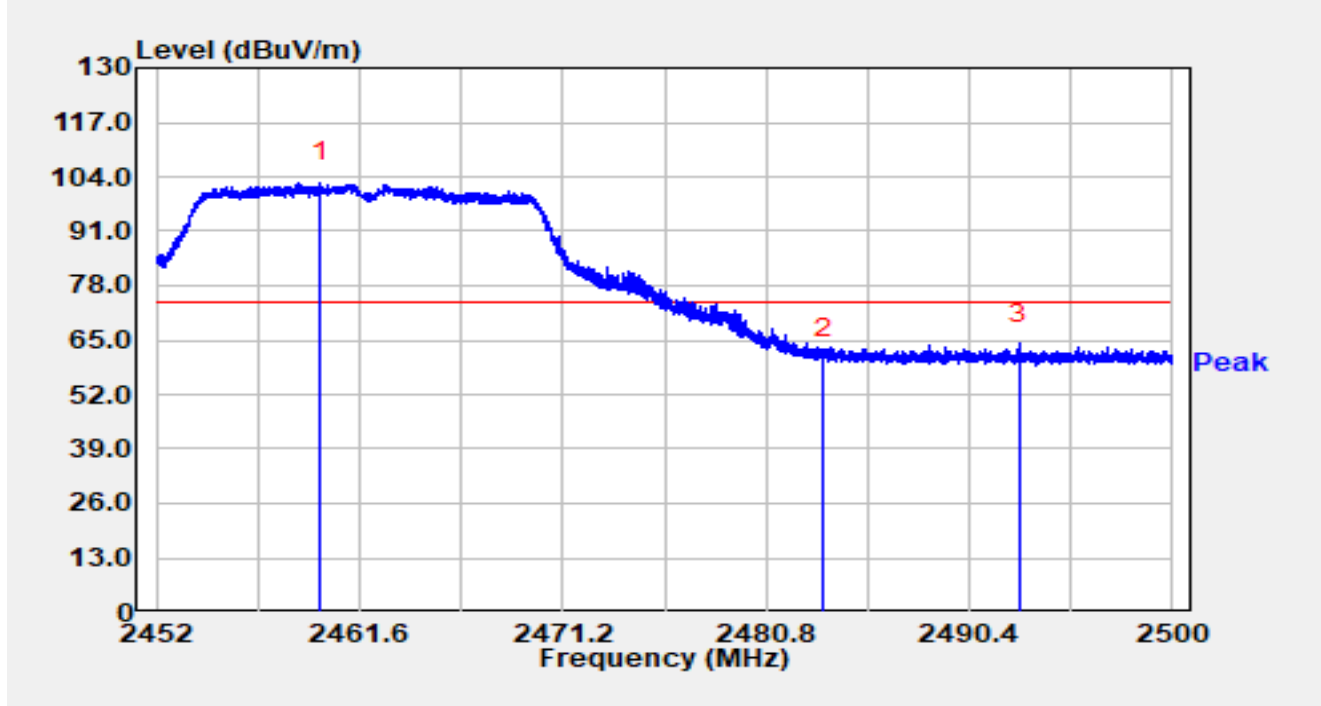


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2459.752	65.60	37.00	102.60	N/A	N/A	Peak
2		2483.500	23.56	37.05	60.61	-13.39	74.00	Peak
3	*	2492.738	27.14	37.07	64.21	-9.79	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

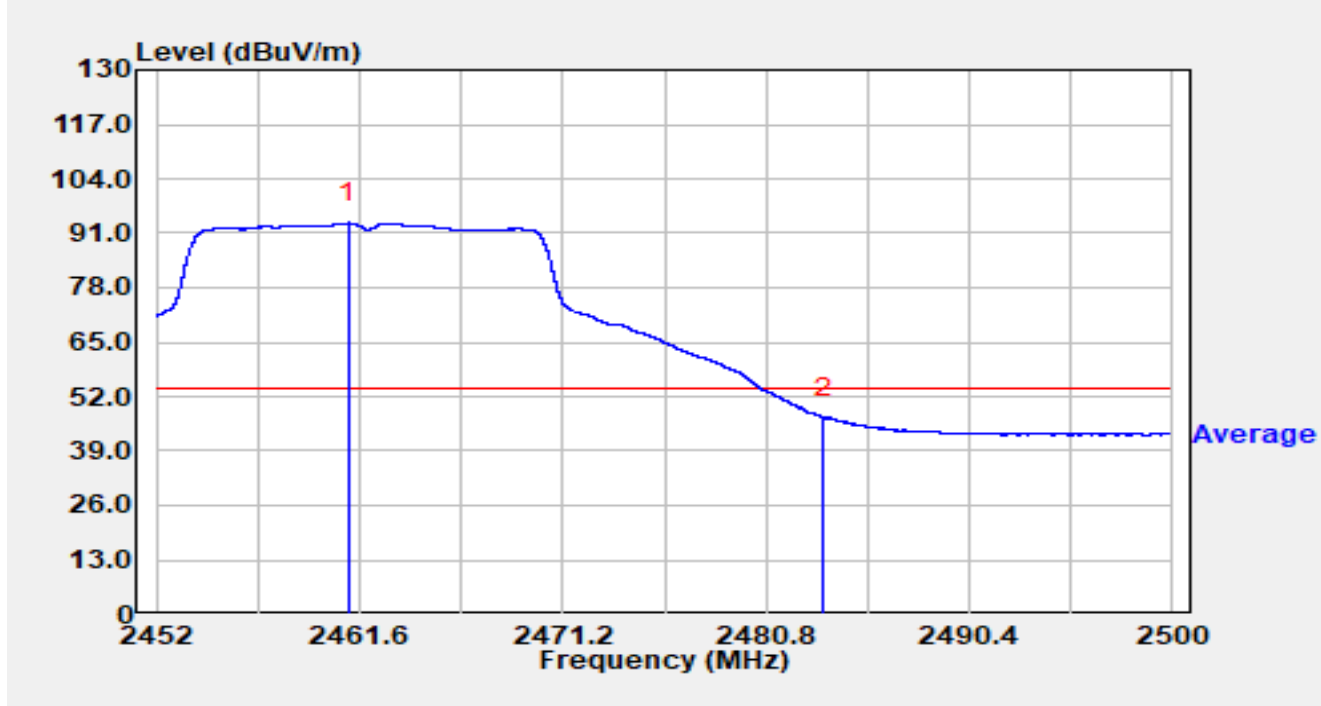


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.063	56.46	37.00	93.46	N/A	N/A	Average
2	*	2483.500	10.02	37.05	47.07	-6.93	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

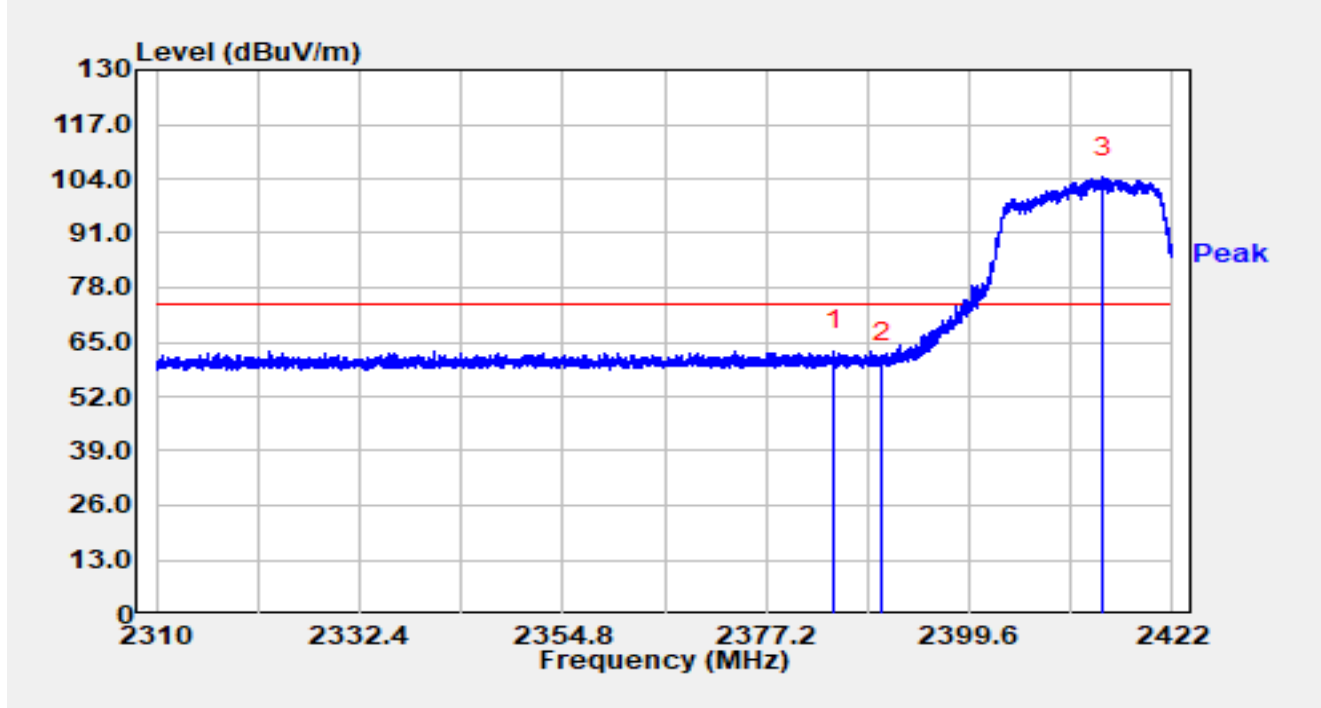


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.738	26.09	36.80	62.89	-11.11	74.00	Peak
2		2390.000	23.49	36.83	60.32	-13.68	74.00	Peak
3		2414.283	67.43	36.98	104.42	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

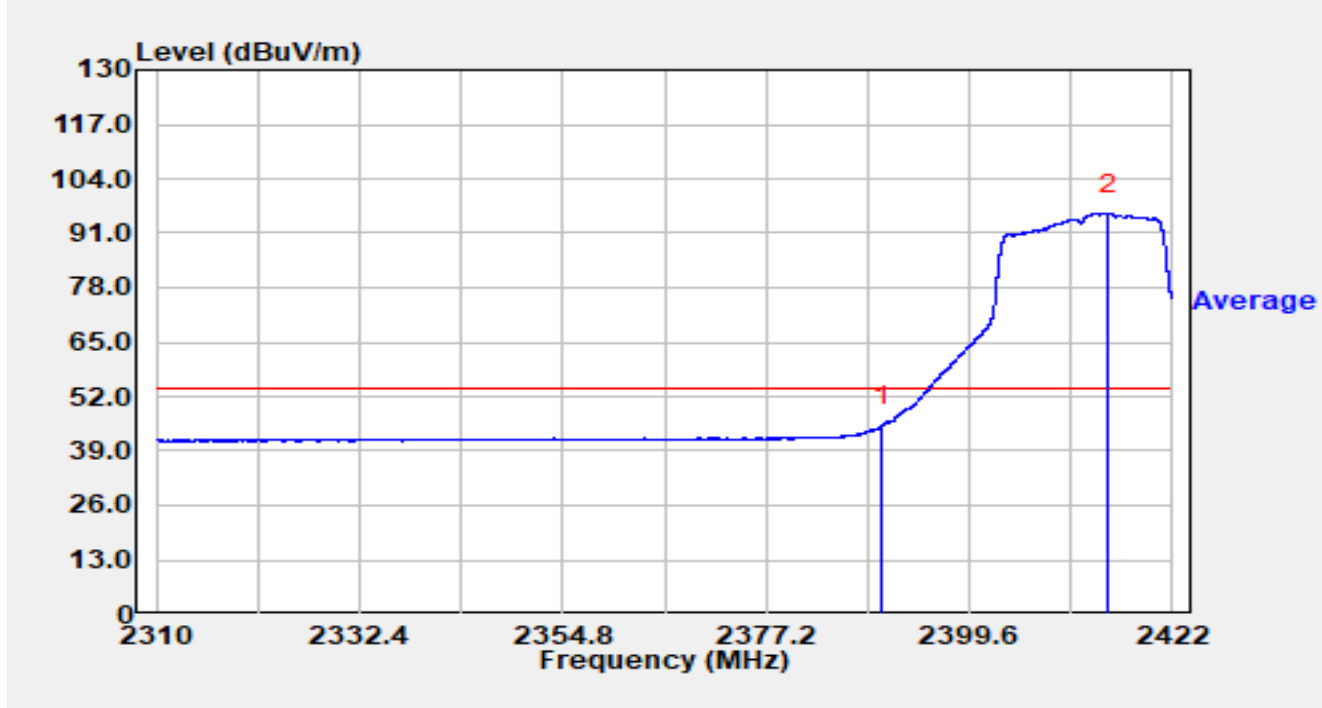


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	8.13	36.83	44.97	-9.03	54.00	Average
2		2414.955	58.65	36.99	95.64	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

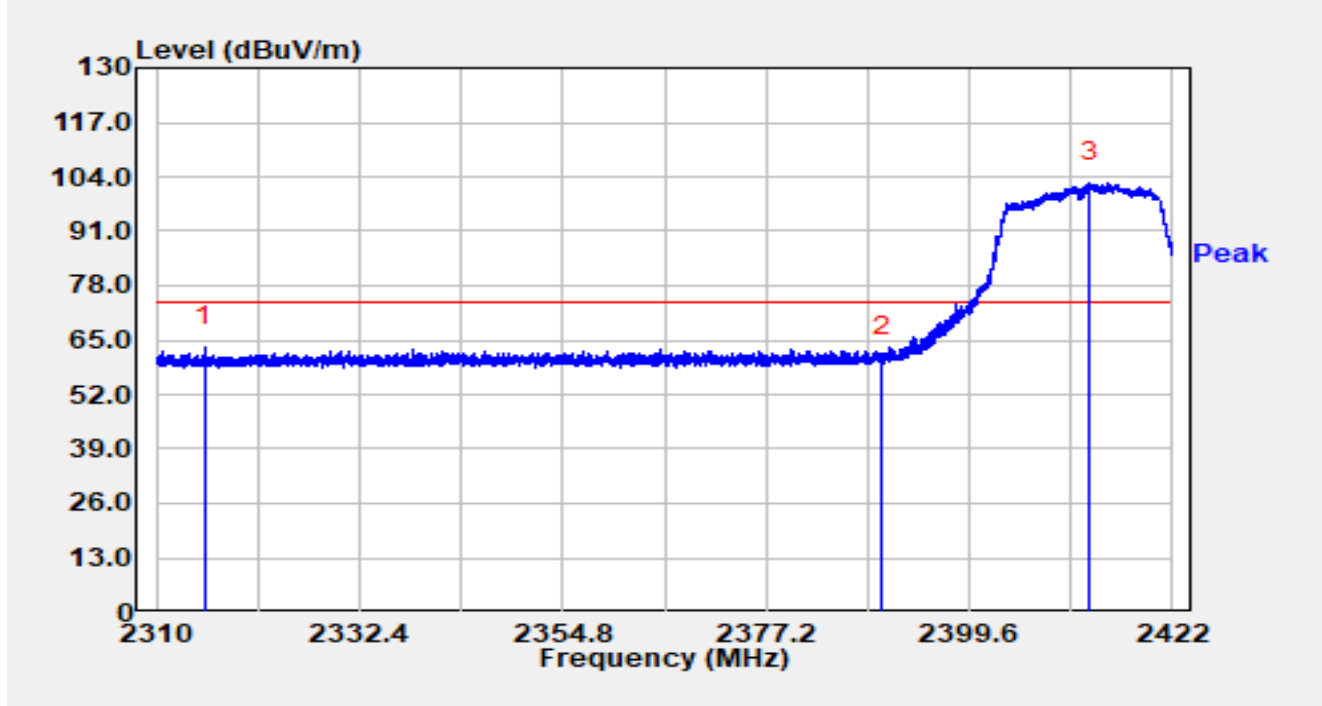


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2315.354	26.90	36.53	63.43	-10.57	74.00	Peak
2		2390.000	24.01	36.83	60.84	-13.16	74.00	Peak
3		2412.805	65.60	36.98	102.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

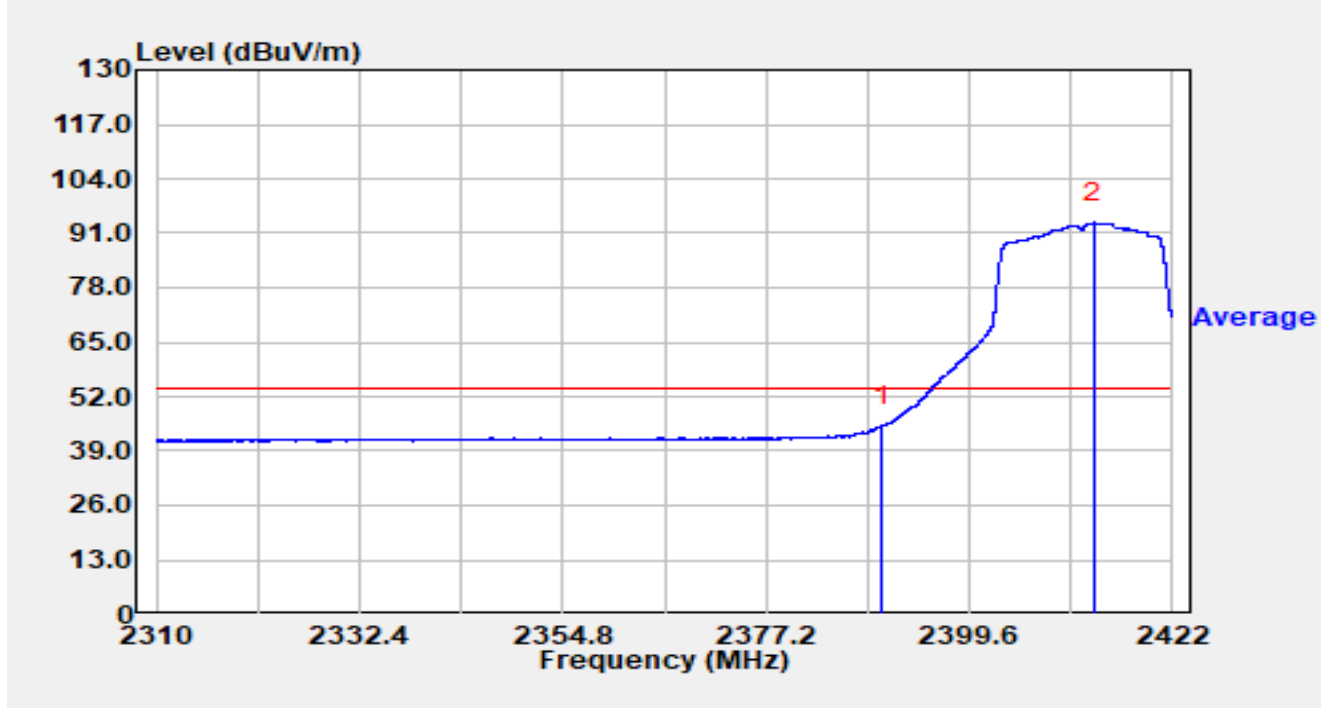


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	8.13	36.83	44.96	-9.04	54.00	Average
2		2413.331	56.50	36.98	93.48	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

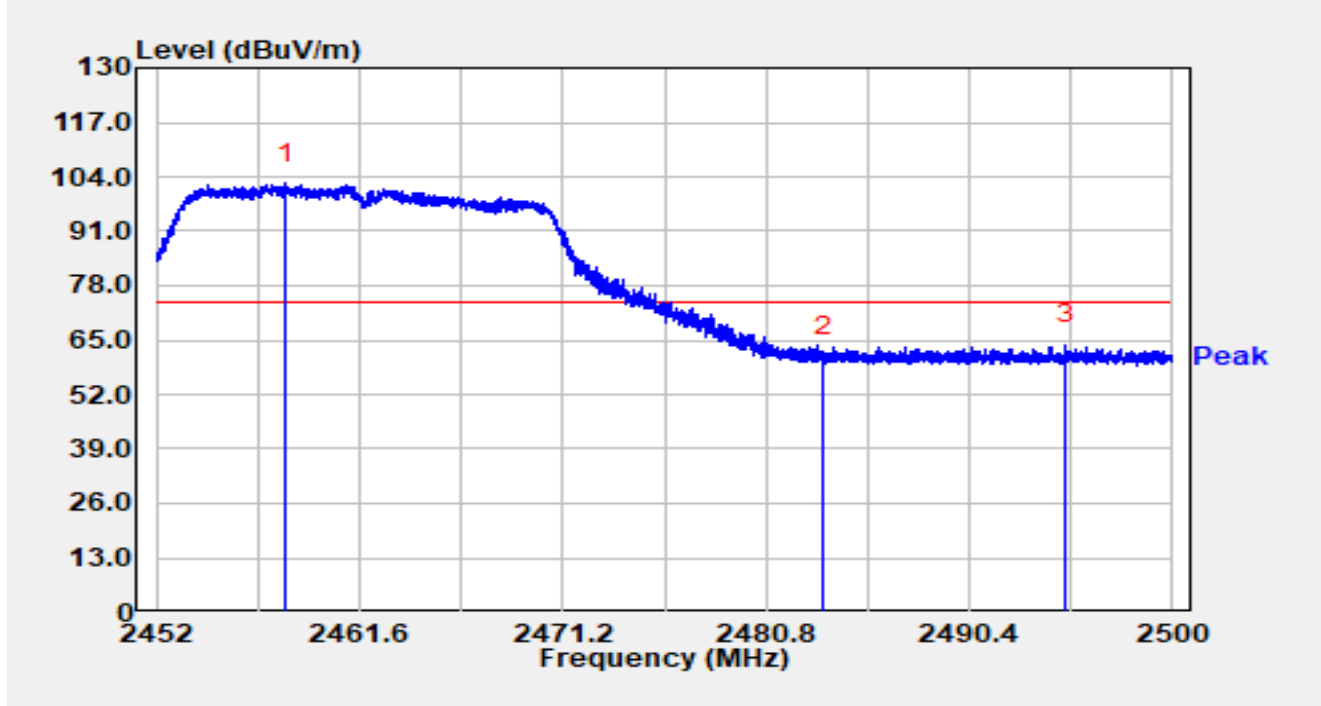


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.101	65.39	36.99	102.38	N/A	N/A	Peak
2		2483.500	23.92	37.05	60.97	-13.03	74.00	Peak
3	*	2494.931	26.87	37.08	63.94	-10.06	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

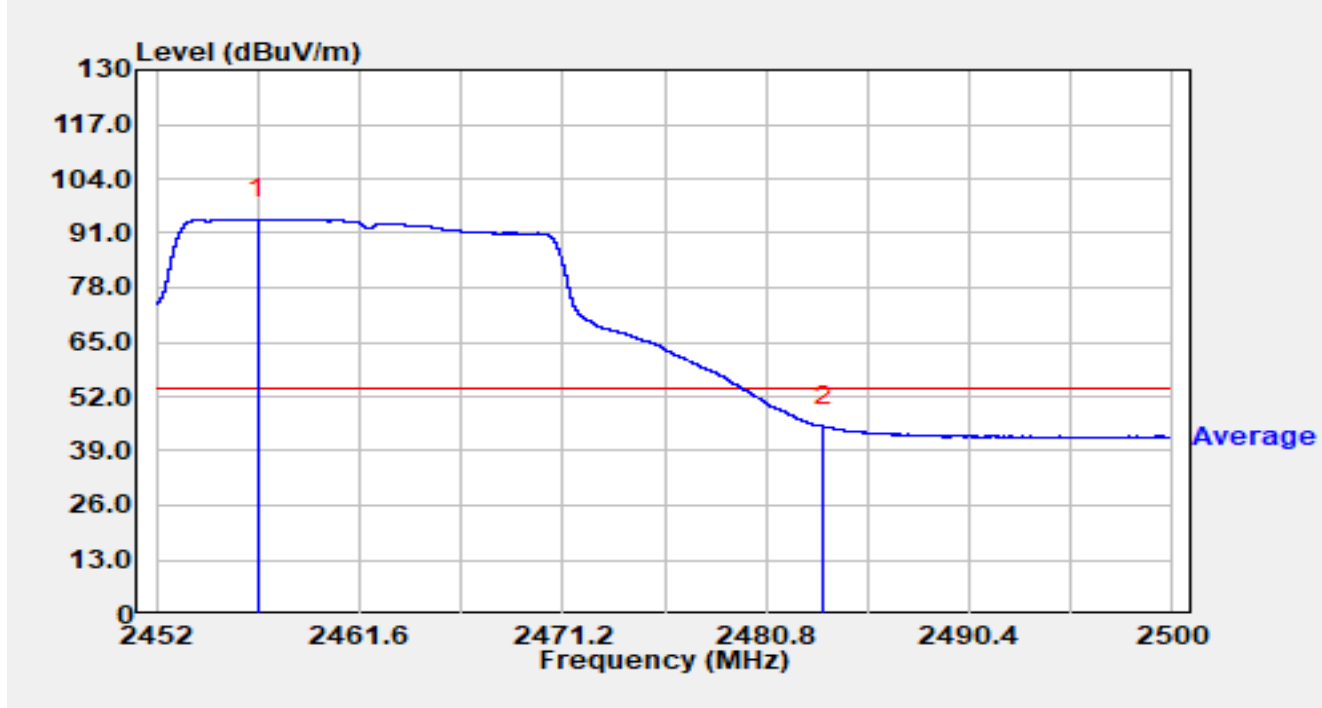


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.814	57.44	36.99	94.43	N/A	N/A	Average
2	*	2483.500	7.74	37.05	44.79	-9.21	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

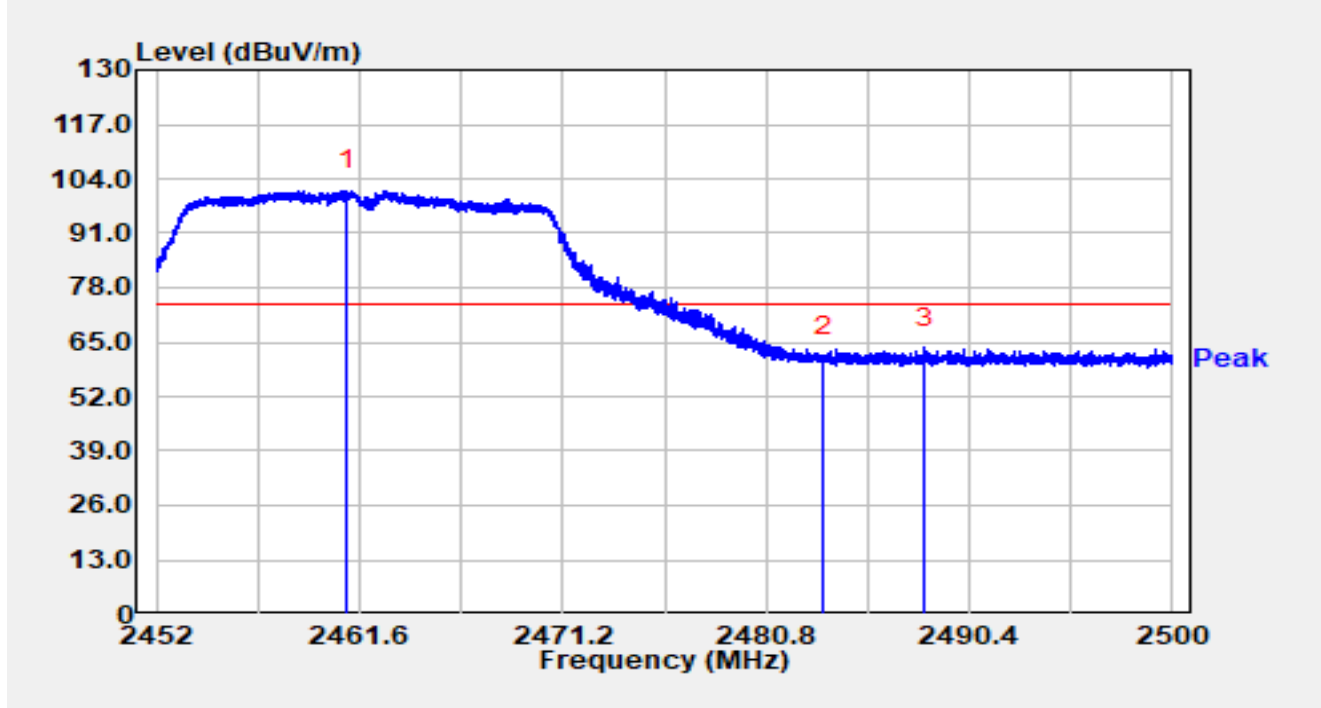


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.029	64.23	37.00	101.22	N/A	N/A	Peak
2		2483.500	24.28	37.05	61.33	-12.67	74.00	Peak
3	*	2488.278	26.55	37.07	63.61	-10.39	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

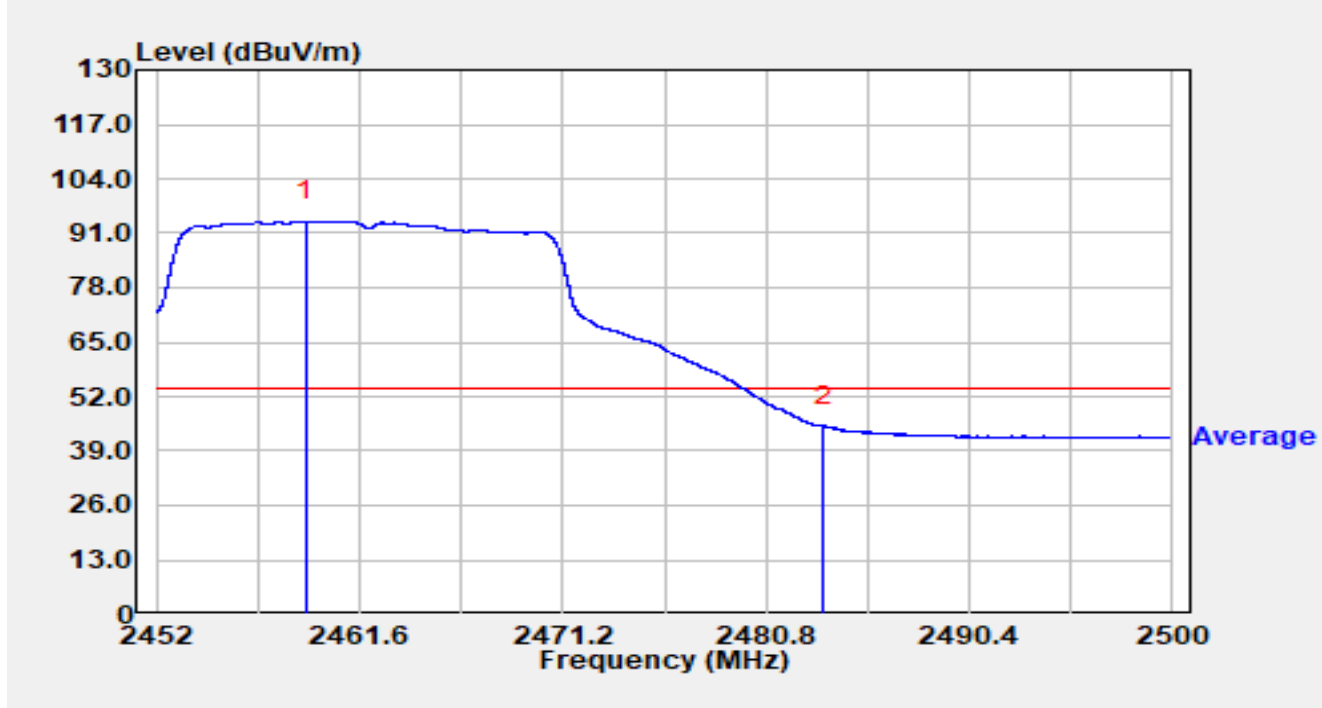


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2459.070	56.87	36.99	93.86	N/A	N/A	Average
2	*	2483.500	7.79	37.05	44.85	-9.15	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

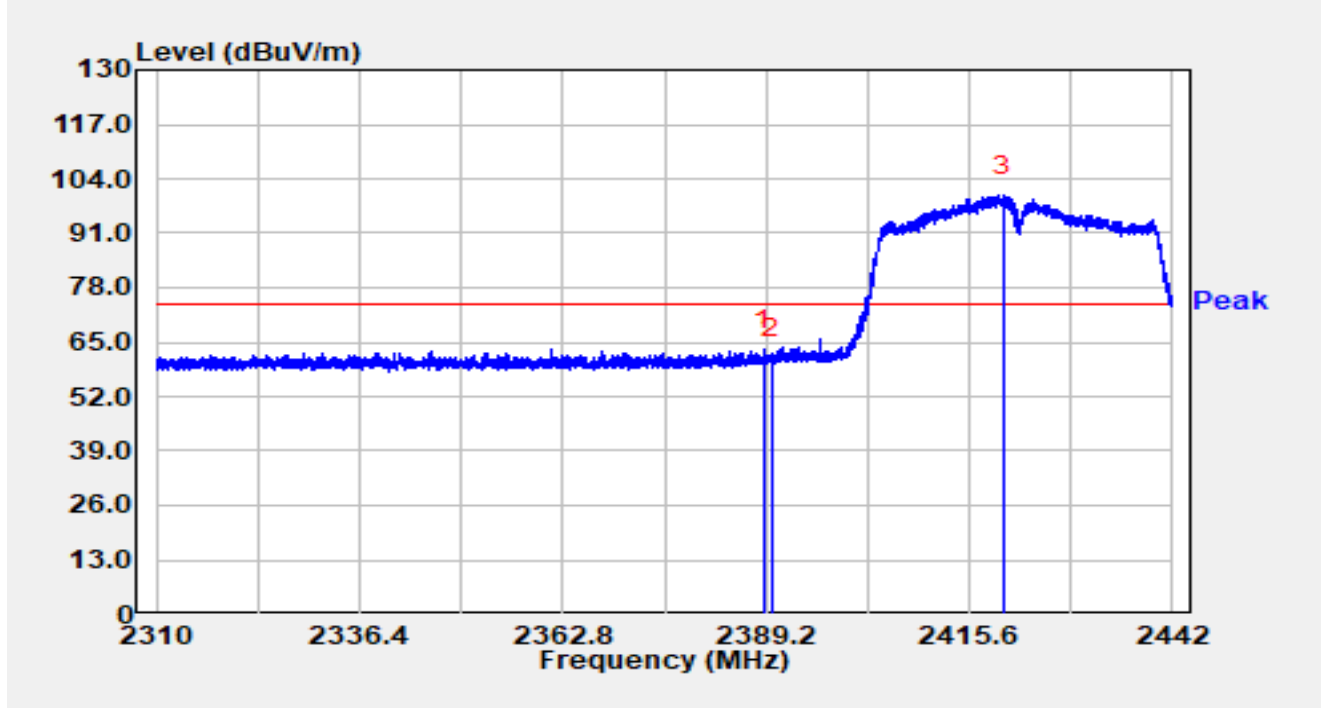


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.949	26.42	36.83	63.24	-10.76	74.00	Peak
2		2390.000	24.22	36.83	61.05	-12.95	74.00	Peak
3		2420.048	62.87	37.00	99.87	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

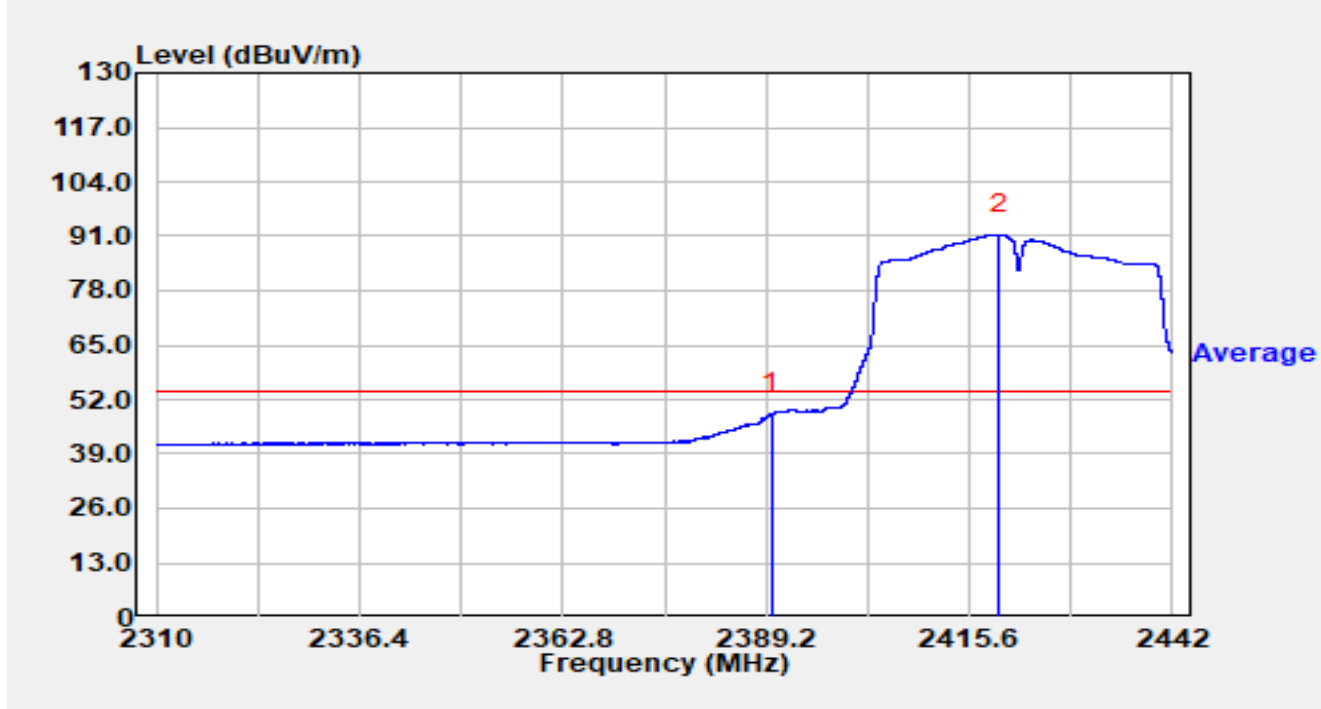


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	11.75	36.83	48.58	-5.42	54.00	Average
2		2419.454	54.43	37.00	91.43	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

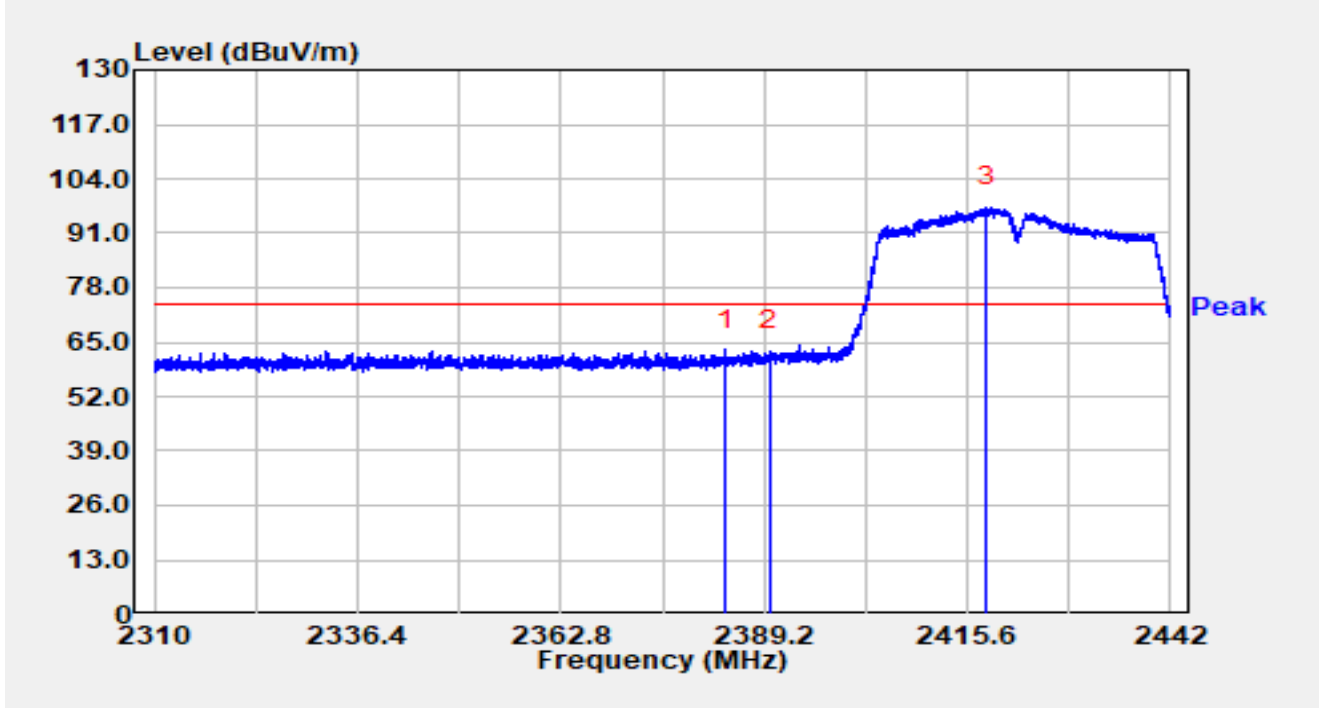


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.158	26.40	36.80	63.20	-10.80	74.00	Peak
2		2390.000	26.10	36.83	62.93	-11.07	74.00	Peak
3		2418.108	60.23	37.00	97.23	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

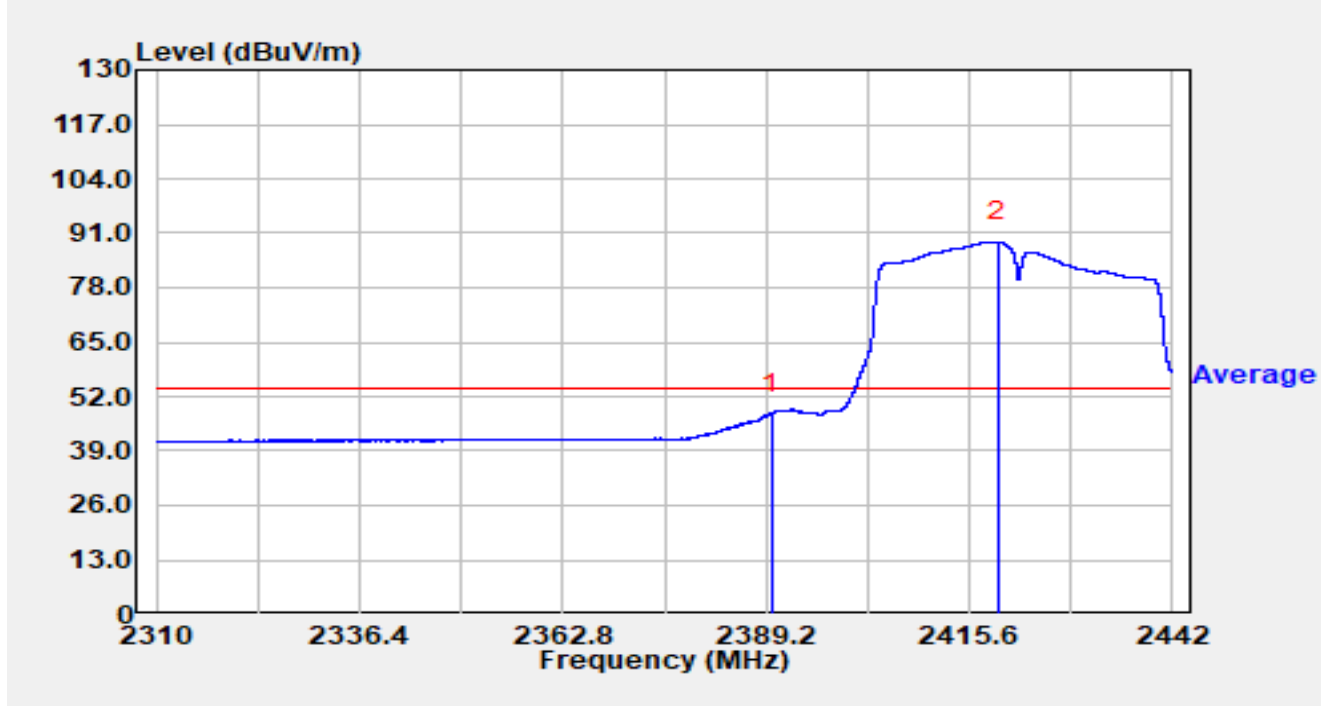


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	11.16	36.83	47.99	-6.01	54.00	Average
2		2419.349	51.88	37.00	88.88	N/A	N/A	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

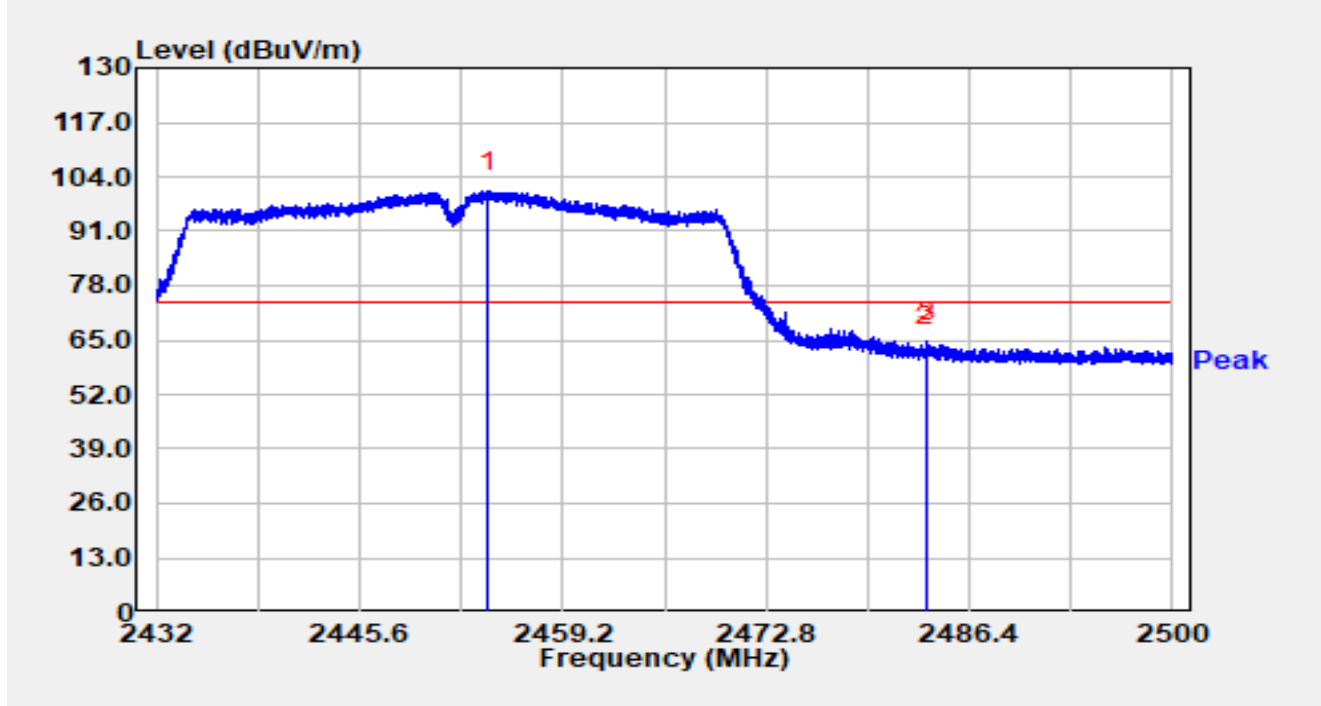


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2454.154	63.57	36.99	100.56	N/A	N/A	Peak
2		2483.500	26.59	37.05	63.64	-10.36	74.00	Peak
3	*	2483.619	27.53	37.05	64.59	-9.41	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

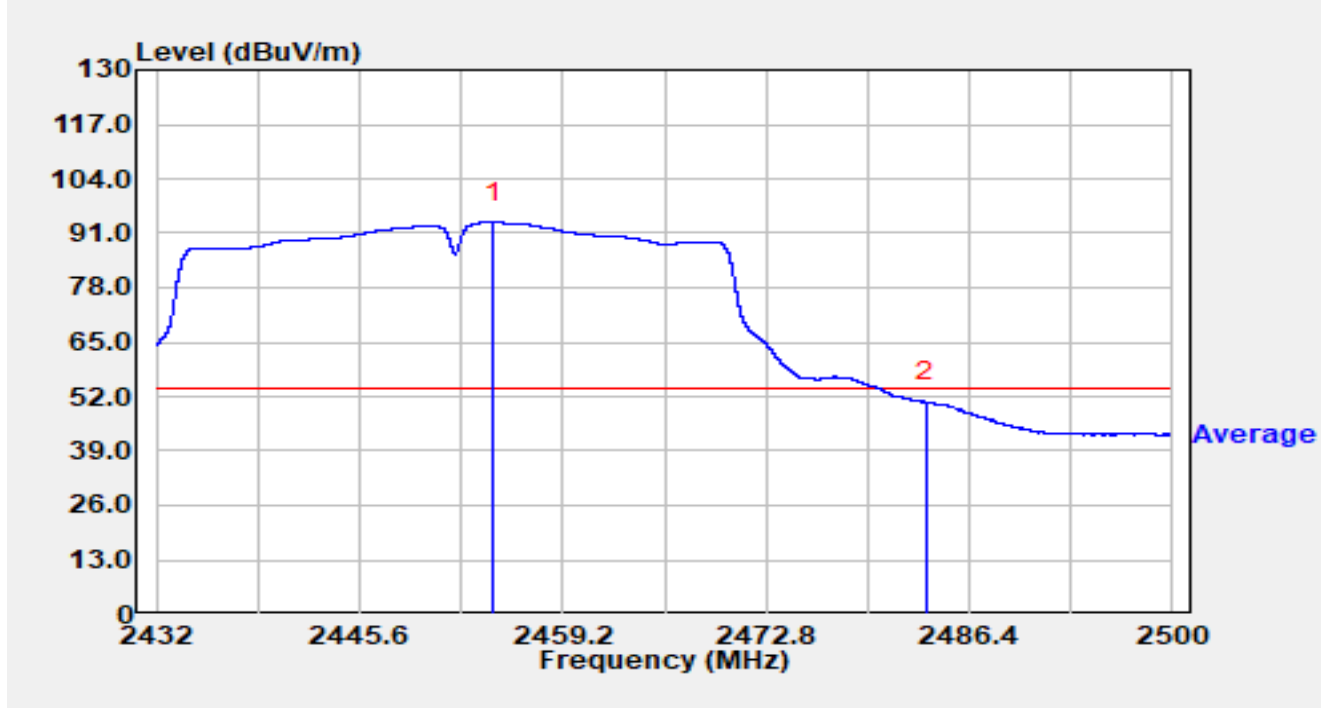


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2454.535	56.64	36.99	93.63	N/A	N/A	Average
2	*	2483.500	13.70	37.05	50.75	-3.25	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

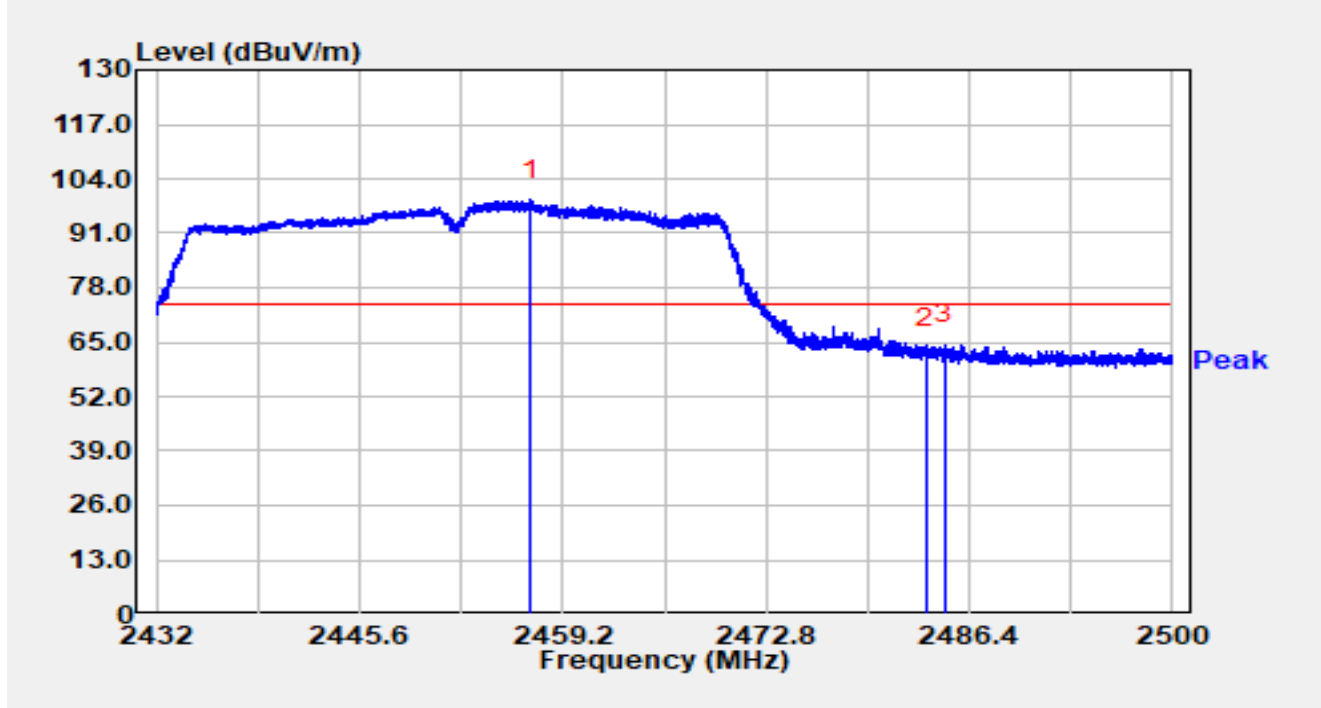


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2457.058	61.92	36.99	98.91	N/A	N/A	Peak
2		2483.500	26.56	37.05	63.61	-10.39	74.00	Peak
3	*	2484.720	27.43	37.06	64.49	-9.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-02-19
Temperature	16.5 °C	Humidity	28.8 %
Limit	FCC_2.4G_RE(3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

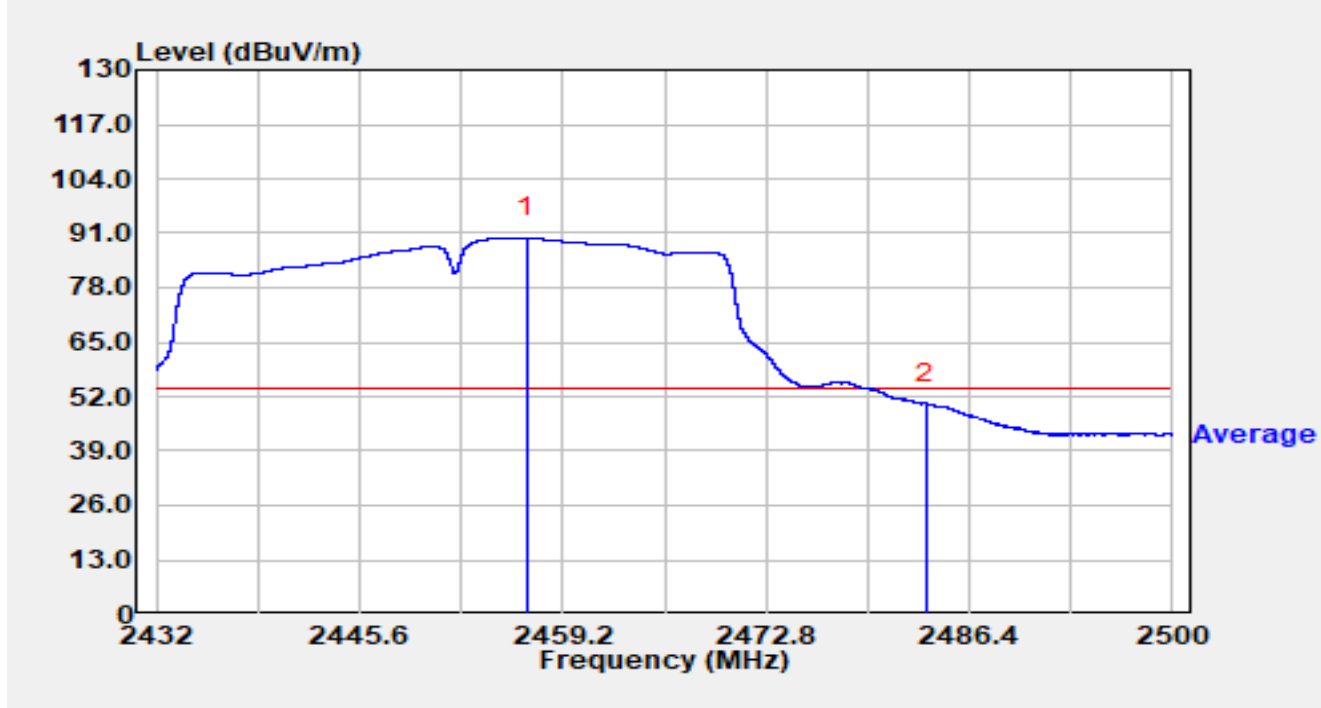


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.759	52.93	36.99	89.92	N/A	N/A	Average
2	*	2483.500	13.32	37.05	50.37	-3.63	54.00	Average

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-02-26
Temperature	17.5 °C	Humidity	39.8 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_C	Polarity	Line
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

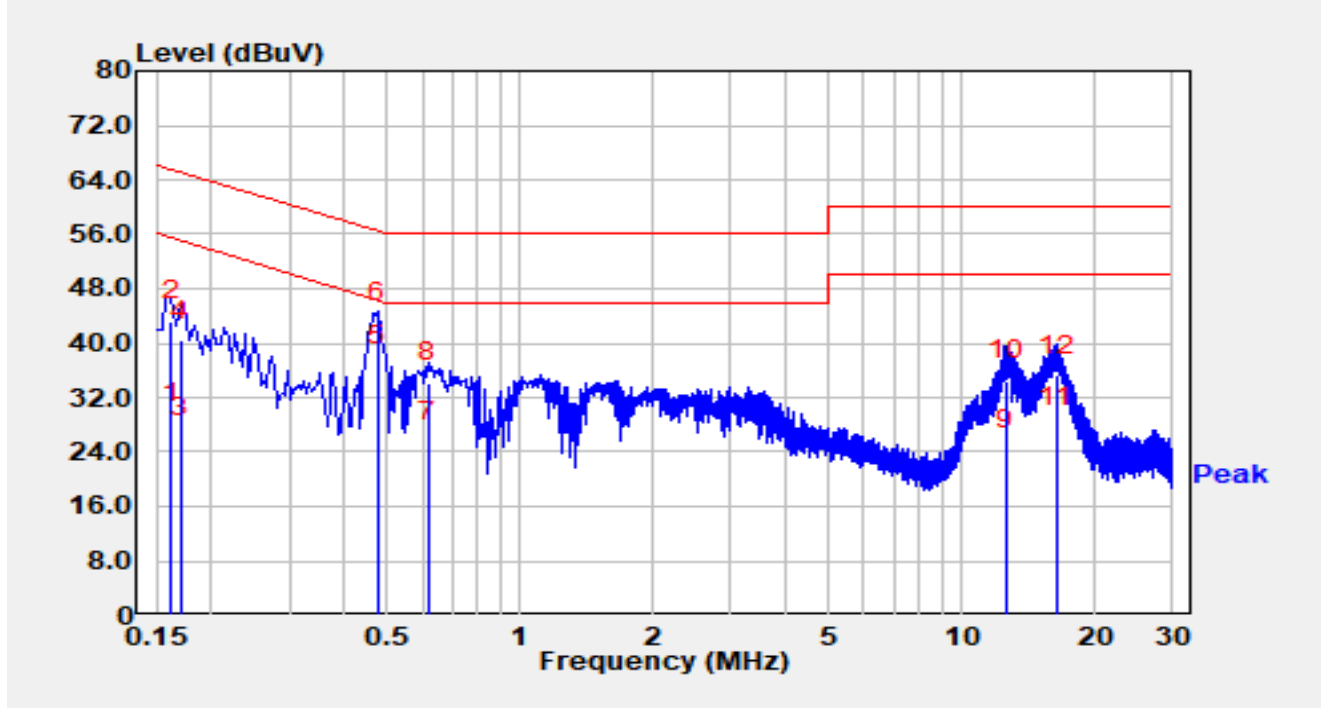


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	18.50	9.82	28.32	-27.04	55.36	Average
2		0.162	33.40	9.82	43.22	-22.14	65.36	QP
3		0.170	16.40	9.82	26.22	-28.74	54.96	Average
4		0.170	30.60	9.82	40.42	-24.54	64.96	QP
5	*	0.474	26.90	9.92	36.82	-9.63	46.44	Average
6		0.474	33.10	9.92	43.02	-13.43	56.44	QP
7		0.618	15.60	9.96	25.56	-20.44	46.00	Average
8		0.618	24.20	9.96	34.16	-21.84	56.00	QP
9		12.600	13.70	10.45	24.15	-25.85	50.00	Average
10		12.600	24.10	10.45	34.55	-25.45	60.00	QP
11		16.390	16.90	10.67	27.57	-22.43	50.00	Average
12		16.390	24.50	10.67	35.17	-24.83	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-02-26
Temperature	17.5 °C	Humidity	39.8 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_C	Polarity	Neutral
EUT	POS Terminal	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

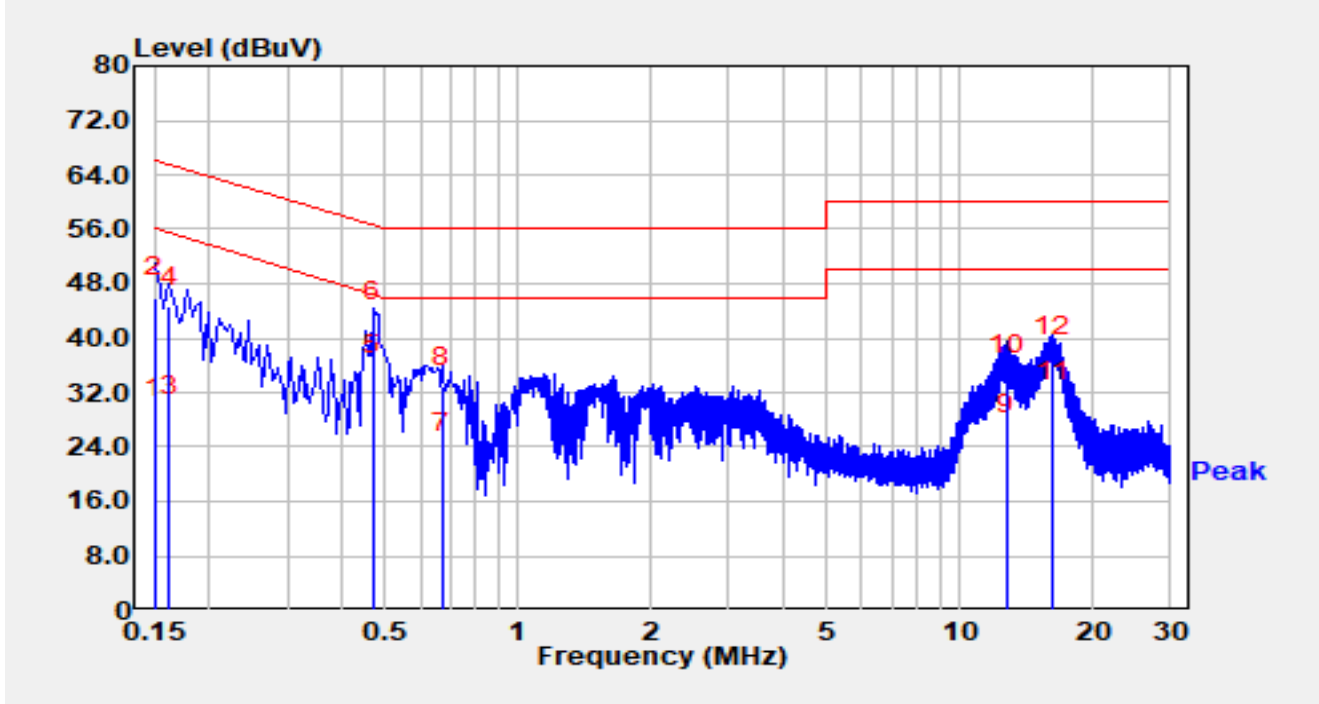

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	18.00	10.13	28.13	-27.87	56.00	Average
2		0.150	35.90	10.13	46.03	-19.97	66.00	QP
3		0.162	18.40	10.12	28.52	-26.84	55.36	Average
4		0.162	34.50	10.12	44.62	-20.74	65.36	QP
5	*	0.470	24.40	10.16	34.56	-11.96	46.51	Average
6		0.470	32.40	10.16	42.56	-13.96	56.51	QP
7		0.674	12.70	10.25	22.95	-23.05	46.00	Average
8		0.674	22.60	10.25	32.85	-23.15	56.00	QP
9		12.800	15.20	10.73	25.93	-24.07	50.00	Average
10		12.800	23.70	10.73	34.43	-25.57	60.00	QP
11		16.240	19.60	10.92	30.52	-19.48	50.00	Average
12		16.240	26.30	10.92	37.22	-22.78	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Appendix B – Test Setup Photograph

Refer to “R25S1016023-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1016023-UE” file.

_____ The End _____