



1.4MHz Channel Bandwidth


Low Channel

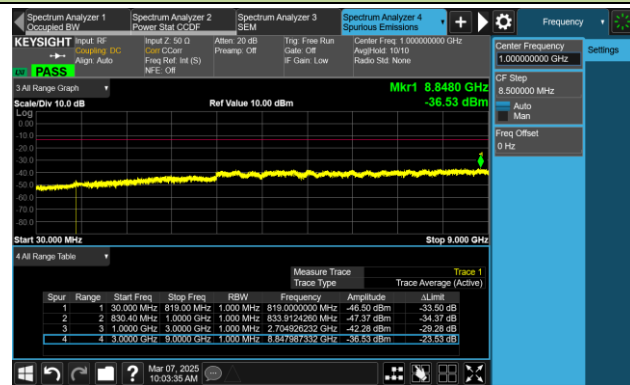

Middle Channel

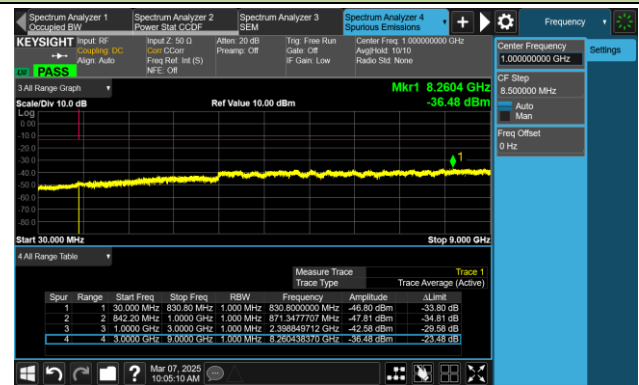


High Channel

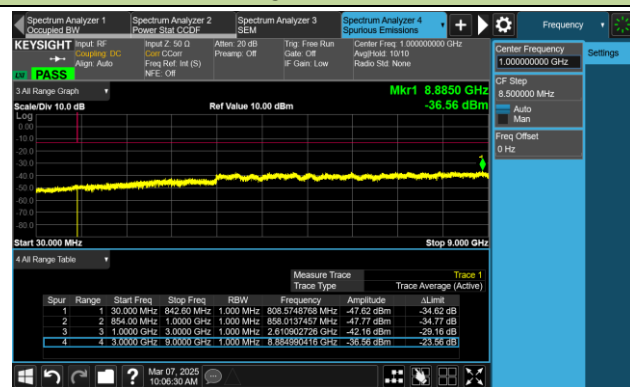


3MHz Channel Bandwidth


Low Channel

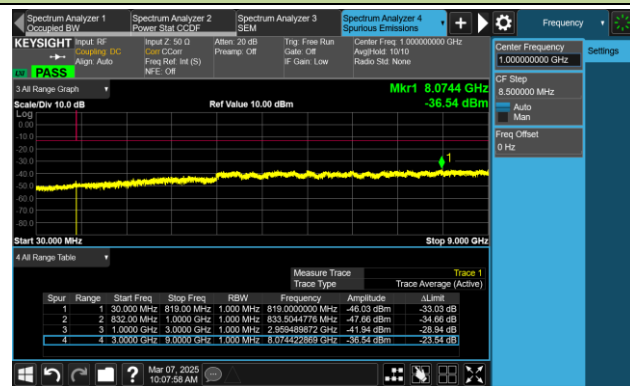

Middle Channel

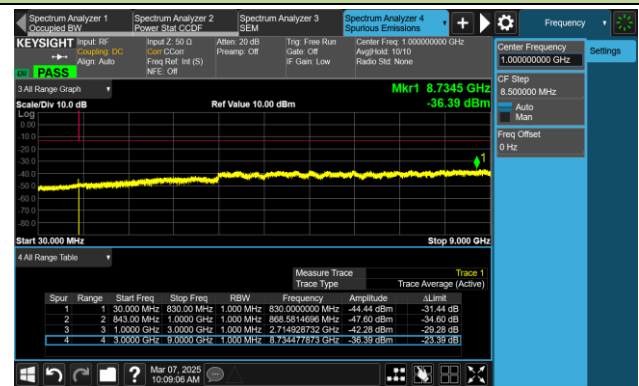


High Channel

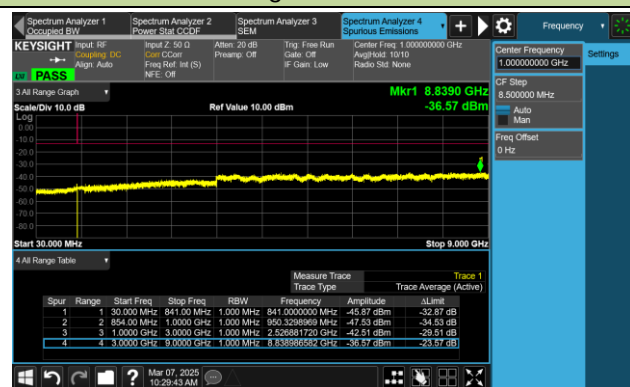


5MHz Channel Bandwidth


Low Channel

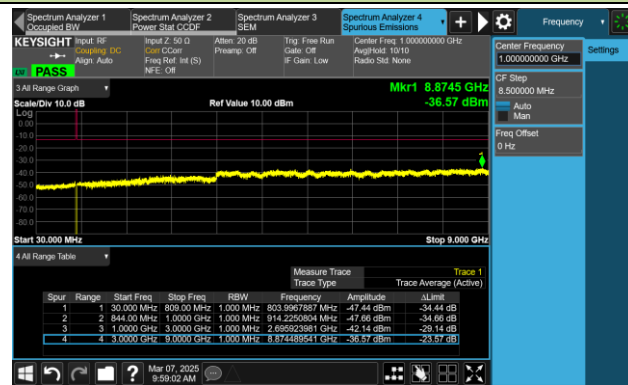

Middle Channel

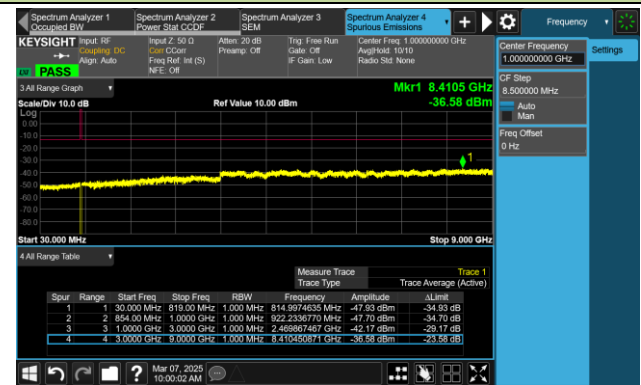


High Channel

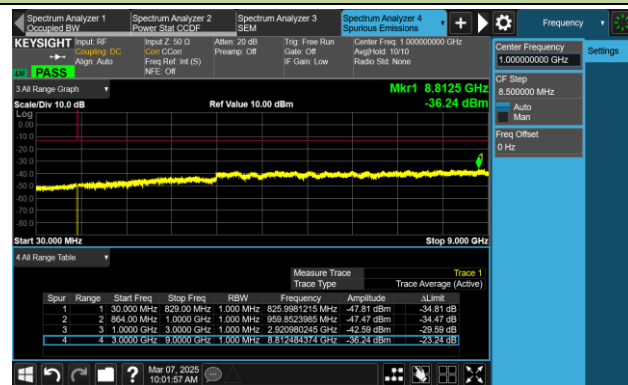


10MHz Channel Bandwidth


Low Channel

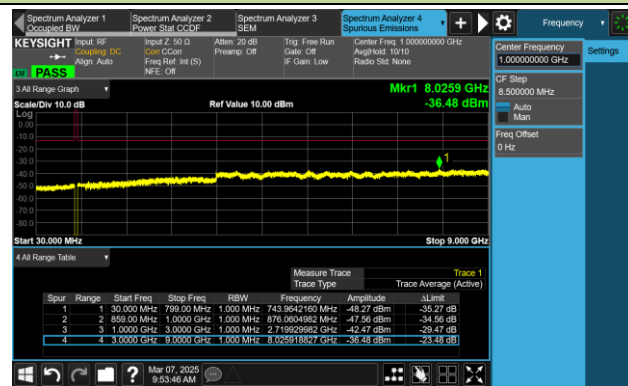

Middle Channel

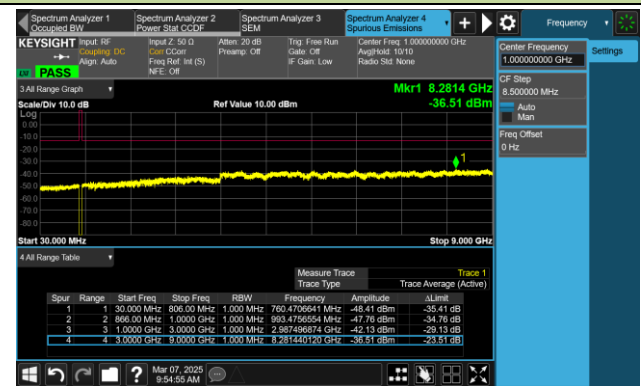


High Channel

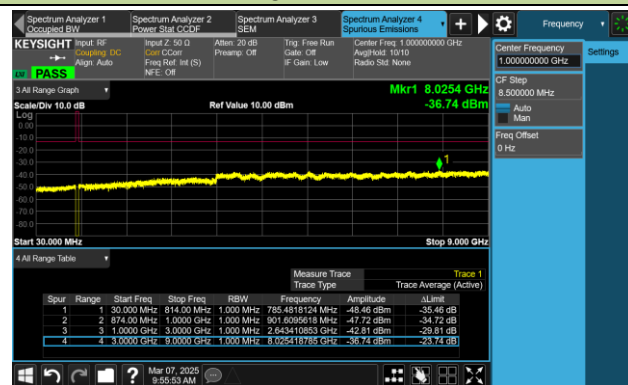


15MHz Channel Bandwidth


Low Channel

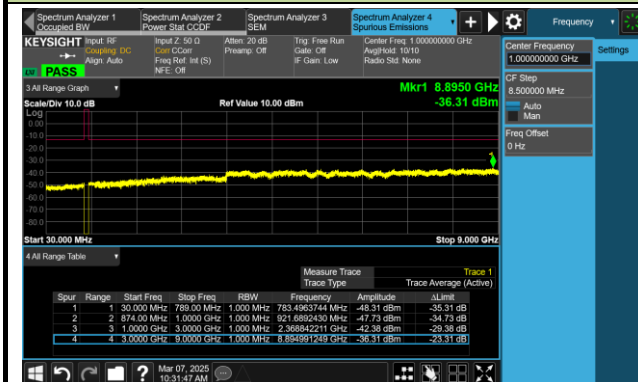

Middle Channel

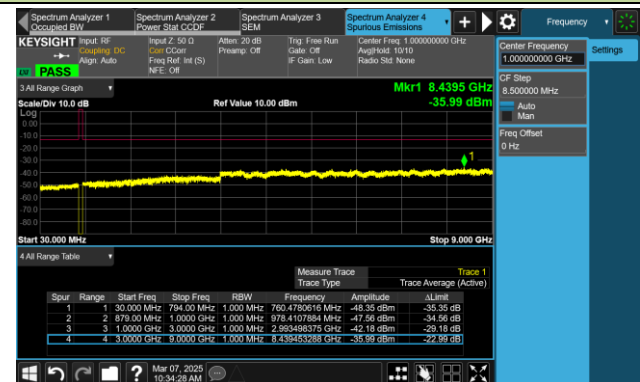

High Channel

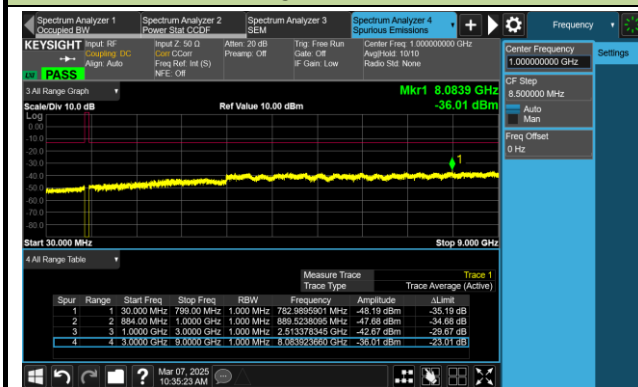


Test Site	WZ-SR6	Test Engineer	Edith Yu
Test Date	2025-02-24	Test Band	Band 7

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
5	2502.5	30 ~ 27000	-35.63	≤ -25.00	Pass
5	2535.0	30 ~ 27000	-36.54	≤ -25.00	Pass
5	2567.5	30 ~ 27000	-35.91	≤ -25.00	Pass
10	2505.0	30 ~ 27000	-36.14	≤ -25.00	Pass
10	2535.0	30 ~ 27000	-35.84	≤ -25.00	Pass
10	2565.0	30 ~ 27000	-35.96	≤ -25.00	Pass
15	2507.5	30 ~ 27000	-35.88	≤ -25.00	Pass
15	2535.0	30 ~ 27000	-36.06	≤ -25.00	Pass
15	2562.5	30 ~ 27000	-36.05	≤ -25.00	Pass
20	2510.0	30 ~ 27000	-35.97	≤ -25.00	Pass
20	2535.0	30 ~ 27000	-35.95	≤ -25.00	Pass
20	2560.0	30 ~ 27000	-36.43	≤ -25.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9 kHz to 30 MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

5MHz Channel Bandwidth


Low Channel

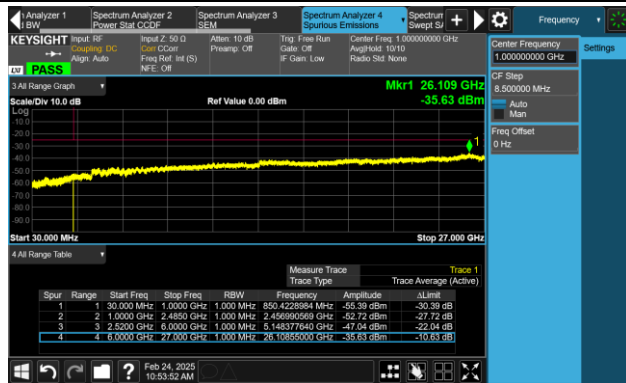

Middle Channel

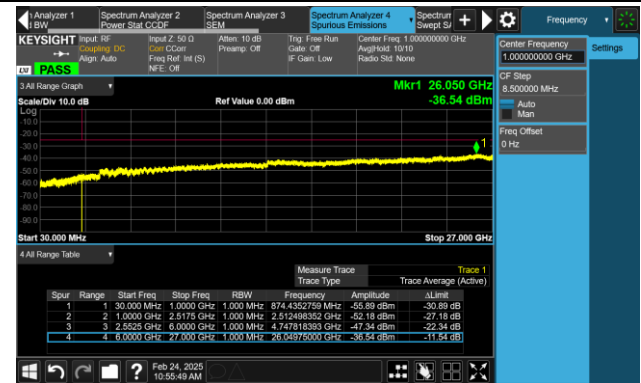


High Channel

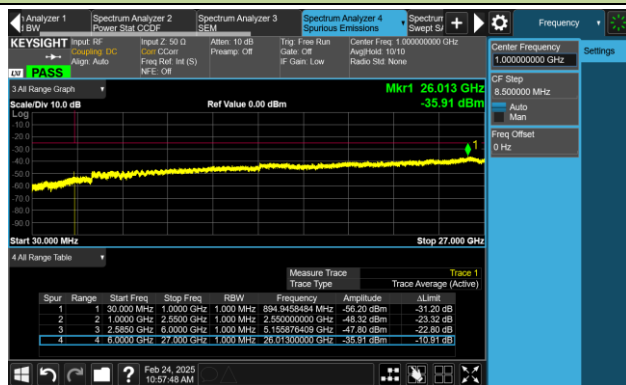


10MHz Channel Bandwidth


Low Channel

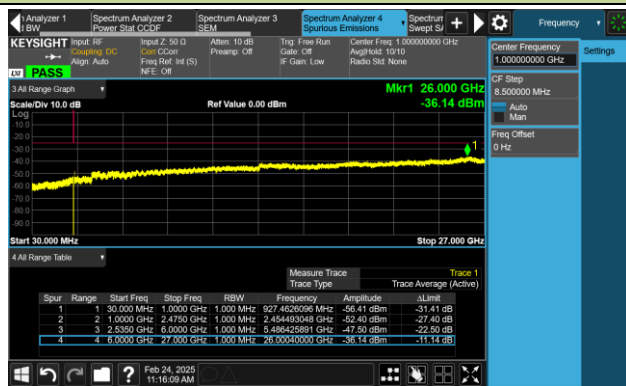

Middle Channel

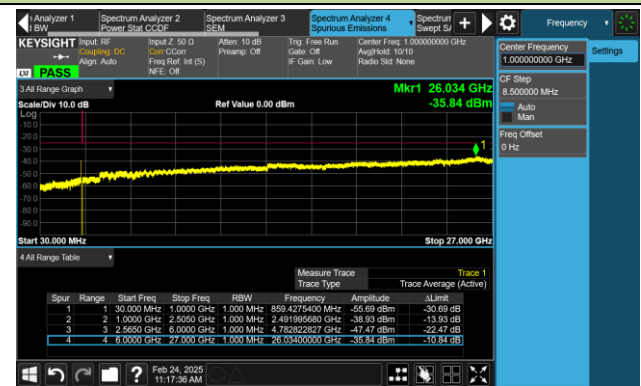


High Channel

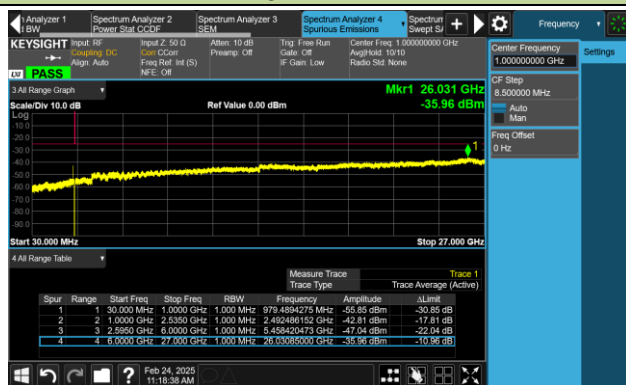


15MHz Channel Bandwidth


Low Channel

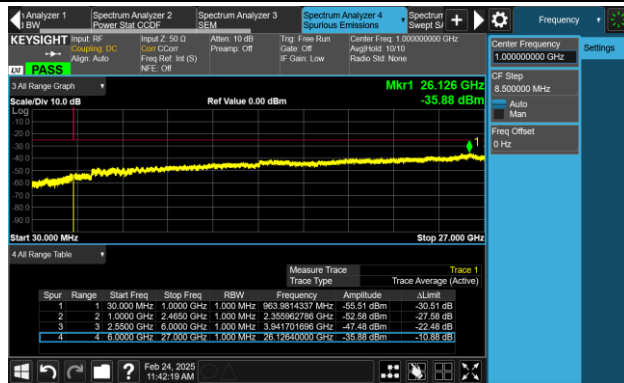

Middle Channel

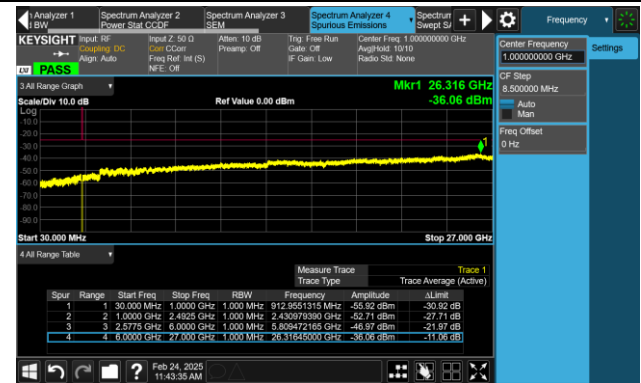


High Channel

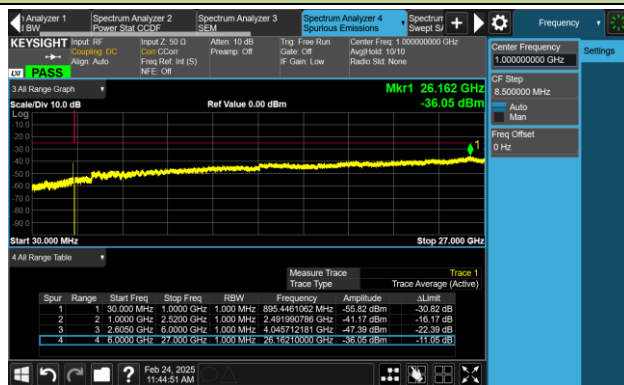


20MHz Channel Bandwidth


Low Channel

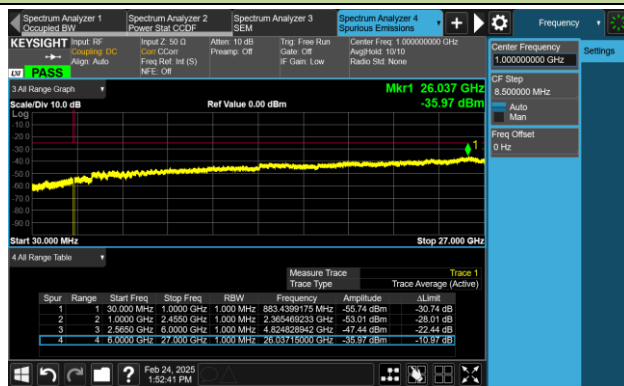

Middle Channel

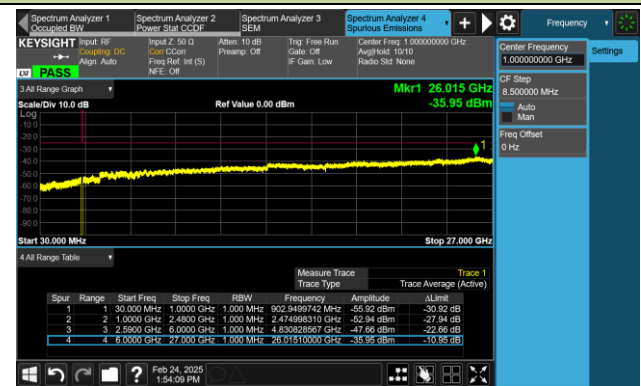

High Channel

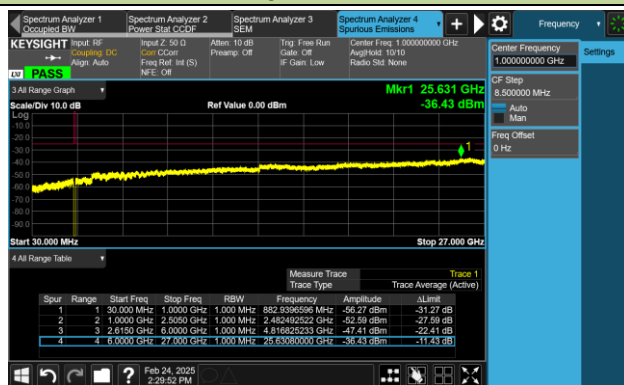


Test Site	WZ-SR6	Test Engineer	Edith Yu
Test Date	2025-03-08	Test Band	Band 13

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
5	779.5	30 ~ 9000	-35.93	≤ -13.00	Pass
		1559 ~ 1610	-70.14	≤ -40.00	Pass
5	782.0	30 ~ 9000	-35.97	≤ -13.00	Pass
		1559 ~ 1610	-53.93	≤ -40.00	Pass
5	784.5	30 ~ 9000	-35.99	≤ -13.00	Pass
		1559 ~ 1610	-58.30	≤ -40.00	Pass
10	782.0	30 ~ 9000	-36.37	≤ -13.00	Pass
		1559 ~ 1610	-70.19	≤ -40.00	Pass

Note: The amplitude of Conducted Spurious emissions (frequency range from 9 kHz to 30 MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

5MHz Channel Bandwidth


Low Channel

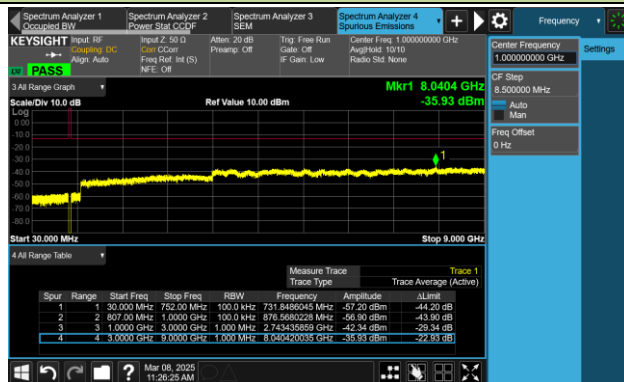

1559 - 1610MHz




Middle Channel

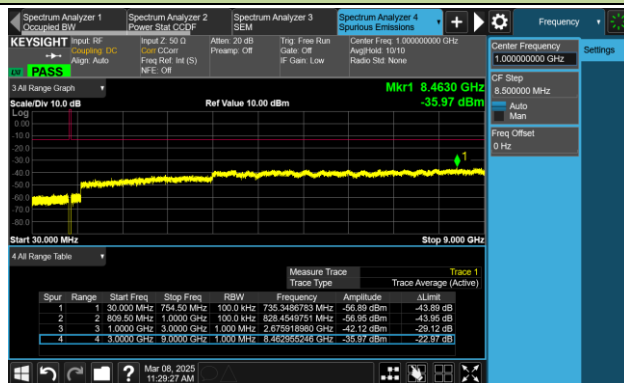

1559 - 1610MHz



High Channel

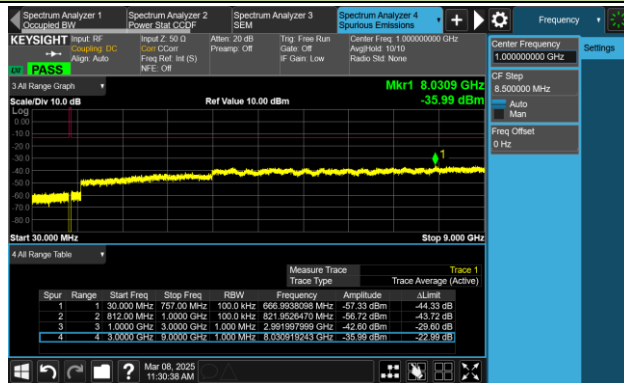


1559 - 1610MHz



10MHz Channel Bandwidth

Middle Channel

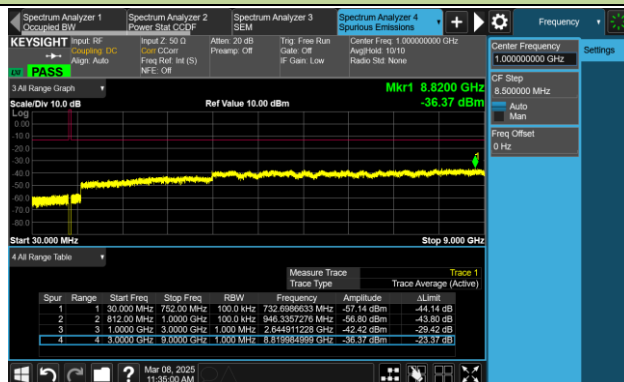

1559 - 1610MHz




Test Site	WZ-SR6	Test Engineer	Edith Yu
Test Date	2025-02-22	Test Band	Band 38/41

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
5	2498.5	30 ~ 27000	-34.19	≤ -25.00	Pass
5	2593.0	30 ~ 27000	-34.10	≤ -25.00	Pass
5	2687.5	30 ~ 27000	-34.23	≤ -25.00	Pass
10	2501.0	30 ~ 27000	-34.25	≤ -25.00	Pass
10	2593.0	30 ~ 27000	-34.23	≤ -25.00	Pass
10	2685.0	30 ~ 27000	-34.44	≤ -25.00	Pass
15	2503.5	30 ~ 27000	-34.33	≤ -25.00	Pass
15	2593.0	30 ~ 27000	-34.01	≤ -25.00	Pass
15	2682.5	30 ~ 27000	-34.29	≤ -25.00	Pass
20	2506.0	30 ~ 27000	-34.24	≤ -25.00	Pass
20	2593.0	30 ~ 27000	-34.24	≤ -25.00	Pass
20	2680.0	30 ~ 27000	-34.25	≤ -25.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9 kHz to 30 MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

5MHz Channel Bandwidth


Low Channel

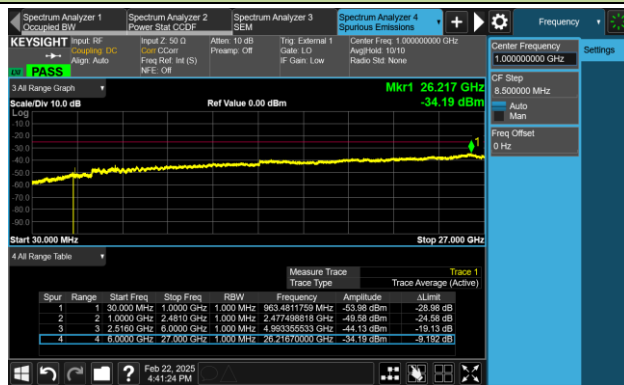

Middle Channel

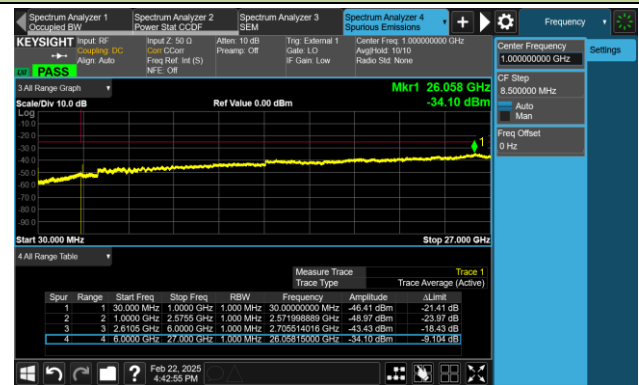


High Channel

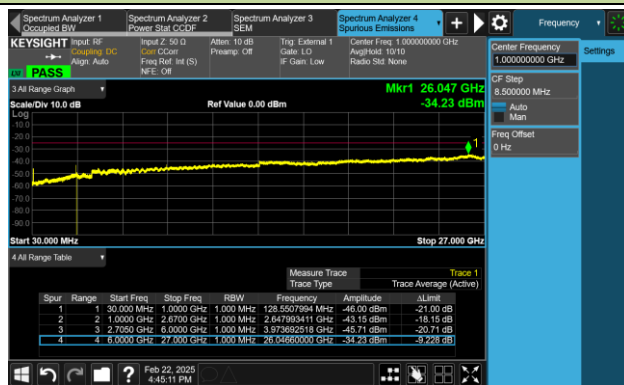


10MHz Channel Bandwidth


Low Channel

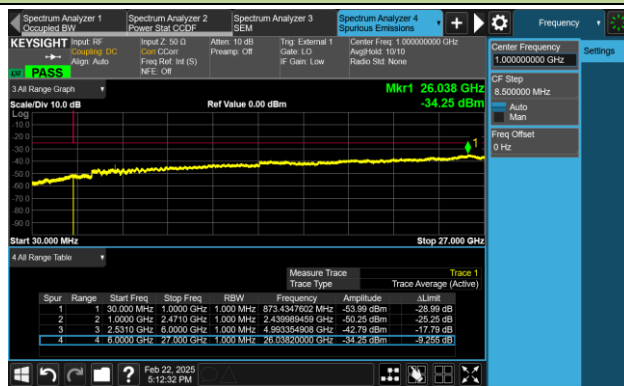

Middle Channel

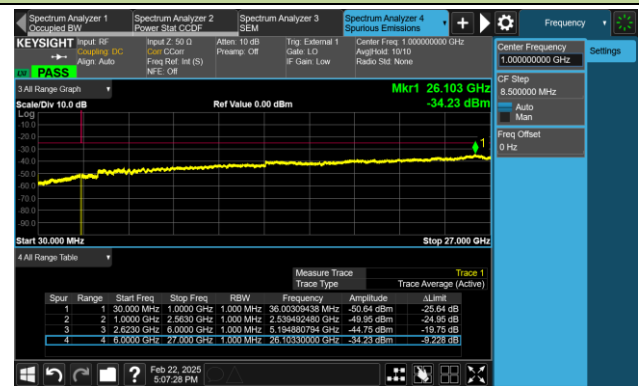


High Channel

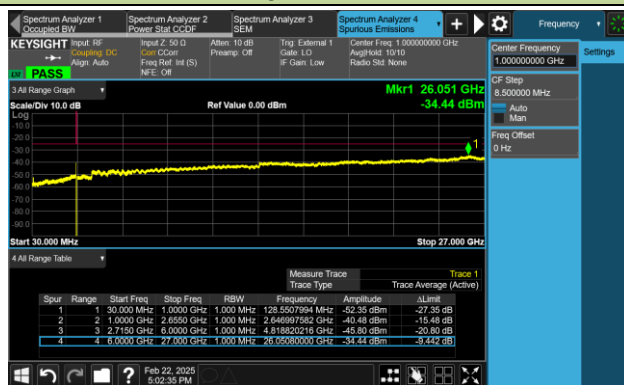


15MHz Channel Bandwidth


Low Channel

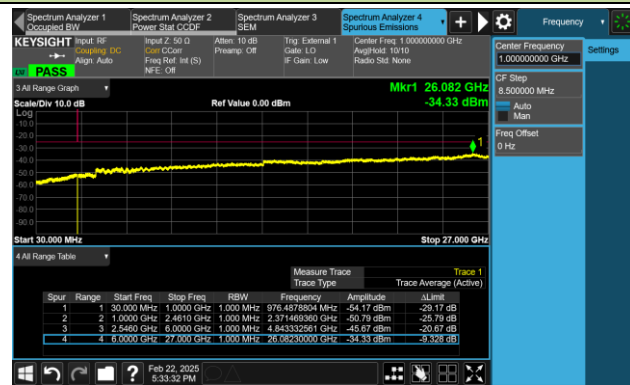

Middle Channel

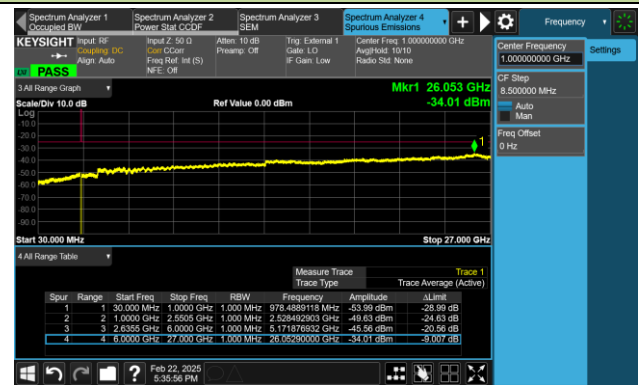


High Channel

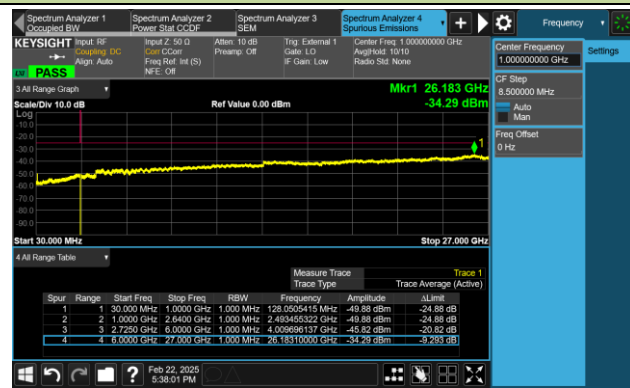


20MHz Channel Bandwidth


Low Channel

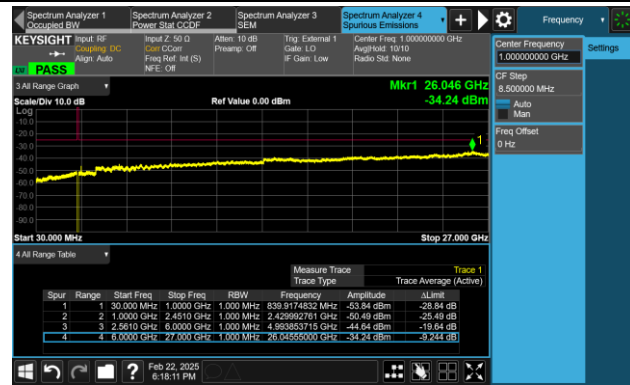

Middle Channel

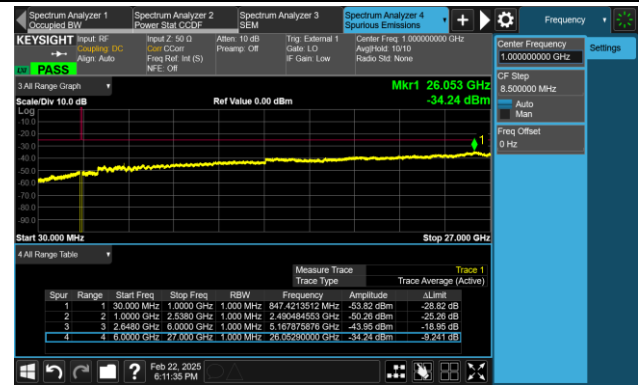

High Channel

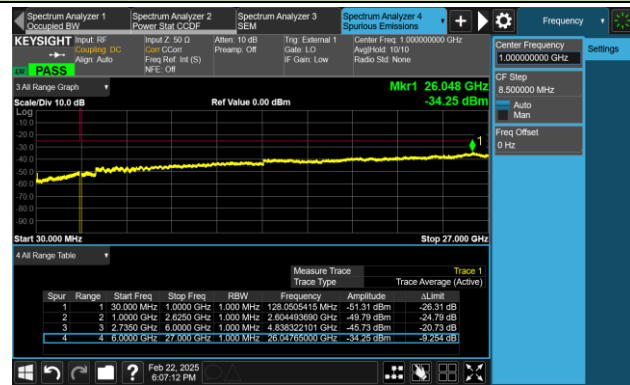

A.7 Radiated Spurious Emissions Test Result

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-13 ~ 2025-03-13	Test Band	Band 5/26

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
62.301	-4.5	17.9	13.4	82.3	-68.9	Quasi-peak	Horizontal
919.490	-4.4	30.5	26.1	82.3	-56.2	Quasi-peak	Horizontal
61.525	5.4	18.0	23.4	82.3	-58.9	Quasi-peak	Vertical
180.156	6.2	17.2	23.4	82.3	-58.9	Quasi-peak	Vertical
1649.600	43.4	-5.7	37.7	82.3	-44.6	Peak	Horizontal
5105.600	36.6	4.3	40.9	82.3	-41.4	Peak	Horizontal
1649.600	43.0	-5.7	37.3	82.3	-45.0	Peak	Vertical
2473.600	42.2	-2.5	39.7	82.3	-42.6	Peak	Vertical
Middle Channel							
171.523	3.5	18.1	21.6	82.3	-60.7	Quasi-peak	Horizontal
931.227	-3.6	30.7	27.1	82.3	-55.2	Quasi-peak	Horizontal
61.428	6.5	18.0	24.5	82.3	-57.8	Quasi-peak	Vertical
929.869	-4.3	30.7	26.4	82.3	-55.9	Quasi-peak	Vertical
1672.800	45.5	-5.8	39.7	82.3	-42.6	Peak	Horizontal
2508.800	44.2	-2.4	41.8	82.3	-40.5	Peak	Horizontal
1672.800	48.3	-5.8	42.5	82.3	-39.8	Peak	Vertical
2508.800	44.0	-2.4	41.6	82.3	-40.7	Peak	Vertical
High Channel							
392.780	3.2	21.1	24.3	82.3	-58.0	Quasi-peak	Horizontal
956.544	-3.5	30.8	27.3	82.3	-55.0	Quasi-peak	Horizontal
62.689	6.8	17.9	24.7	82.3	-57.6	Quasi-peak	Vertical
976.526	-4.1	31.1	27.0	82.3	-55.3	Quasi-peak	Vertical
1696.000	49.5	-5.7	43.8	82.3	-38.5	Peak	Horizontal
2544.000	41.1	-2.3	38.8	82.3	-43.5	Peak	Horizontal
1696.000	49.1	-5.7	43.4	82.3	-38.9	Peak	Vertical
8760.000	36.5	11.4	47.9	82.3	-34.4	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-13 ~ 2025-03-13	Test Band	Band 7

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
382.886	6.8	20.9	27.7	70.3	-42.6	Quasi-peak	Horizontal
921.139	-3.7	30.5	26.8	70.3	-43.5	Quasi-peak	Horizontal
36.305	10.6	17.7	28.3	70.3	-42.0	Quasi-peak	Vertical
61.816	18.7	18.0	36.7	70.3	-33.6	Quasi-peak	Vertical
5005.200	47.3	3.9	51.2	70.3	-19.1	Peak	Horizontal
7504.200	45.4	8.7	54.1	70.3	-16.2	Peak	Horizontal
5005.200	44.7	3.9	48.6	70.3	-21.7	Peak	Vertical
7511.000	43.9	8.7	52.6	70.3	-17.7	Peak	Vertical
Middle Channel							
66.084	8.7	17.4	26.1	70.3	-44.2	Quasi-peak	Horizontal
977.787	-4.6	31.2	26.6	70.3	-43.7	Quasi-peak	Horizontal
35.529	10.3	17.7	28.0	70.3	-42.3	Quasi-peak	Vertical
60.264	19.0	18.2	37.2	70.3	-33.1	Quasi-peak	Vertical
5066.400	54.3	4.1	58.4	70.3	-11.9	Peak	Horizontal
7599.400	50.9	8.7	59.6	70.3	-10.7	Peak	Horizontal
5066.400	53.3	4.1	57.4	70.3	-12.9	Peak	Vertical
7599.400	47.7	8.7	56.4	70.3	-13.9	Peak	Vertical
High Channel							
62.592	5.9	17.9	23.8	70.3	-46.5	Quasi-peak	Horizontal
981.279	-5.5	31.3	25.8	70.3	-44.5	Quasi-peak	Horizontal
58.227	18.7	18.3	37.0	70.3	-33.3	Quasi-peak	Vertical
945.777	-4.7	30.6	25.9	70.3	-44.4	Quasi-peak	Vertical
5131.000	53.8	4.2	58.0	70.3	-12.3	Peak	Horizontal
7696.300	48.8	8.8	57.6	70.3	-12.7	Peak	Horizontal
5131.000	52.8	4.2	57.0	70.3	-13.3	Peak	Vertical
7696.300	50.3	8.8	59.1	70.3	-11.2	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-13 ~ 2025-03-13	Test Band	Band 13

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
62.495	1.1	17.9	19.0	82.3	-63.3	Quasi-peak	Horizontal
910.469	-3.6	30.1	26.5	82.3	-55.8	Quasi-peak	Horizontal
62.398	8.7	17.9	26.6	82.3	-55.7	Quasi-peak	Vertical
981.570	-5.5	31.3	25.8	82.3	-56.5	Quasi-peak	Vertical
1576.800	40.4	-6.0	34.4	55.3	-20.9	Peak	Horizontal
2332.000	48.3	-2.2	46.1	82.3	-36.2	Peak	Horizontal
1565.600	41.9	-6.0	35.9	55.3	-19.4	Peak	Vertical
2332.800	49.1	-2.2	46.9	82.3	-35.4	Peak	Vertical
Middle Channel							
170.747	-4.5	18.2	13.7	82.3	-68.6	Quasi-peak	Horizontal
974.974	-4.9	31.1	26.2	82.3	-56.1	Quasi-peak	Horizontal
62.107	8.0	18.0	26.0	82.3	-56.3	Quasi-peak	Vertical
968.475	-4.3	30.9	26.6	82.3	-55.7	Quasi-peak	Vertical
1564.000	41.9	-6.0	35.9	55.3	-19.4	Peak	Horizontal
6324.000	37.7	6.1	43.8	82.3	-38.5	Peak	Horizontal
1560.800	41.7	-6.1	35.6	55.3	-19.7	Peak	Vertical
5241.600	36.5	4.1	40.6	82.3	-41.7	Peak	Vertical
High Channel							
62.398	2.4	17.9	20.3	82.3	-62.0	Quasi-peak	Horizontal
939.860	-4.5	30.7	26.2	82.3	-56.1	Quasi-peak	Horizontal
62.398	8.7	17.9	26.6	82.3	-55.7	Quasi-peak	Vertical
984.868	-4.9	31.4	26.5	82.3	-55.8	Quasi-peak	Vertical
1596.000	40.8	-6.0	34.8	55.3	-20.5	Peak	Horizontal
2347.200	44.3	-2.3	42.0	82.3	-40.3	Peak	Horizontal
1607.200	42.2	-6.0	36.2	55.3	-19.1	Peak	Vertical
2347.200	42.4	-2.3	40.1	82.3	-42.2	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2025-02-13 ~ 2025-03-13	Test Band	Band 38/41

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
62.980	4.7	17.8	22.5	70.3	-47.8	Quasi-peak	Horizontal
984.965	-5.3	31.4	26.1	70.3	-44.2	Quasi-peak	Horizontal
58.324	18.9	18.3	37.2	70.3	-33.1	Quasi-peak	Vertical
965.274	-4.2	30.9	26.7	70.3	-43.6	Quasi-peak	Vertical
4995.000	46.6	3.7	50.3	70.3	-20.0	Peak	Horizontal
7499.100	41.4	8.7	50.1	70.3	-20.2	Peak	Horizontal
4996.700	42.0	3.8	45.8	70.3	-24.5	Peak	Vertical
7495.700	40.6	8.7	49.3	70.3	-21.0	Peak	Vertical
Middle Channel							
61.622	5.0	18.0	23.0	70.3	-47.3	Quasi-peak	Horizontal
942.479	-4.2	30.7	26.5	70.3	-43.8	Quasi-peak	Horizontal
62.107	19.2	18.0	37.2	70.3	-33.1	Quasi-peak	Vertical
105.563	15.4	14.8	30.2	70.3	-40.1	Quasi-peak	Vertical
5182.000	51.2	4.0	55.2	70.3	-15.1	Peak	Horizontal
7772.800	46.8	9.0	55.8	70.3	-14.5	Peak	Horizontal
5182.000	50.0	4.0	54.0	70.3	-16.3	Peak	Vertical
7772.800	47.1	9.0	56.1	70.3	-14.2	Peak	Vertical
High Channel							
106.533	8.7	15.0	23.7	70.3	-46.6	Quasi-peak	Horizontal
976.332	-4.3	31.1	26.8	70.3	-43.5	Quasi-peak	Horizontal
60.846	18.4	18.1	36.5	70.3	-33.8	Quasi-peak	Vertical
105.466	14.7	14.8	29.5	70.3	-40.8	Quasi-peak	Vertical
5370.700	51.1	4.1	55.2	70.3	-15.1	Peak	Horizontal
8056.700	48.2	10.1	58.3	70.3	-12.0	Peak	Horizontal
5370.700	53.7	4.1	57.8	70.3	-12.5	Peak	Vertical
8056.700	49.2	10.1	59.3	70.3	-11.0	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Appendix B - Test Setup Photograph

Refer to "R25S1009034-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1009034-UE" file.

The End
