



**KES Co., Ltd.**  
C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

# TEST REPORT

## Part 15 Subpart C 15.225

**Equipment under test** Keyfree RF

**Model name** RF-001

**FCC ID** WJ3RF-001

**Applicant** Bisro Co., Ltd.

**Manufacturer** Bisro Co., Ltd.

**Date of test(s)** 2012.06.29 ~ 2012.07.04

**Date of issue** 2012.07.10

**Issued to**

**Bisro Co., Ltd.**

JoongAng ilbo 9F 778, Wonsi-Dong, Danwon-gu, Ansan-Si, Gyeonggi-Do, Korea

**Issued by**


**KES Co., Ltd.**

C3701 Dongil Techno Town, 889-1, Gwanyang 2-dong, Dongan-gu, Anyang-si,

Gyeonggi-do, 431-716, Korea

477-6, Hageo-ri, Yeoju-eup, Yeoju-gun, Gyeonggi-do, 469-803, Korea

Tel: +82-31-425-6200 / Fax: +82-31-424-0450

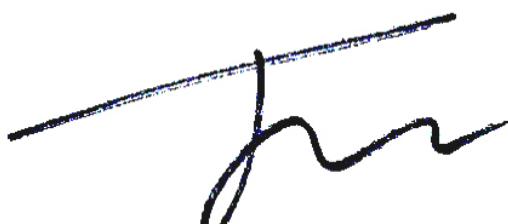Test and report completed by :	Report approval by :
	
J.J Lee Test engineer	Gyu-cheol Shin Technical manager



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
[www.kes.co.kr](http://www.kes.co.kr)

---

### Revision history

Revision	Date of issue	Test report No.	Description
-	2012.07.10	KES-RF-120051	Initial



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

## TABLE OF CONTENTS

1.0	General product description.....	4
1.1	Test frequency.....	4
1.2	Model differences .....	4
1.3	Device modifications .....	4
1.4	Test facility .....	5
1.5	Test measurement procedure.....	5
1.6	Laboratory accreditations and listings .....	5
2.0	Summary of tests .....	6
2.1	Test data .....	7
2.1.1	Fundamental, spurious emission .....	7
2.1.2	20 dB bandwidth .....	12
2.1.3	Frequency tolerance .....	13
Appendix A.	Test equipment used for test .....	15
Appendix B.	Test setup photo.....	16



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

### 1.0 General product description

Equipment under test	Keyfree RF
Model name	RF-001
Serial number	N/A
Frequency Range	13.561 MHz
Modulation technique	ASK
Number of channels	1
Antenna type	PCB antenna
Power source	DC 12 V

### 1.1 Test frequency

	Low channel	Middle channel	High channel
Frequency (MHz)	13.561	N/A	N/A

### 1.2 Model differences

N/A

### 1.3 Device modifications

N/A



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

### 1.4 Test facility

C3701 Dongil Techno Town, 889-1, Gwanyang 2-dong, Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
477-6, Hageo-ri, Yeoju-eup, Yeoju-gun, Gyeonggi-do, 469-803, Korea

The open area test sites are constructed in conformance with the requirements of ANSI C63.4-2003/2009.

### 1.5 Test measurement procedure

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.4-2003/2009).

### 1.6 Laboratory accreditations and listings

Country	Agency	Scope of accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 343818
KOREA	KC	EMI (10 meter Open Area Test Site and two conducted sites) Radio (3 & 10 meter Open Area Test Sites and one conducted site)	 KR0100
Canada	IC	3 & 10 meter Open Area Test Sites and one conducted site	 4769B-1



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

### 2.0 Summary of tests

Section in FCC Part 15	Parameter	Status
15.225(a)	The field strength of fundamental	C
15.225(b)(c)	The field strength of spurious emission(In-band)	C
15.225(d) 15.209	The field strength of spurious emission(Out-band)	C
15.225(e)	The frequency tolerance	C
15.215(c)	20 dB bandwidth	C

Note 1: C=Complies NC=Not complies NT=Not tested NA=Not applicable

## 2.1 Test data

### 2.1.1 Fundamental, spurious emission

#### Test location

Testing was performed at a test distance of 3 meter Open Area Test Site

#### Test procedures

[9 kHz to 30 MHz]

The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Quasi-peak function and specified bandwidth with maximum hold mode.

The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 200 Hz for Quasi-peak detection (QP) at frequency below 9 kHz~ 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer 9 kHz for Quasi-peak detection (QP) at frequency below 150 kHz~ 30 MHz.

[30 MHz to 1 GHz]


The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.


The spectrum analyzer is set to:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 kHz to 30 MHz Emissions.

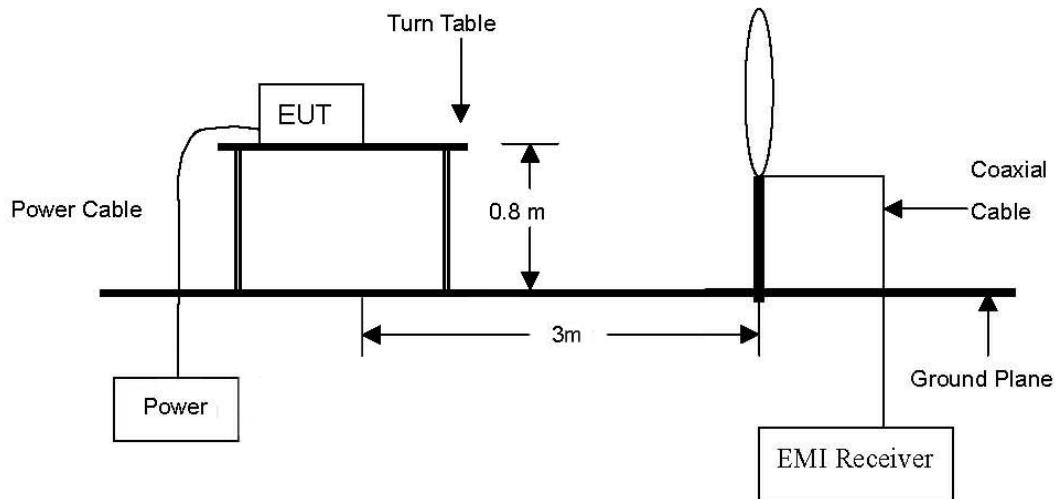

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

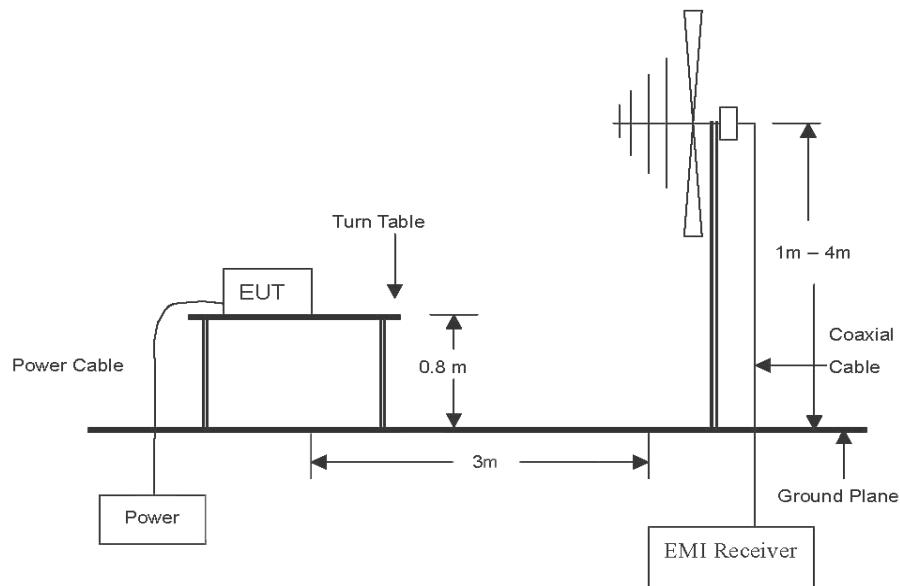

## Limit

In the section 15.209:

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Distance (Meters)	Radiated ( $\mu$ V/m)
0.009 ~ 0.490	300	2400 / F(kHz)
0.490 ~ 1.705	30	24000 / F(kHz)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 MHz, 76 ~ 88 MHz, 174 ~ 216 MHz or 470 ~ 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

In the section 15.225:

- (a) The field strength of any emissions within the band 13.553 ~ 13.567 MHz shall not exceed 15,848 microvolts/meter (= 84 dB $\mu$ V/m) at 30 meters.
- (b) Within the bands 13.410 ~ 13.553 MHz and 13.567 ~ 13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter (=50.5 dB $\mu$ V/m) at 30 meters.
- (c) Within the bands 13.110 ~ 13.410 MHz and 13.710 ~ 14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter (=40.5 dB $\mu$ V/m) at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110 ~ 14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

### Test results for fundamental

Radiated emissions		Ant.	Correction factors			Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Distance (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
13.561	34.55	H	18.30	0.57	-40	13.42	84.00	70.58
13.561	43.54	V	18.30	0.57	-40	22.41	84.00	61.59

### Test results for in-band & out-band(9 kHz to 14.010 MHz)

Radiated emissions		Ant.	Correction factors			Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Distance (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
0.072	22.89	V	18.28	0.19	-80	-38.64	30.45	69.09
0.076	26.67	V	18.28	0.19	-80	-38.86	29.98	68.84
10.224	23.84	H	18.16	0.47	-40	2.47	29.54	27.07

### Test results for in-band & out-band(14.010 MHz to 30 MHz)

Radiated emissions		Ant.	Correction factors			Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Distance (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
The emission level is much lower than the limit by over 20 dB.								

#### \* Remark

1. Actual = Reading + Ant. factor + Cable loss + Distance
2. Distance correction below 30 MHz =  $40\log(3 \text{ m} / 30 \text{ m or } 300\text{m})$   
Measurement distance: 3 m
3. Detector mode: Quasi peak
4. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

### Test results (Below 1000 MHz)

Radiated emissions		Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Pol.	Ant. factor (dB/m)	Cable loss (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
34.9	23.09	V	12.76	0.83	36.68	40.00	3.32
54.3	17.57	V	13.44	0.96	31.97	40.00	8.03
80.9	22.29	V	9.25	1.13	32.67	40.00	3.33
80.9	14.59	H	9.25	1.13	24.97	40.00	5.03
95.5	15.71	V	8.24	1.22	25.17	43.50	18.33
134.3	12.08	V	12.27	1.32	25.67	43.50	17.83
379.2	11.05	H	15.14	2.15	28.34	46.00	17.66
886.0	9.36	H	23.13	3.45	35.94	46.00	10.06

#### ※ Remark

1. Actual = Reading + Ant. factor + Cable loss
2. Detector mode: Quasi peak
3. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.

### 2.1.2 20 dB bandwidth


Test setup: The EUT was connected to a spectrum analyzer.

Test procedure: The 20 dB bandwidth was measured by using a spectrum analyzer.



### 2.1.3 Frequency tolerance

#### Test setup

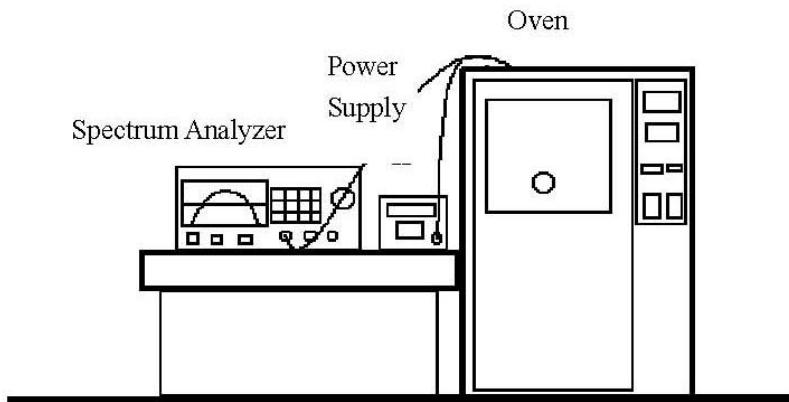

#### Test procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The transmission time was measured with the spectrum analyzer using  $RBW=1$  kHz,  $VBW=1$  kHz.
3. Set the temperature of chamber to  $-20^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the highest temperature  $50^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

#### Limit

According to FCC Part 15 Section 15.225 (e),

The frequency tolerance of the carrier signal shall be maintained within  $+/-0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

### Test results

Test voltage (%)	Test voltage (V)	Temperature (°C)	Measure frequency (MHz)	Frequency deviation (Hz)	Deviation (%)
100 %	DC 12.0	-20	13.561 400	400	0.002 949
100 %		-10	13.561 400	400	0.002 949
100 %		0	13.561 400	400	0.002 949
100 %		10	13.561 600	600	0.004 424
100 %		20	13.561 600	600	0.004 424
100 %		30	13.561 600	600	0.004 424
100 %		40	13.561 600	600	0.004 424
100 %		50	13.559 530	530	0.003 908
Battery End Point	DC 2.7	20	13.561 600	600	0.004 424
115 %	DC 13.8	20	13.561 600	600	0.004 424



## KES Co., Ltd.

C-3701 Dongil Techno Town, 889-1, Gwanyang 2-dong,  
Dongan-gu, Anyang-si, Gyeonggi-do, 431-716, Korea  
Tel: +82-31-425-6200 / Fax: +82-31-424-0450  
www.kes.co.kr

---

### Appendix A. Test equipment used for test

Equipment	Manufacturer	Model	Calibration due.
Spectrum Analyzer	R&S	FSP	2013.05.04
DC Power Supply	HP	6674A	2012.12.05
Loop Antenna	R&S	HFH2-Z2.335.4711.52	2013.03.10
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	2013.04.28
Temperature chamber	TABAI	MC711P	2013.05.04
EMI Test Receiver	Agilent	E7405A	2012.08.22

### Peripheral device

Device	Manufacturer	Model No.	Serial No.
-	-	-	-

**Appendix B. Test setup photo**

N/A

