

# TEST REPORT

REPORT NUMBER: B08GE6003-FCC-EMC

ON

Type of Equipment: GSM Mobile Phone  
Type of Designation: S7  
Manufacturer: SODIFF BMT

ACCORDING TO

FCC CFR Part 2, FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS; e-CFR, March 23, 2006


PART 22, PUBLIC MOBILE SERVICES (Oct 1, 02 Edition)

PART 24, PERSONAL COMMUNICATIONS SERVICES (Oct 1, 97 Edition)

China Telecommunication Technology Labs.

Month date, year  
Aug, 01, 2008

Signature



He Guili  
Director

**FCC ID:** WJG-S7  
**Report Date:** 2008-08-01

**Test Firm Name:** China Telecommunication Technology Labs  
**Registration Number:** 840587

**Statement**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22, and 24. The sample tested was found to comply with the requirements defined in the applied rules.

## CONTENTS

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 NOTES .....	4
1.2 TESTERS.....	5
1.3 TESTING LABORATORY INFORMATION .....	6
1.4 DETAILS OF APPLICANT OR MANUFACTURER .....	7
<b>2 TEST ITEM .....</b>	<b>8</b>
2.1 GENERAL INFORMATION .....	8
2.2 OUTLINE OF EUT .....	8
2.3 MODIFICATIONS INCORPORATED IN EUT .....	8
2.4 EQUIPMENT CONFIGURATION .....	8
2.5 OTHER INFORMATION .....	9
<b>3 SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>4 TEST RESULTS OF MODE .....</b>	<b>11</b>
4.1 RADIATED SPURIOUS EMISSION.....	11
4.2 RADIATED RF POWER OUTPUT AND ERP .....	21
4.3 OCCUPIED BANDWIDTH .....	24
4.4 FREQUENCY STABILITY OVER TEMPERATURE VARIATION .....	32
4.5 FREQUENCY STABILITY OVER VOLTAGE VARIATION .....	35
4.6 CONDUCTED RF POWER OUTPUT .....	37
4.7 CONDUCTED SPURIOUS EMISSION .....	40
4.8 BAND EDGE .....	45
<b>ANNEX A EXTERNAL PHOTOS .....</b>	<b>51</b>
<b>ANNEX B INTERNAL PHOTOS.....</b>	<b>55</b>
<b>ANNEX C DEVIATIONS FROM PRESCRIBED TEST METHODS.....</b>	<b>58</b>

## 1 General Information

### 1.1 Notes

All reported tests were carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Parts 2, 22 and 24.


The test results of this test report relate exclusively to the item(s) tested as specified in section 2.


The following deviation from, additions to, or exclusions from the test specifications have been made. See Annex C.

China Telecommunication Technology Labs.(CTTL) authorizes the applicant or manufacturer (see section 1.4) to reproduce this report provided, and the test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTTL Mr. He Guili.


Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. CTTL accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

**1.2 Testers**

Name: Lv Ke  
 Position: Engineer  
 Department: Department of EMC test  
 Signature: 

Name: Li Dongjin  
 Position: Engineer  
 Department: Department of EMC test  
 Signature: 

Editor of this test report:

Name: Li Guoqing  
 Position: Engineer  
 Department: Department of EMC test  
 Date: 2008-08-01  
 Signature: 

Technical responsibility for area of testing:

Name: Zhang Xia  
 Position: Manager  
 Department: Department of EMC test  
 Date: 2008-08-01  
 Signature: 

## 1.3 Testing Laboratory information

### 1.3.1 Location

Name: China Telecommunication Technology Labs.  
Address: No. 11, Yue Tan Nan Jie, Xi Cheng District  
BEIJING  
P. R. CHINA, 100083  
Tel: +86 10 68094053  
Fax: +86 10 68011404  
Email: [emc@chinattl.com](mailto:emc@chinattl.com)

### 1.3.2 Details of accreditation status

Accredited by: China National Accreditation Service for Conformity  
Assessment (CNAS)  
Registration number: CNAS Registration No. CNAS L0570  
Standard: ISO/IEC 17025:2005

### 1.3.3 Test location, where different from section 1.3.1

Name: -----  
Street: -----  
City: -----  
Country: -----  
Telephone: -----  
Fax: -----  
Postcode: -----

## 1.4 Details of applicant or manufacturer

### 1.4.1 Applicant

Name: SODIFF BMT  
Address: 678-7, ChangMan-Ri, GwangTan-Myun, Paju-City,  
Gyeonggi-Do, Korea  
Country: Rep. Of Korea  
Telephone: +82.70.7096.0713  
Fax: +82.31.441.0171  
Contact: Mr. Steve Noh  
Telephone: +82.10.8568.4145  
Email: [Sinoh76@sodiff.net](mailto:Sinoh76@sodiff.net)

### 1.4.2 Manufacturer (if different from applicant in section 1.4.1)

Name: --  
Address: --

### 1.4.3 Manufactory (if different from applicant in section 1.4.1)

Name: --  
Address: --

## 2 Test Item

### 2.1 General Information

Manufacturer: SODIFF BMT  
 Name: GSM Mobile phone  
 Model Number: S7  
 Serial Number: --  
 Production Status: Production  
 Receipt date of test item: 2008-07-24

### 2.2 Outline of EUT

E.U.T. is a GSM/GPRS Mobile phone.

### 2.3 Modifications Incorporated in EUT

The EUT has not been modified from what is described by the brand name and unique type identification stated above.

### 2.4 Equipment Configuration

Equipment configuration list:

Item	Generic Description	Manufacturer	Type	Serial No.	Remarks
A	handset	SODIFF BMT	S7	--	None
B	adapter	Shenzhen Zhong Xin Tong Co.,Ltd. ZHUHAI REMINDA COMMUNICATION DEVELOPMENT CO., LTD.	ZXTSC01-50050 0	--	None
C	battery	SHENZHEN BAK BATTERY CO.,LTD	BAT-02	--	None
D	Earphone	SANG FAI ELECTRONICAL PRODUCTS CO., LTD.	SF-600KM-1	--	None

Cables:

Item	Cable Type	Manufacturer	Length	Shield	Quantity	Remarks
1	DC cable on Adapter	Unknown	1.0 m	No	1	None

## 2.5 Other Information

- (a) Modulation is GMSK.
- (b) Emission Designator is 281KGXW.
- (c) Version of hardware and software

HW Version: 2.0

SW Version: SGP500 MXC1NC\_MT2706BV105\_MP

- (d) Adaptor information:
  - Input: 100-240VAC 50/60Hz 0.2A
  - Output: 5.0V 500mA
- (e) Battery information:
  - 3.7VDC 680mAh

CTTTL Test Report

### 3 Summary of Test Results

A brief summary of the tests carried out is shown as following.

<b>GSM mode:</b>		
Specification Clause	Name of Test	Result
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 1
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 1: No applicable performance criteria.		

<b>GPRS mode:</b>		
Specification Clause	Name of Test	Result
2.1051, 24.238, 2.1053,22.917	Radiated Spurious Emission	Pass
2.1046,24.232	Radiated RF Power Output	Pass
22.913(a)	Effective Radiated Power (ERP)	Pass
2.1049,22.917(b), 24.238(b)	Occupied Bandwidth	*Note 2
2.1055,22.355, 24.235	Frequency Stability over Temperature Variation	Pass
2.1055,22.355, 24.235	Frequency Stability over Voltage Variation	Pass
2.1046,22.913(a), 24.232(c)	Conducted RF Power Output	Pass
2.1051,22.917,24. 238	Conducted spurious emissions	Pass
Note 2: No applicable performance criteria.		

## 4 Test Results of mode

### 4.1 Radiated Spurious Emission

<b>Specifications:</b>	2.1051, 24.238, 2.1053, 22.917					
<b>Date of Tests</b>	2008-07-29					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661 for GSM and GPRS mode					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	SCHWARZBECK	VULB 9160	--	2010-10-26	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

#### Limit Level Construction:

According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB, so the limit level is:  $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13 \text{ dBm}$

<b>Limits for Radiated spurious emissions(UE)</b>	
<b>Frequency range</b>	<b>Limit Level /Resolution Bandwidth</b>
30 MHz to 20000 MHz	-13dBm/1MHz

#### Test Setup:

The EUT was placed in an anechoic chamber, see figure SP. The Wireless Communications Test Set was used to set the TX channel and power level and modulate the TX signal with different bit patterns. The test was done using an automated test system, where all test equipments were controlled by a computer.

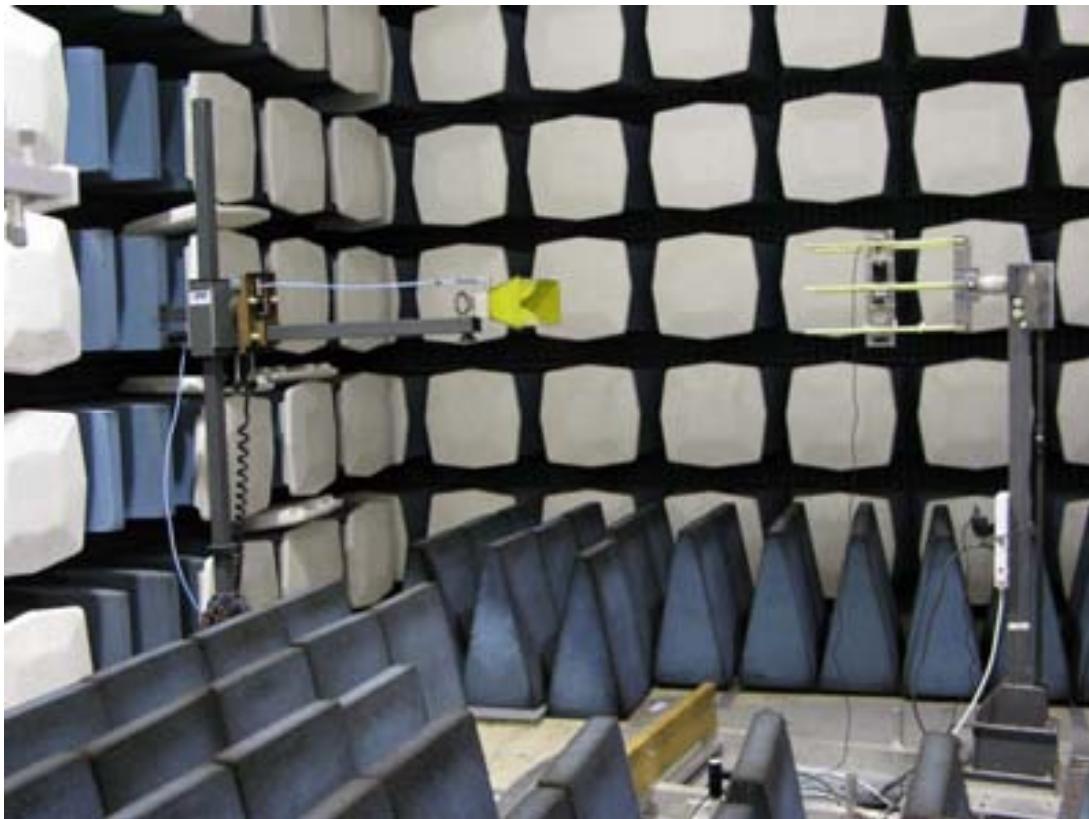


Figure SP

**Test Method:**


The measurement was performed accordance with section 2.2.12 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

- 1 The maximum spurious emissions were searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.
- 2 Levels of EUT's transmitter harmonics and suspicious signals were recorded.
- 3 The recorded levels were corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration was made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.
- 4 The corrected values of radiated spurious emissions indicated as EIRP are reported.


**Note:**

- 1 The investigated ARFCNs are 190 (836.6 MHz) and 661 (1880.0 MHz).
- 2 The investigated frequency range is 30 MHz ~ 18 GHz.

## Test Results for GSM mode:

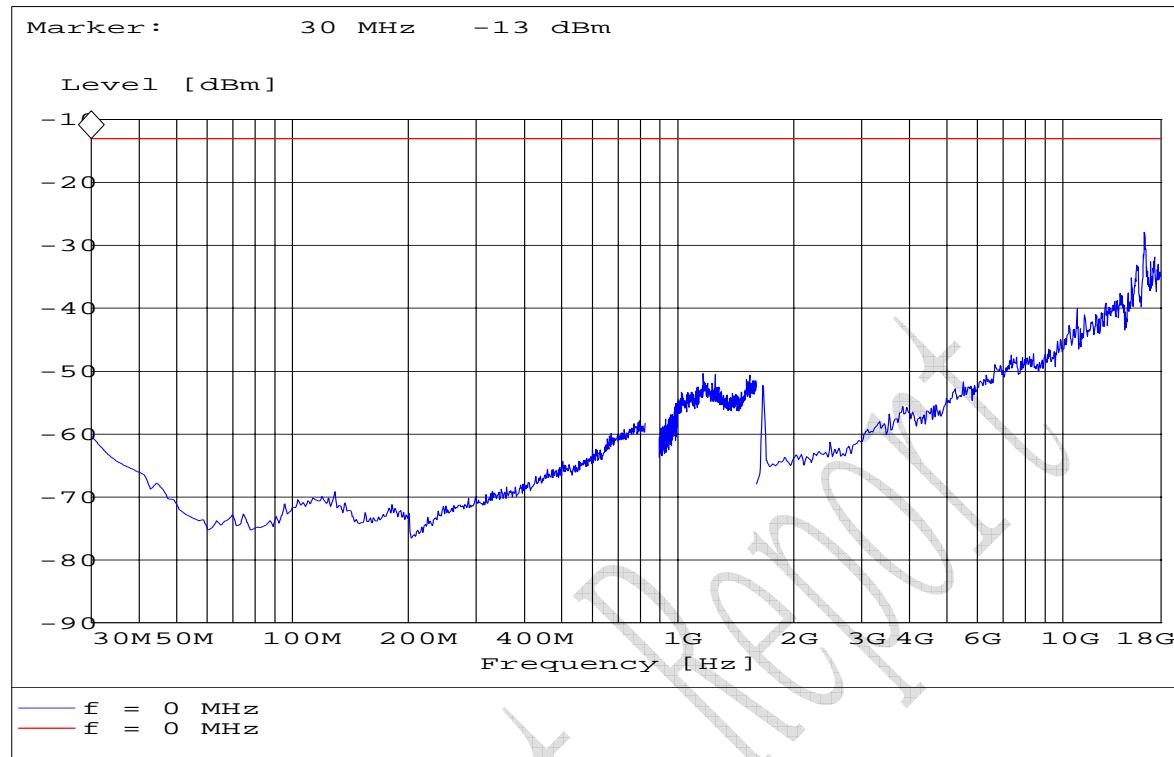



## S190VF for GSM mode

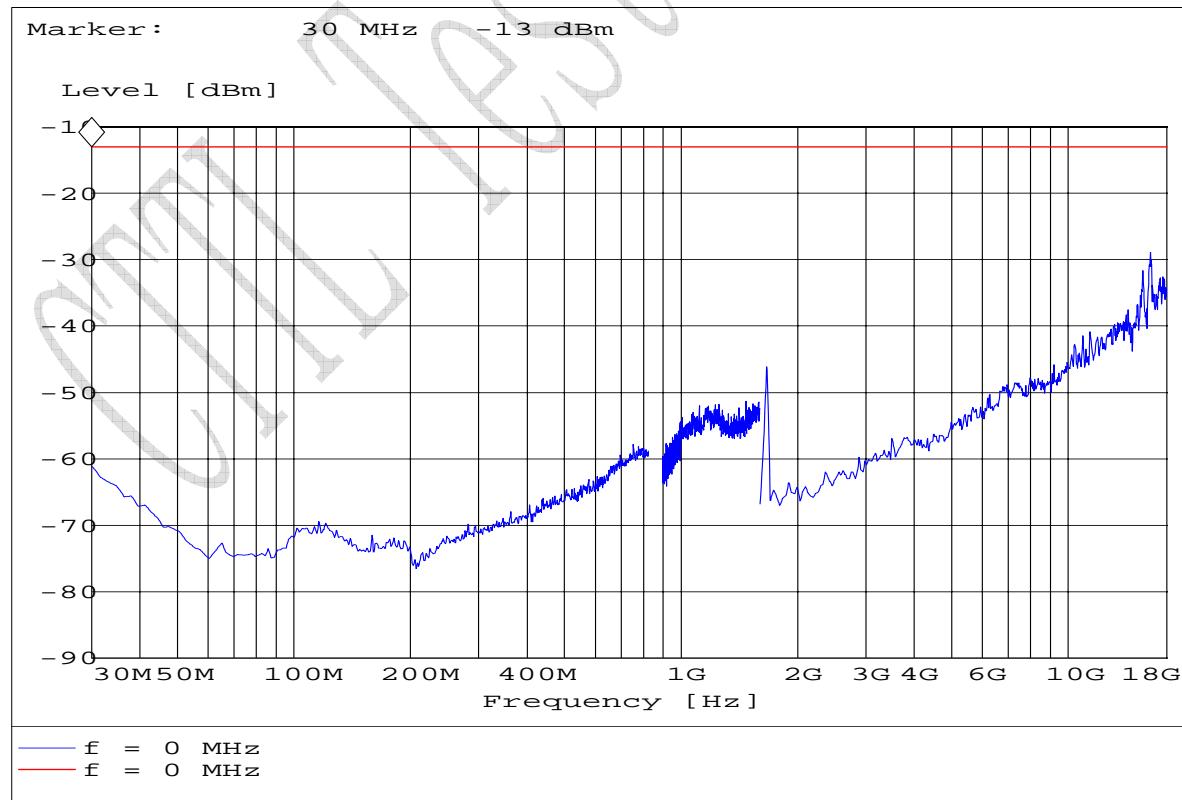

## S190HF for GSM mode


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

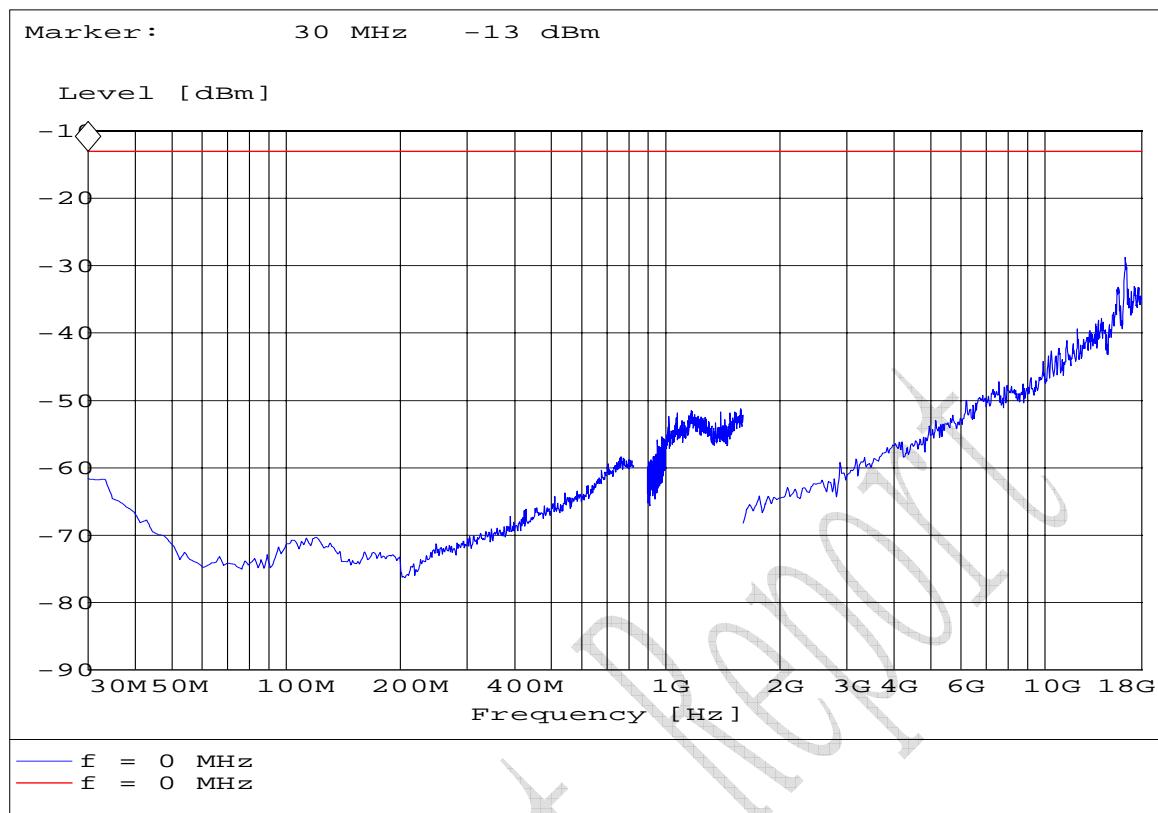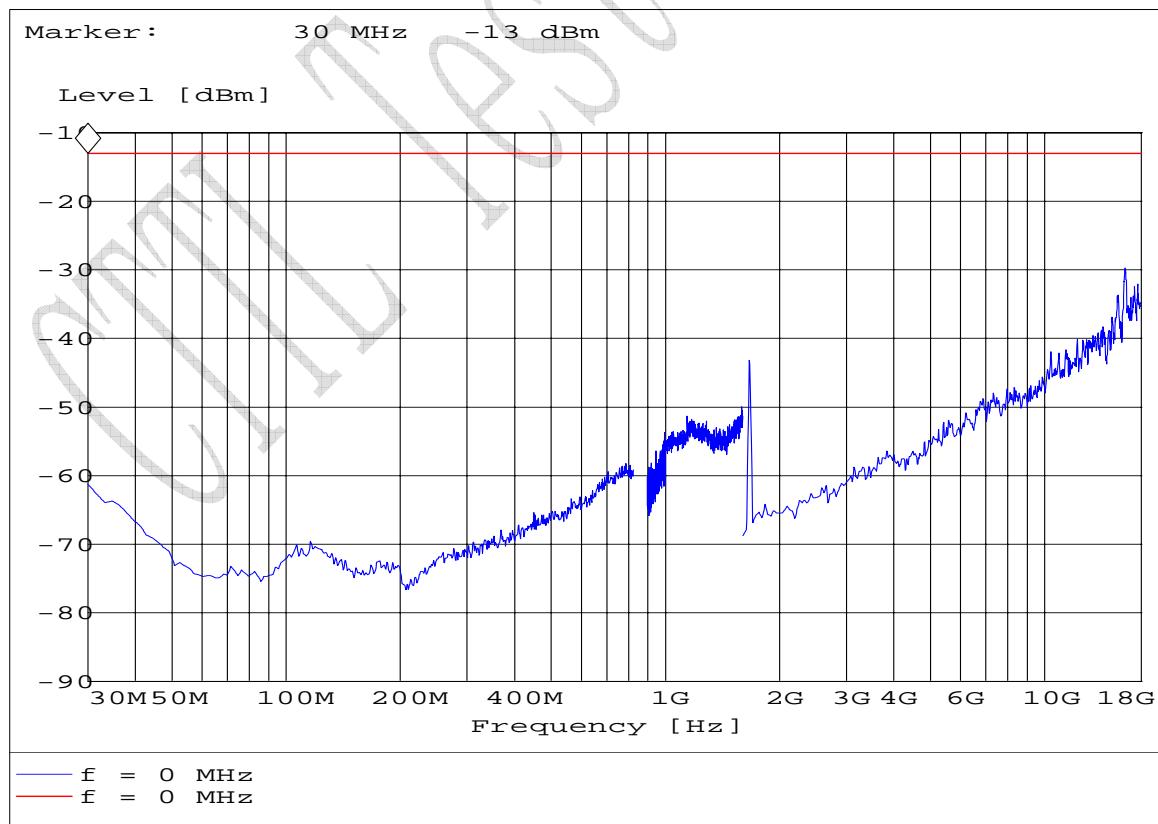
**S190VT for GSM mode****S190HT for GSM mode**

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

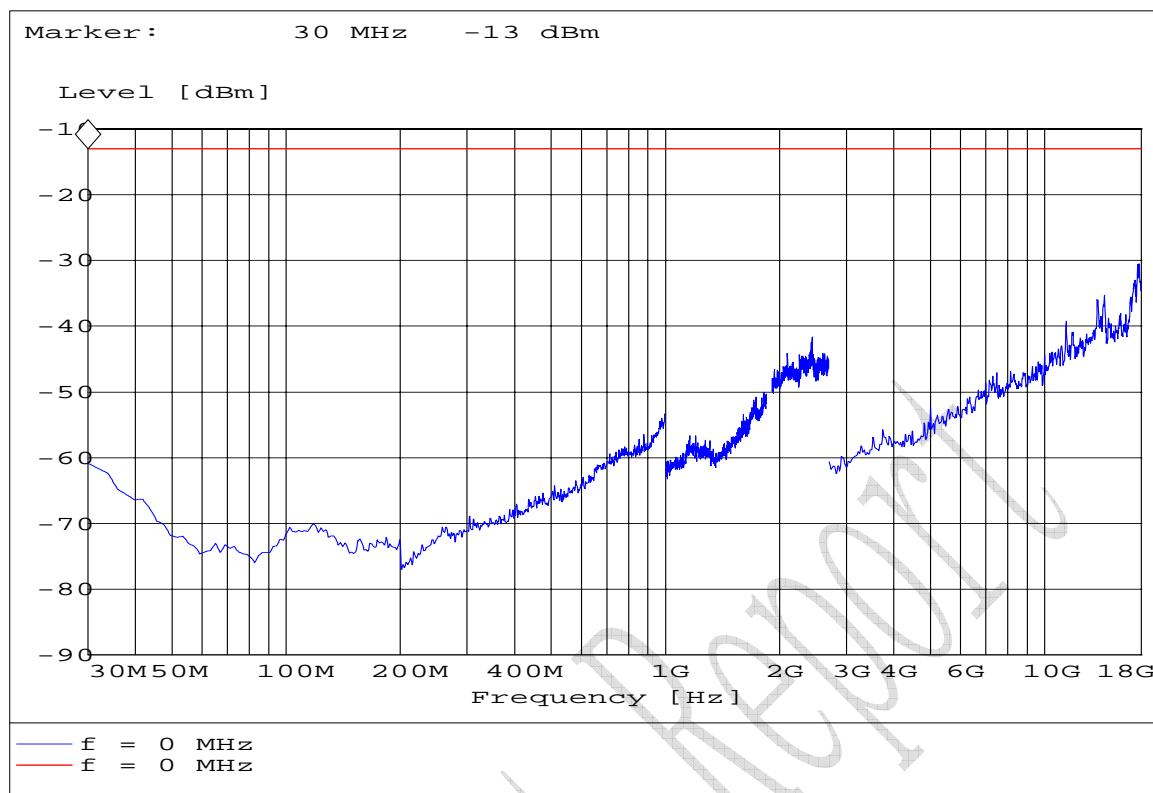



S661VF for GSM mode

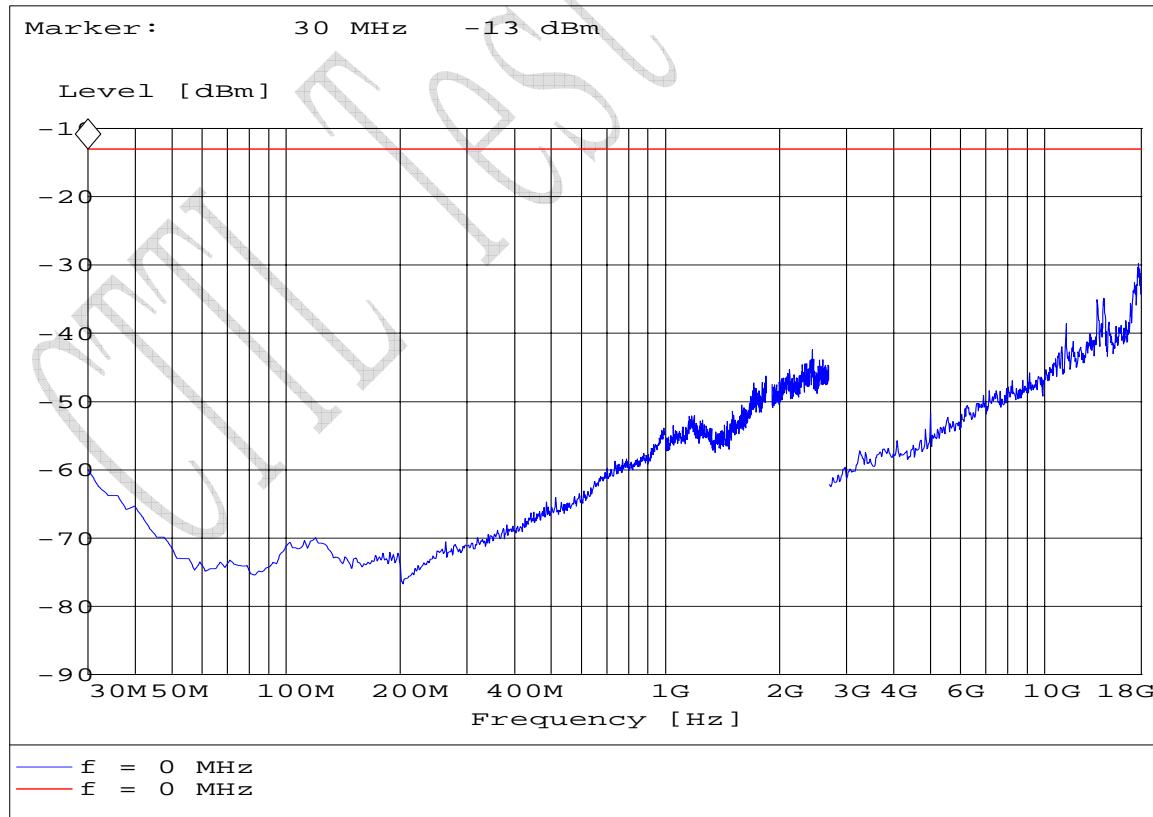


S661HF for GSM mode

FCC Parts 2, 22, 24  
Equipment: S7


REPORT NO.: B08GE6003-FCC-EMC

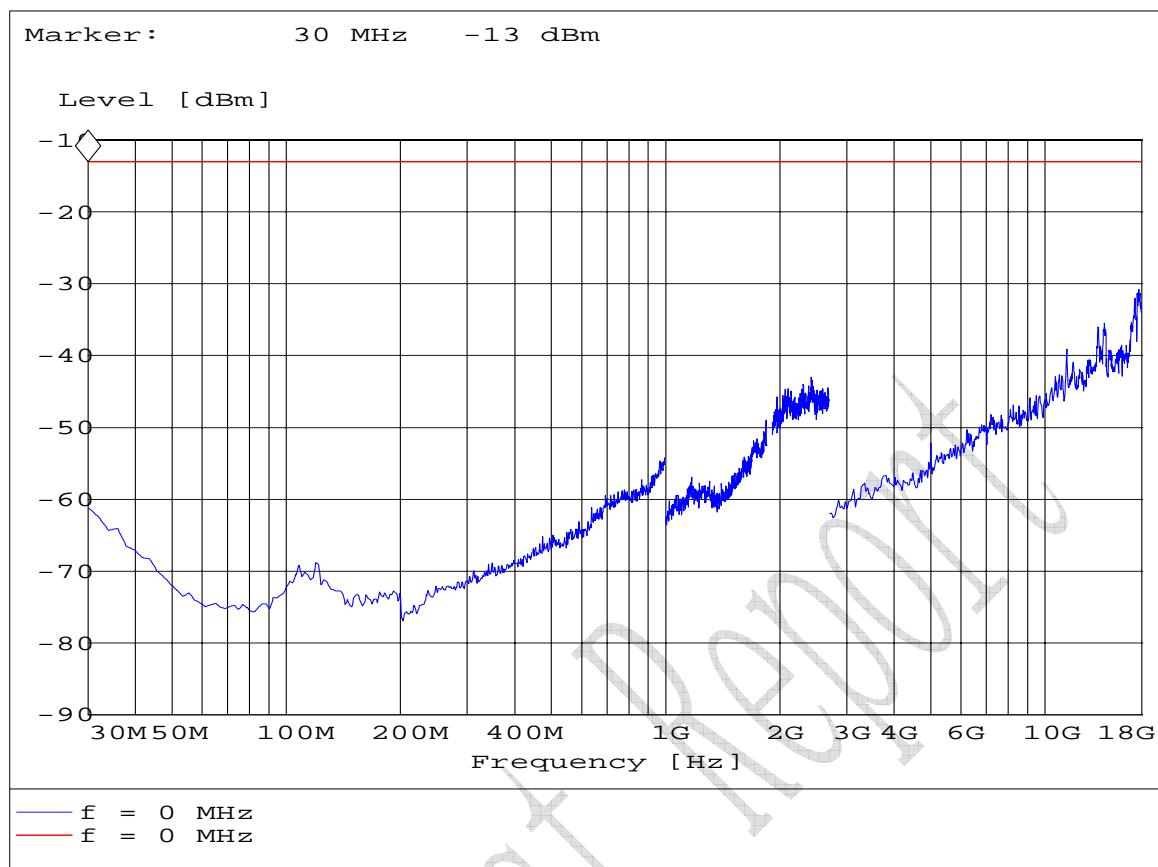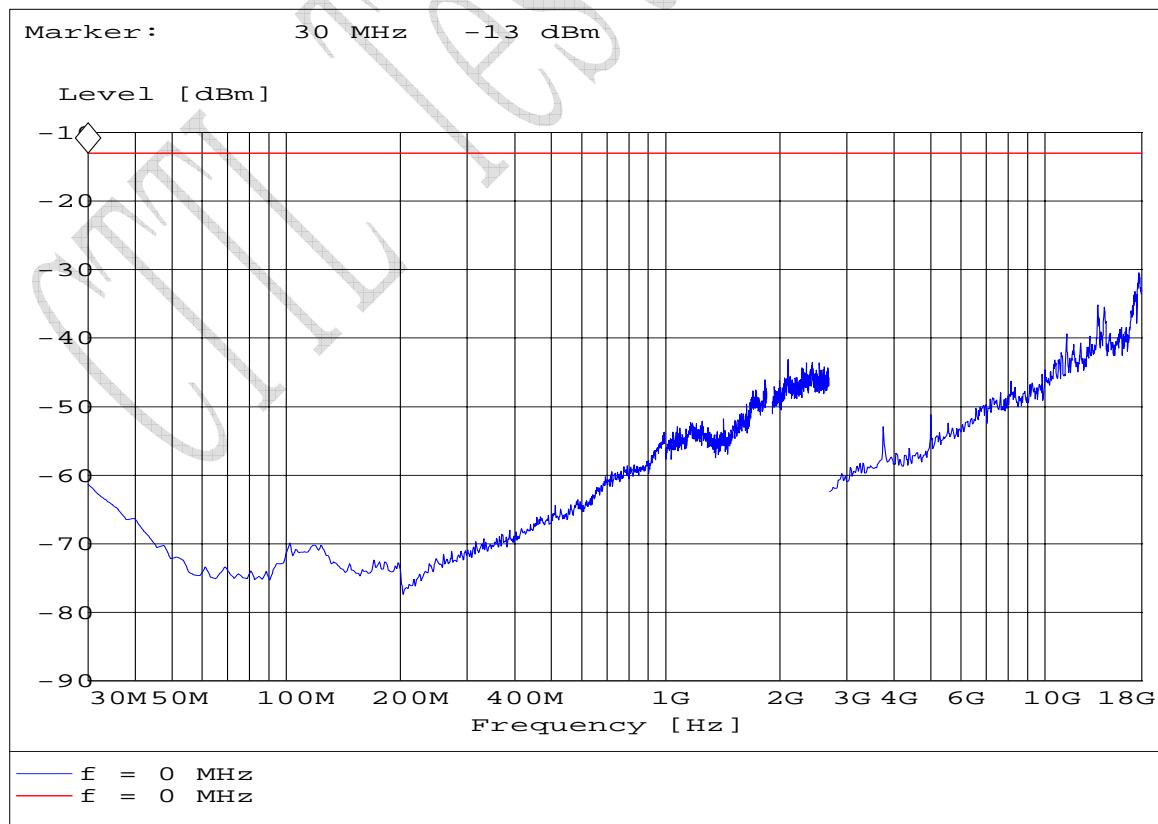**S661VT for GSM mode****S661HT for GSM mode**

## Test Results for GPRS mode:

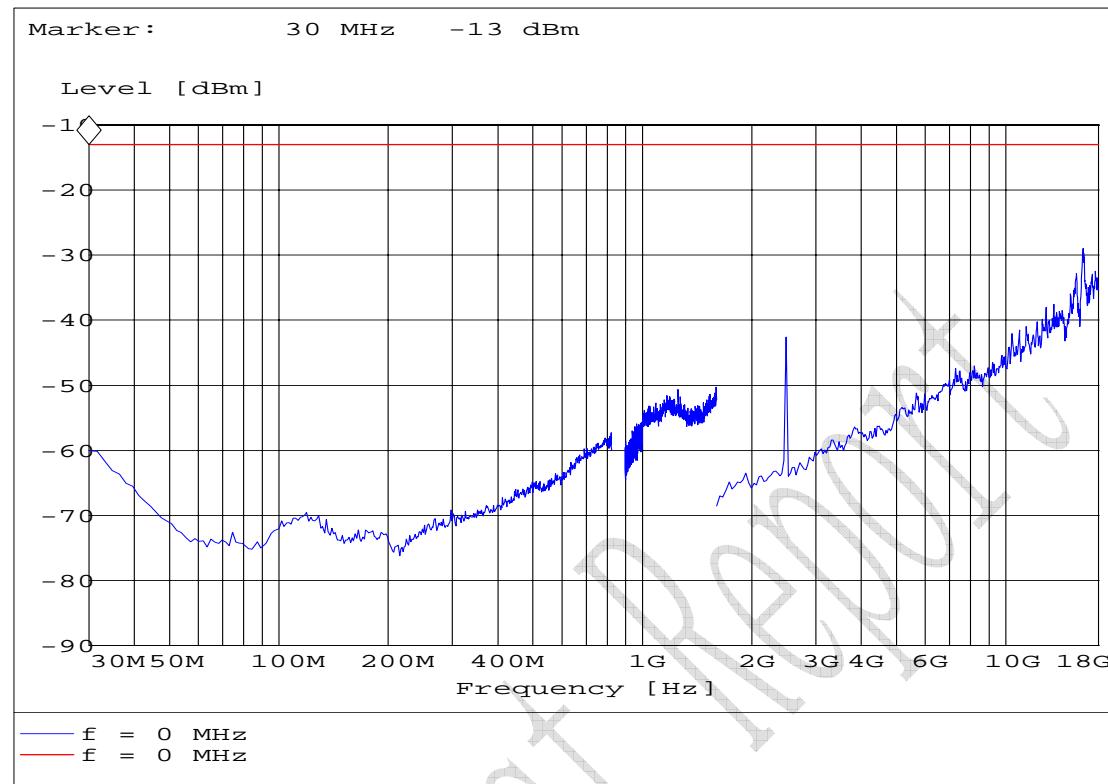


## S190VF for GPRS mode

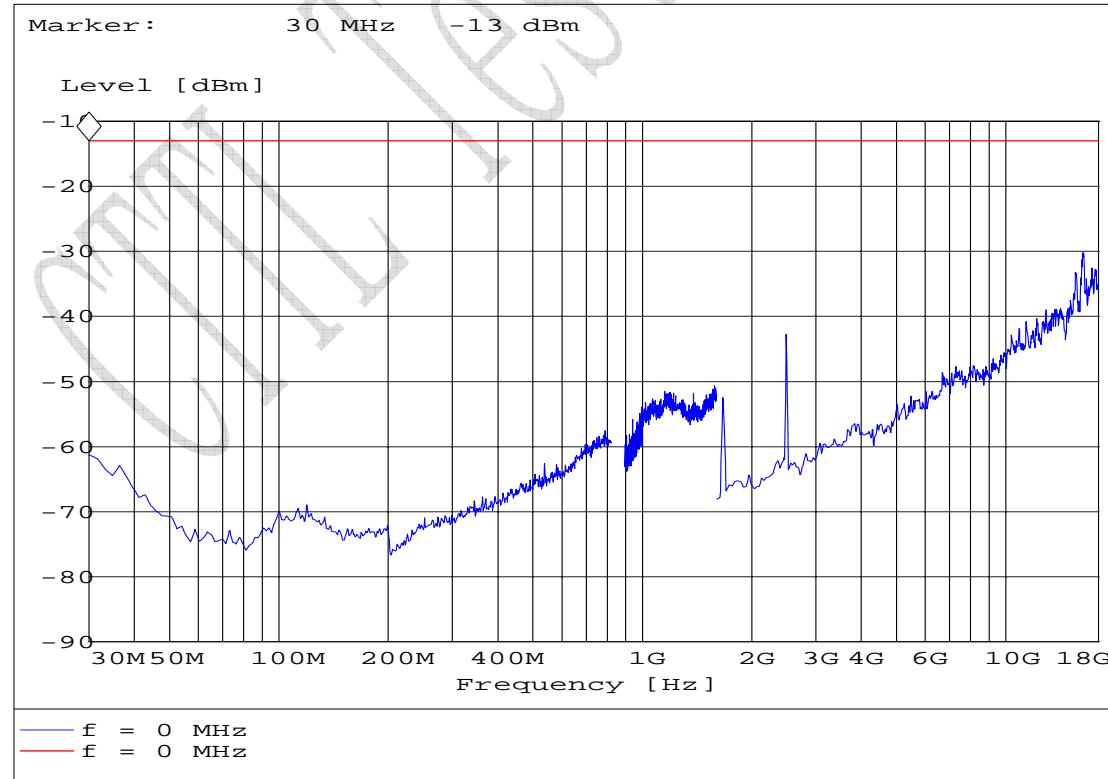

## S190HF for GPRS mode


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

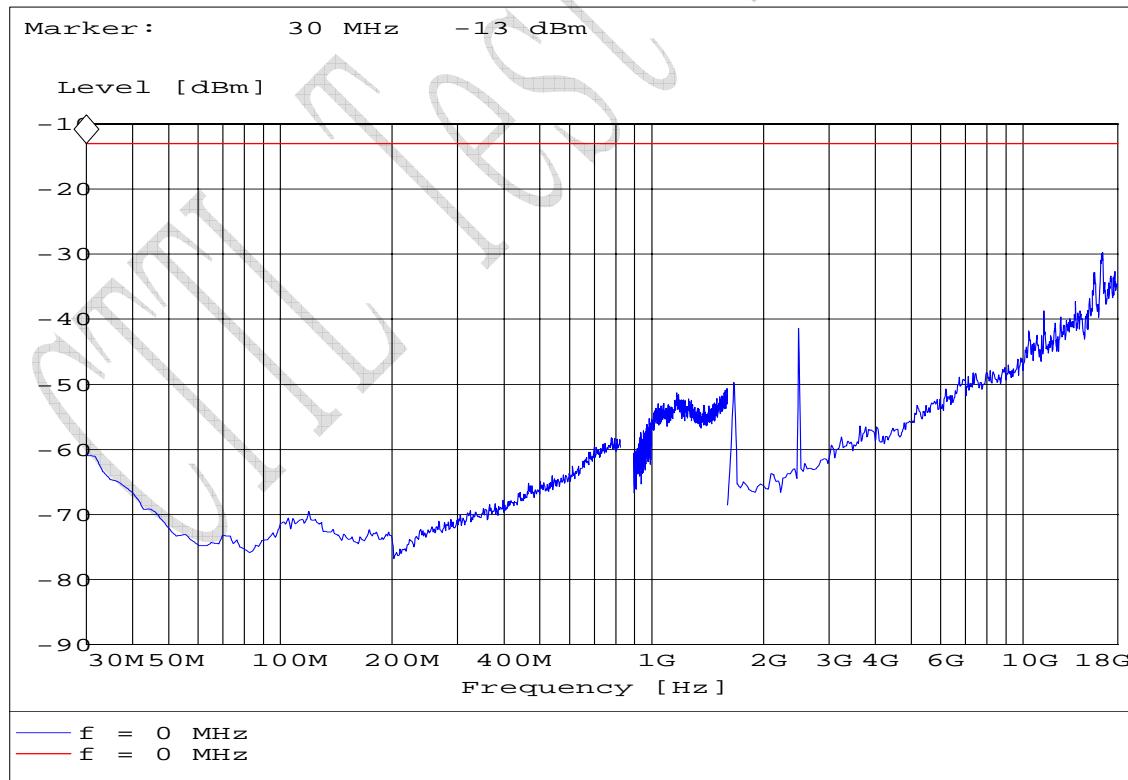
**S190VT for GPRS mode****S190HT for GPRS mode**

FCC Parts 2, 22, 24  
Equipment: S7


REPORT NO.: B08GE6003-FCC-EMC

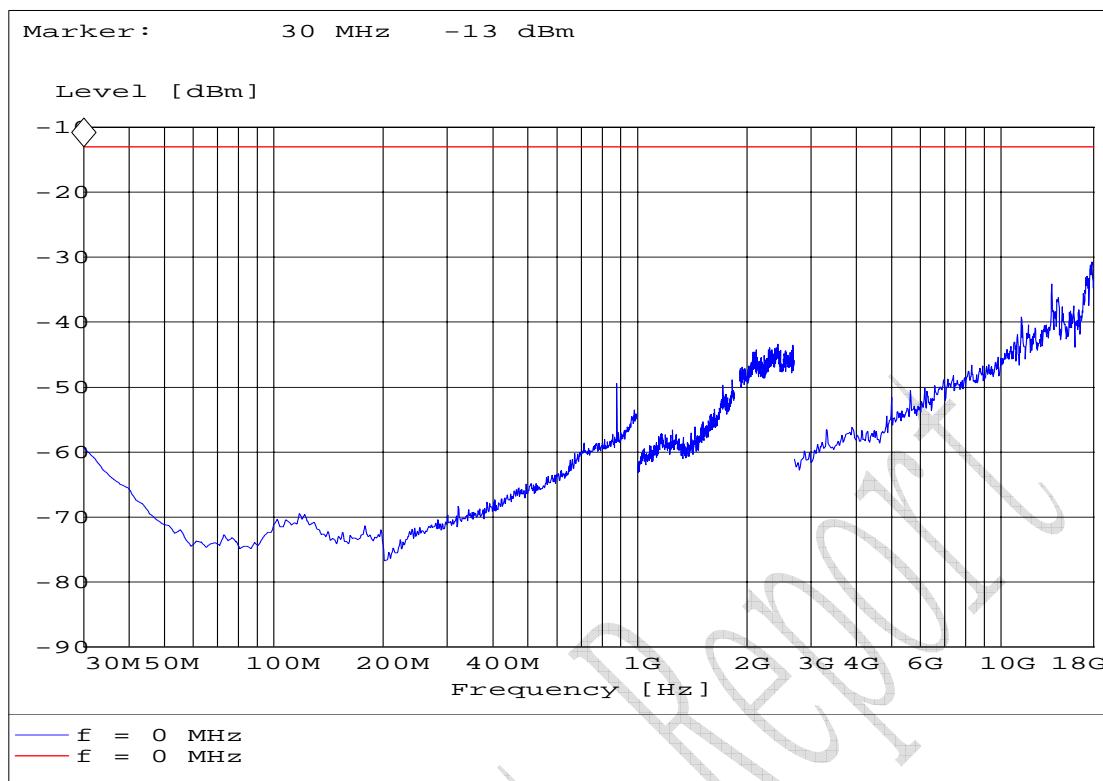


S661VF for GPRS mode

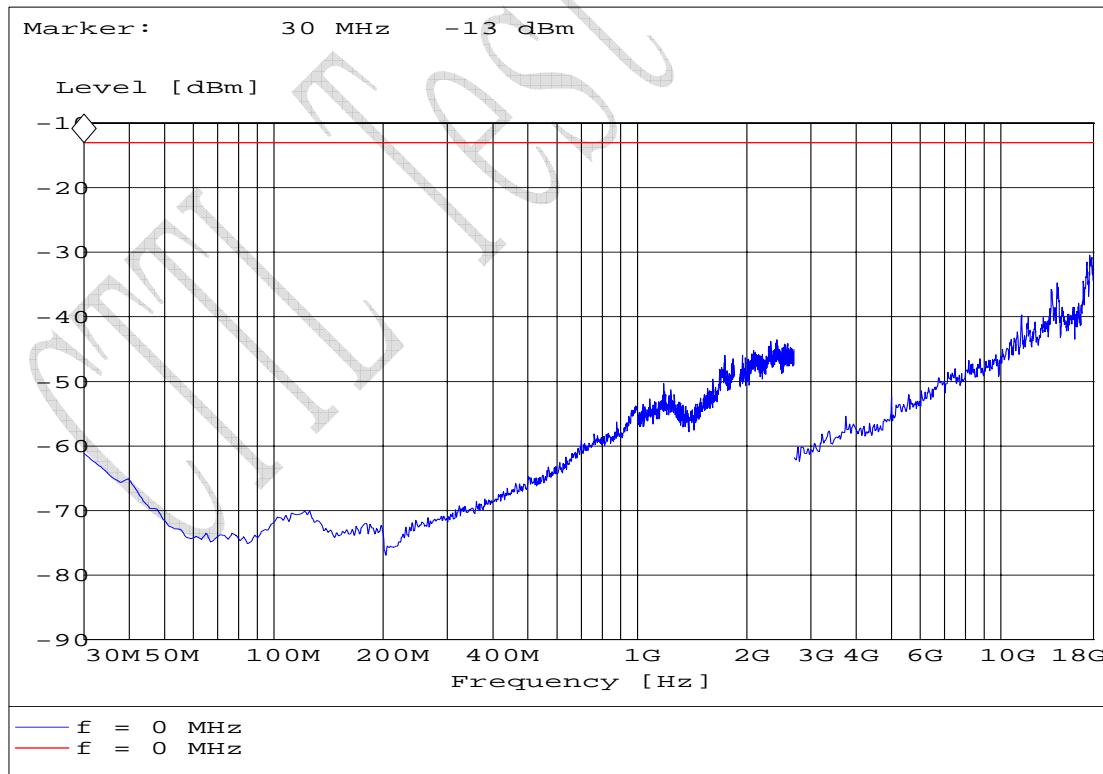

S661HF for GPRS mode

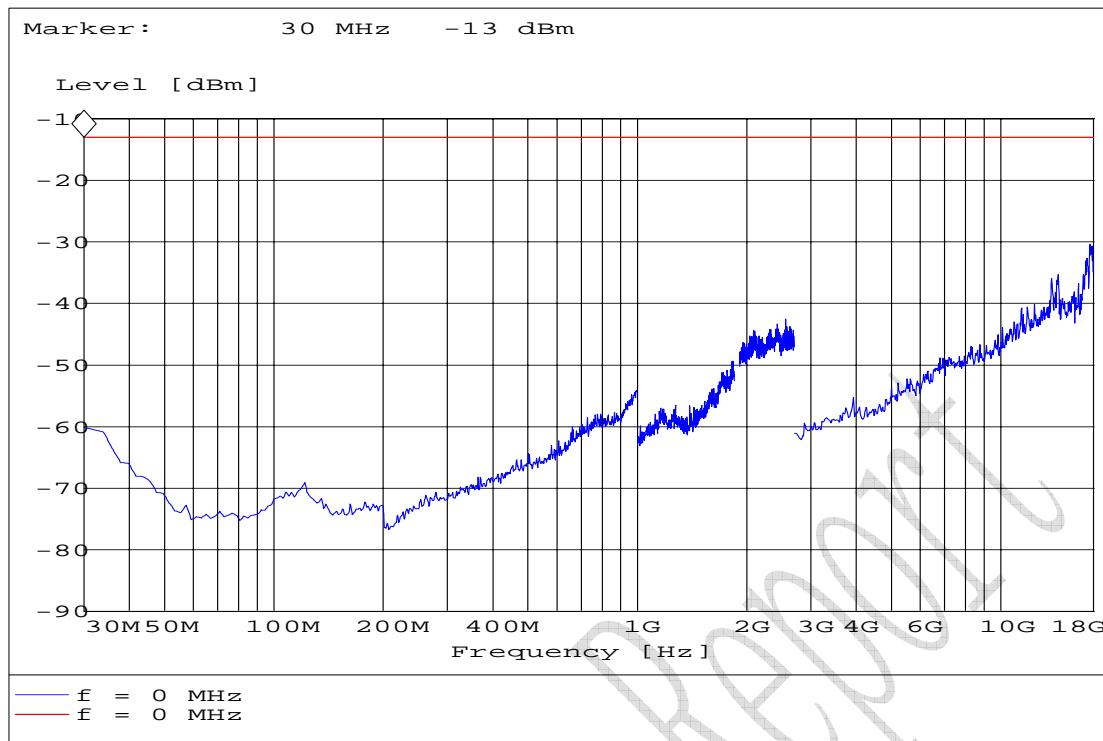

S661VT for GPRS mode

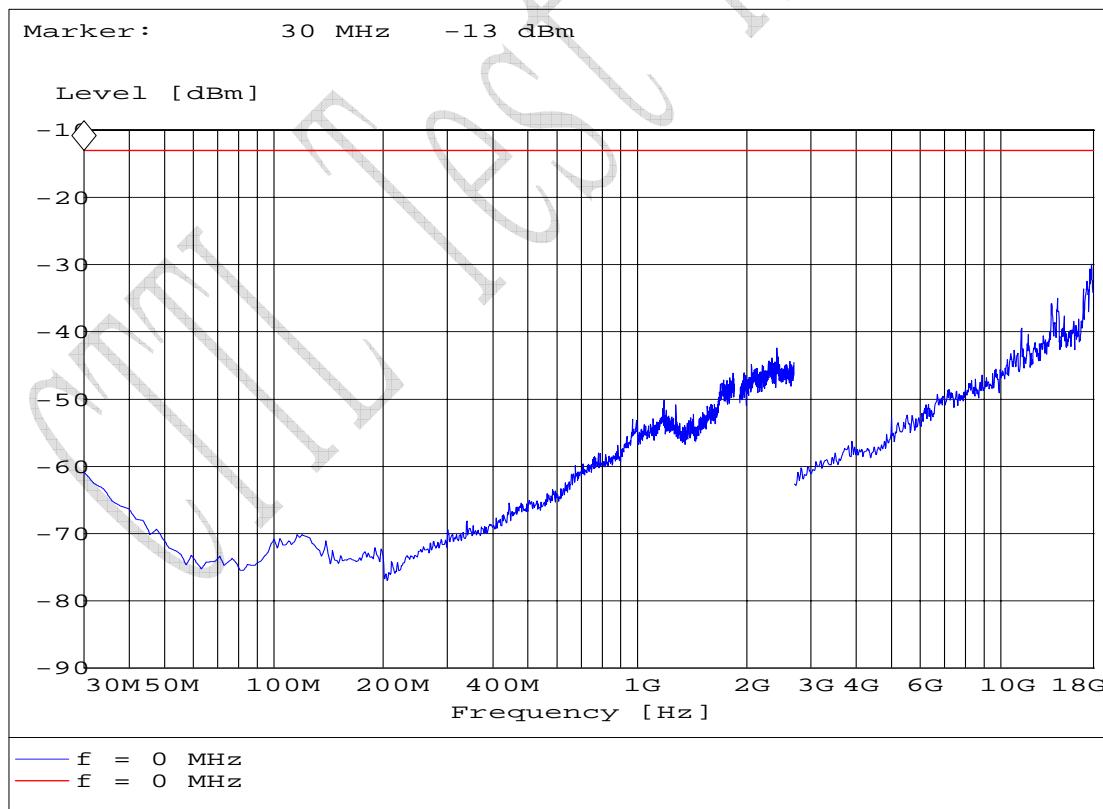

S661HT for GPRS mode

## 4.2 Radiated RF Power Output and ERP

<b>Specifications:</b>	2.1046,24.232,22.913(a)					
<b>Date of Tests</b>	2008-07-29					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 190, 251, 512, 661 and 810					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
7330	Ultra Broadband Antenna	SCHWARZBECK	VULB 9160	--	2010-10-26	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

### Limit Level Construction:

#### (a) Radiated RF Power Output

According to Part 24.232(b), i.e., Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications, so the limit level is 2 W or 33 dBm.

#### (b) ERP

According to Part 22.913(a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

### Limits for Radiated RF Power Output

Frequency range	Limit Level (EIRP)/Resolution Bandwidth
TX channel	33dBm/1MHz

### Limits for ERP

Frequency range	Limit Level (ERP)
TX channel	7W

## Test Setup:

The EUT was set in an anechoic chamber, which is connected to the Wireless Communications Test Set located outside the chamber over the air. The test was done using an automated test system, where all test equipments were controlled by a computer.

## Test Method

The measurement was performed accordance with section 2.2.17 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

- 1 The maximum power was searched by turning the azimuth of the turntable, shifting the polarization of the measuring antenna and changing the pose of the EUT.
- 2 The measured levels are EIRP values corrected in the automated test system with the correction factors given by a substitution calibration made before the measurement. The calibration is made separately for vertical and horizontal polarization and the system uses different correction factors depending on the measuring antenna polarization.
- 3 The corrected maximum levels were reported for EIRP values, and ERP values can be calculated from EIRP values.

## Note:

ERP dBm = EIRP dBm – 2.15dB.

### ERP Value for GSM 850 band mode:

ARFCN	Frequency [MHz]	ERP [dBm]
128	824.228457	22.10
190	836.553106	20.77
251	848.777555	22.05

### EIRP Value for GSM 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
512	1849.979960	22.13
661	1880.040080	20.94
810	1909.799599	20.51

## ERP Value for GPRS 850 band mode:

ARFCN	Frequency [MHz]	ERP [dBm]
512	824.228457	22.85
661	836.653307	21.36
810	848.877756	20.97

## EIRP Value for GPRS 1900 band mode:

ARFCN	Frequency [MHz]	EIRP [dBm]
128	1850.280561	21.90
190	1880.040080	20.27
251	1909.799599	16.27

### 4.3 Occupied bandwidth

<b>Specifications:</b>	2.1049,22.917(b),24.238(b)					
<b>Date of Test</b>	2008-07-30					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 190, 251, 512, 661 and 810					
<b>Test Results:</b>	--					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-03	Normal
7330	Ultra Broadband Antenna	SCHWARZBECK	VULB 9160	--	2010-10-26	Normal
7330	Double-Ridged Horn Antenna	R/S	HF906	100037	2009-01-14	Normal
713	Fully-Anechoic Chamber	ETS	11.8m×6.5m×6.3 m	--	2010-11-17	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

### Test Setup

The situation under which maximum EIRP values were found in the measurement of the radiated RF power output was used to determine the 99% occupied bandwidth. The Wireless Communications Test Set was used to set the TX channel, power level and modulation.

### Test Method


The 99% occupied bandwidth was calculated from the spectrum analyzer. Markers in the spectrum analyzer were then placed between the calculated frequencies to show the calculated 99% power band.

Note: --

## Results data of GSM mode:


EUT channel	99% occupied bandwidth [kHz]
128	277
190	277
251	277
512	277
661	277
810	277

## Graphical results for GSM mode:

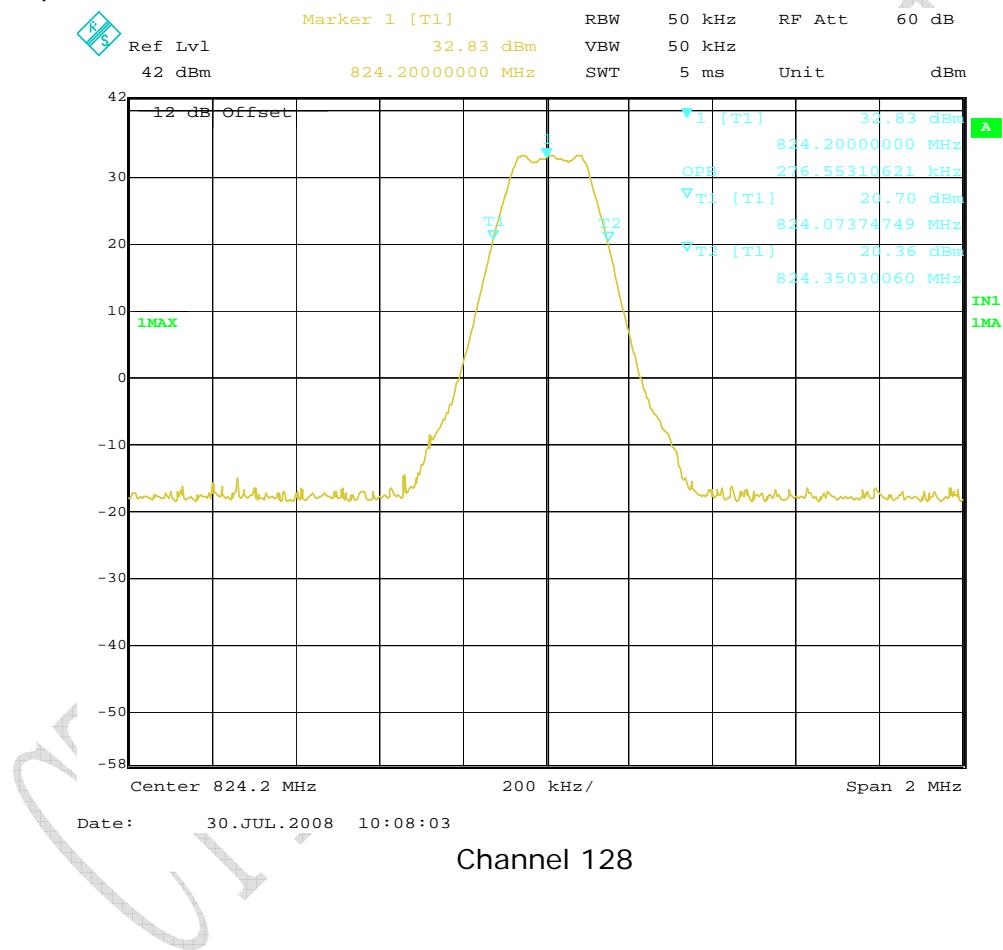


**FCC Parts 2, 22, 24  
Equipment: S7**

**REPORT NO.: B08GE6003-FCC-EMC**

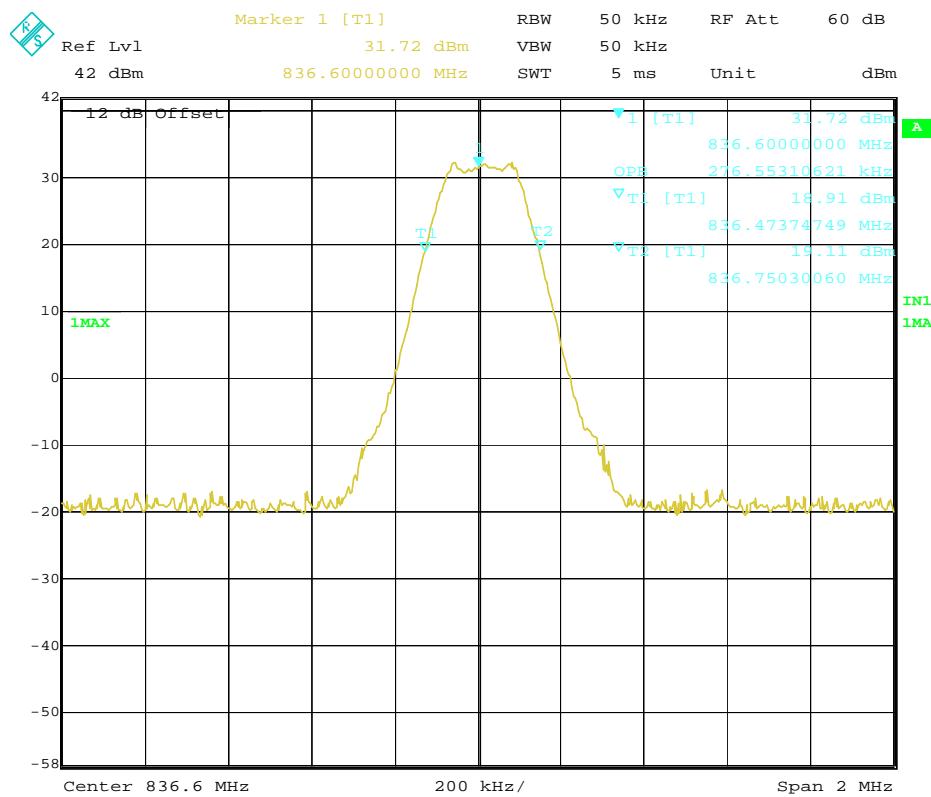

Date: 30.JUL.2008 10:09:12

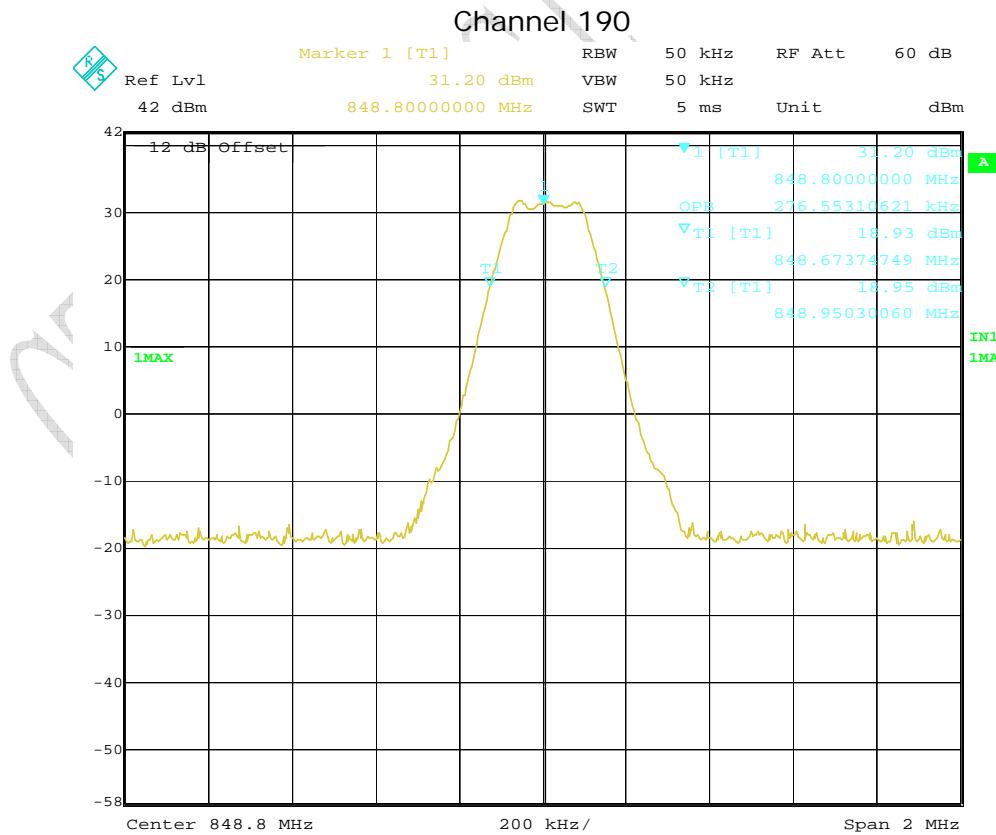


Date: 30.JUL.2008 10:16:29

## Channel 251


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

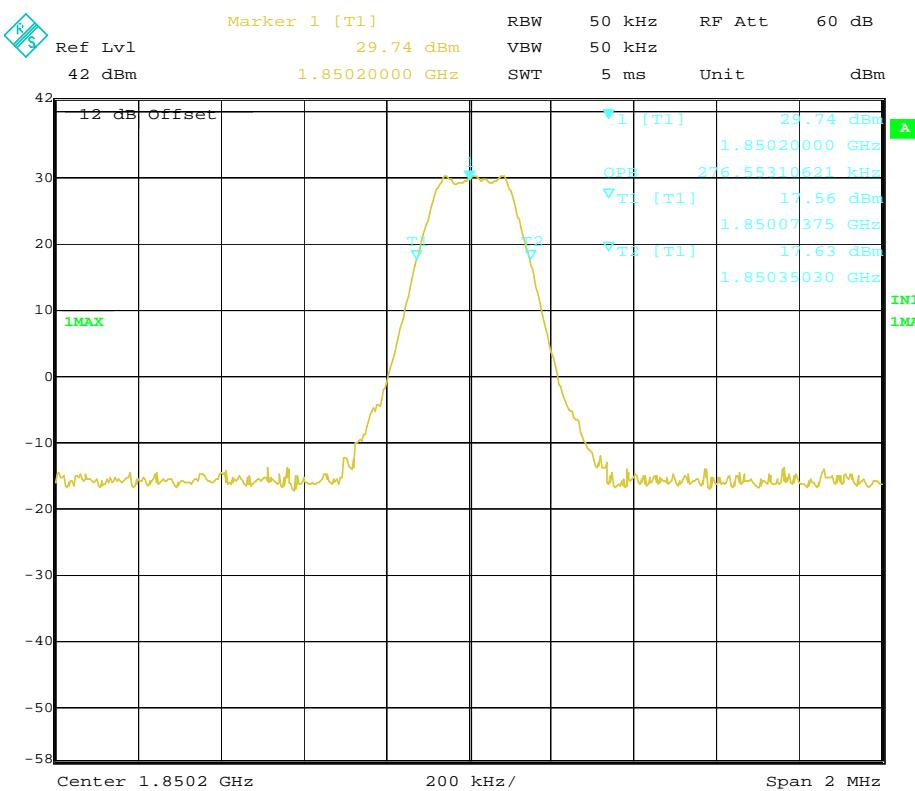


Date: 30.JUL.2008 10:23:59

## Channel 512

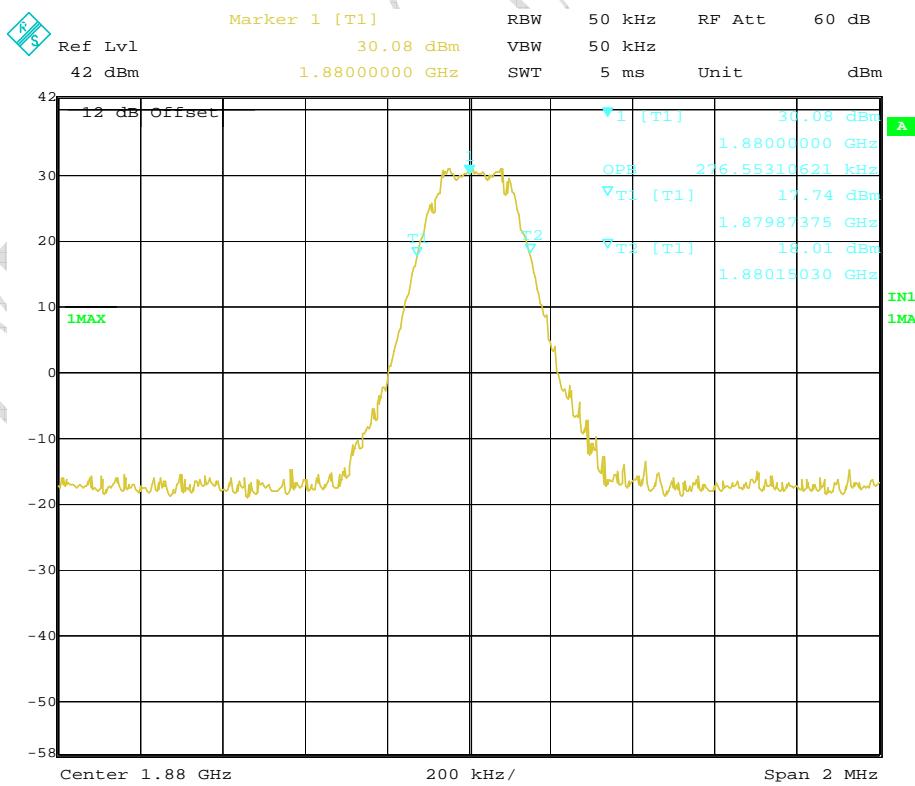

Date: 30.JUL.2008 10:26:32

## Channel 661

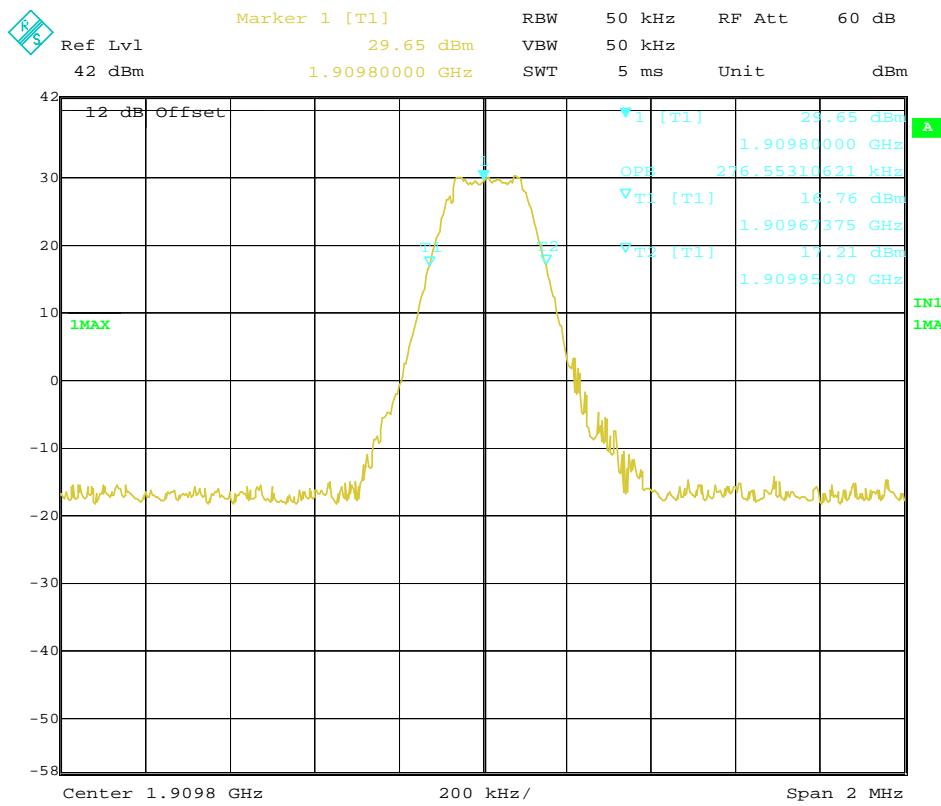

Channel 810


## Results data of GPRS mode:

EUT channel	99% occupied bandwidth [kHz]
128	273
190	277
251	273
512	277
661	281
810	281


Graphical results for GPRS mode:

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

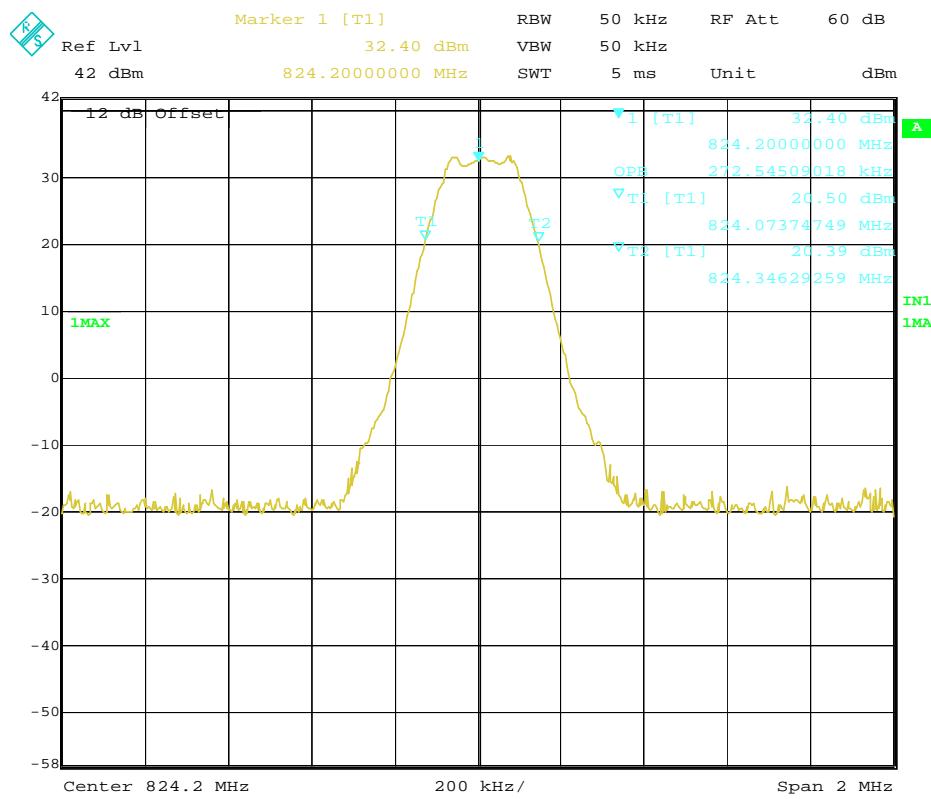


## Channel 128

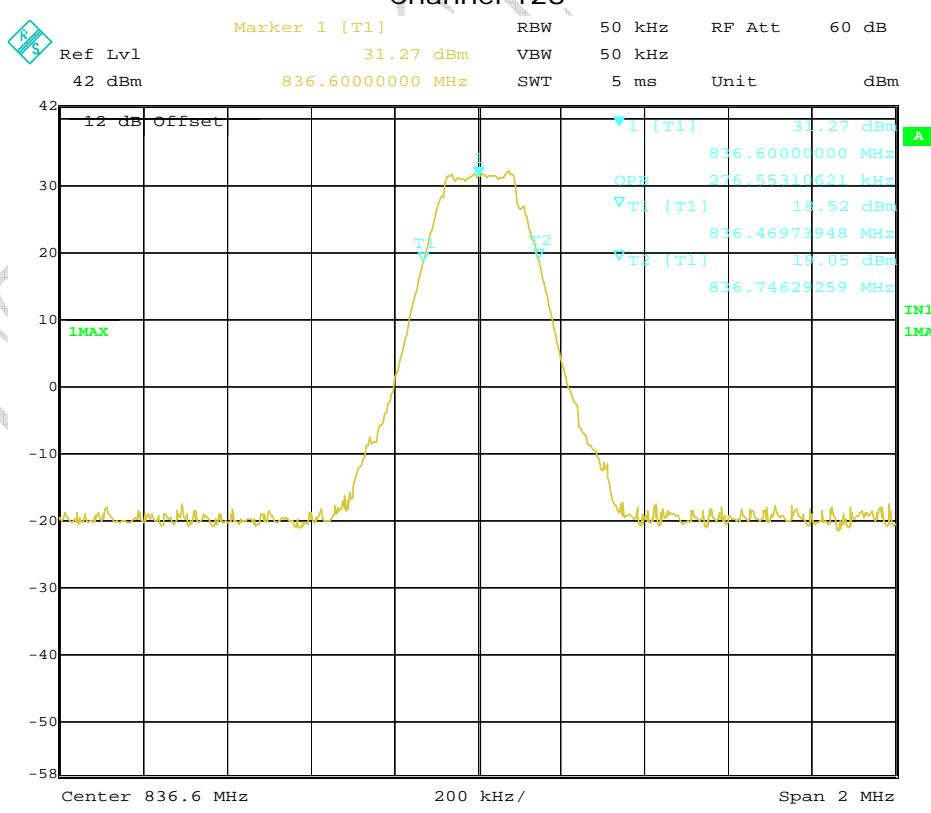


## Channel 190

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

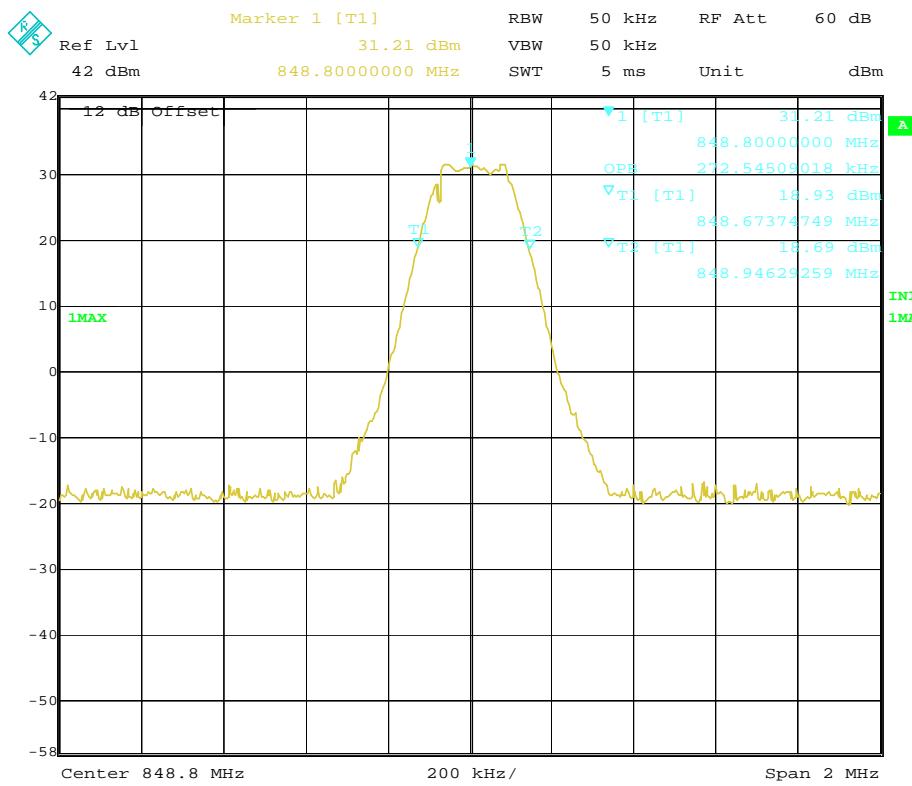


## Channel 251

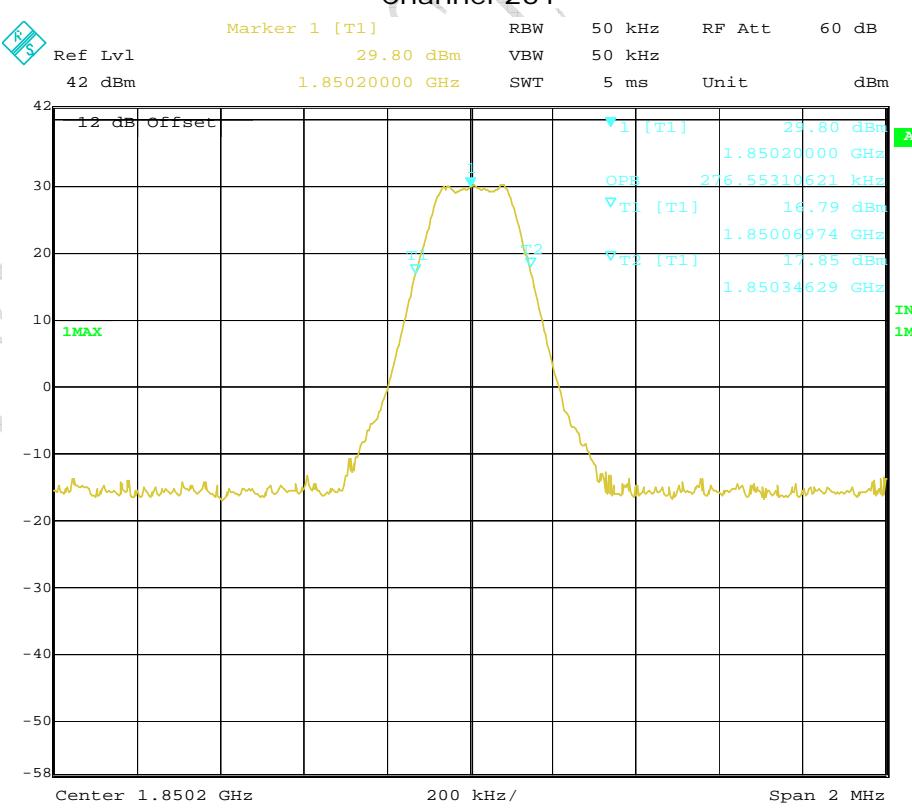


## Channel 512

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

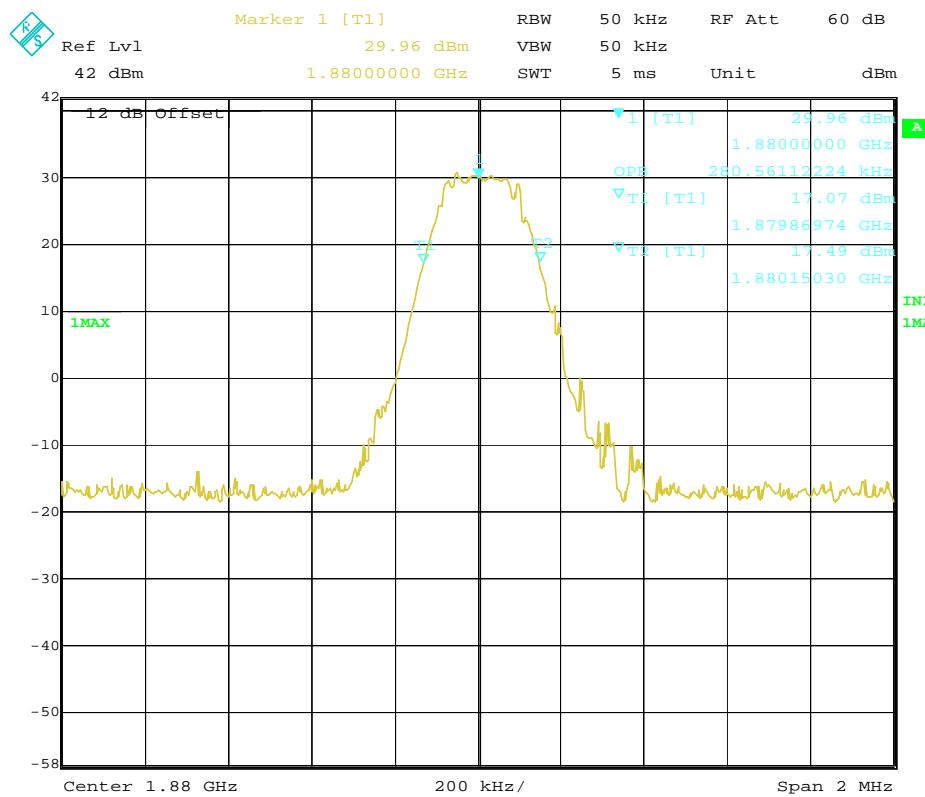

## Channel 661

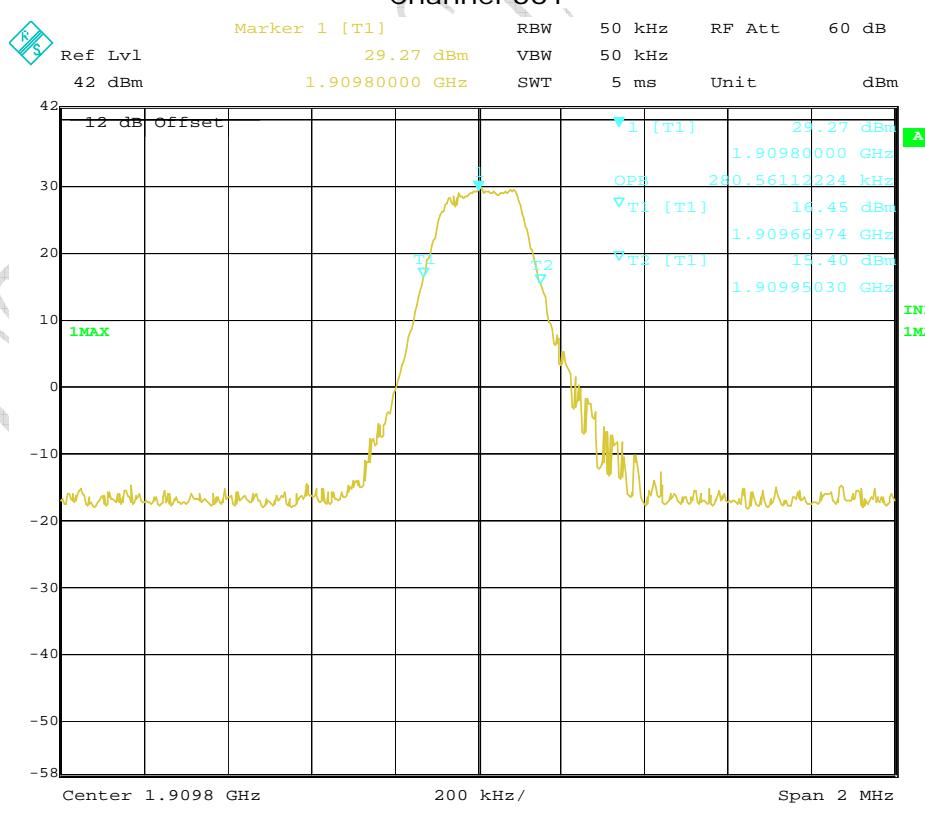

## Channel 810

#### 4.4 Frequency Stability over Temperature Variation

<b>Specifications:</b>	2.1055,22.355,24.235					
<b>Date of Test</b>	2008-07-31					
<b>Test conditions:</b>	Ambient Temperature: -30°C-50°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
561	Temperature Chamber	Terchy Environmental Technology LTD.	MHU-800SR	84121202	2009-05-06	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal
<b>Limit</b>						
Frequency deviation [ppm]	±2.5					

#### Test Setup

The EUT was placed in a temperature chamber, demonstrated as figure T. The wireless communications test set (test simulator) was used to set the TX channel and power levels, modulate the TX signal with different bit patterns and measure the frequency of TX.

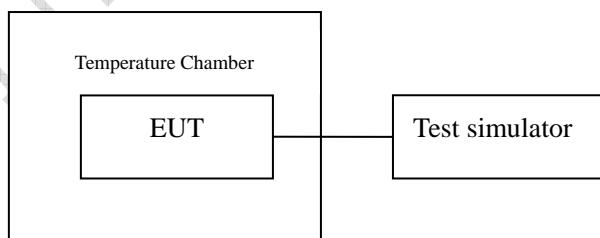


Figure T: setup for measurement of frequency stability over temperature variation

## Test Method

1. The EUT was turned off and placed in the temperature chamber.
2. The temperature of the chamber was set to -30°C and allowed to stabilize.
3. The EUT temperature was allowed to stabilize for 45 minutes.
4. The EUT was turned on and set to transmit with 8960.
5. The maximum transmit frequency deviation during one minute period was measured by Wireless Communications Test Set.
6. The steps 3-5 were repeated for -20°C, -10°C, 0°C, 10°C, 20°C, 30°C, 40°C and 50°C.

## Test results data for GSM mode:

Channel 190:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	25	0.030	Pass
-20	23	0.027	Pass
-10	15	0.018	Pass
0	18	0.022	Pass
10	16	0.019	Pass
20	15	0.018	Pass
30	12	0.014	Pass
40	24	0.029	Pass
50	26	0.031	Pass

Channel 661:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	46	0.024	Pass
-20	37	0.020	Pass
-10	63	0.034	Pass
0	46	0.024	Pass
10	38	0.020	Pass
20	32	0.017	Pass
30	43	0.023	Pass
40	44	0.023	Pass
50	40	0.021	Pass

## Test results data for GPRS mode:

## Channel 190:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	26	0.031	Pass
-20	19	0.023	Pass
-10	17	0.020	Pass
0	23	0.027	Pass
10	21	0.025	Pass
20	24	0.029	Pass
30	28	0.033	Pass
40	30	0.034	Pass
50	32	0.038	Pass

## Channel 661:

Temperature[°C]	Deviation[Hz]	Deviation[ppm]	Remarks
-30	71	0.037	Pass
-20	91	0.048	Pass
-10	87	0.046	Pass
0	84	0.045	Pass
10	71	0.037	Pass
20	51	0.030	Pass
30	67	0.036	Pass
40	53	0.028	Pass
50	77	0.041	Pass

#### 4.5 Frequency Stability over Voltage Variation

<b>Specifications:</b>	2.1055,22.355,24.235					
<b>Date of Test</b>	2008-07-30					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal
7982	DC Power Source	4NIC	DH1715A-3	004224	--	Normal
<b>Limit</b>						
Frequency deviation [ppm]	$\pm 2.5$					

#### Test Setup

The EUT was placed in a shielding chamber and powered by the dummy battery which is connected to a DC power source, demonstrated as figure V. The wireless communications test set was used to set the TX channel and power level, modulate the TX signal with different bit patterns and measure the frequency of TX.

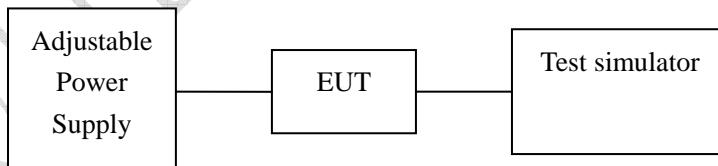


Figure V: test setup for measurement of frequency stability over voltage variation

## Test Results data for GSM mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	14	0.017	Pass
Cut-off point	3.3	22	0.026	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	38	0.020	Pass
Cut-off point	3.3	54	0.028	Pass

## Test Results data for GPRS mode:

Channel 190:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	32	0.038	Pass
Cut-off point	3.3	41	0.049	Pass

Channel 661:

Level	Voltage[V]	Deviation[Hz]	Deviation[ppm]	Remarks
Nominal	3.7	52	0.028	Pass
Cut-off point	3.3	71	0.038	Pass


#### 4.6 Conducted RF Power Output

<b>Specifications:</b>	2.1046,22.913(a),24.232(c)					
<b>Date of Tests</b>	2008-07-30					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 190, 251, 512, 661 and 810					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power spliter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

<b>Limits for Radiated RF Power Output</b>	
<b>Frequency range</b>	<b>Limit Level (EIRP)/Resolution Bandwidth</b>
TX channel	33dBm/1MHz
<b>Limits for ERP</b>	
<b>Frequency range</b>	<b>Limit Level (ERP)</b>
TX channel	7W

#### Test Setup:

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

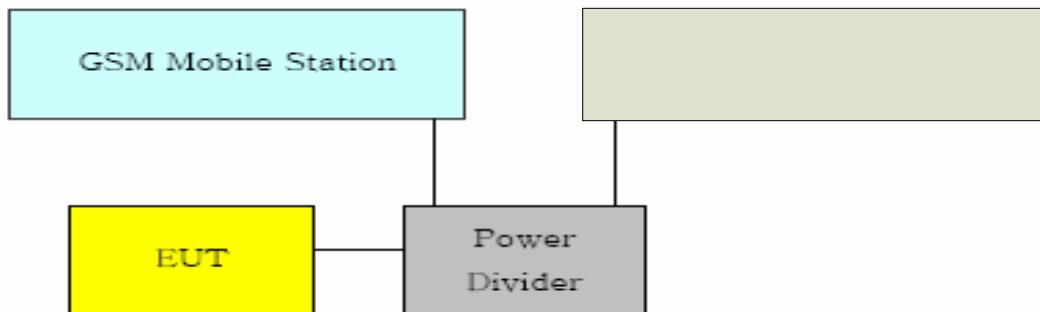

## Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables in the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

## Test Results for GSM mode:

ERP Value for GSM 850 band:

ARFCN	Peak output power [dBm]
128	30.90
190	29.91
251	29.34

EIRP Value for GSM 1900 band:

ARFCN	Peak output power [dBm]
512	30.08
661	30.92
810	30.06

## Test Results for GPRS mode:

ERP Value for GPRS 850 band:

ARFCN	Peak output power [dBm]
128	30.83
190	29.76
251	29.30

EIRP Value for GPRS 1900 band:

ARFCN	Peak output power [dBm]
512	29.98
661	30.79
810	29.85

#### 4.7 Conducted Spurious Emission

<b>Specifications:</b>	2.1051,22.917,24.238					
<b>Date of Tests</b>	2008-07-30					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 190 and 661					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power spliter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

#### Limit Level Construction:


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB, so the limit level is:  $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13 \text{ dBm}$

#### Limits for Radiated spurious emissions(UE)

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

#### Test Setup:

During the process of testing, the EUT was controlled via Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26)

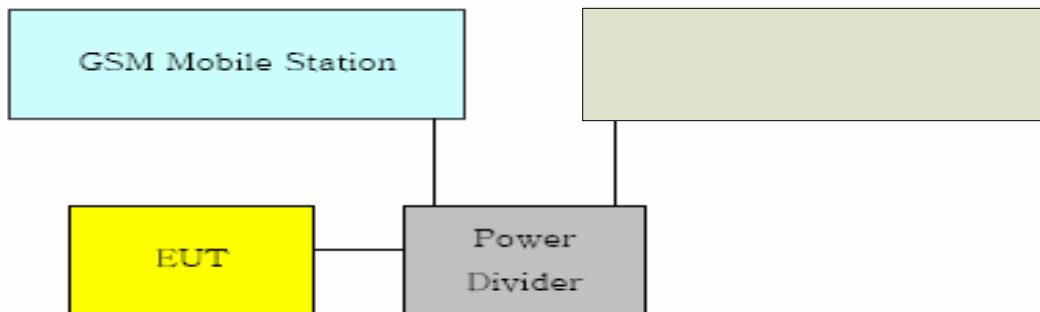

## Test Method

The measurement was performed accordance with section 2.2.13 of ANSI/TIA-603-B-2002: *Land Mobile FM or PM Communications Equipment Measurement and Performance Standards*.

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment under test, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

Note: --


### Test Results for GSM mode:

Out of band emission	
Frequency [MHz]	Level (dBm)
--	--


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

## Graphical results for GSM mode:

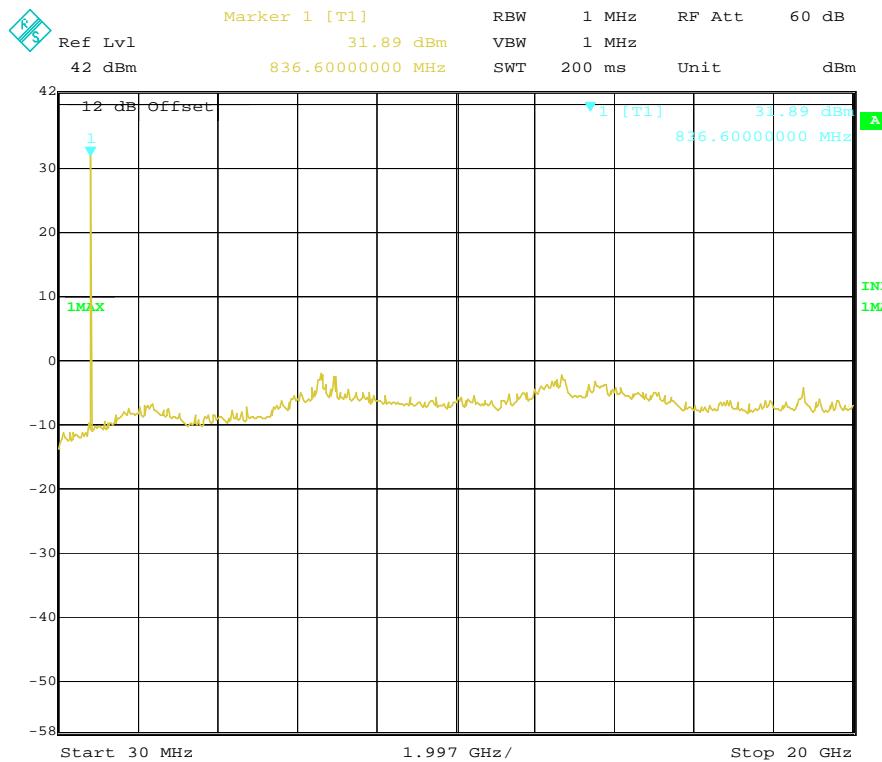

## Channel 190

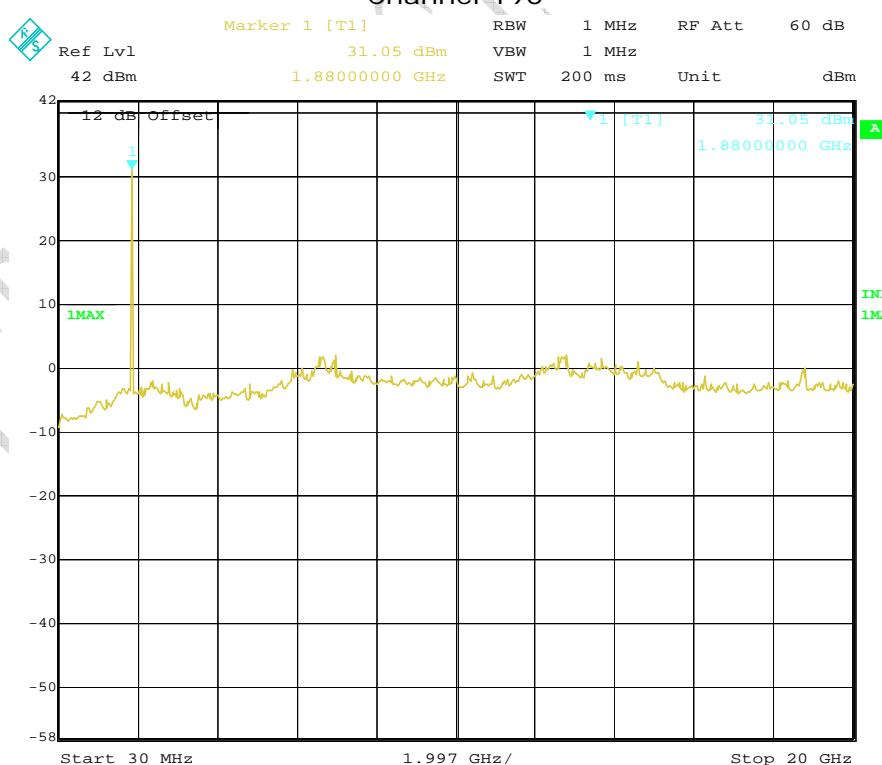


## Channel 661

## Test Results for GPRS mode:


Out of band emission	
Frequency [MHz]	Level (dBm)
--	--

## Graphical results for GPRS mode:

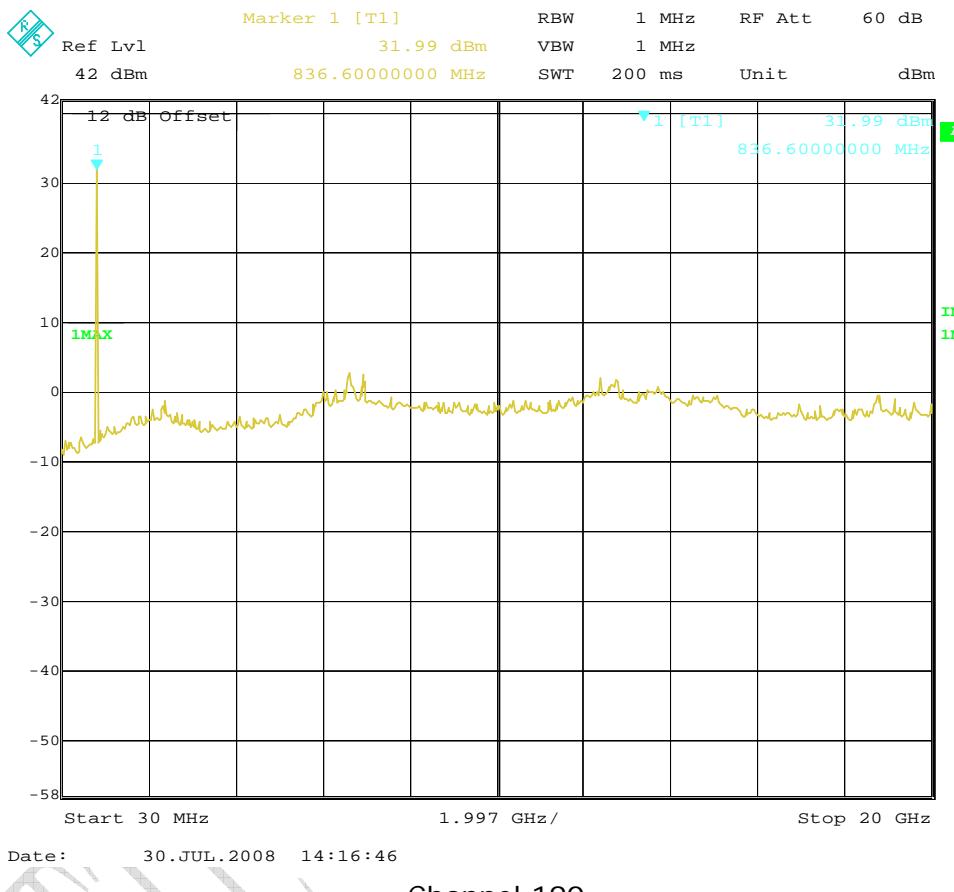

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

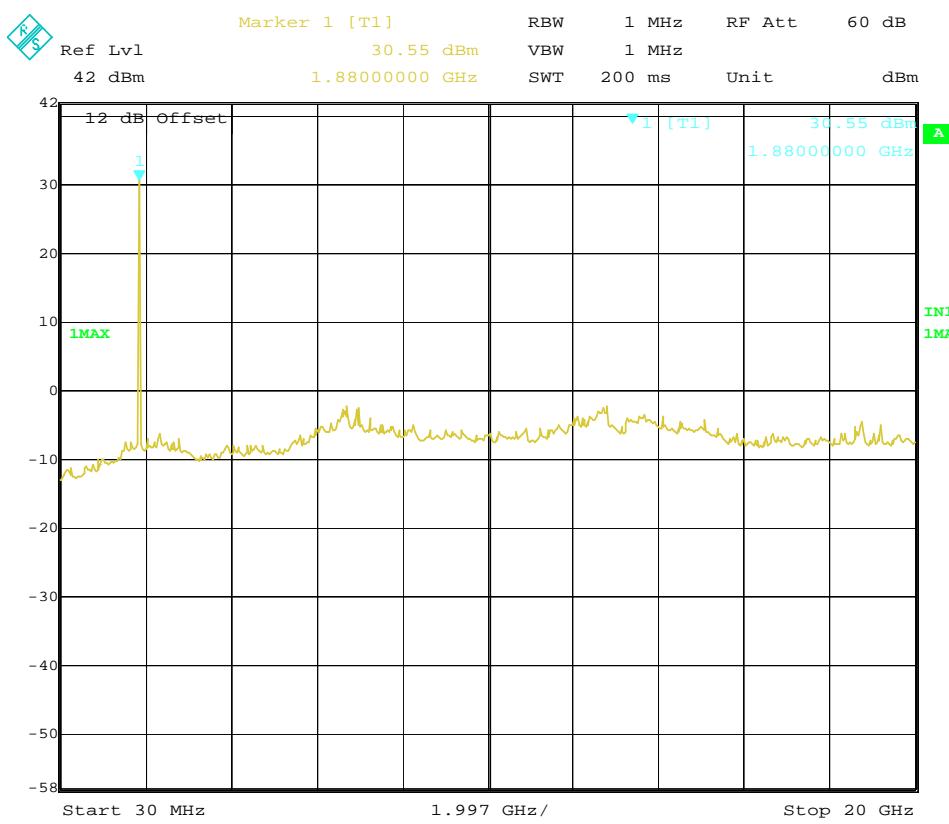

Channel 661

Test

CEMTE

**4.8 Band Edge**

<b>Specifications:</b>	2.1051, 24.238, 2.1053, 22.917					
<b>Date of Tests</b>	2008-07-30					
<b>Test conditions:</b>	Ambient Temperature: 15°C-35°C Relative Humidity: 30%-60% Air pressure: 86-106kPa					
<b>Operation Mode</b>	TX on, channel 128, 251, 512 and 810					
<b>Test Results:</b>	Pass					
<b>Test equipment Used:</b>						
Asset Number	Description	Manufacturer	Model Number	Serial Number	Cal Due	State
7805	EMI Test Receiver	R/S	ESI26	100211	2009-01-04	Normal
023	Wireless Communications Test Set	Agilent	8960(E5515C)	GB41450323	2009-06-13	Normal
---	Power spliter	Jie sai	---	1000132	2009-01-04	Normal
111835	Wireless Communications Test Set	R&S	CMU200	1100000802	--	Normal

**Limit Level Construction:**


According to Part 24.238 (a), i.e., Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB, so the limit level is:  $P(\text{dBm}) - (43 + 10 \log(P)) \text{ dB} = -13 \text{ dBm}$

**Limits for Radiated spurious emissions(UE)**

Frequency range	Limit Level /Resolution Bandwidth
30 MHz to 20000 MHz	-13dBm/1MHz

**Test Setup:**

During the process of testing, the EUT was controlled via the Wireless Communications Test Set to ensure max power transmission and proper modulation and measured by Rhode & Schwarz EMI test receiver (ESI26).

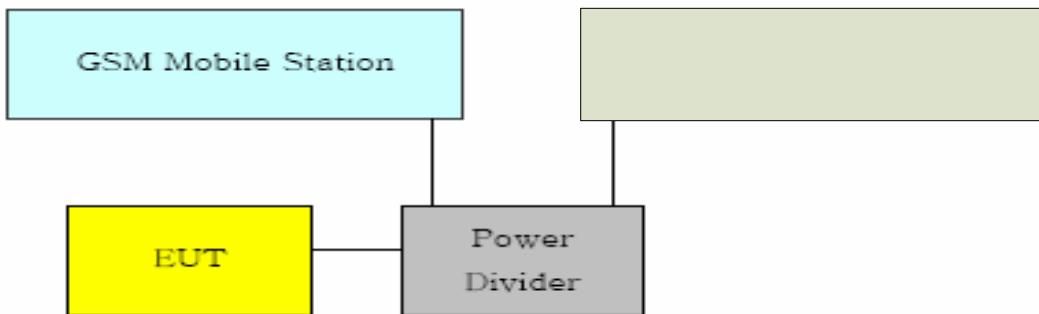

## Test Method

- 1) The EUT was coupled to the EMI test receiver analyzer mode and the base station simulator through a power divider. The radio frequency load attached to the EUT antenna terminal was 50 Ohm. The loss of the cables in the test system is calibrated to correct the readings.
- 2) The spectrum analyzer was set to Maxpeak Detector function and Maximum hold mode.
- 3) The resolution bandwidth of the spectrum analyzer was comparable to the emission bandwidth.

Note: --

## Test Results:

### GSM mode:


Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-14.08
251 Right band edge	849.000	-15.27
512 Left band edge	1850.000	-16.86
810 Right band edge	1910.000	-16.61

### GPRS mode:


Band-edge emission		
EUT Channel	Frequency [MHz]	Level [dBm]
128 Left band edge	824.000	-15.30
251 Right band edge	849.000	-15.05
512 Left band edge	1850.000	-14.10
810 Right band edge	1910.000	-17.25

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

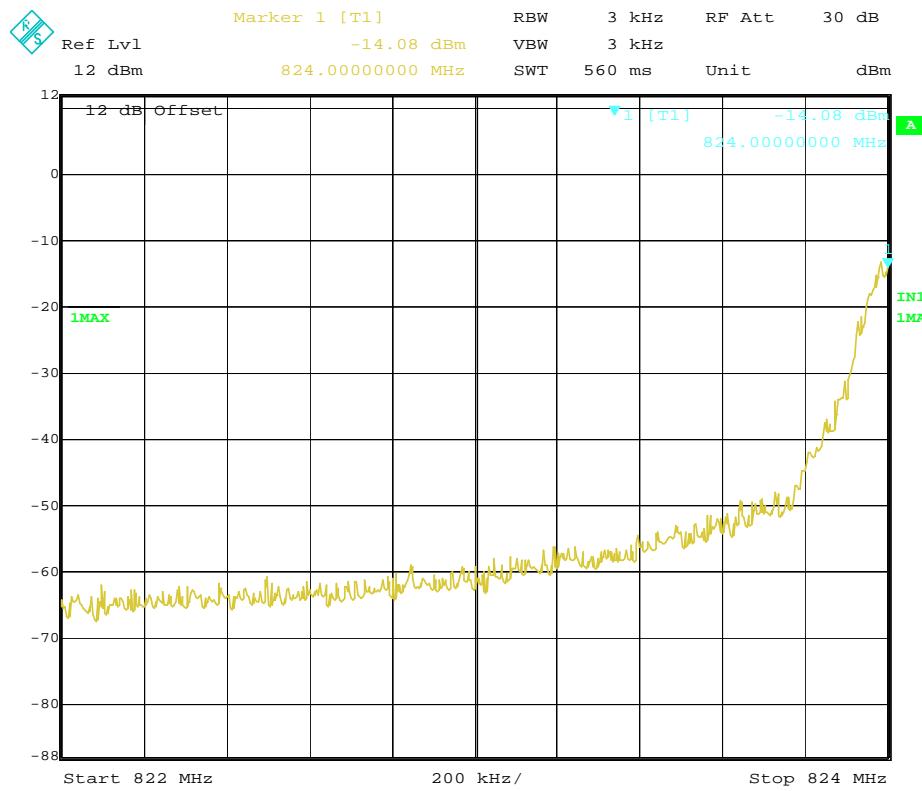


GSM channel 128 Left band edge

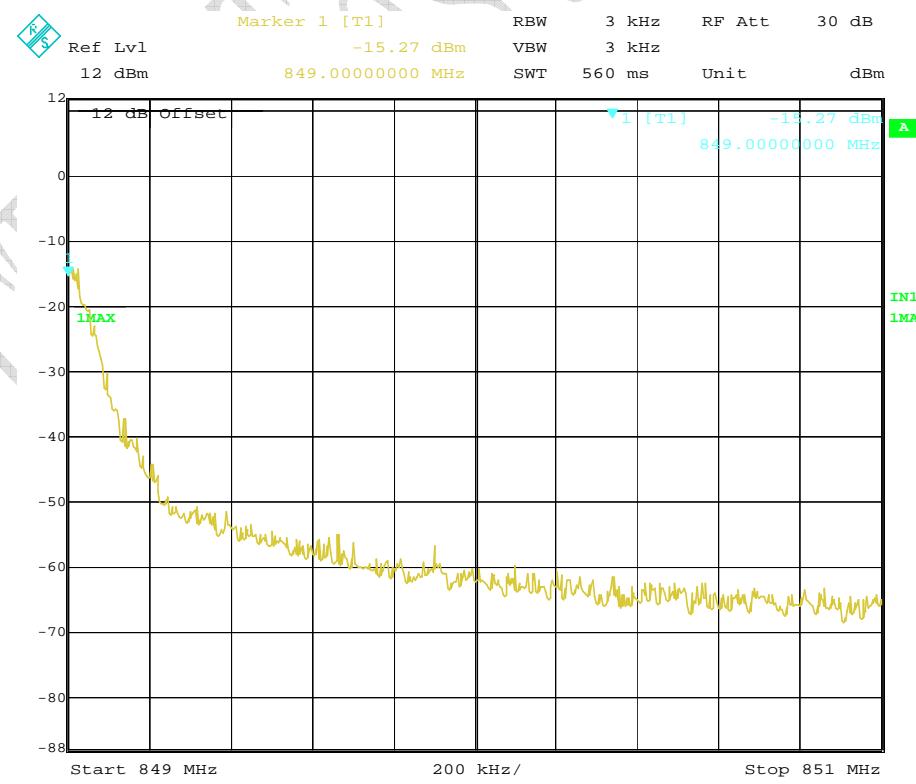

GSM channel 251 Right band edge


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

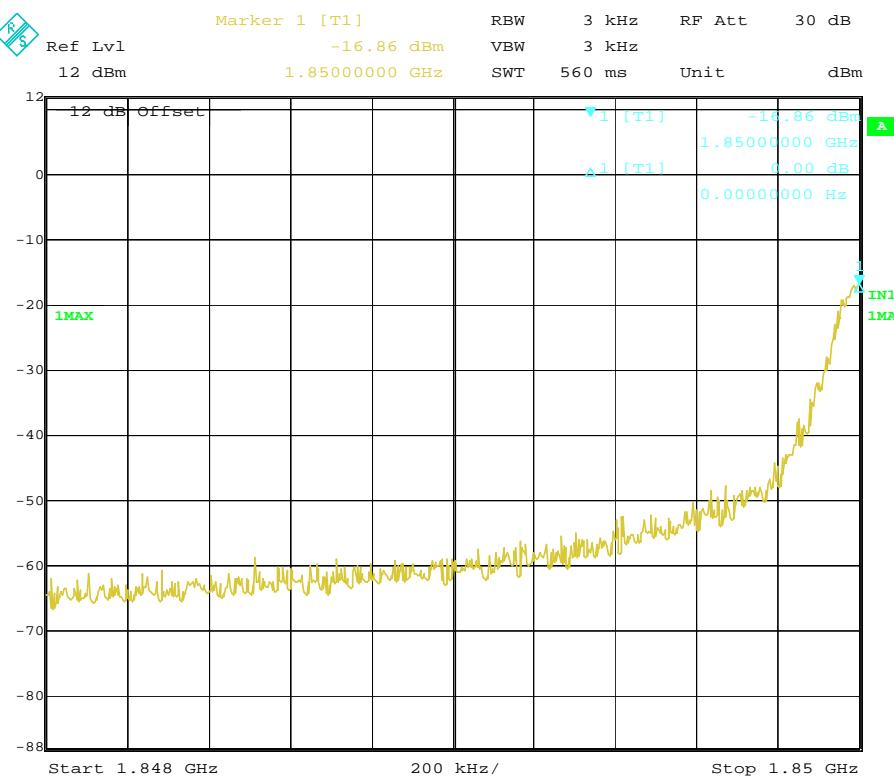

Date: 30.JUL.2008 11:32:52

## GSM channel 512 Left band edge

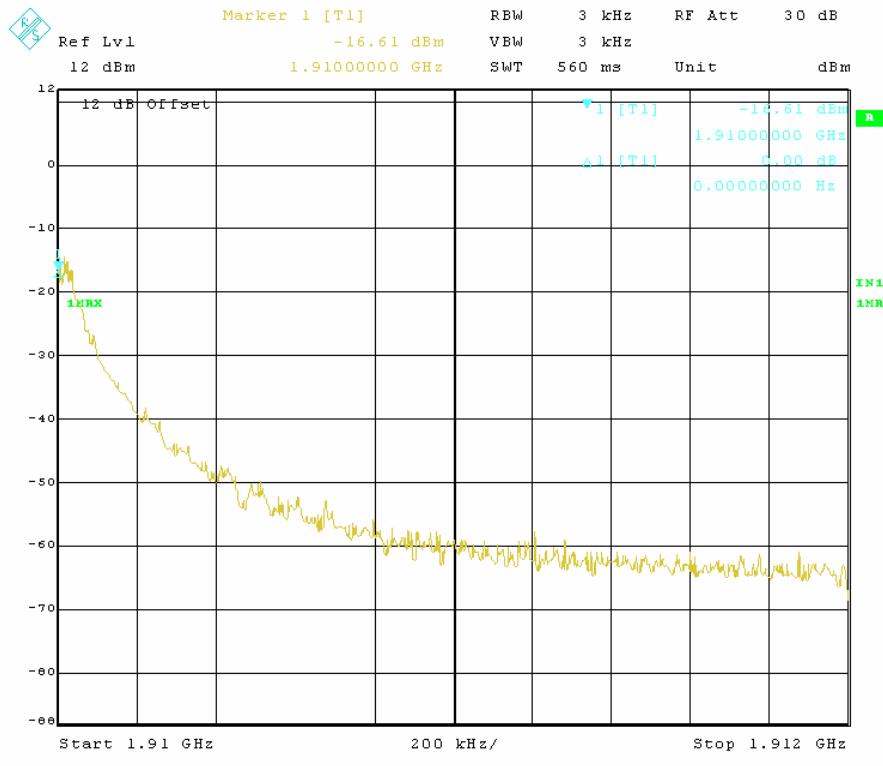


Date: 30.JUL.2008 11:34:14

## GSM channel 810 Right band edge


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

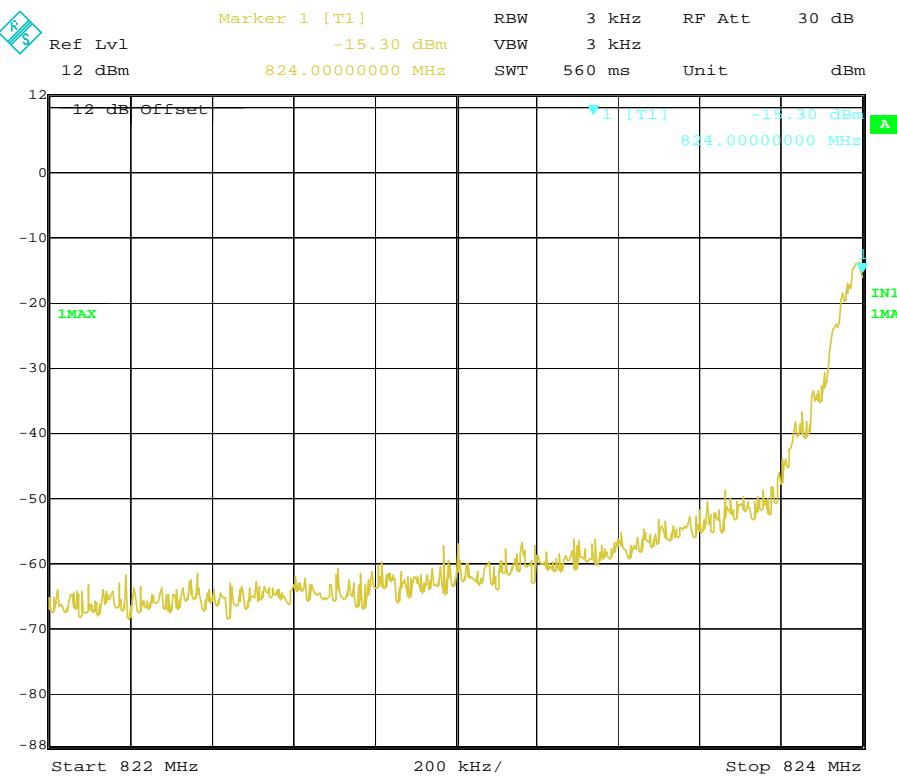

Date: 30.JUL.2008 14:28:46

## GPRS channel 128 Left band edge

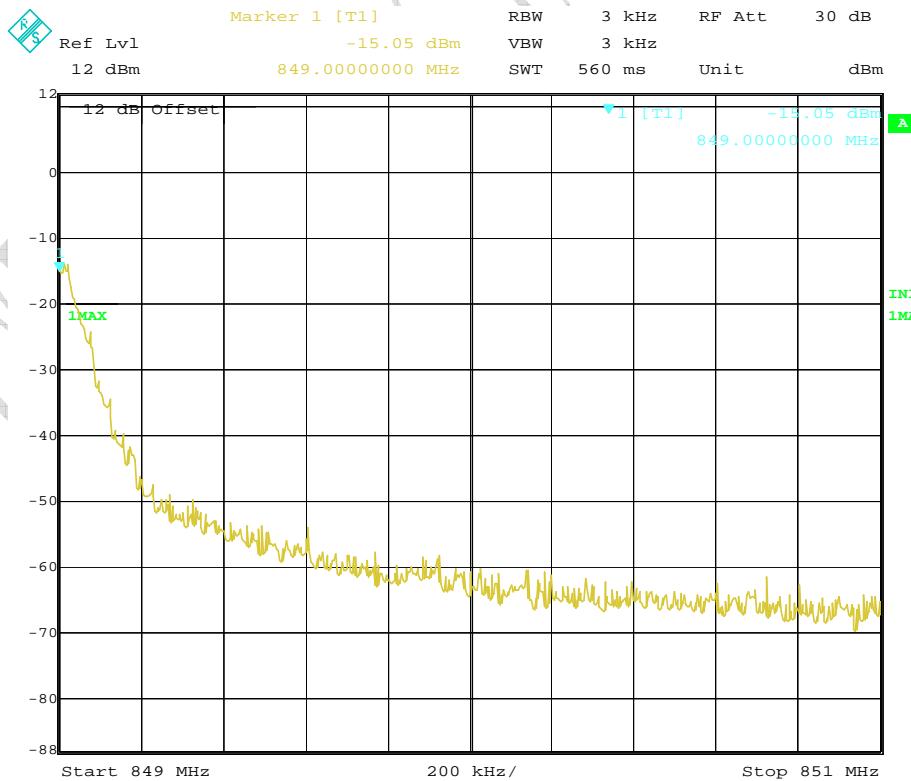


Date: 30.JUL.2008 14:30:53


## GPRS channel 251 Right band edge

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC

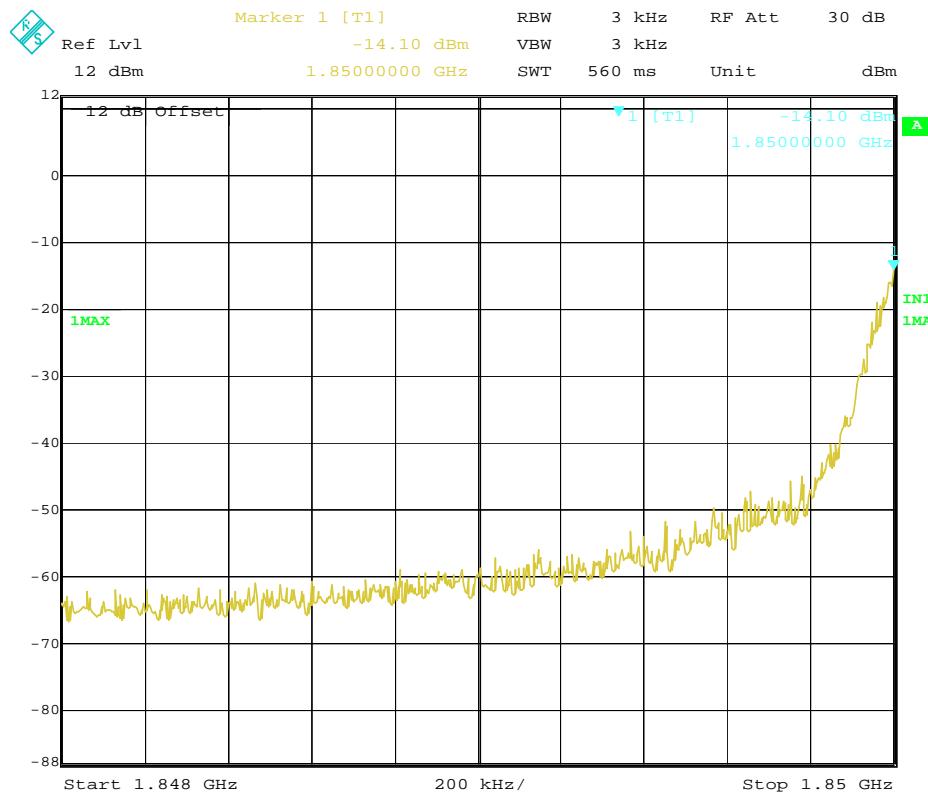

## GPRS channel 512 Left band edge

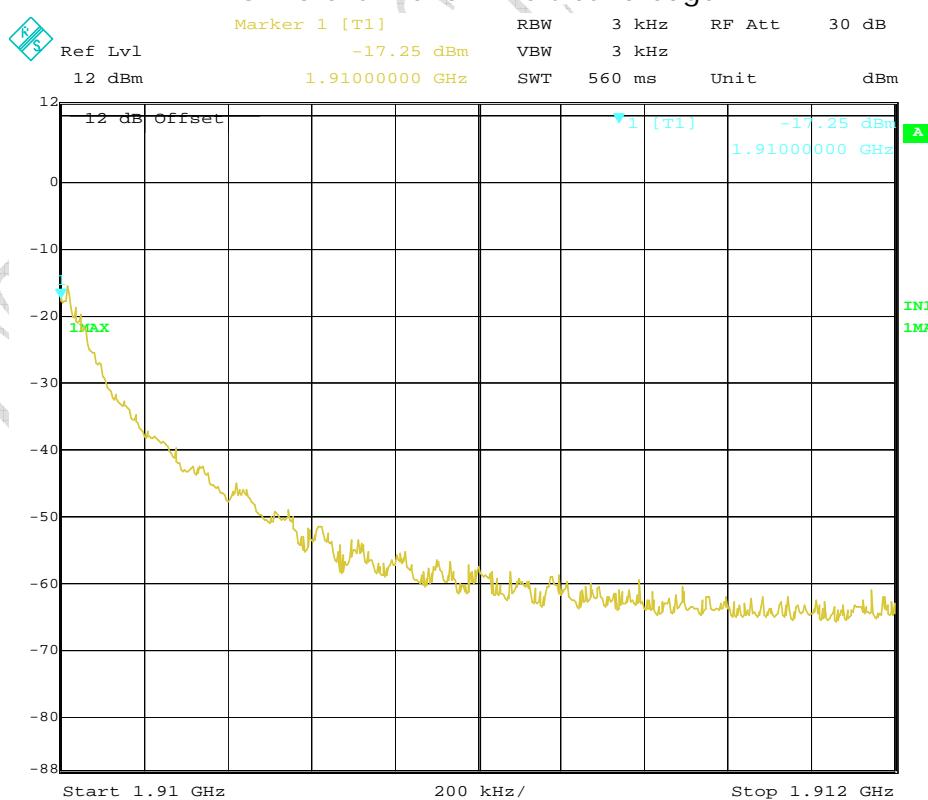

## GPRS channel 810 Right band edge


## Annex A External Photos




Front view



Front view with clip open

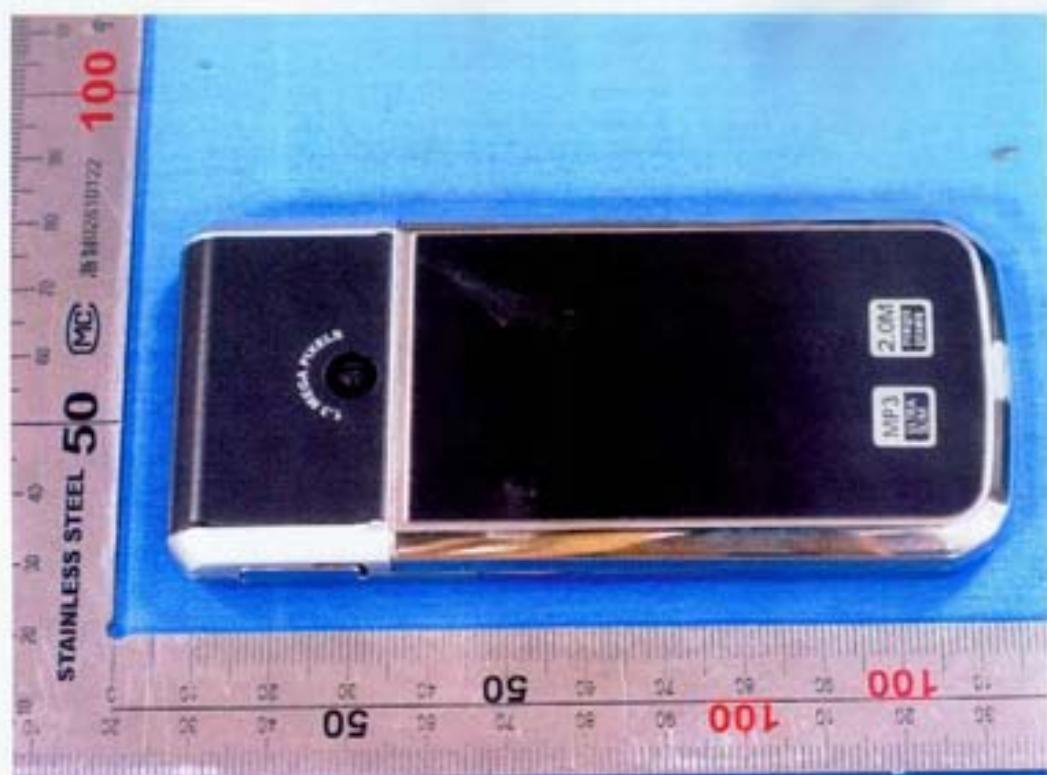

Back view

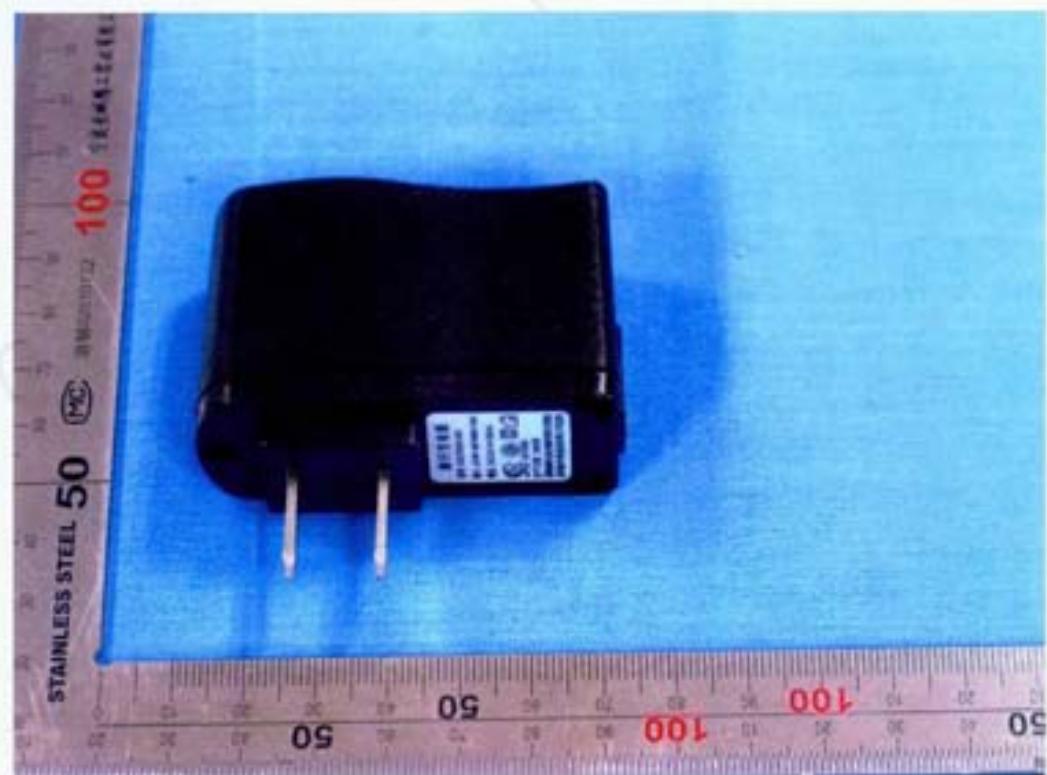

Adaptor

FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B0BGE6003-FCC-EMC



Cable



Headset


FCC Parts 2, 22, 24  
Equipment: S7

REPORT NO.: B08GE6003-FCC-EMC




battery


## Annex B Internal Photos

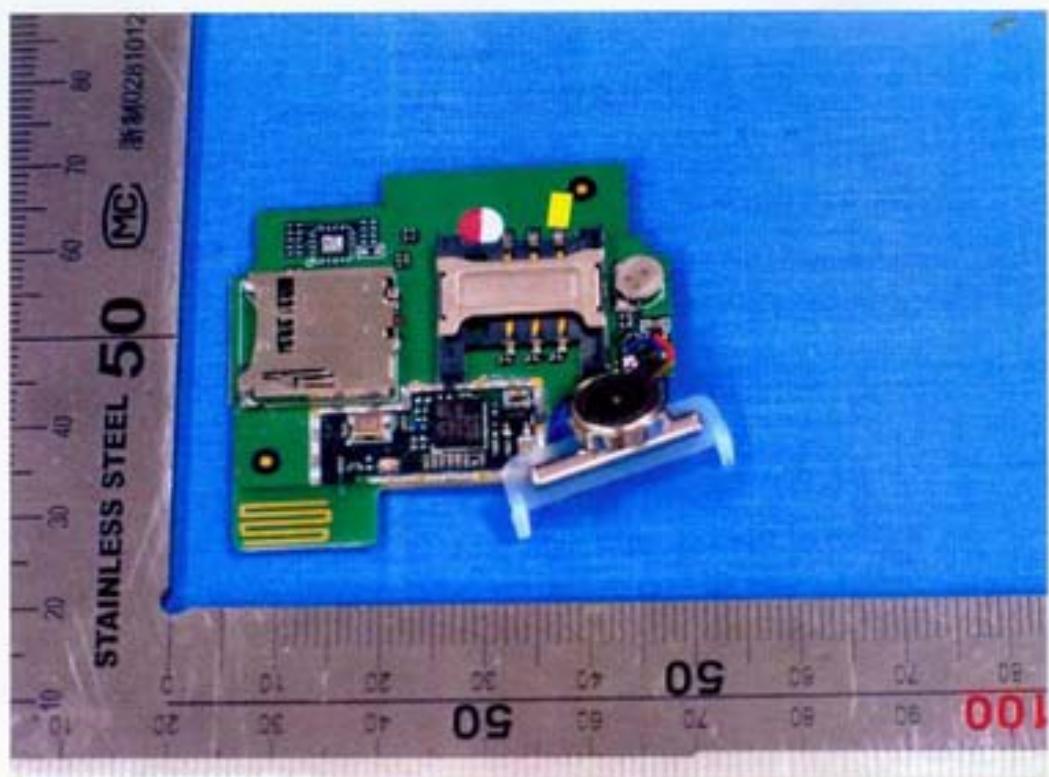


Main board (face)

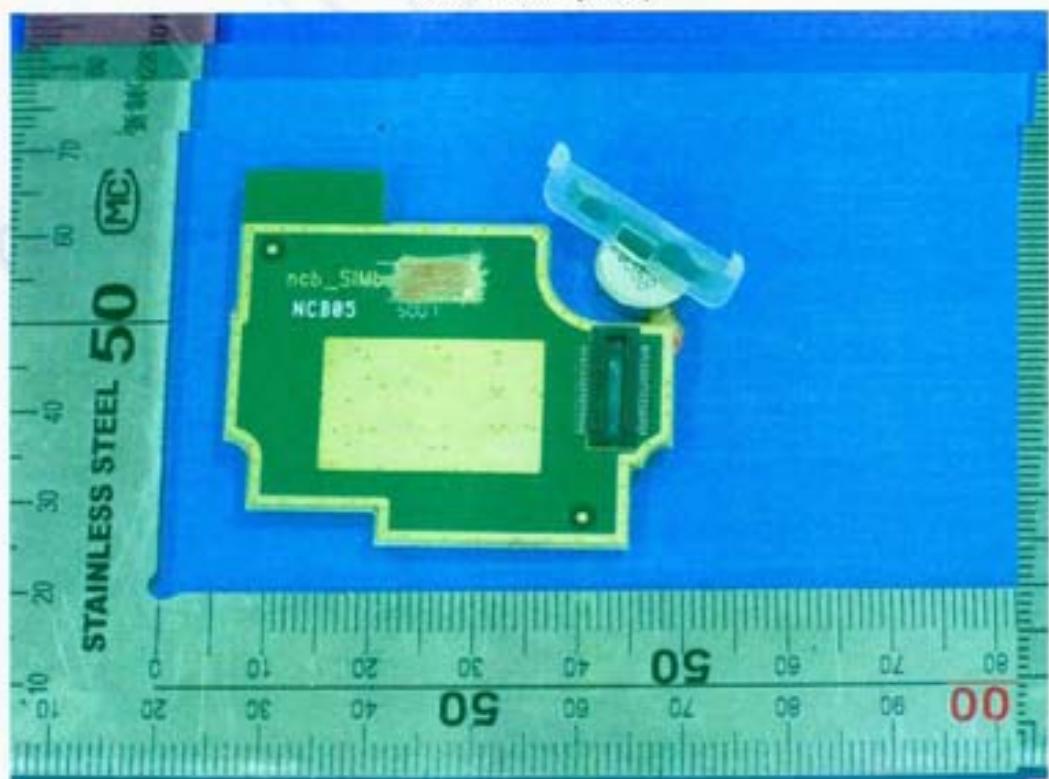


Main board (back)

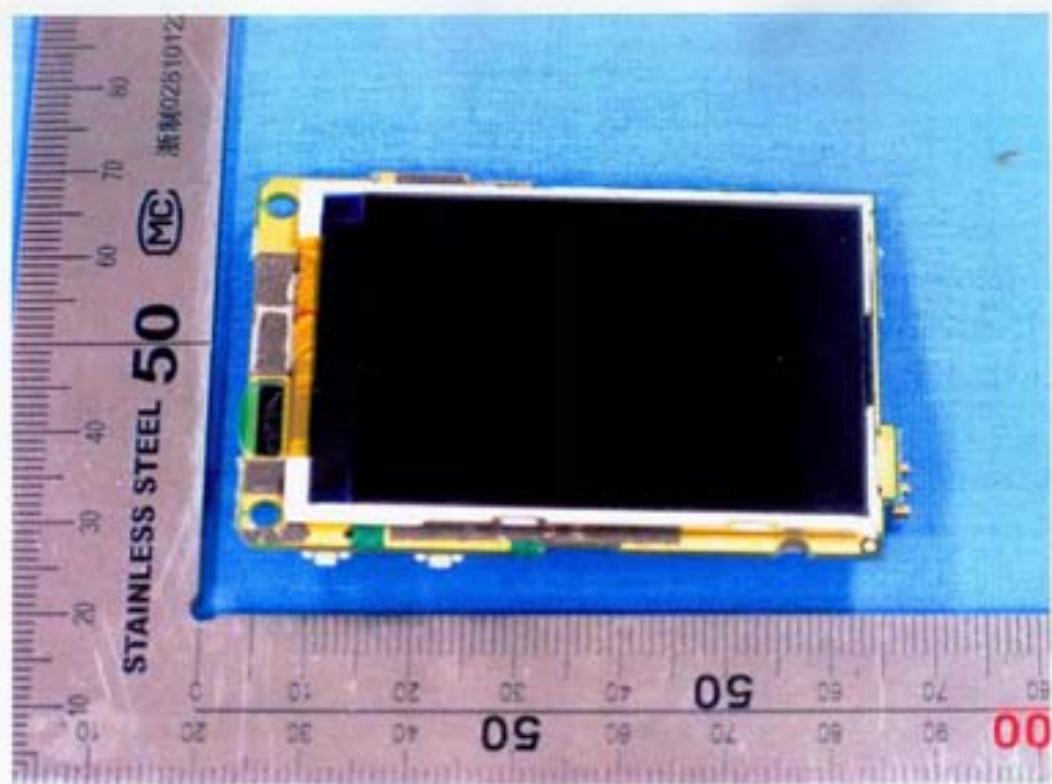


LCD (face)

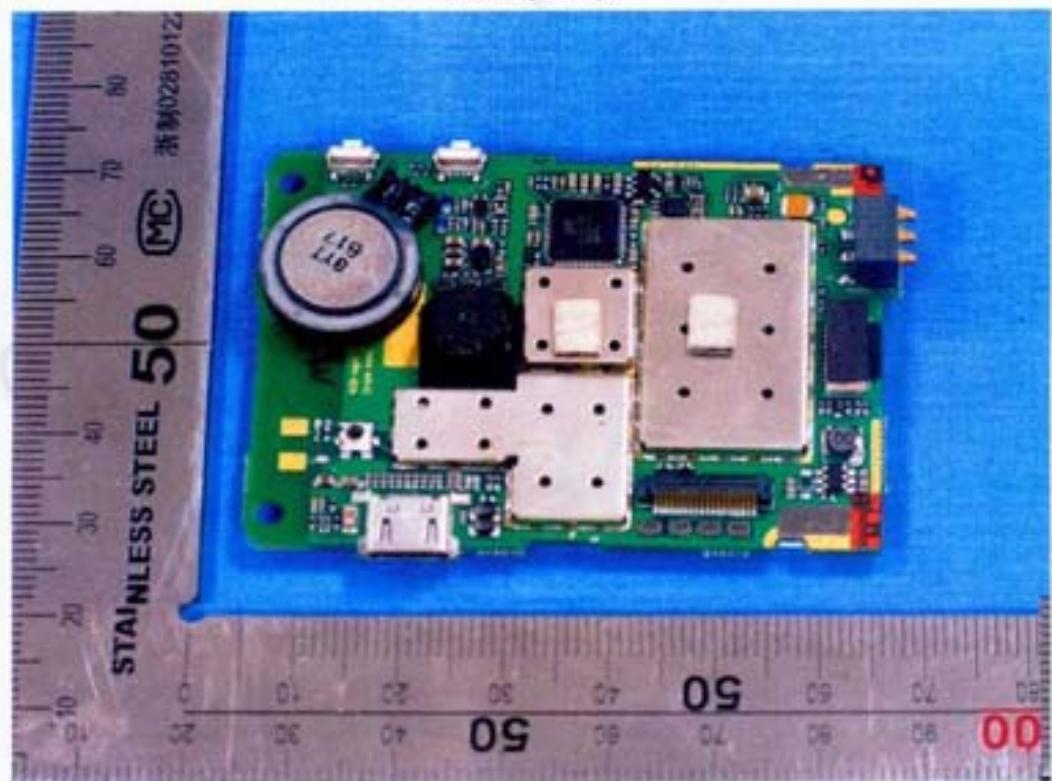

LCD (back)

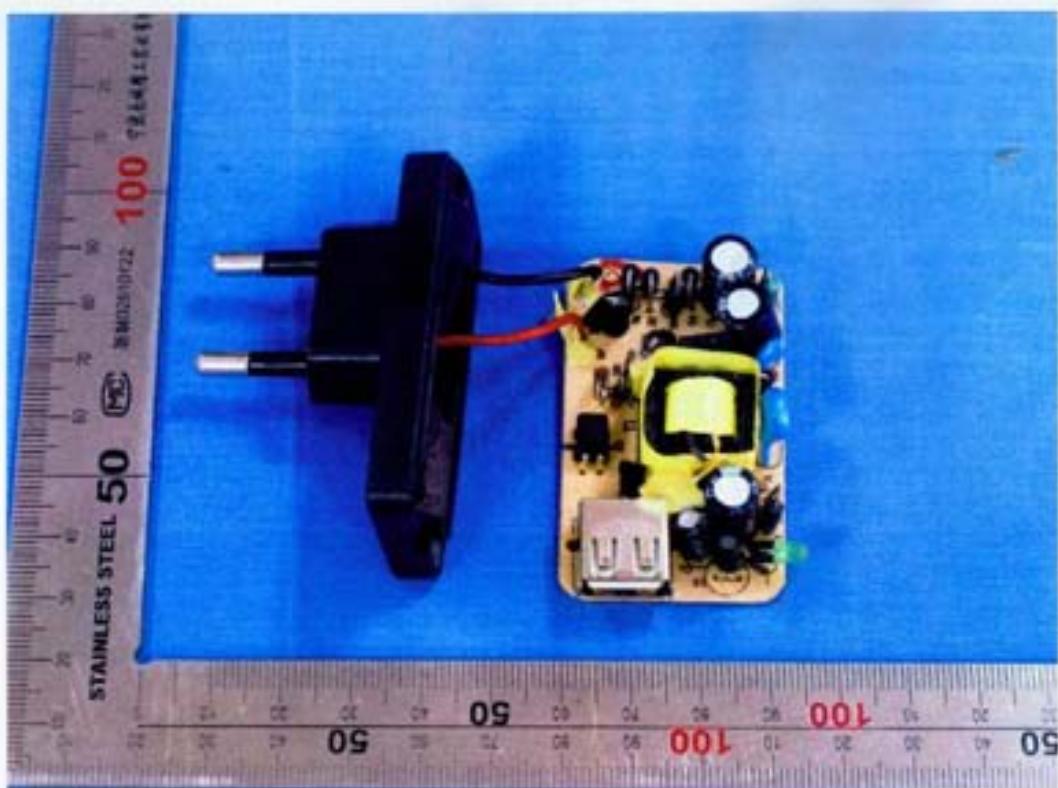

Adaptor face

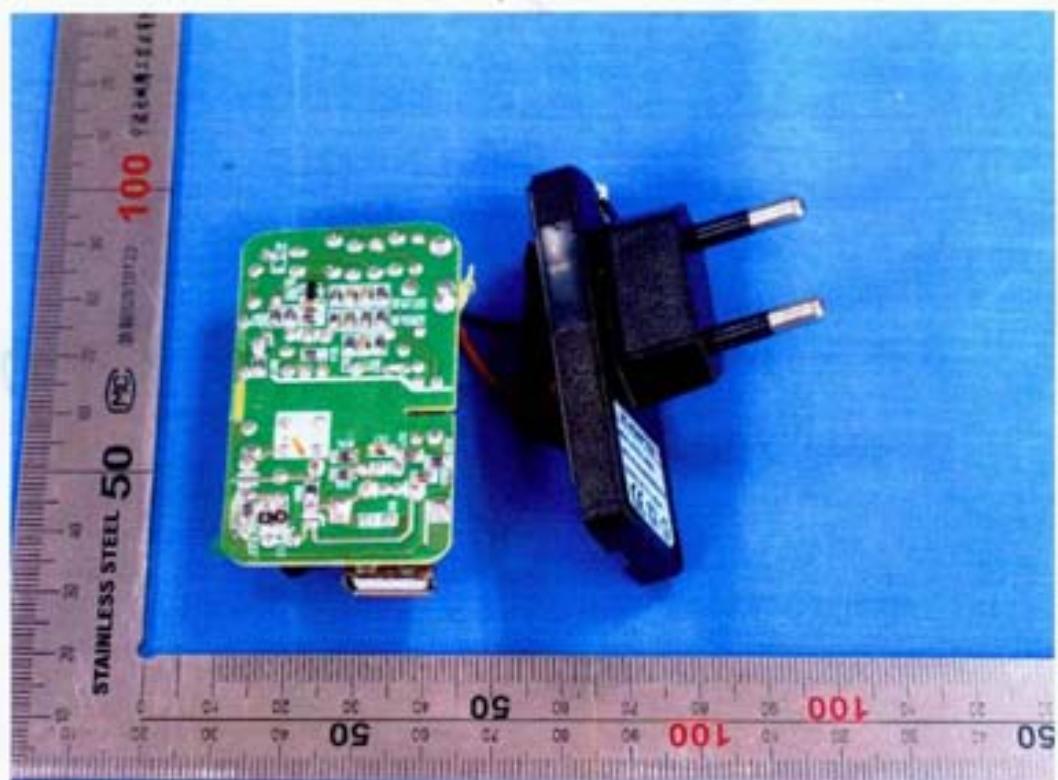

Adaptor back

## ANNEX C Deviations from Prescribed Test Methods

No deviation from Prescribed Test Methods.

\_\_\_\_\_ The End of this Report \_\_\_\_\_