



www.flaike.com

flaik Inc.
4450 Arapahoe Avenue,
Suite 100
Boulder, CO, 80303
United States

C: +1 (303) 847 6756

26 November 2008

To Whom It May Concern:

This letter is in reference to Dock Charging Station which is used to charge the GSM2.00 flaik device.

The Dock Charging Station can charge up to 25 GSM2.00 flaik devices. The Dock Charger is powered by the Cincon TR45A05 power supply which is FCC certified. Each GSM2.00 flaik device draws 200mA in normal conditions and 220mA in max conditions when placed in the Dock Charger. The TR45A05 is rated at 5V/6A. If all 25 tags were drawing max current the total current draw would be 5.5A which is 0.5A under the TR45A05 rating.

The Dock Charger Station does not include any internal circuitry and consists of 25 connections from the Positive and GND of the TR45A05 to the 25 GSM2.00 flaik devices, see Appendix A.

Regards,

David Wood



1. APPENDIX A



Figure 1: Top View



Figure 2: Front View



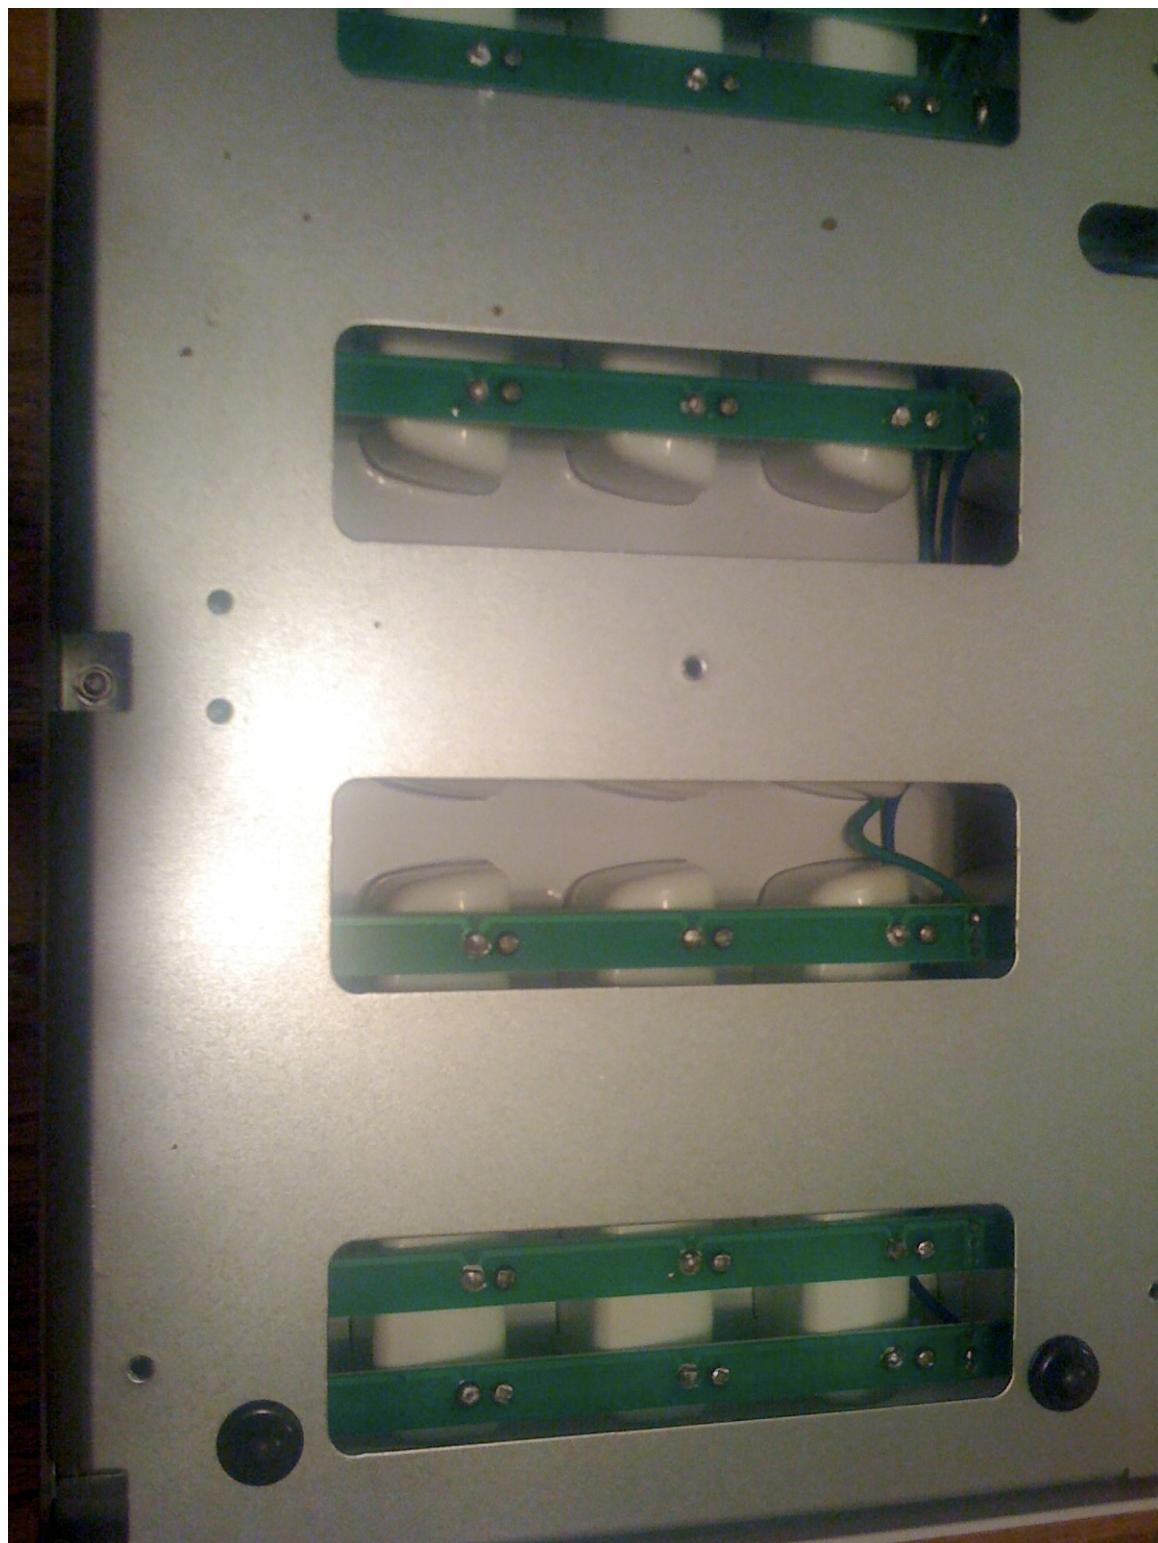


Figure 3: Internal View

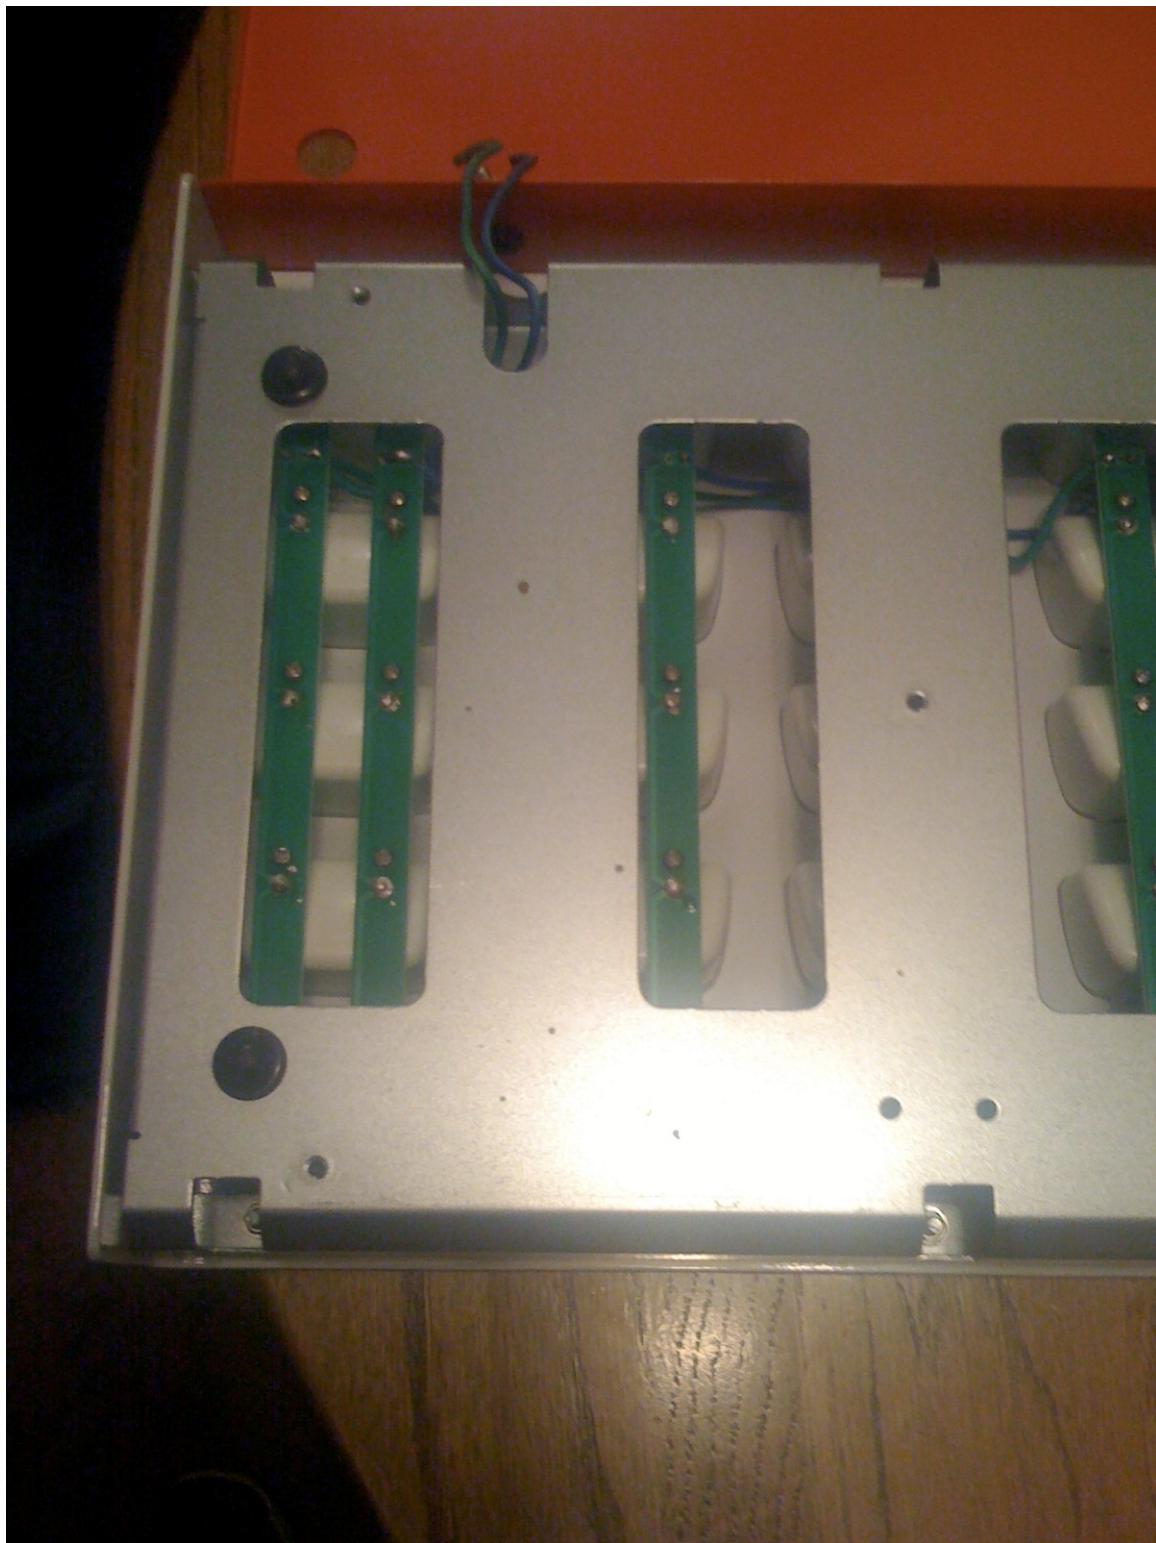


Figure 4: Internal View

★



Figure 5: Rear View showing the DC connection from the TR45A05.

★