



# FCC Test Report

## FCC Part 22, 24

For the  
**Flaik Inc.**  
GPS Tracking Device  
**Model Number: GSM 2.03**

**FCC ID: WL5FLAIKGSM203**  
**IC NO.: 7890A-FLAIKGSM203**

**TEST REPORT #: EMC\_FLAIK\_001\_FCC22\_24**  
**DATE: 2009-09-15**



**Bluetooth™**  
Bluetooth  
Qualification Test  
Facility  
(BQTF)

**CTIA Authorized Test Lab**

LAB CODE 20020328-00

FCC listed:  
A2LA accredited  
  
IC recognized #  
3462B

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

**Table of Contents**

<b>1 ASSESSMENT .....</b>	<b>3</b>
<b>2 ADMINISTRATIVE DATA.....</b>	<b>4</b>
2.1 IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT.....	4
2.2 IDENTIFICATION OF THE CLIENT .....	4
2.3 IDENTIFICATION OF THE MANUFACTURER.....	4
<b>3 EQUIPMENT UNDER TEST (EUT).....</b>	<b>5</b>
3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST.....	5
3.2 IDENTIFICATION OF THE EQUIPMENT UNDER TEST (EUT) .....	5
3.3 IDENTIFICATION OF ACCESSORY EQUIPMENT .....	5
<b>4 SUBJECT OF INVESTIGATION.....</b>	<b>6</b>
<b>5 MEASUREMENTS.....</b>	<b>7</b>
5.1 RF POWER OUTPUT .....	7
5.1.1 <i>FCC 2.1046 Measurements required: RF power output.....</i>	7
5.1.2 <i>Limits: .....</i>	7
5.1.2.1 FCC 22.913 (a) Effective radiated power limits. ....	7
5.1.2.2 FCC 24.232 (b)(c) Power limits. ....	7
5.1.3 <i>Conducted Output Power Measurement procedure:.....</i>	7
5.1.4 <i>Radiated Output Power Measurement procedure:.....</i>	8
5.1.5 <i>ERP Results 850 MHz band: .....</i>	9
5.1.6 <i>EIRP Results 1900 MHz band:.....</i>	9
5.2 SPURIOUS EMISSIONS RADIATED .....	16
5.2.1 <i>FCC 2.1053 Measurements required: Field strength of spurious radiation.....</i>	16
5.2.2 <i>Limits: .....</i>	16
5.2.2.1 FCC 22.917 Emission limitations for cellular equipment. ....	16
5.2.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment. ....	16
5.2.3 <i>Radiated out of band measurement procedure: .....</i>	17
5.2.4 <i>Radiated out of band emissions results on EUT: .....</i>	19
5.2.4.1 Test Results Transmitter Spurious Emission GSM850/1900:.....	19
5.2.5 <i>RECEIVER RADIATED EMISSIONS § 2.1053 / RSS-132 &amp; 133 .....</i>	28
5.3 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207.....	32
5.3.1 <i>Limits .....</i>	32
<b>6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS .....</b>	<b>37</b>
<b>7 REFERENCES .....</b>	<b>38</b>
<b>8 BLOCK DIAGRAMS .....</b>	<b>39</b>
<b>9 REVISION HISTORY .....</b>	<b>41</b>

## **1 Assessment**

**The following is in compliance with the applicable criteria specified in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations and in compliance with the applicable criteria specified in Industry Canada rules RSS132 and RSS133.**

Company	Description	Model #
Flaik Inc.	GPS Tracking Device	GSM 2.03

**Technical responsibility for area of testing:**

**Heiko Strehlow**

**2009-09-15 EMC & Radio (Director Compliance Services)**

Date	Section	Name	Signature
------	---------	------	-----------

**This report is prepared by:**

**Marc Douat**

**2009-09-15 EMC & Radio (Test Lab Manager)**

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the EMC Test Report**

Company Name:	<b>CETECOM Inc.</b>
Department:	<b>EMC</b>
Address:	<b>411 Dixon Landing Road Milpitas, CA 95035 U.S.A.</b>
Telephone:	<b>+1 (408) 586 6200</b>
Fax:	<b>+1 (408) 586 6299</b>
Responsible Test Lab Manager:	<b>Heiko Strehlow</b>
Responsible Project Leader:	<b>Marc Douat</b>

### **2.2 Identification of the Client**

Applicant's Name:	<b>Flaik Inc.</b>
Street Address:	<b>PO Box 4119 Boulder, CO 80306, USA</b>
Contact Person:	<b>Steve Kenny</b>
Phone No.	<b>(303) 847 6756</b>
e-mail:	<b>steve.kenny@flaik.com</b>

### **2.3 Identification of the Manufacturer**

**Same as above applicant**

### **3 Equipment under Test (EUT)**

#### **3.1 Specification of the Equipment under Test**

<b>Marketing Name of EUT (if not same as Model No.)</b>	<b>GSM 2.03</b>
<b>Description</b>	<b>GPS Tracking Device</b>
<b>Model No.</b>	<b>GSM 2.03</b>
<b>FCC-ID</b>	<b>WL5FLAIKGSM302</b>
<b>Frequency Range:</b>	<b>824.2MHz – 848.8MHz for GSM 850 1850.2MHz – 1909.8MHz for PCS 1900</b>
<b>Type(s) of Modulation:</b>	<b>GMSK</b>
<b>Number of Channels:</b>	<b>124 for GSM-850, 299 for PCS-1900</b>
<b>Max. Output Power:</b>	<b>Cellular band ERP 26.43 dBm, 440 mW PCS band EIRP 31.93 dBm, 1560 mW</b>

#### **3.2 Identification of the Equipment Under Test (EUT)**

<b>EUT #</b>	<b>TYPE</b>	<b>MANF.</b>	<b>MODEL</b>	<b>SERIAL #</b>
<b>1</b>	<b>EUT</b>	<b>Flaik Inc.</b>	<b>GSM 2.03</b>	<b>BE-70</b>

#### **3.3 Identification of Accessory equipment**

<b>AE #</b>	<b>TYPE</b>	<b>MODEL</b>
<b>1</b>	<b>GSM 2.03 Charge base</b>	<b>N/A</b>

#### **4 Subject of Investigation**

All testing was performed on the EUT listed in Section 3. The EUT was maximized in the X,Y, Z positions , all data in this report shows the worst case between horizontal and vertical polarization for above 1GHz.

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations.

This report only contains radiated measurements.

## **5 Measurements**

### **5.1 RF Power Output**

#### **5.1.1 FCC 2.1046 Measurements required: RF power output.**

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

#### **5.1.2 Limits:**

##### **5.1.2.1 FCC 22.913 (a) Effective radiated power limits.**

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.


##### **5.1.2.2 FCC 24.232 (b)(c) Power limits.**

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).  
(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.


#### **5.1.3 Conducted Output Power Measurement procedure:**

Based on TIA-603C 2004

##### **2.2.1 Conducted Carrier Output Power Rating**

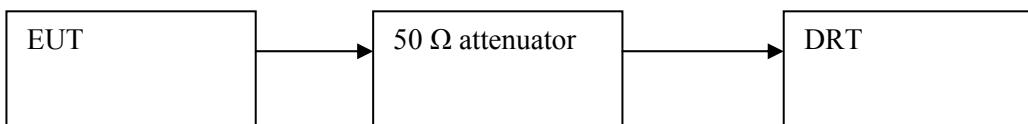

1. Connect the equipment as shown in the above diagram. A Digital Radiocommunication Tester (DRT) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the DRT to set the EUT to its maximum power at the required channel.
3. Record the output power level measured by the DRT.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

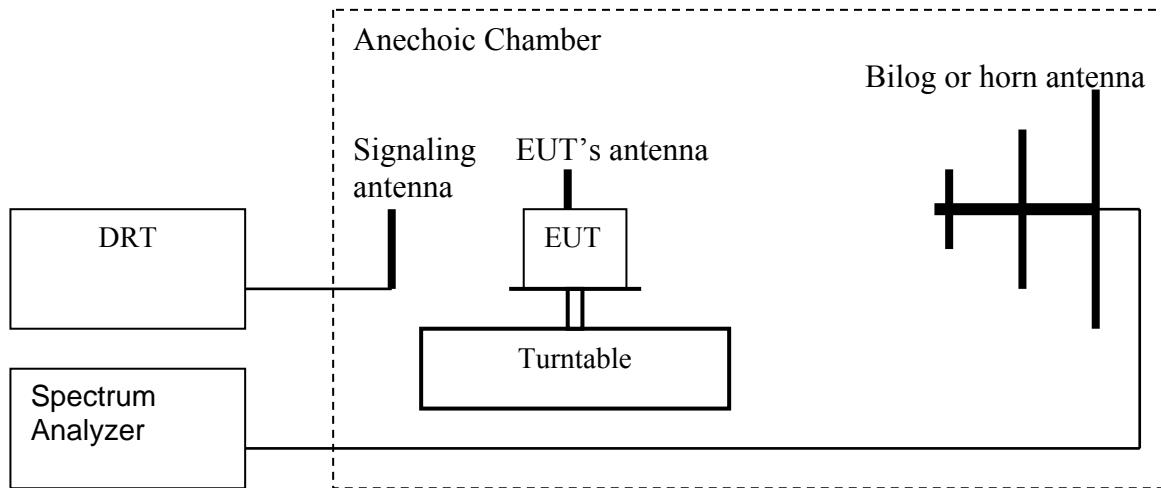**5.1.4 Radiated Output Power Measurement procedure:****Based on TIA-603C 2004****2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)**

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the ERP using the following equation:  

$$\text{ERP (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$
8. Determine the EIRP using the following equation:  

$$\text{EIRP (dBm)} = \text{ERP (dBm)} + 2.14 \text{ (dB)}$$
9. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band. **Spectrum analyzer settings = rbw=vbw=3MHz**

**(note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4, 7 and 8 above are performed with test software.)

**5.1.5 ERP Results 850 MHz band:**

<b>Power Control Level</b>	<b>Burst Peak ERP</b>
<b>5</b>	<b><math>\leq 38.45\text{dBm}</math> (7W)</b>

<b>Frequency (MHz)</b>	<b>Effective Radiated Power (dBm)</b>
	<b>GSM</b>
<b>824.2</b>	<b>26.43</b>
<b>836.6</b>	<b>26.26</b>
<b>848.8</b>	<b>25.56</b>


**5.1.6 EIRP Results 1900 MHz band:**

<b>Power Control Level</b>	<b>Burst Peak EIRP</b>
<b>0</b>	<b><math>\leq 33\text{dBm}</math> (2W)</b>

<b>Frequency (MHz)</b>	<b>Effective Isotropic Radiated Power (dBm)</b>
	<b>GSM</b>
<b>1850.2</b>	<b>31.24</b>
<b>1880.0</b>	<b>31.93</b>
<b>1909.8</b>	<b>30.42</b>


**ERP (GSM 850) CHANNEL 128 §22.913(a)**

ERP 850 L

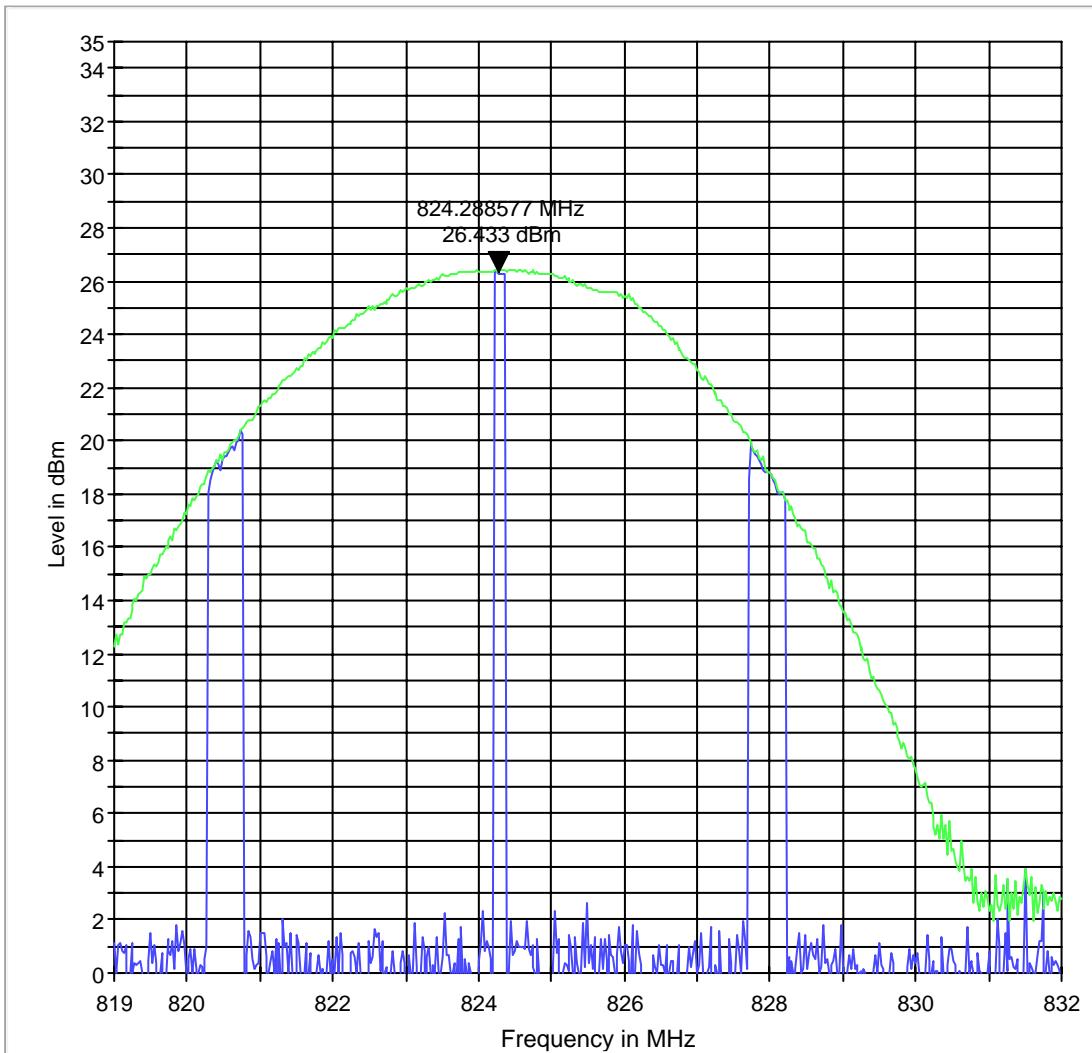


**ERP (GSM 850) CHANNEL 190 §22.913(a)**

ERP 850 M

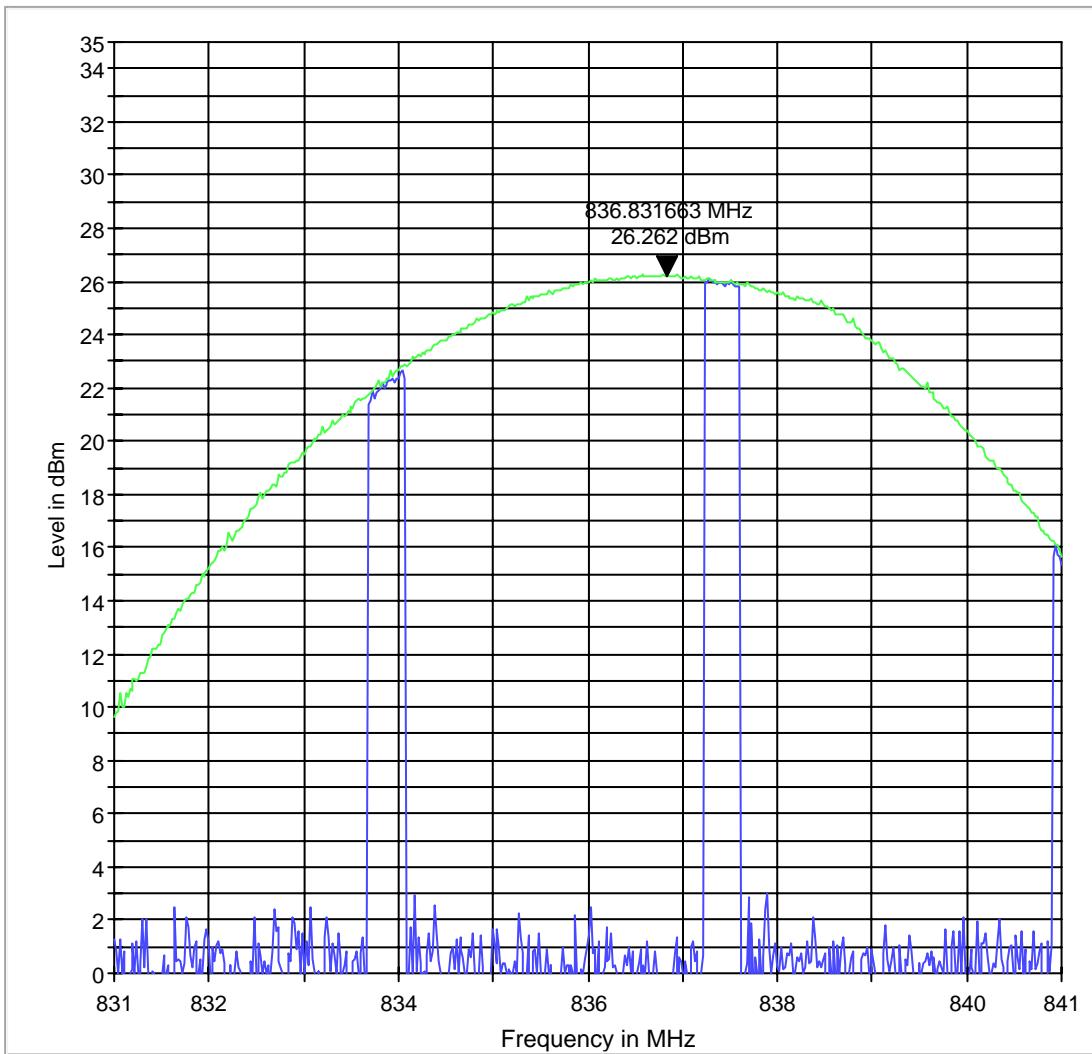

**ERP (GSM 850) CHANNEL 251 §22.913(a)**


ERP 850 H

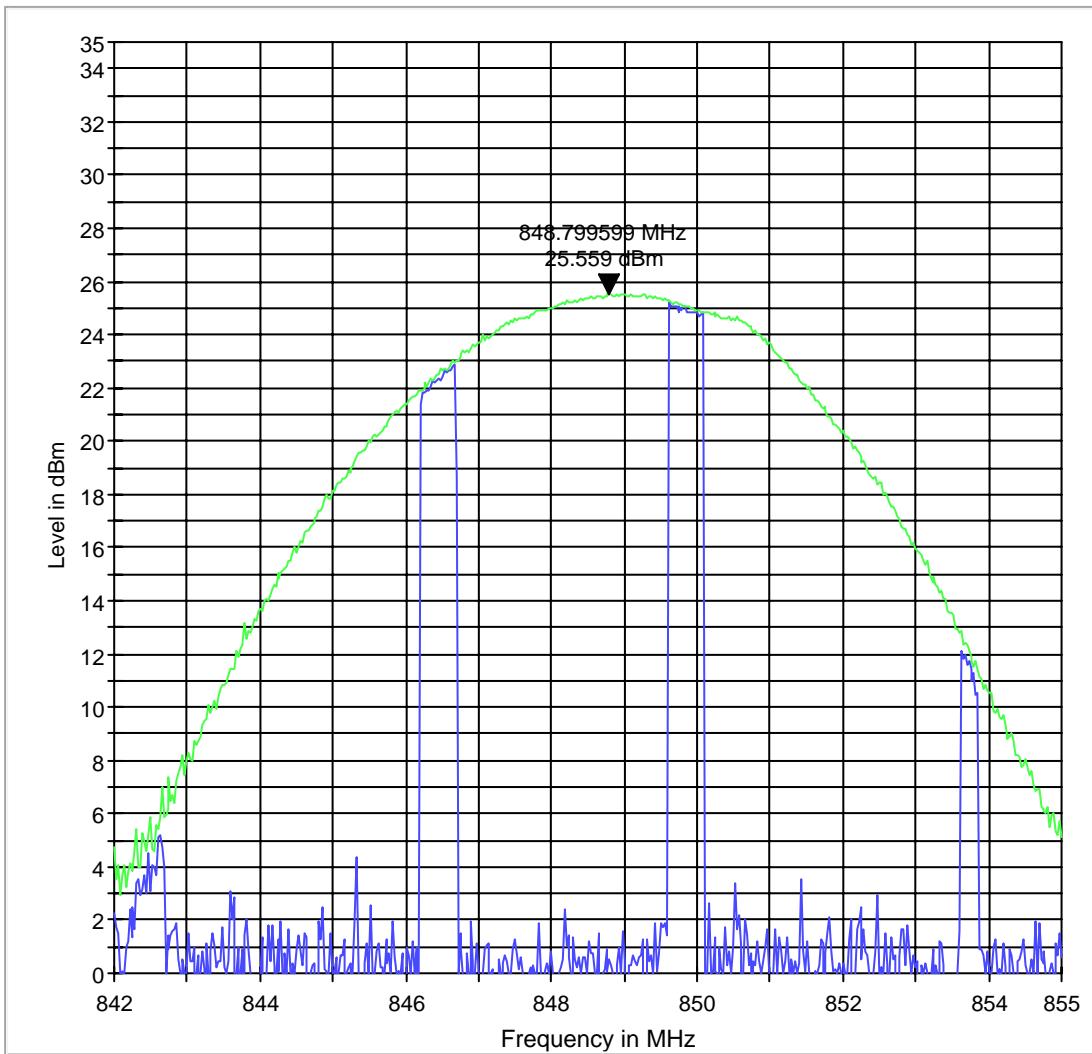

**EIRP (PCS-1900) CHANNEL 512 §24.232(b)**

**1900\_L\_ver ant-111cm TT@147°**


EIRP 1900 L

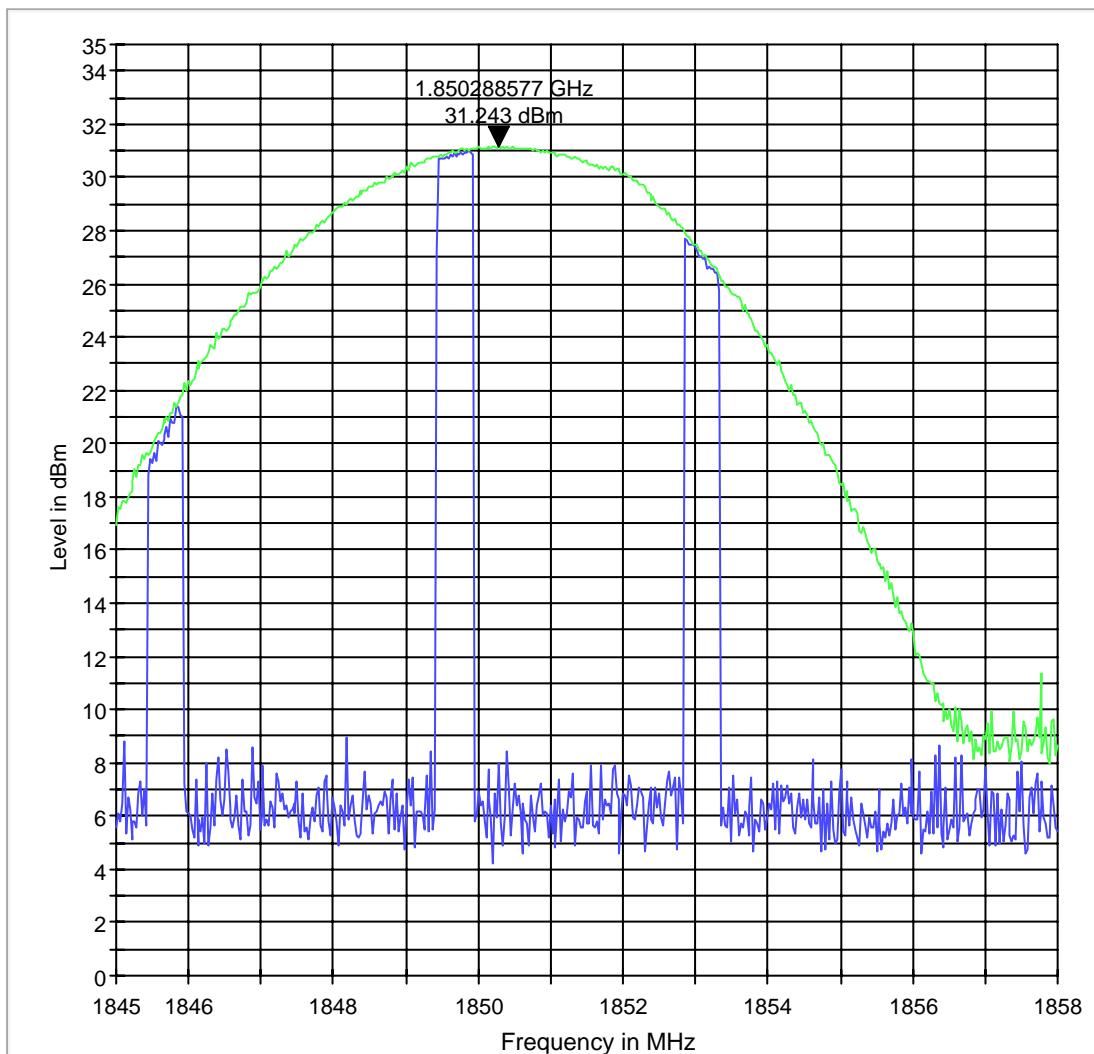

**EIRP (PCS-1900) CHANNEL 661 §24.232(b)**

**1900\_M\_ver ant-111cm TT@147°**


EIRP 1900 M

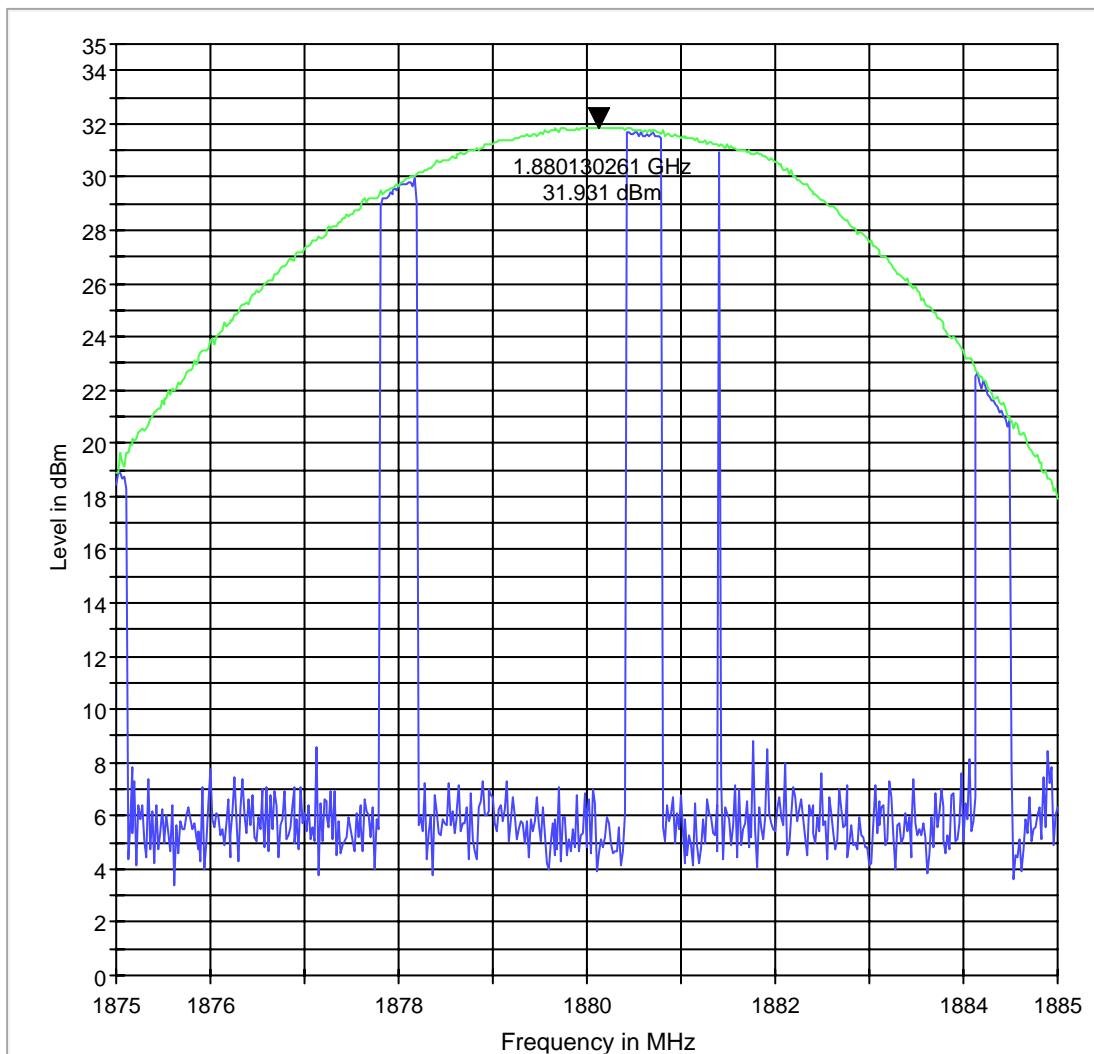

**EIRP (PCS-1900) CHANNEL 810 §24.232(b)**

**1900\_H\_ver ant-111cm TT@147°**

EIRP 1900 H

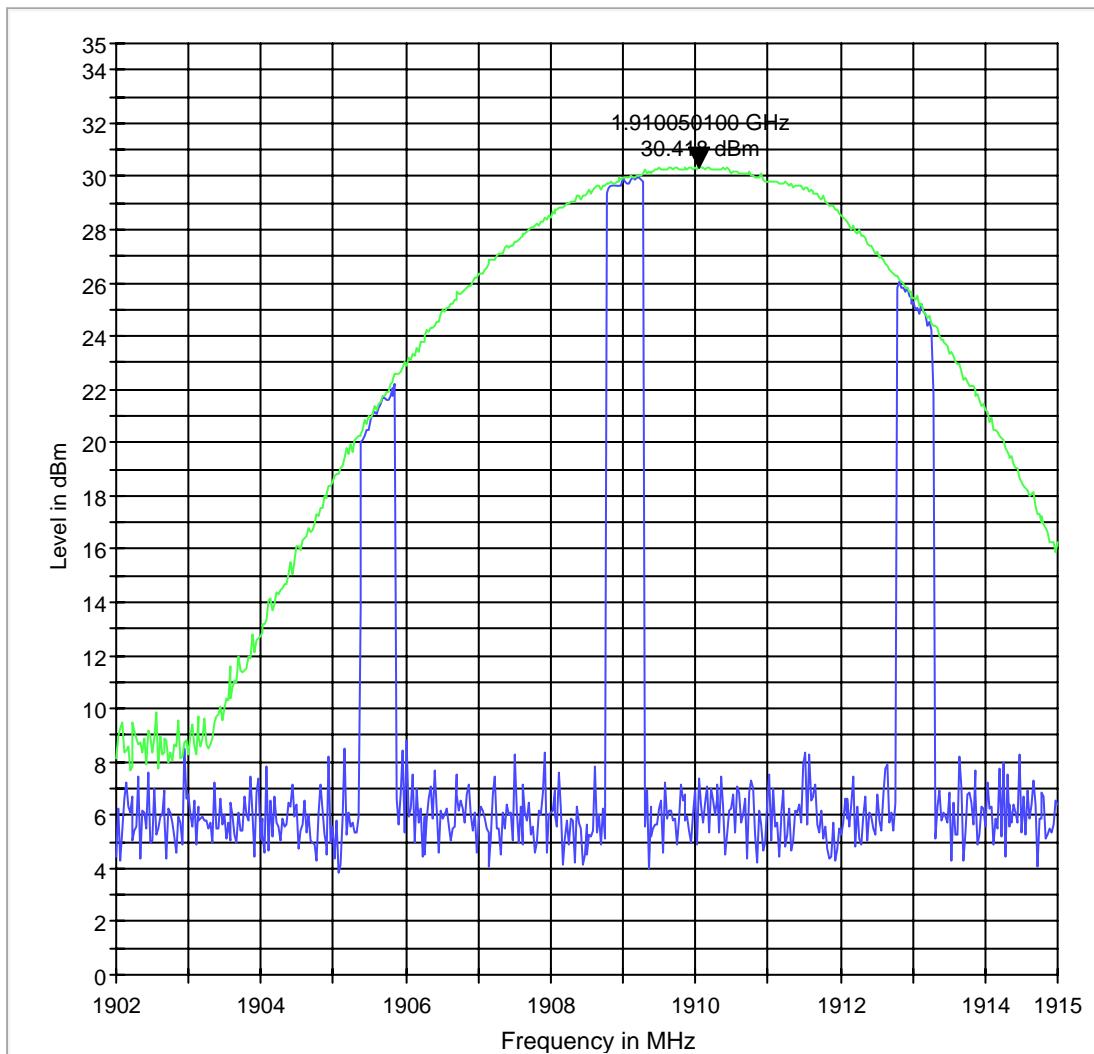

## **5.2 Spurious Emissions Radiated**

### **5.2.1 FCC 2.1053 Measurements required: Field strength of spurious radiation.**

(a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

### **5.2.2 Limits:**

#### **5.2.2.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **5.2.2.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to

improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### **5.2.3 Radiated out of band measurement procedure:**

**Based on TIA-603C 2004**

#### **2.2.12 Unwanted emissions: Radiated Spurious**

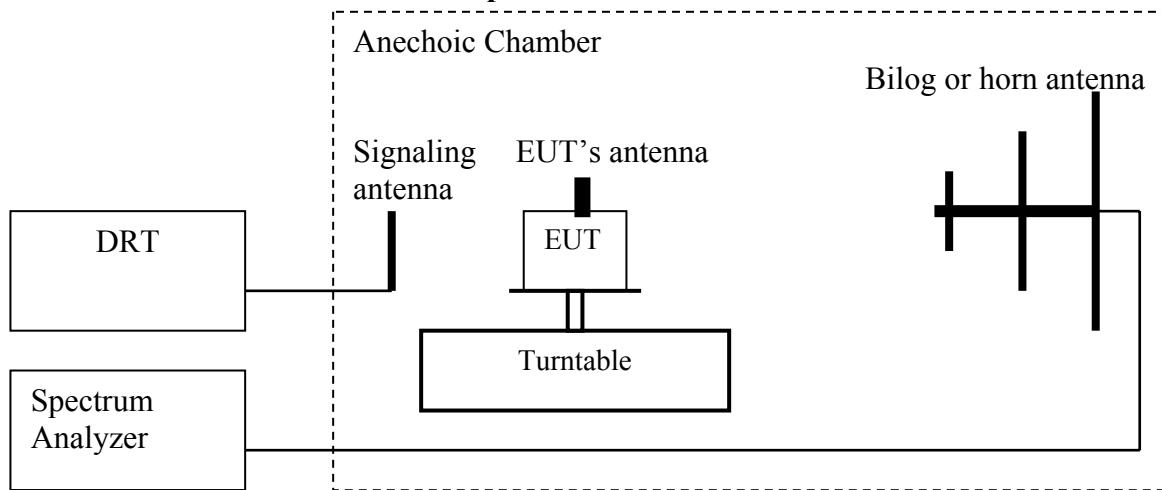

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radiocommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:  

$$\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  

$$\text{Spurious (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$$

10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.

(**note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

**Spectrum analyzer settings:**

Res B/W: 1 MHz

Vid B/W: 1 MHz

**Measurement Survey:**

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the GSM-850 & PCS-1900 bands. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the GSM-850 & PCS-1900 band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made only with Circuit Switched mode GMSK modulation because this mode represents the worse case emission for all the modulations for GSM. See section 5.5.4.1 and 5.5.4.3

Radiated emissions measurements were made also with UMTS FDD mode. See section 5.5.4.2 and 5.5.4.4

**5.2.4 Radiated out of band emissions results on EUT:****5.2.4.1 Test Results Transmitter Spurious Emission GSM850/1900:**

Harmonics	<b>Tx ch-128 Freq. (MHz)</b>	Level (dBm)	<b>Tx ch-190 Freq. (MHz)</b>	Level (dBm)	<b>Tx ch-251 Freq. (MHz)</b>	Level (dBm)
2	<b>1648.4</b>	NF	<b>1673.2</b>	NF	<b>1697.6</b>	NF
3	<b>2472.6</b>	NF	<b>2509.8</b>	NF	<b>2546.4</b>	NF
4	<b>3296.8</b>	NF	<b>3346.4</b>	NF	<b>3395.2</b>	NF
5	<b>4121</b>	NF	<b>4183</b>	NF	<b>4244</b>	NF
6	<b>4945.2</b>	NF	<b>5019.6</b>	NF	<b>5092.8</b>	NF
7	<b>5769.4</b>	NF	<b>5856.2</b>	NF	<b>5941.6</b>	NF
8	<b>6593.6</b>	NF	<b>6692.8</b>	NF	<b>6790.4</b>	NF
9	<b>7417.8</b>	NF	<b>7529.4</b>	NF	<b>7639.2</b>	NF
10	<b>8242</b>	NF	<b>8366</b>	NF	<b>8488</b>	NF
NF = NOISE FLOOR						

**RADIATED SPURIOUS EMISSIONS (GSM-850) TX: 30MHz - 1GHz**

Spurious emission limit -13dBm

**Antenna: vertical/horizontal****Note:**

1. The peak above the limit line is the carrier freq.
2. This plot is valid for low, mid & high channels (worst-case plot)


**FCC 22 30-1000MHz High Channel****Final Result 1**

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
850.459920	-28.0	20.000	100.000	120.0	H	112.0	-70.9	15.0	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
850.459920	

FCC 22 30-1000MHz

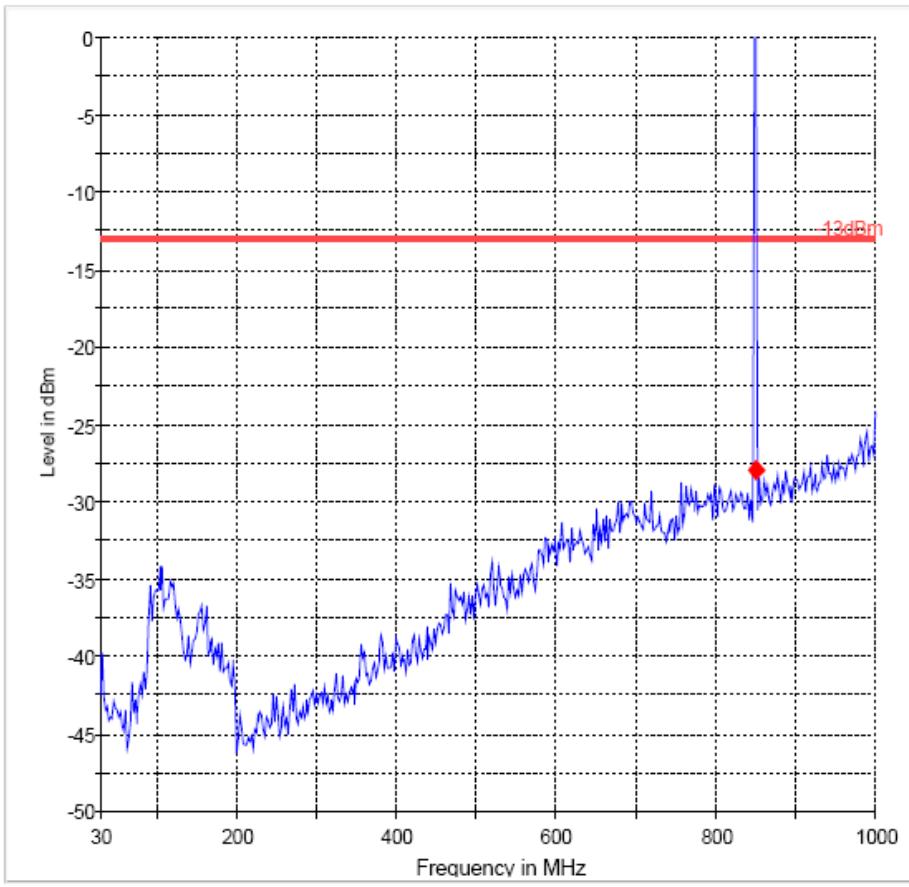

-13dBm.LimitLine

Preview Result 1

Final Result 1


**RADIATED SPURIOUS EMISSIONS (GSM-1900) TX: 30MHz - 1GHz**

Spurious emission limit –13dBm

**Antenna: vertical/horizontal**

**FCC 24 30-1000MHz Mid Channel**


FCC 22 30-1000MHz

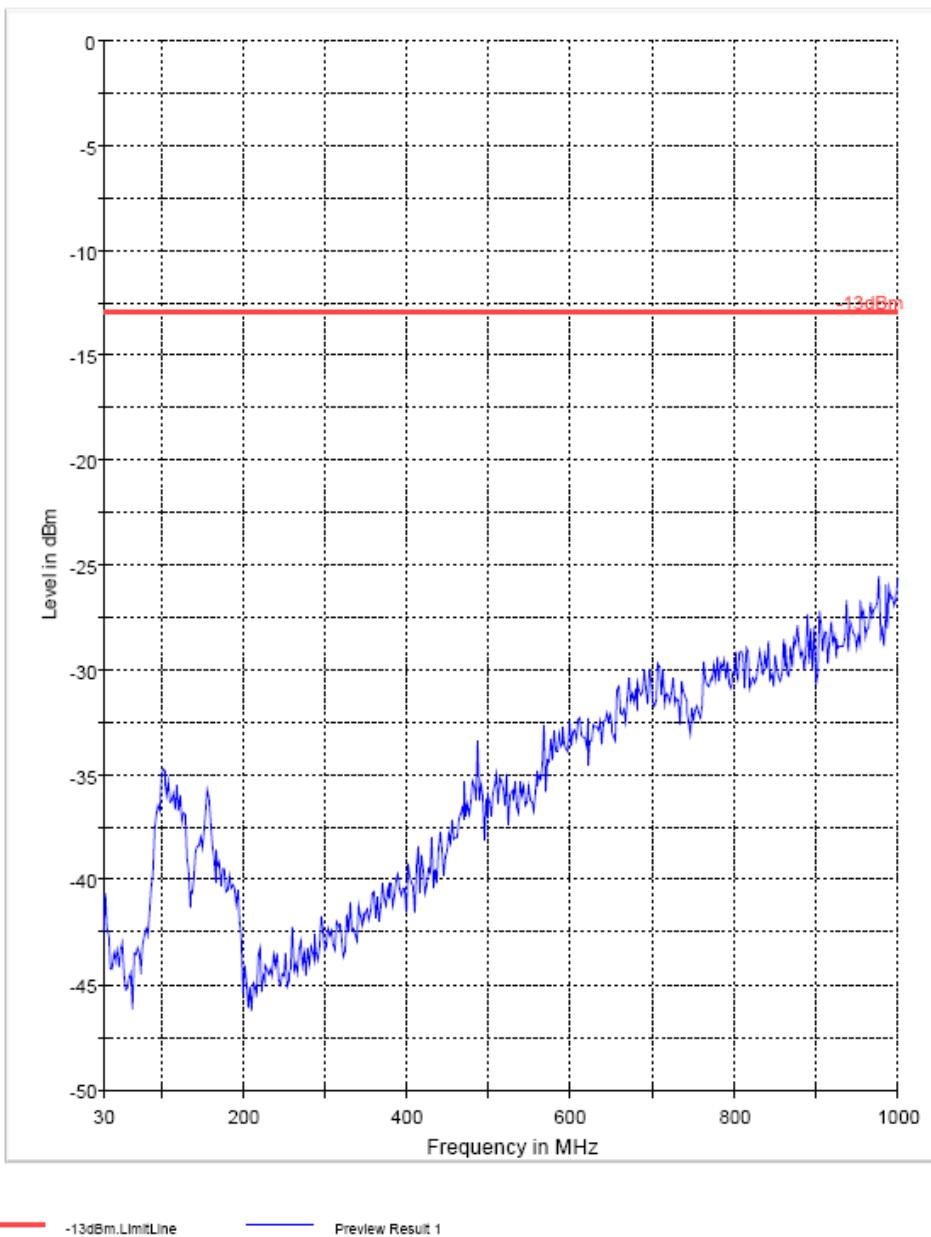

# GSM Radiated Spurious Emissions

## FCC 22 1-9GHz Low Channel

FCC 22 1-9GHz

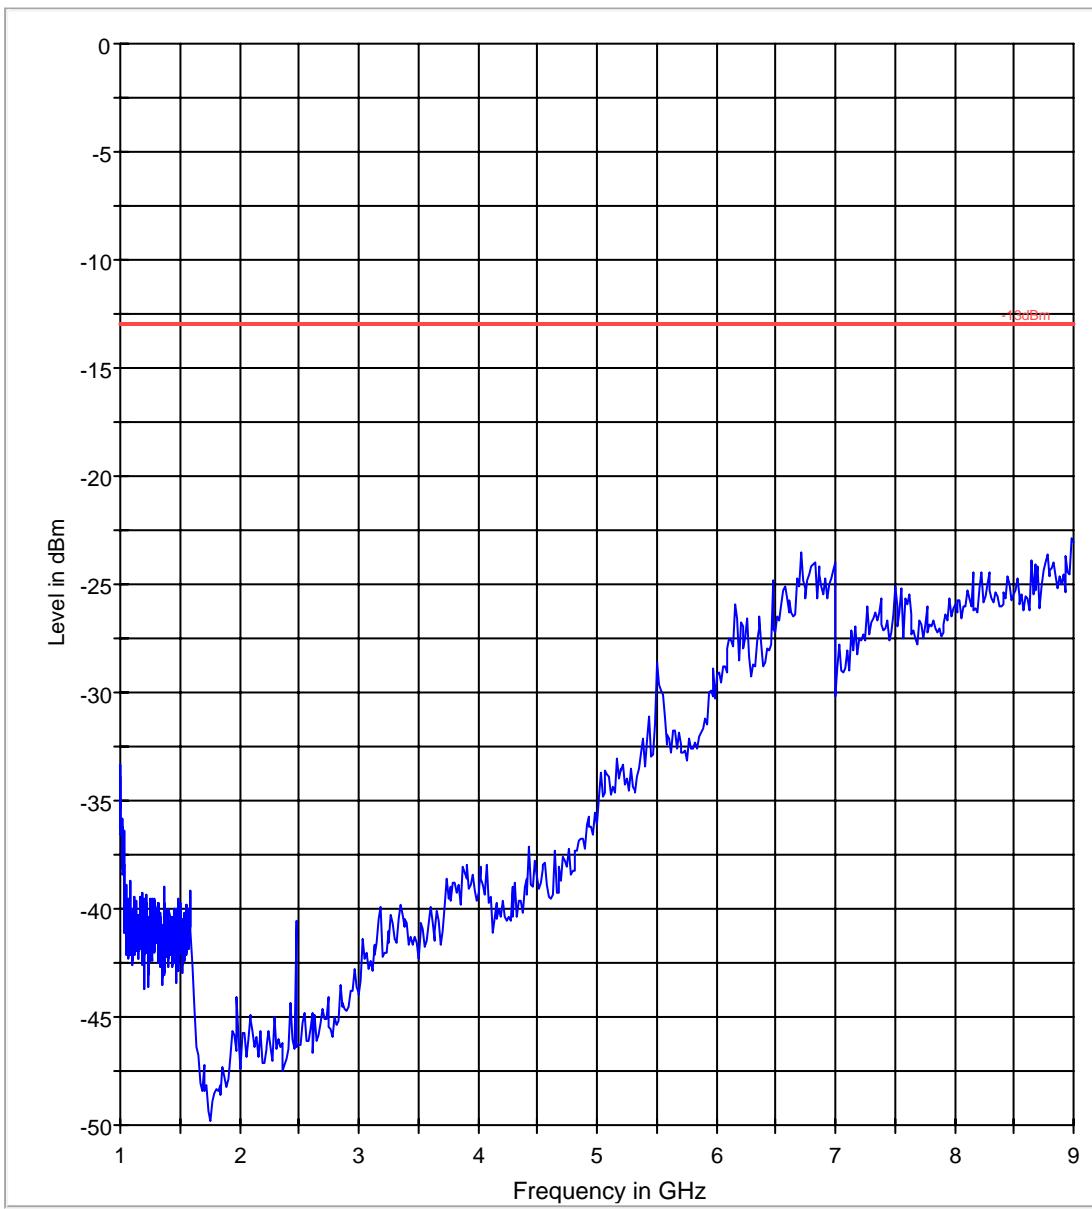


— -13dBm.LimitLine

— Preview Result 1

## FCC 22 1-9GHz Mid Channel

FCC 22 1-9GHz

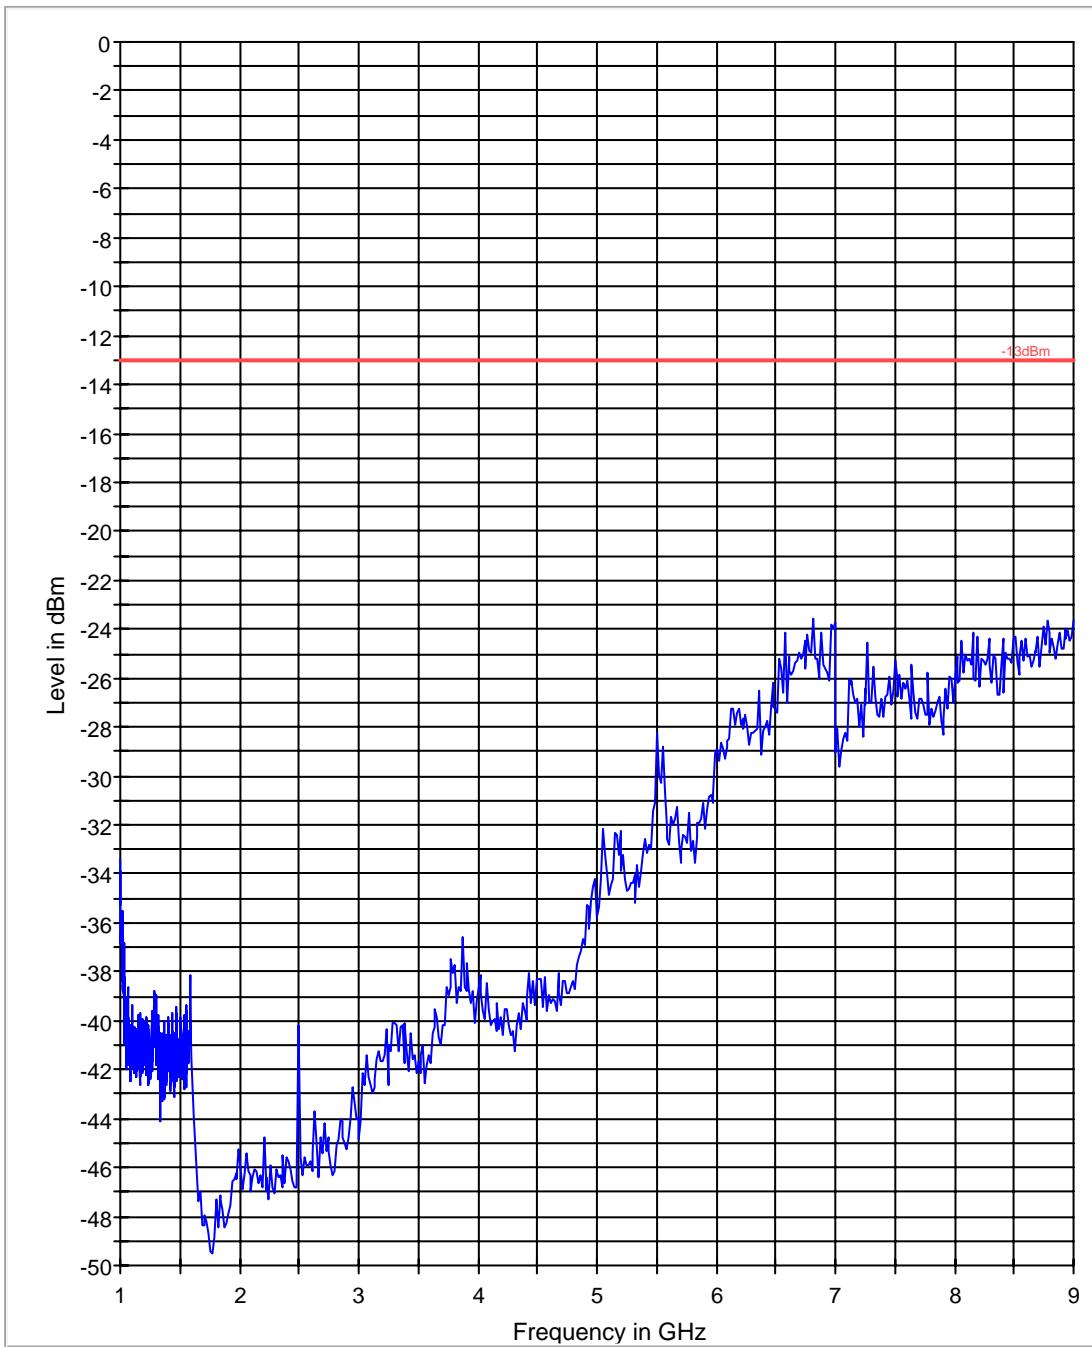


— -13dBm.LimitLine

— Preview Result 1

## FCC 22 1-9GHz High Channel

FCC 22 1-9GHz

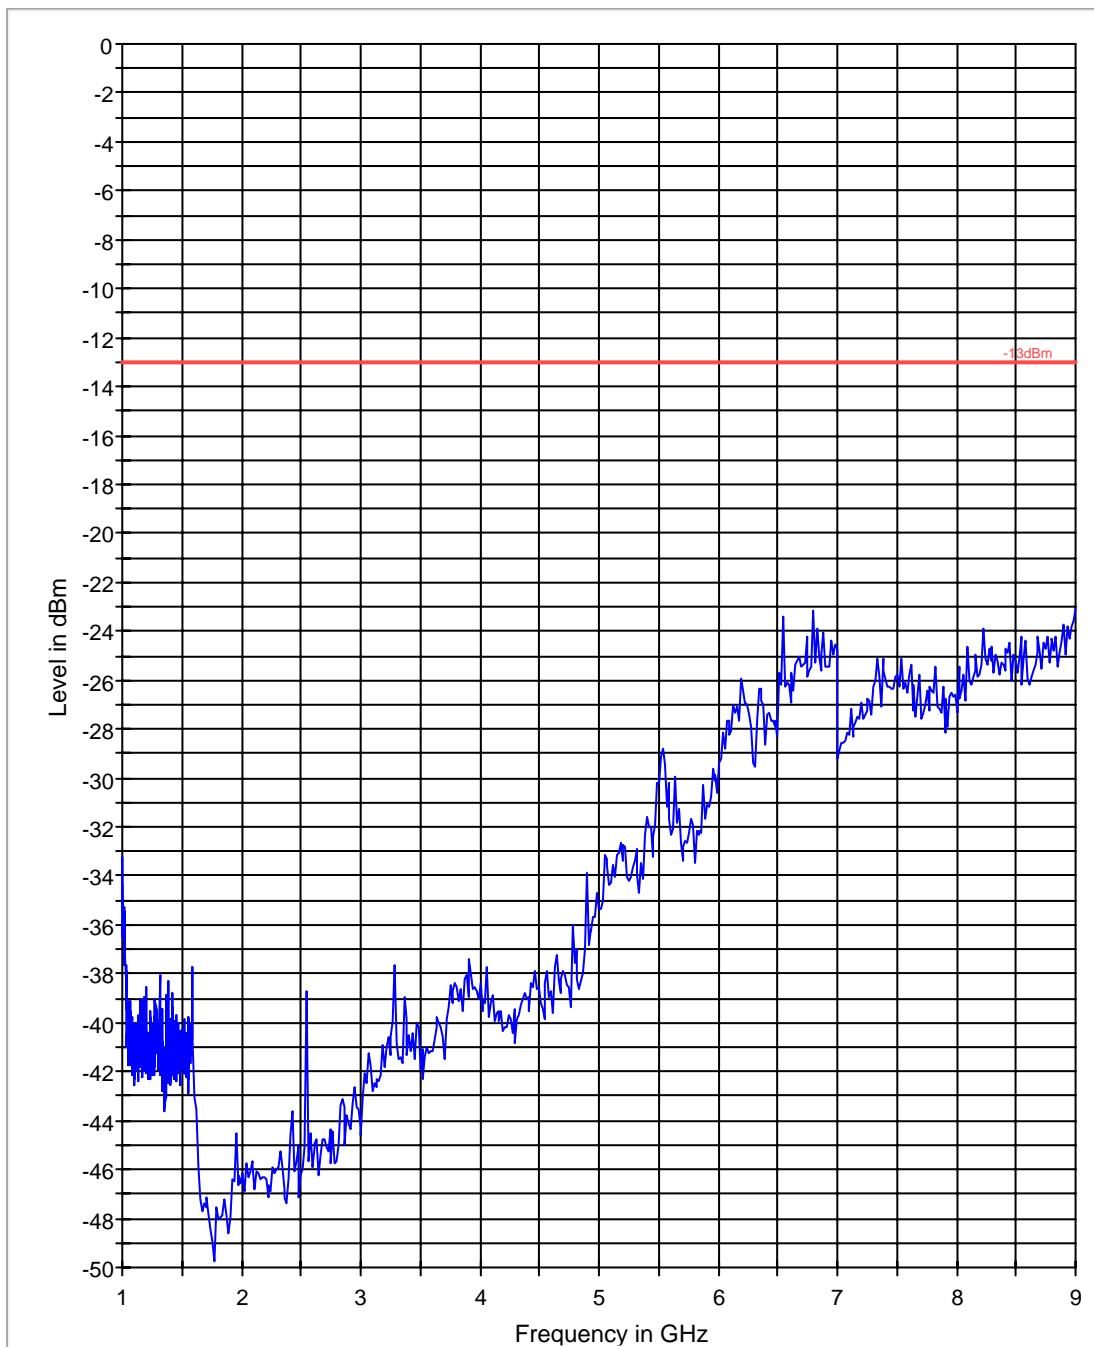

— -13dBm.LimitLine

— Preview Result 1

## FCC 24 1-18GHz Low Channel


### Final Result 1

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
1849.809619	25.7	1000.000	1000.000	155.0	H	108.0	-69.5	-38.7	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
1849.809619	

FCC 24 1-18GHz

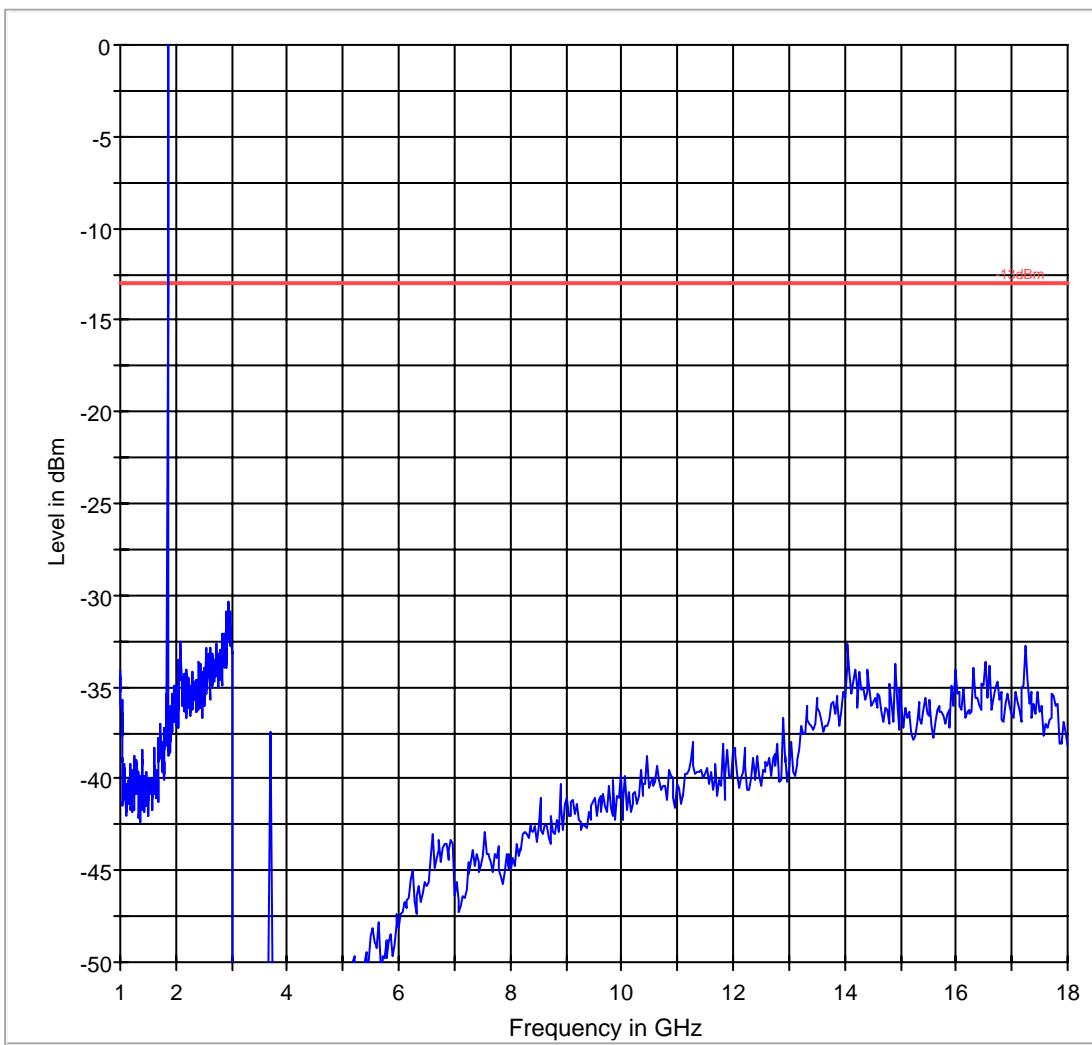

— -13dBm.LimitLine

— Preview Result 1

◆ Final Result 1

## FCC 24 1-18GHz Mid Channel


### Final Result 1

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
1879.889780	-6.7	1000.000	1000.000	120.0	V	202.0	-70.1	-6.3	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
1879.889780	

FCC 24 1-18GHz

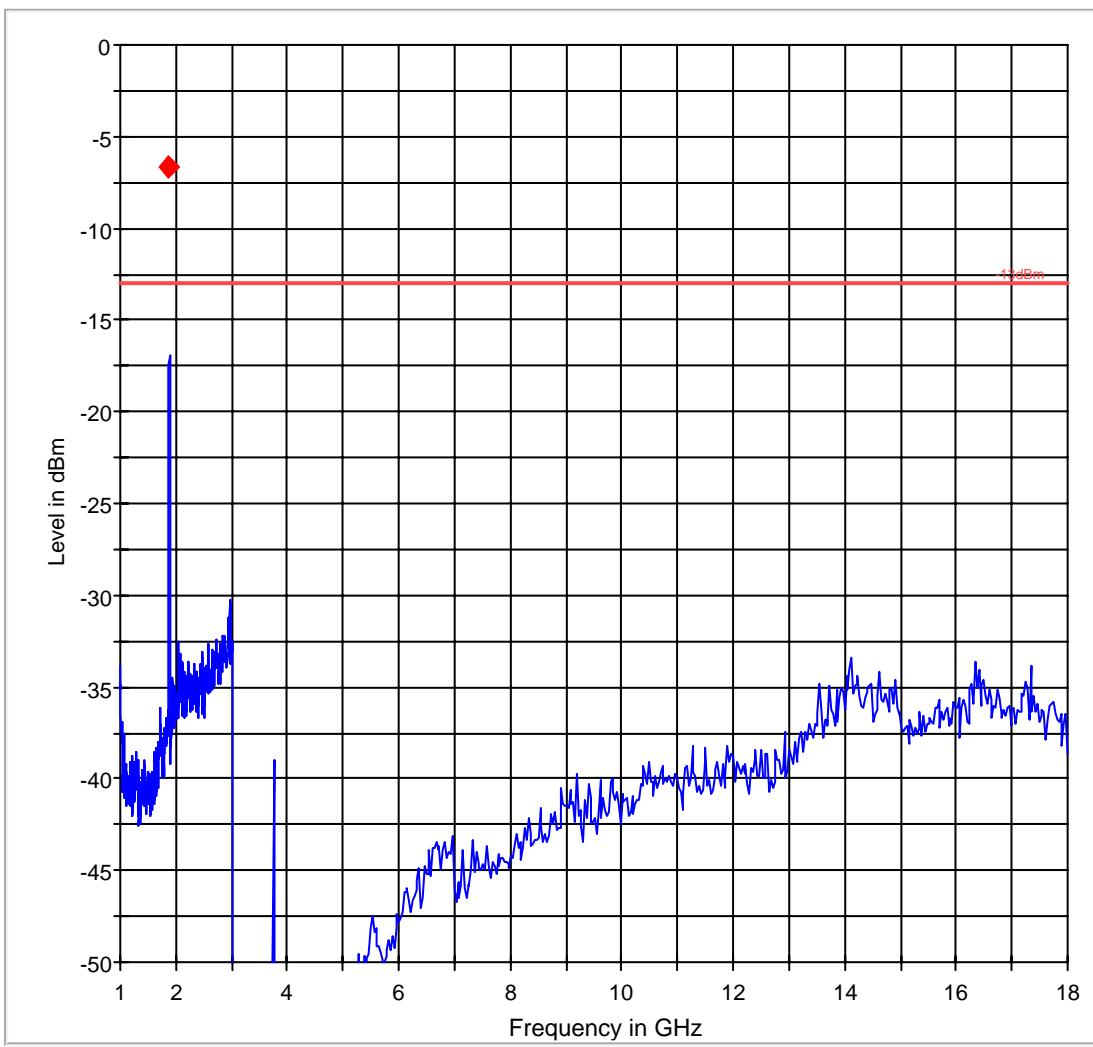

— -13dBm.LimitLine

— Preview Result 1

◆ Final Result 1

## FCC 24 1-18GHz High Channel


### Final Result 1

Frequency (MHz)	MaxPeak (dBm)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBm)
1909.929859	25.3	1000.000	1000.000	120.0	V	16.0	-70.4	-38.3	-13.0

(continuation of the "Final Result 1" table from column 10 ...)

Frequency (MHz)	Comment
1909.929859	

FCC 24 1-18GHz

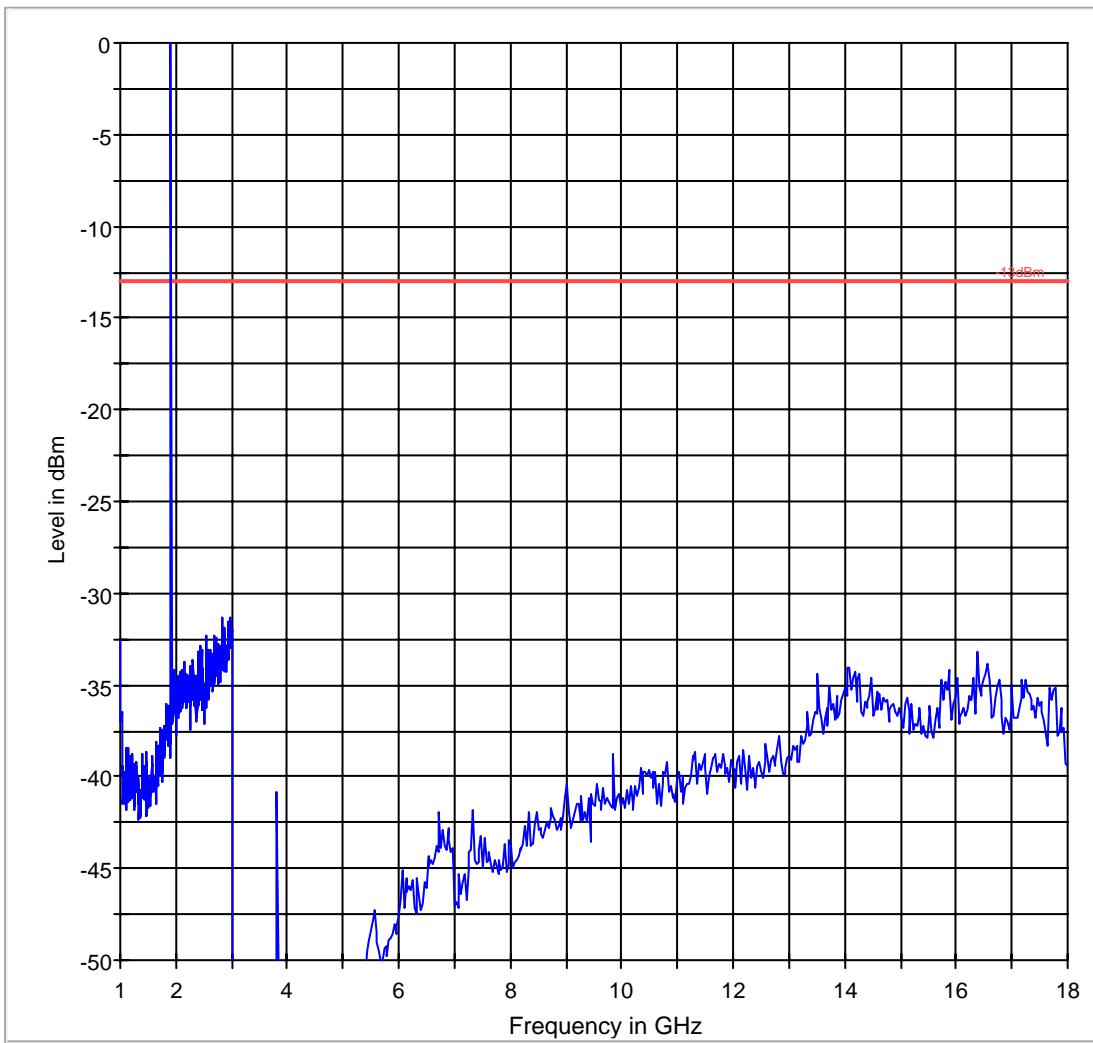

— -13dBm.LimitLine

— Preview Result 1

◆ Final Result 1

### **5.2.5 RECEIVER RADIATED EMISSIONS**

### **§ 2.1053 / RSS-132 & 133**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.

**Limits**

**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength ( $\mu$ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

No significant emissions measurable. Plots reported here represent the worse case emissions.


Test Results Receiver Spurious Emission  
**30M-1GHz, Antenna Vertical/Horizontal**  
This plot is valid for low, mid & high channels (worst-case plot)

## EUT Information

### Description:

EUT Name: GSM 2.03  
Manufacturer: FLAIK  
Serial Number:  
Hardware Rev:  
Software Rev:  
Comment:

FCC 15 30-1000MHz

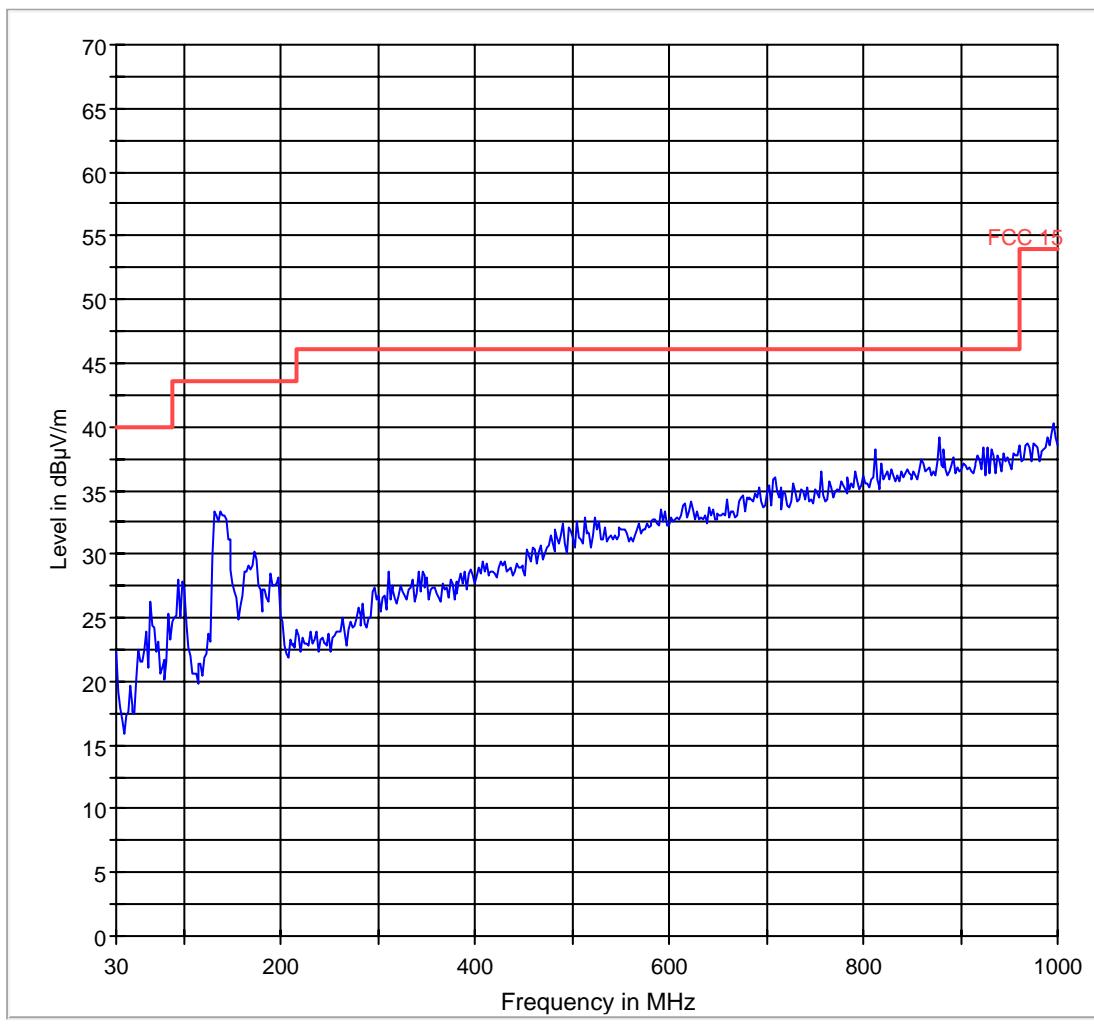


### Receiver Spurious Emission: 1-18GHz

#### EUT Information

##### Description:

EUT Name: GSM 2.03  
Manufacturer: FLAIK  
Serial Number:  
Hardware Rev:  
Software Rev:  
Comment:


FCC 15 1-18GHz

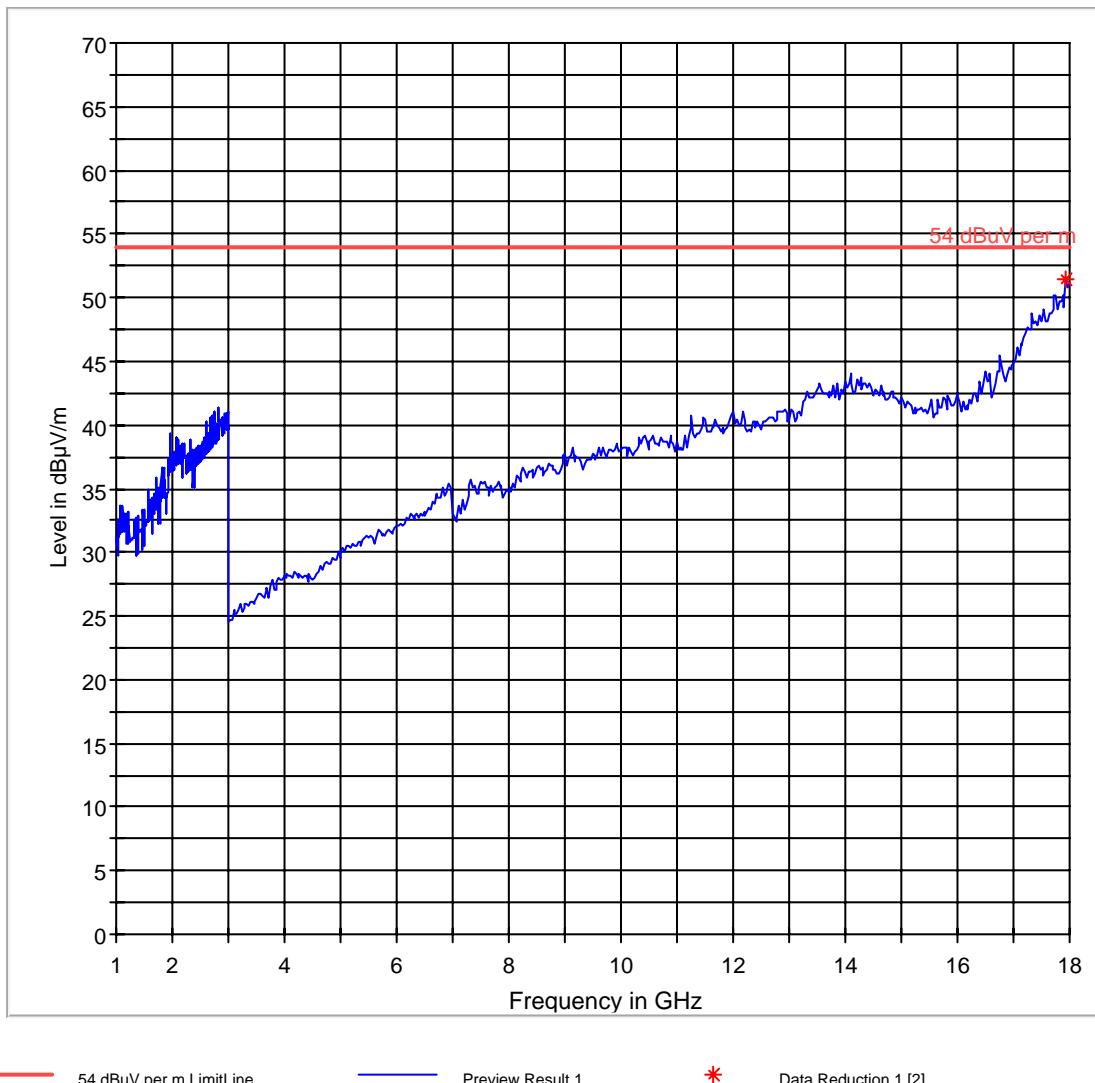

***SWEEP TABLE: "FCC 24spuri 18-19.1G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer Bandw.
18.0 GHz	19.1 GHz	Average	Coupled	1 MHz	DUMMY-DBM

Marker:	18.606212425 GHz	-53.06 dBm
---------	------------------	------------

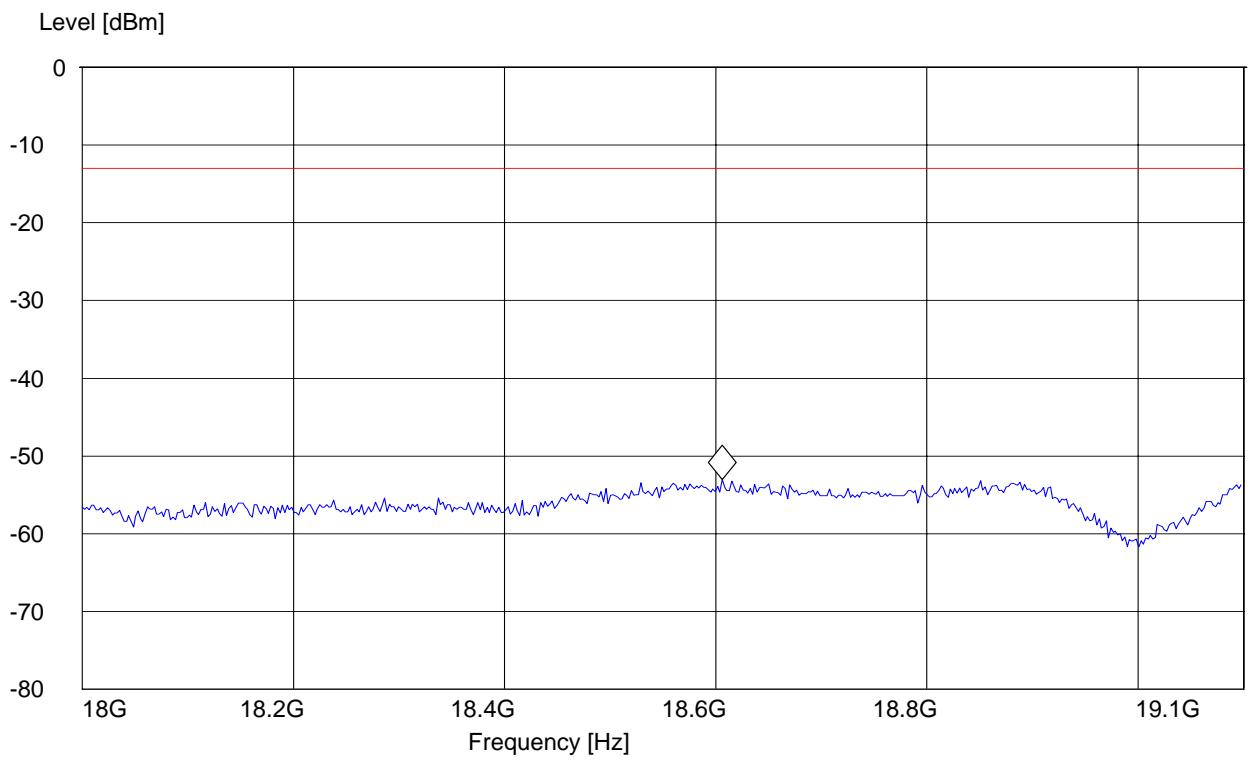

### **5.3 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207**

#### **5.3.1 Limits**

**Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

#### **Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

**ANALYZER SETTINGS: RBW = 10KHz      VBW = 10KHz**


## EUT Information

### Description:

EUT Name: GSM 2.03  
Manufacturer: FLAIK  
Serial Number:  
Hardware Rev:  
Software Rev:  
Comment:

## Tx Line

CISPR 22 Mains Conducted - L

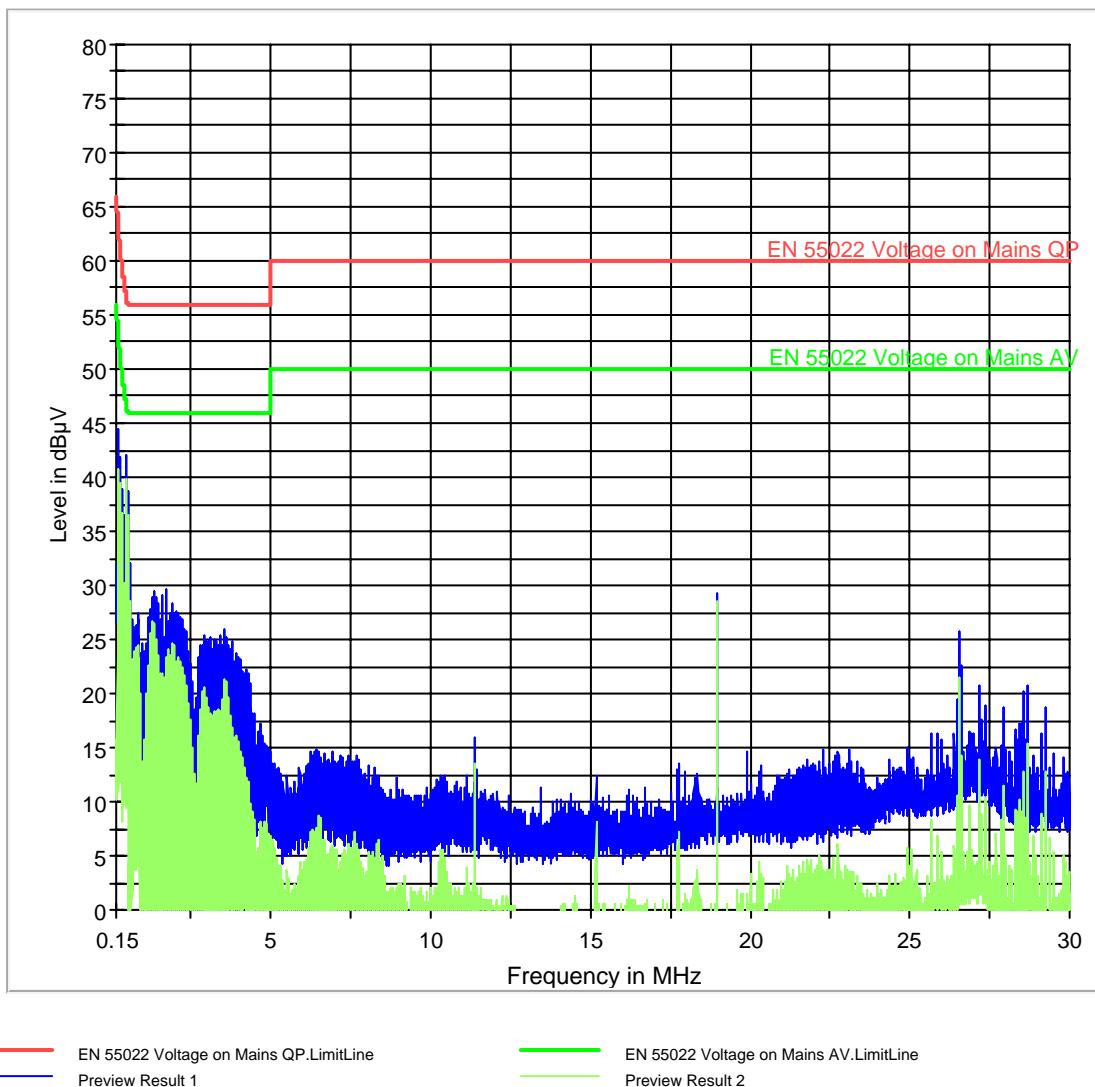


## EUT Information

### Description:

EUT Name: GSM 2.03  
Manufacturer: FLAIK  
Serial Number:  
Hardware Rev:  
Software Rev:  
Comment:

## Tx Neutral

CISPR 22 Mains Conducted - N

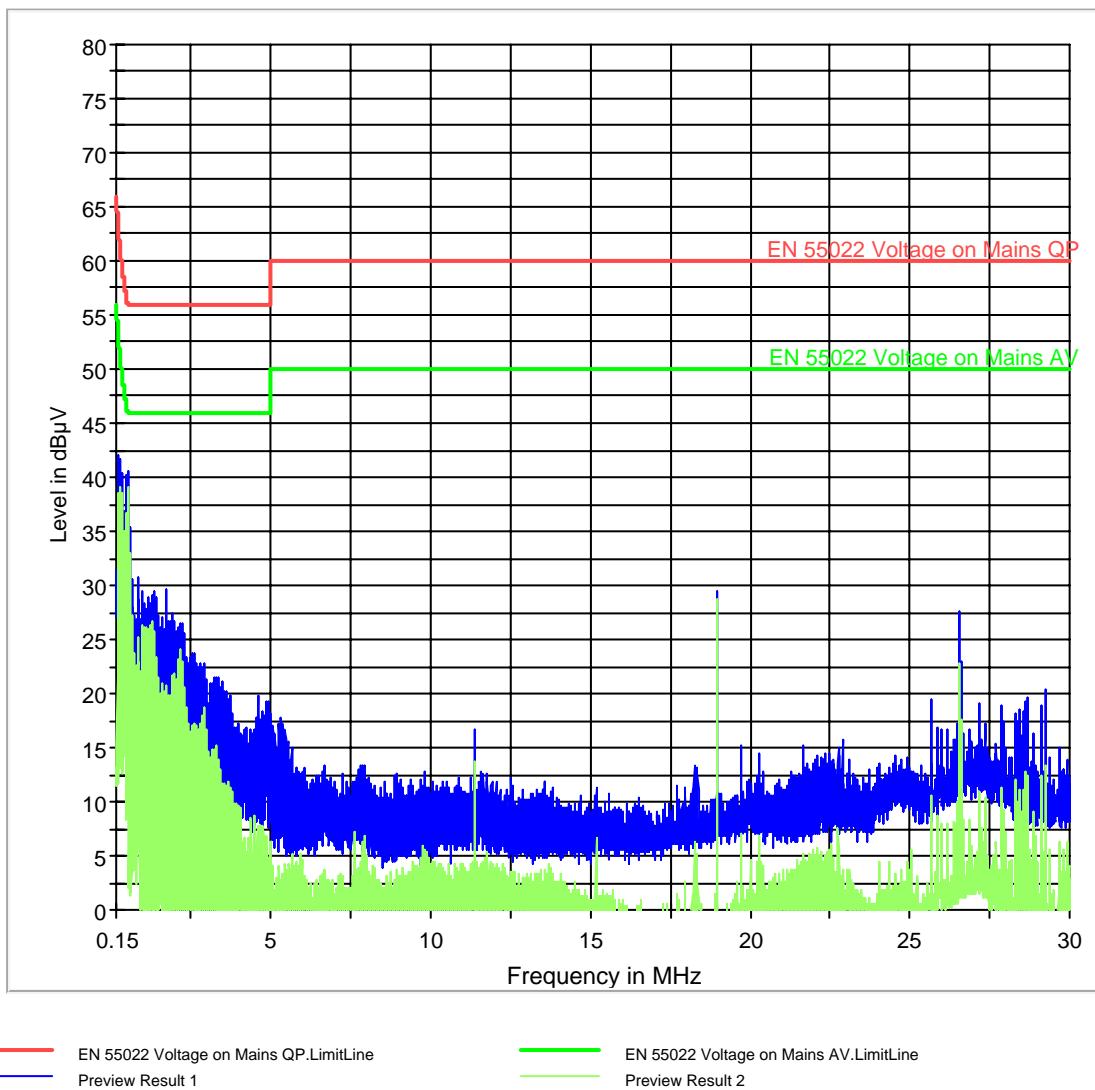


## EUT Information

### Description:

EUT Name: GSM 2.03  
Manufacturer: FLAIK  
Serial Number:  
Hardware Rev:  
Software Rev:  
Comment:

## RX Line

CISPR 22 Mains Conducted - L

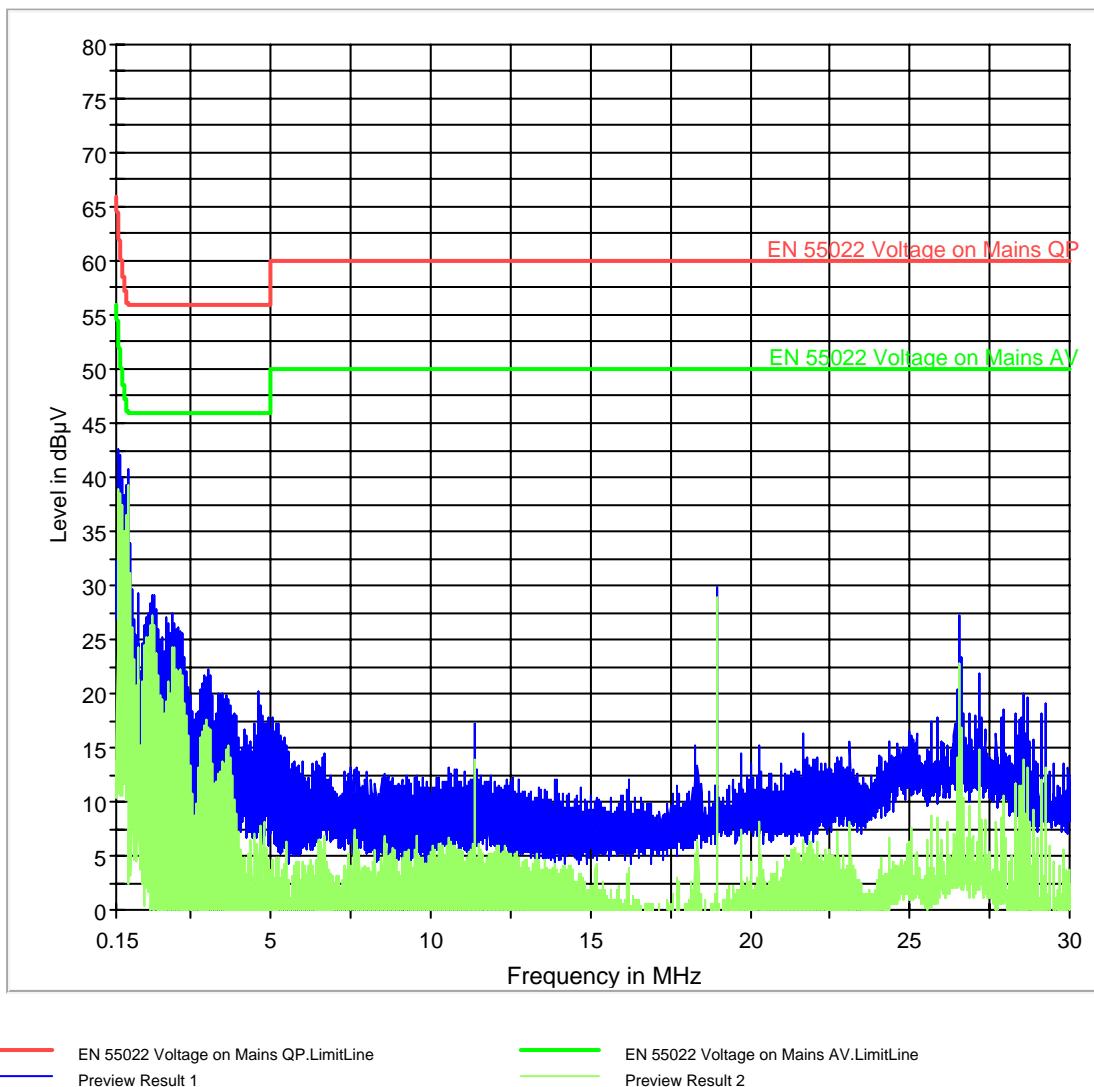


## EUT Information

### Description:

EUT Name: GSM 2.03  
Manufacturer: FLAIK  
Serial Number:  
Hardware Rev:  
Software Rev:  
Comment:

## Rx Neutral

CISPR 22 Mains Conducted - N

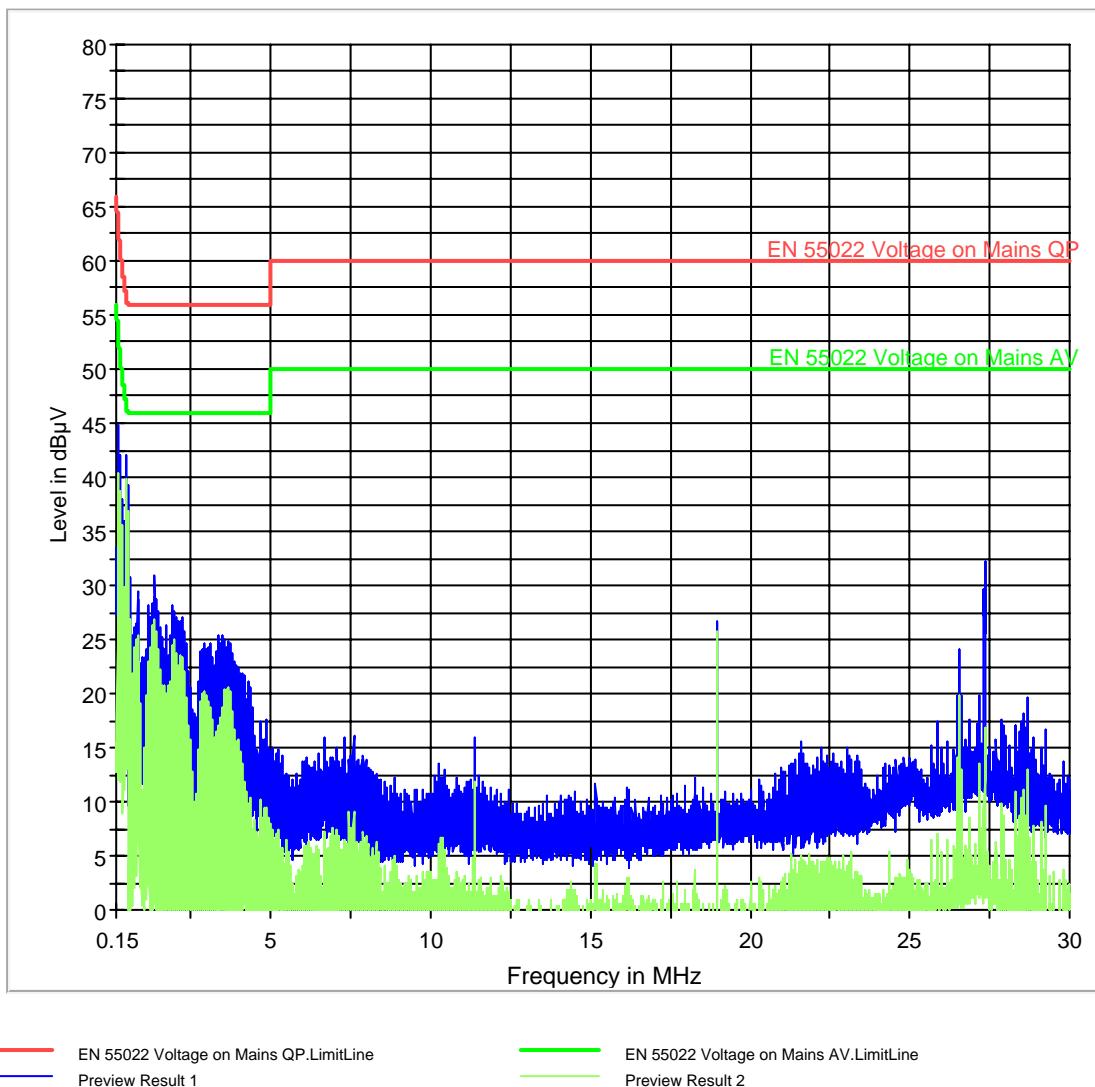

**6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2010	1 year
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	May 2010	1 year
<b>03</b>	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2010	1 year
<b>04</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2010	1 year
<b>05</b>	Biconilog Antenna	3141	EMCO	0005-1186	June 2011	2 year
<b>06</b>	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2011	2 year
<b>07</b>	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2011	2 year
<b>08</b>	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
<b>09</b>	Climatic Chamber	VT4004	Voltsch	G1115	n/a	1 year
<b>10</b>	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
<b>11</b>	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
<b>12</b>	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2010	1 year
<b>13</b>	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2010	1 year
<b>14</b>	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2010	1 year
<b>15</b>	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2010	1 year
<b>16</b>	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2010	1 year
<b>17</b>	Loop Antenna	6512	EMCO	00049838	May 2011	2 years

## **7 References**

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 2--FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS October 1, 2001.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 22 PUBLIC MOBILE SERVICES October 1, 1998.


FCC Report and order 02-229 September 24, 2002.

Title 47—Telecommunication, CHAPTER I--FEDERAL COMMUNICATIONS COMMISSION, PART 24 PERSONAL COMMUNICATIONS SERVICES October 1, 1998.

ANSI / TIA-603-C-2004 Land Mobile FM or PM Communications Equipment Measurement and Performance Standard November 7, 2002.


## **8 BLOCK DIAGRAMS**

### **Conducted Testing**

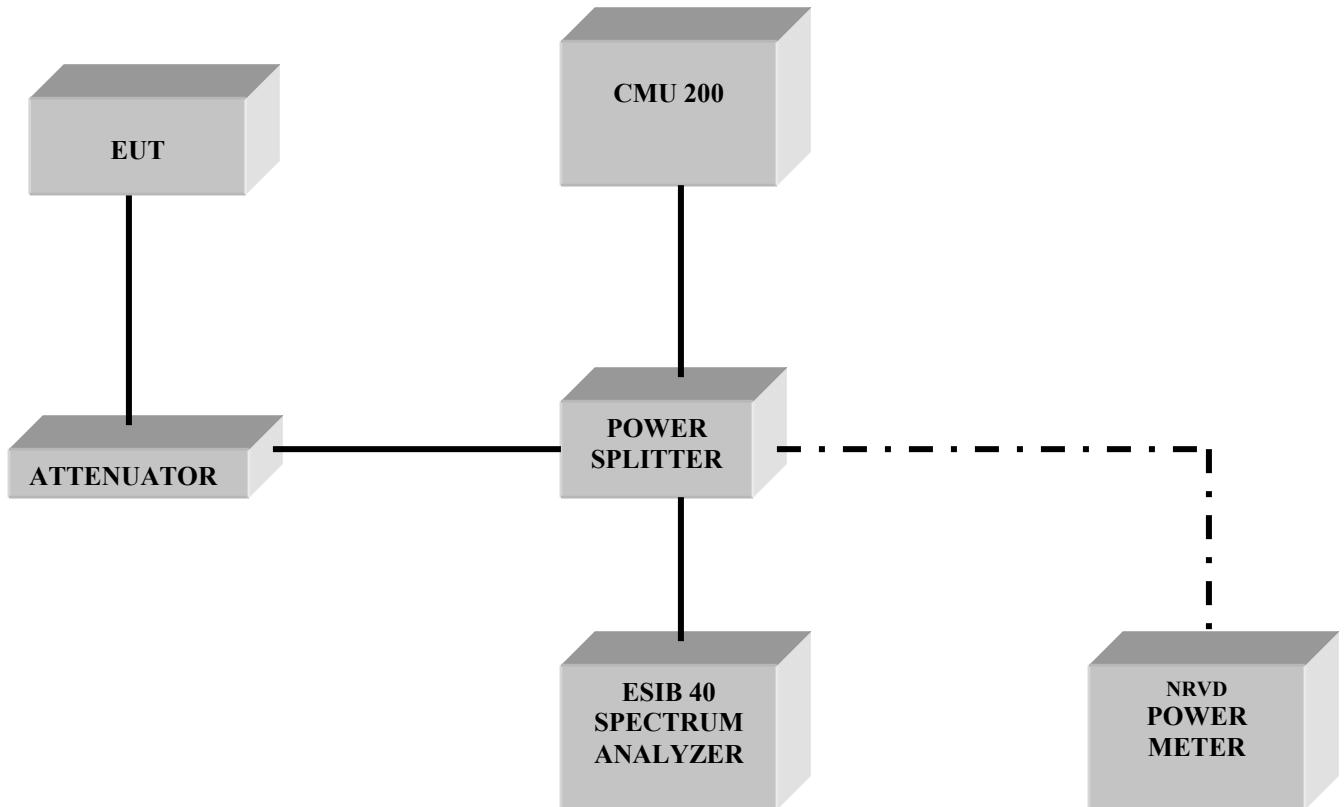

## Radiated Testing

### ANECHOIC CHAMBER

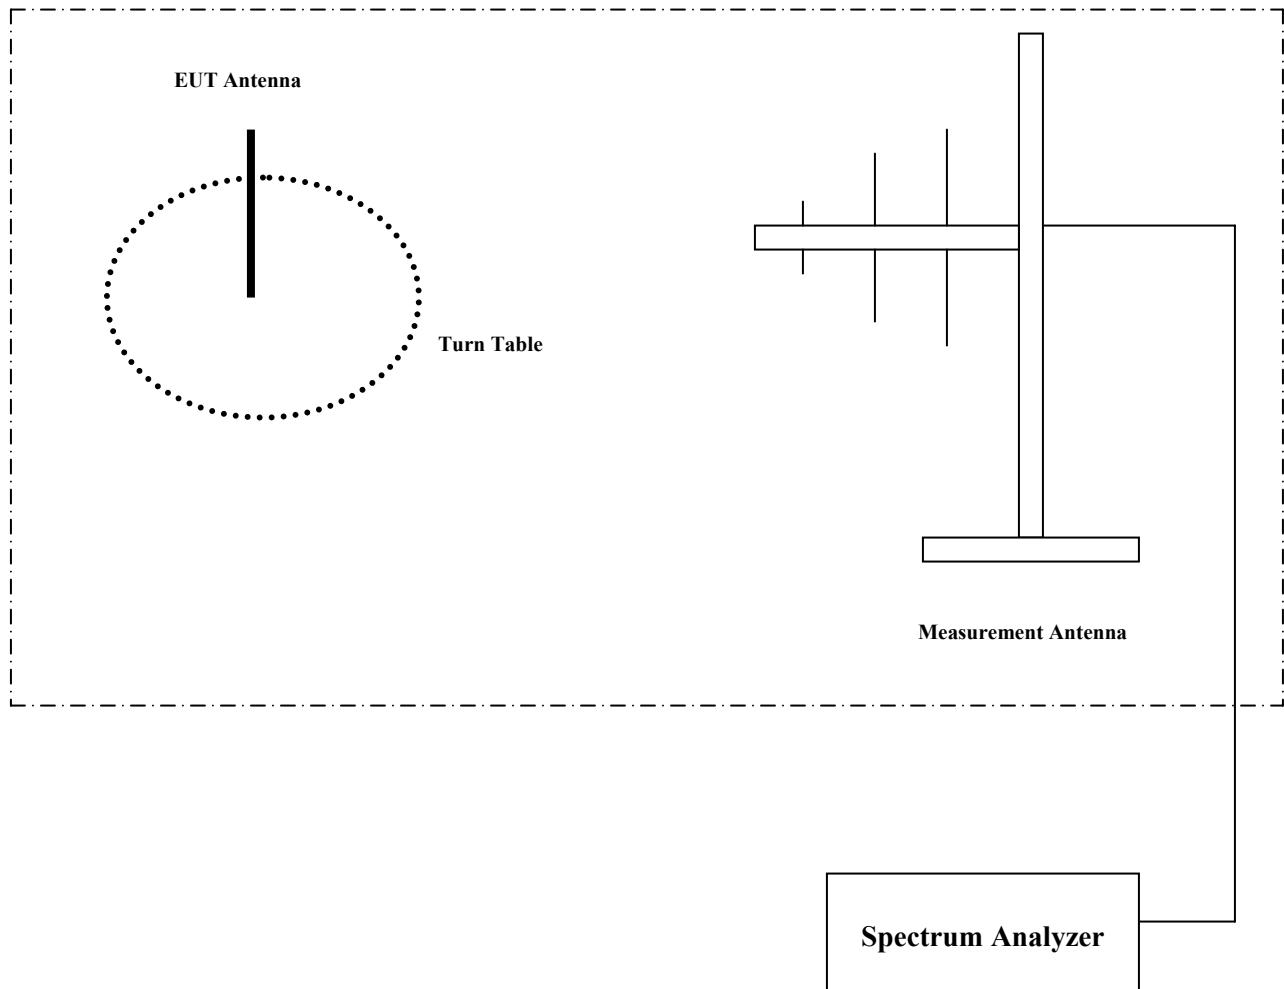

## **9 Revision History**

2009-09-15 Original report EMC\_FLAIK\_001\_FCC22\_24