



MRT Technology (Suzhou) Co., Ltd
Phone: +86-512-66308358
Fax: +86-512-66308368
Web: www.mrt-cert.com

Report No.: 1503RSU01804
Report Version: V02
Issue Date: 09-22-2015

MEASUREMENT REPORT

FCC PART 22&24 Portable Handset

FCC ID: WL6-TE69SA3

APPLICANT: ELITEGROUP COMPUTER SYSTEMS CO., LTD

Application Type: Certification

Product: Tablet PC

Model No.: TE69SA3

Brand Name: ECS ELITEGROUP

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

FCC Rule Part(s): Part2, Part22 Subpart H, Part24 Subpart E

Test Procedure(s): ANSI/TIA-603-C-2004, KDB 971168 D01v02r02

Test Date: Mar. 26 ~ Apr. 03, 2015

Reviewed By : Robin Wu
 (Robin Wu)

Approved By : Marlinchen
 (Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date
1503RSU01804	Rev. 01	Initial report	09-18-2015
1503RSU01804	Rev. 02	Revised the KDB 971168 version	09-22-2015

CONTENTS

Description	Page
§2.1033 General Information	5
1. INTRODUCTION	6
1.1. Scope	6
1.2. MRT Test Location	6
2. PRODUCT INFORMATION	7
2.1. Equipment Description.....	7
2.2. Product Specification Subjective to this Report.....	8
2.3. Device Capabilities	8
2.4. Test Configuration	8
2.5. EMI Suppression Device(s)/Modifications.....	8
3. DESCRIPTION OF TEST	9
3.1. Evaluation Procedure	9
3.2. Cellular – Base Frequency Blocks	9
3.3. Cellular – Mobile Frequency Blocks.....	9
3.4. PCS – Base Frequency Blocks	9
3.5. PCS – Mobile Frequency Blocks.....	10
3.6. Occupied Bandwidth.....	10
3.7. Spurious and Harmonic Emissions at Antenna Terminal.....	10
3.8. Radiated Power and Radiated Spurious Emissions	11
3.9. Peak-Average Ratio.....	12
3.10. Frequency Stability / Temperature Variation	12
4. TEST EQUIPMENT CALIBRATION DATA	13
5. SAMPLE CALCULATIONS	14
6. MEASUREMENT UNCERTAINTY	15
7. TEST RESULT	16
7.1. Summary	16
7.2. Occupied Bandwidth.....	17
7.2.1. Test Limit	17
7.2.2. Test Procedure used.....	17
7.2.3. Test Setting.....	17
7.2.4. Test Setup.....	17
7.2.5. Test Result.....	18
7.3. Spurious and Harmonic Emissions at Antenna Terminal.....	22

7.3.1. Test Limit	22
7.3.2. Test Procedure Used	22
7.3.3. Test Setting.....	22
7.3.4. Test Setup.....	22
7.3.5. Test Result.....	23
7.4. Conducted & Radiated Power and Radiated Spurious Emissions.....	31
7.4.1. Test Limit	31
7.4.2. Test Procedure Used	31
7.4.3. Test Setting.....	31
7.4.4. Test Setup.....	33
7.4.5. Test Result.....	34
7.5. Peak-Average Ratio.....	42
7.5.1. Test Limit	42
7.5.2. Test Procedure	42
7.5.3. Test Setup.....	42
7.5.4. Test Result.....	43
7.6. Frequency Stability Under Temperature & Voltage Variations.....	45
7.6.1. Test Limit	45
7.6.2. Test Procedure	45
7.6.3. Test Setup.....	45
7.6.4. Test Result.....	46
8. CONCLUSION.....	50

§2.1033 General Information

Applicant:	ELITEGROUP COMPUTER SYSTEMS CO., LTD
Applicant Address:	No.239, Sec. 2, Tiding Blvd., Neihu Dist, Taipei City 14, Taiwan (R.O.C)
Manufacturer:	ELITEGROUP COMPUTER SYSTEMS CO., LTD
Manufacturer Address:	No.239, Sec. 2, Tiding Blvd., Neihu Dist, Taipei City 14, Taiwan (R.O.C)
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	809388
FCC Rule Part(s):	Part22 Subpart H, Part24 Subpart E
Model No.:	Tablet PC
FCC ID:	WL6-TE69SA3
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, Youxin Industrial Park, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Tablet PC
Model No.	TE69SA3
Antenna Type	Internal
Wi-Fi Specification	802.11b/g/n-HT20
Bluetooth Version	v3.0 + HS / v4.0 LE
GPS Frequency	1575.42MHz
GSM Operation Band (s)	GSM850 / PCS1900
UMTS Operation Band (s)	WCDMA Band II / WCDMA Band V
Release Version	Rel-7
Component	
Adapter #1	Model No.: W12-010N3A Output Power: 5VDC/2A Input Power: 100 - 240V ~ 50/60Hz, 0.3A
Adapter #2	Model No.: WB-10G05FU Output Power: 5VDC/2A Input Power: 100 - 240V ~ 50/60Hz, 0.4A

2.2. Product Specification Subjective to this Report

GSM/WCDMA Specification	
Uplink Frequency Range	GSM 850: 824 ~ 849MHz PCS 1900: 1850 ~ 1910MHz WCDMA Band II: 1852.4 ~ 1907.6MHz WCDMA Band V: 824 ~ 849MHz
Downlink Frequency Range	GSM 850: 869 ~ 894MHz PCS 1900: 1930 ~ 1990MHz WCDMA Band II: 1932.4 ~ 1987.6MHz WCDMA Band V: 869 ~ 894MHz
Antenna Type / Gain	GSM 850: 1.07dBi PCS 1900: 2.12dBi WCDMA Band II: 2.12dBi WCDMA Band V: 1.07dBi
Type of Modulation	GSM / GPRS: GMSK WCDMA/HSDPA/HSUPA: QPSK (Uplink)

Note: The test data contained in this report only to the emissions due to the EUT's 2G/3G licensed transmitters. The test report has showed the worst test mode.

2.3. Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSDPA/HSUPA/HSPA+, 802.11b/g/n WLAN (DTS), Bluetooth (v3.0+HS, v4.0)

2.4. Test Configuration

The **Tablet PC FCC ID: WL6-TE69SA3** was tested per the guidance of ANSI/TIA-603-C-2004 and KDB 971168 D01v02r02. See section 3.0 of this report for a description of the radiated and antenna port conducted emissions tests.

2.5. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

3. DESCRIPTION OF TEST


3.1. Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-C-2004) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168) were used in the measurement of the **Tablet PC FCC ID: WL6-TE69SA3**

Deviation from measurement procedure.....None


3.2. Cellular – Base Frequency Blocks

§22.905

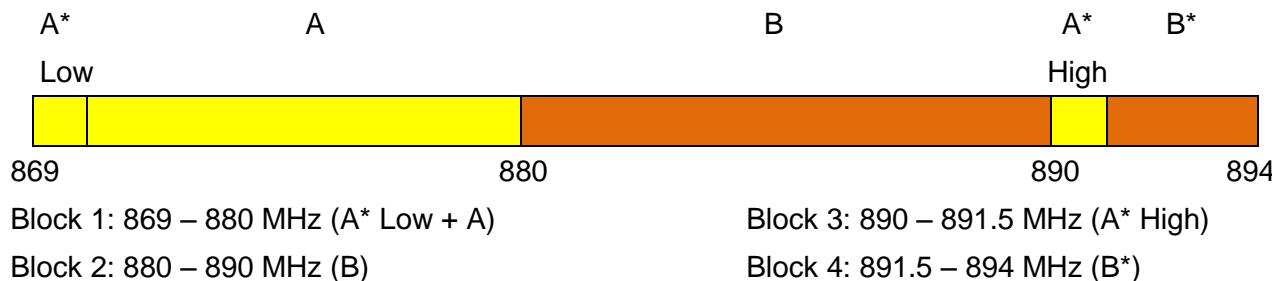


3.3. Cellular – Mobile Frequency Blocks

§22.905

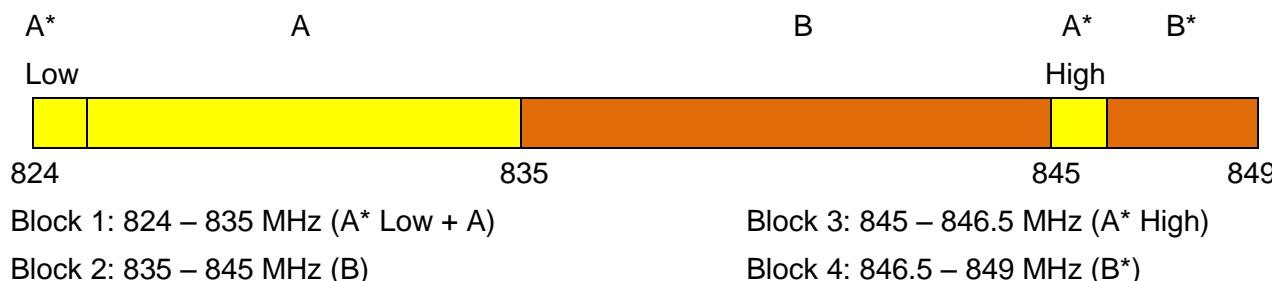

3.4. PCS – Base Frequency Blocks

§24.229

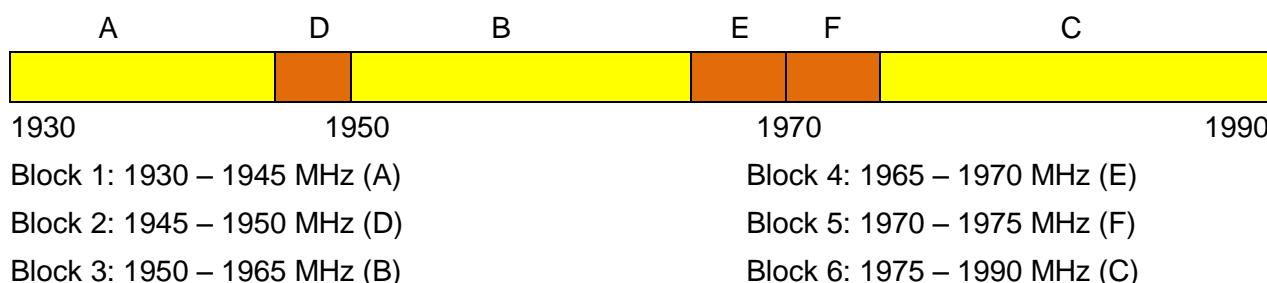

3.5. PCS – Mobile Frequency Blocks

§24.229



3.6. Occupied Bandwidth

§2.1049

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The spectrum analyzers' "occupied bandwidth" measurement function was used to record the occupied bandwidth in accordance with KDB 971168.

3.7. Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.8. Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a.2) §22.917(a) §24.232(c) §24.238(a)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurement and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 80cm high PVC support structure is placed on top of the turntable.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168.

Per the guidance of ANSI/TIA-603-C-2004, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [dBm] = P_g [dBm] - \text{cable loss [dB]} + \text{antenna gain [dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [dBm] - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10 \log_{10}(\text{Power [Watts]})$ specified in 22.917(a) and 24.238(a).

3.9. Peak-Average Ratio

§24.232(d)

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For pulsed signals, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power. For continuous signals, the trigger is set to “free run” in the CCDF measurement mode.

3.10. Frequency Stability / Temperature Variation

§2.1055 §22.355 §22.863 §22.905 §24.229 §24.235

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) Temperature: The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. TEST EQUIPMENT CALIBRATION DATA

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	E4447A	MRTSUE06028	1 year	2015/10/09
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2015/11/07
Radio Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2015/12/14
Preamplifier	Agilent	83017A	MRTSUE06020	1 year	2015/12/13
Preamplifier	Schwarzbeck	BBV9721	MRTSUE06121	1 year	2016/04/15
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2015/11/08
TRILOG Antenna	Schwarzbeck	VULB9162	MRTSUE06022	1 year	2015/11/08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2015/11/08
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2016/01/05
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06115	1 year	2015/11/20

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2016/04/23
Radio Communication Tester	R&S	CMU 200	MRTSUE06009	1 year	2015/12/14
DC Power Supply	GWINSTEK	GPS-3030D	MRTSUE06063	1 year	2015/11/13
Programmable Temperature & Humidity Chamber	BAOYT	BYH-1500L	MRTSUE06051	1 year	2015/12/10
USB Wideband Power Sensor	Boonton	55006	MRTSUE06109	1 year	2015/10/15
Temperature/Humidity Meter	Ouleinuo	N/A	MRTSUE06112	1 year	2015/11/20

Software	Version	Function
e3	V8.3.5	EMI Test Software

5. SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

GSM BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0dBm.

The gain of the substituted antenna is 8.1dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40MHz. So 6.1 dB is added to the signal generator reading of -30.9dBm yielding -24.80dBm. The fundamental EIRP was 25.50dBm so this harmonic was 25.50dBm - (-24.80) = 50.3dBc.

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_{\text{c}}(y)$):

9kHz ~ 1GHz: 4.18dB

1GHz ~ 40GHz: 4.76dB

7. TEST RESULT

7.1. Summary

Company Name: ELITEGROUP COMPUTER SYSTEMS CO., LTD
FCC ID: WL6-TE69SA3
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
Mode(s): GSM / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference	
Transmitter Mode(TX)						
2.1049	Occupied bandwidth	N/A	Conducted	Pass	Section 7.2	
2.1051	Band Edge /	> 43 + log10 (P[Watts]) at Band Edge and for all		Pass	Section 7.3	
22.917(a)	Conducted Spurious	out-of-band emissions		Pass	Section 7.5	
24.238(a)	Emissions			Pass	RF Exposure Report	
24.232(d)	Peak-Average Ratio	< 13 dB	Radiated	Pass	Section 7.4	
2.1046	Transmitter Conducted Output Power	N/A		Pass	Section 7.4	
22.913(a.2)	Effective Radiated Power	< 7 Watts max. ERP		Pass	Section 7.4	
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		Pass	Section 7.6	
2.1053	Undesirable Emissions	> 43 + log10 (P[Watts]) for all out-of-band emissions	Radiated	Pass	Section 7.4	
22.917(a)				Pass	Section 7.4	
24.238(a)				Pass	Section 7.6	
2.1055	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24)		Pass	Section 7.6	
22.355						
24.235						

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 4.0 were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.

7.2. Occupied Bandwidth

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 971168 D01v02r02 – Section 4.1 & ANSI/TIA-603-C-2004

7.2.3. Test Setting


1. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW. RBW = approximately 1% of the emission bandwidth.
2. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
3. Set the detection mode to peak, and the trace mode to max hold.
4. Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.


7.2.4. Test Setup

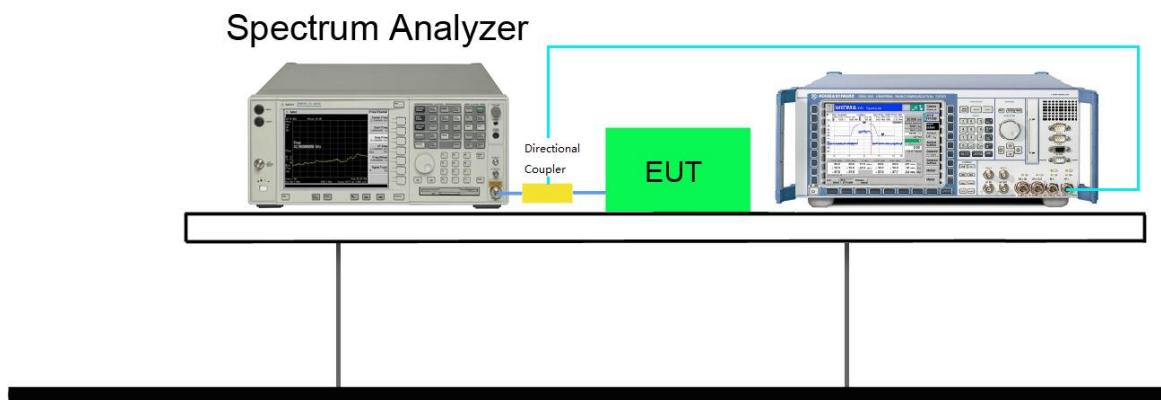



7.2.5. Test Result

Test Mode	Channel No.	Frequency (MHz)	99% Occupied Bandwidth (kHz)	-26dB Occupied Bandwidth (kHz)	Result
GSM850	128	824.2	241.87	305.0	Pass
	189	836.4	242.25	304.7	Pass
	251	848.8	242.17	304.0	Pass
PCS1900	512	1850.2	242.92	312.1	Pass
	661	1880.0	245.84	313.2	Pass
	810	1909.8	243.86	314.9	Pass
WCDMA Band II	9262	1852.4	4124.2	4930.0	Pass
	9400	1880.0	4136.3	5885.0	Pass
	9538	1907.6	4185.2	7707.0	Pass
WCDMA Band V	4132	826.4	4047.9	4587.0	Pass
	4182	836.4	4061.3	4593.0	Pass
	4233	846.6	4056.8	4597.0	Pass

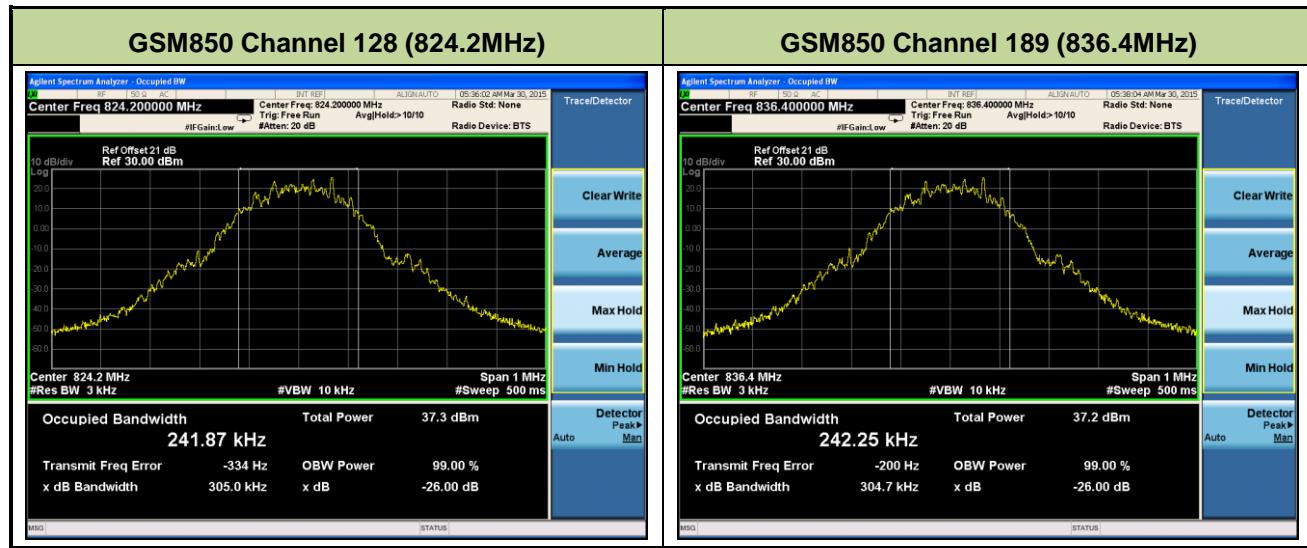

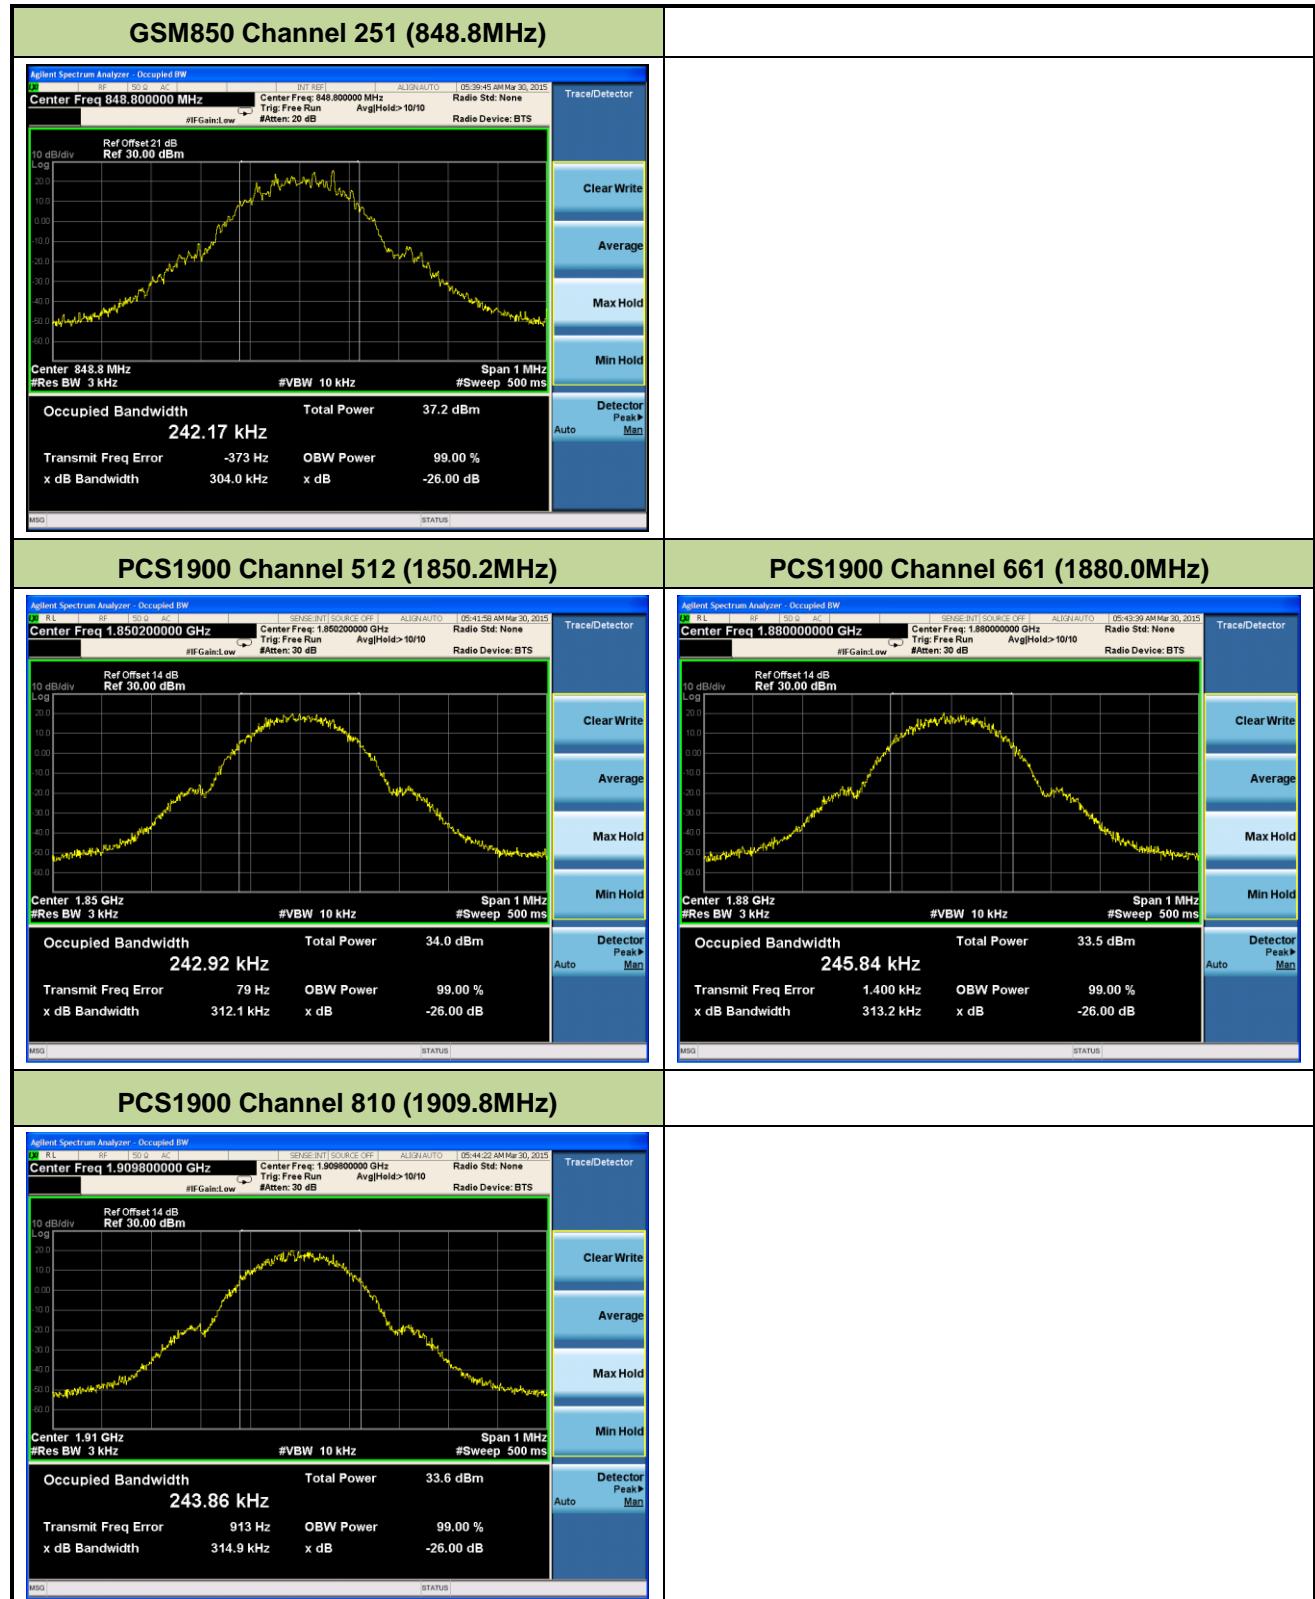

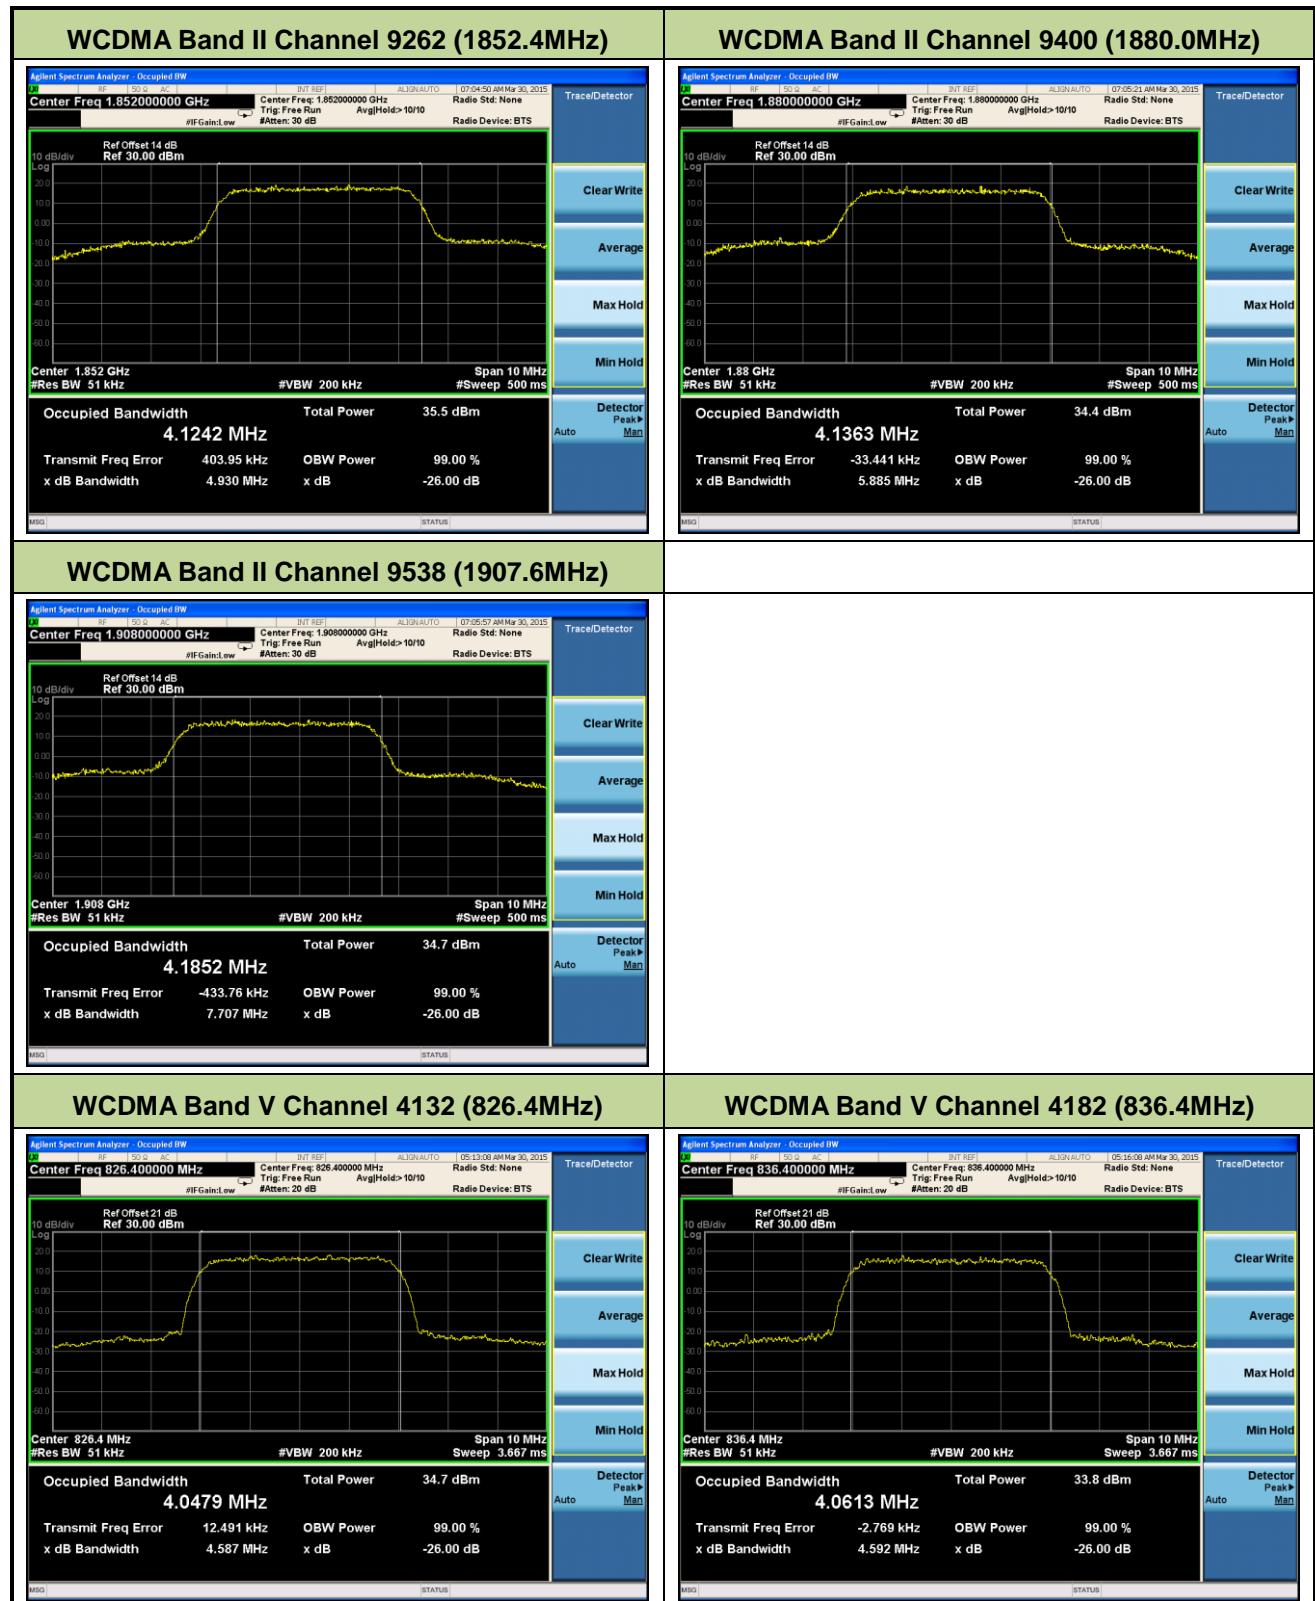

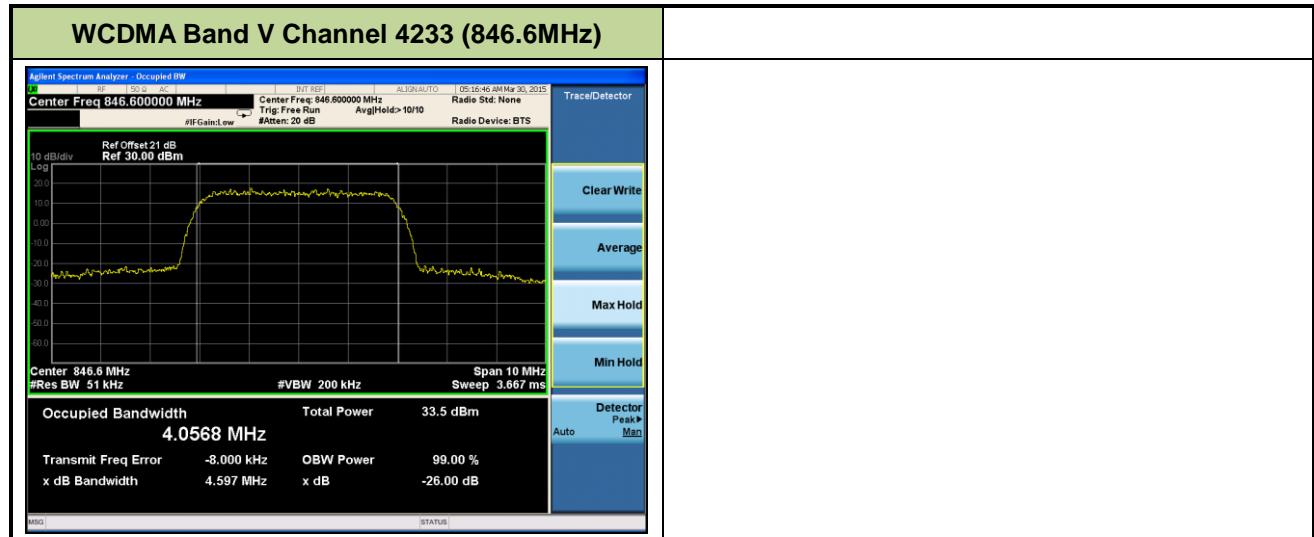

7.3. Spurious and Harmonic Emissions at Antenna Terminal

7.3.1. Test Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.


7.3.2. Test Procedure Used

KDB 971168 D01v02r02 – Section 6.0 & ANSI/TIA-603-C-2004

7.3.3. Test Setting


In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

7.3.4. Test Setup

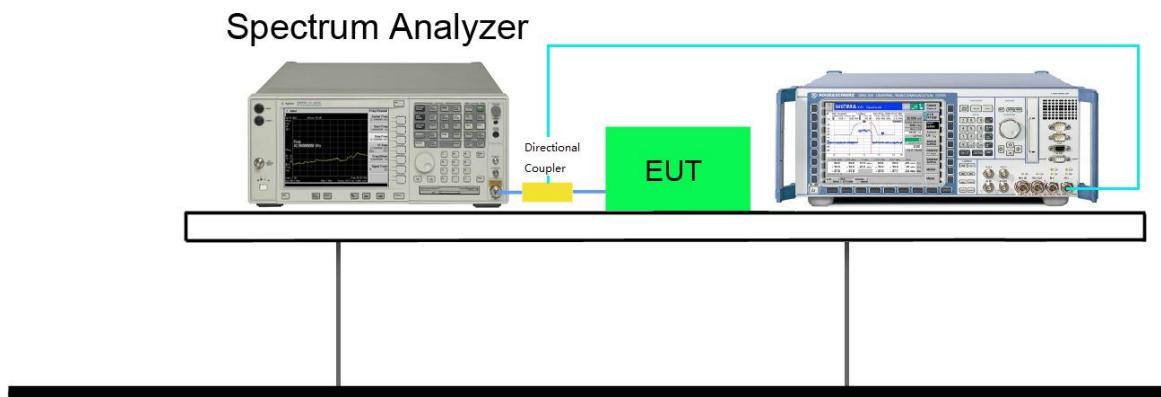

7.3.5. Test Result


Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
GSM850	128	824.20	GMSK	Pass
GSM850	189	836.40	GMSK	Pass
GSM850	251	848.80	GMSK	Pass

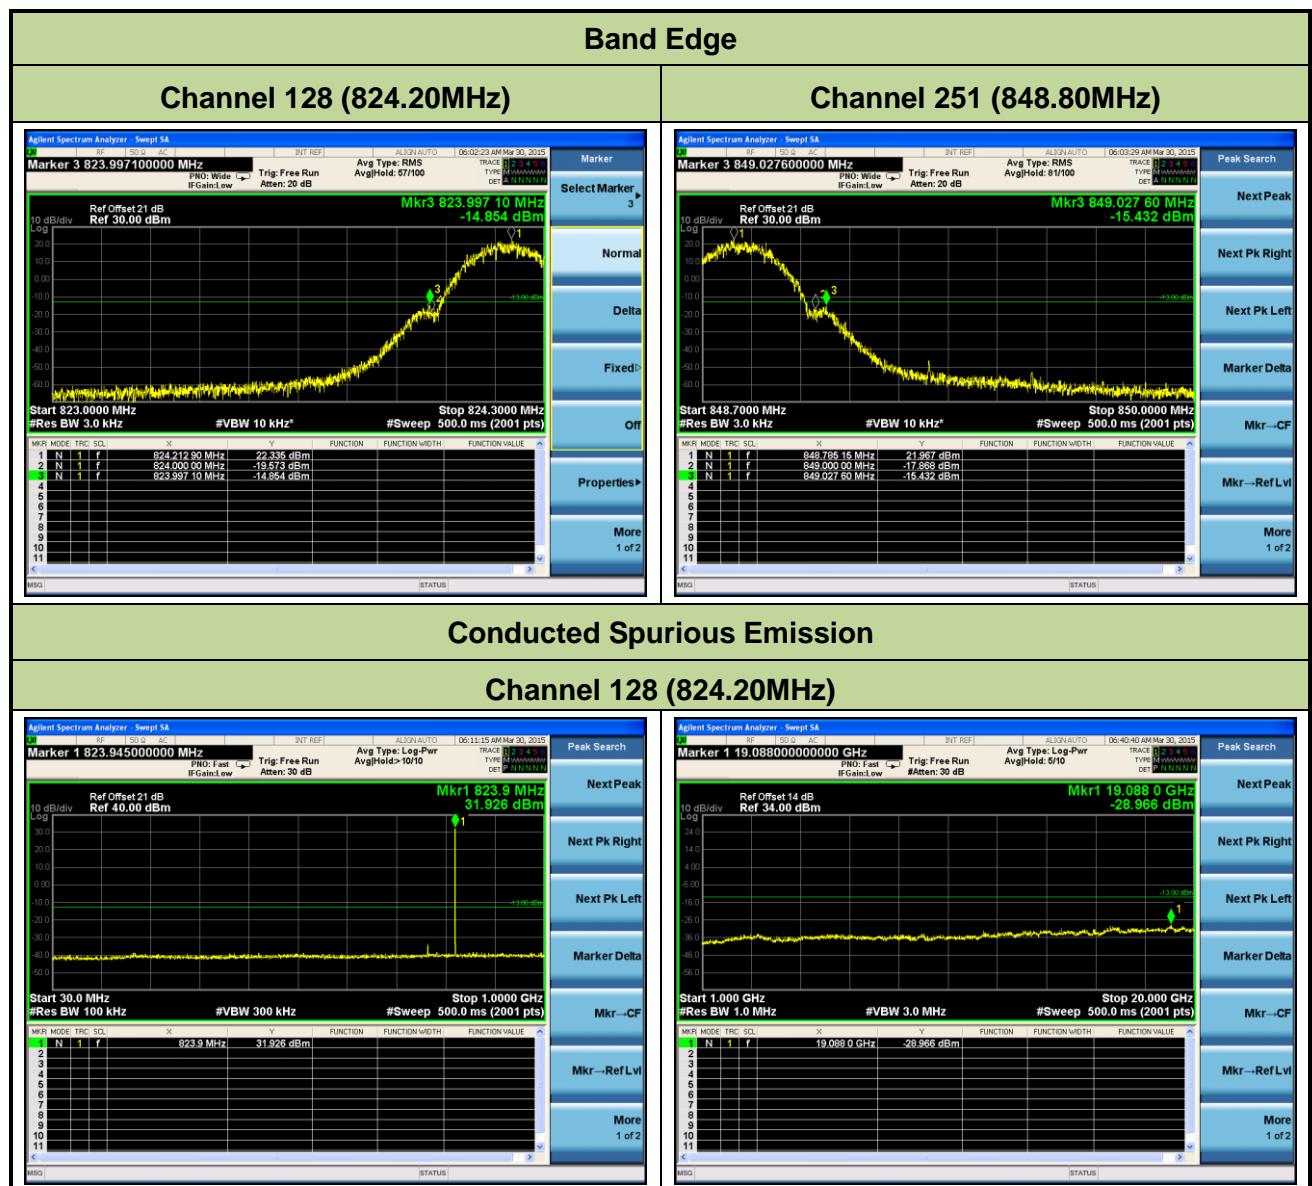

Channel 189 (836.40MHz)



Channel 251 (848.80MHz)

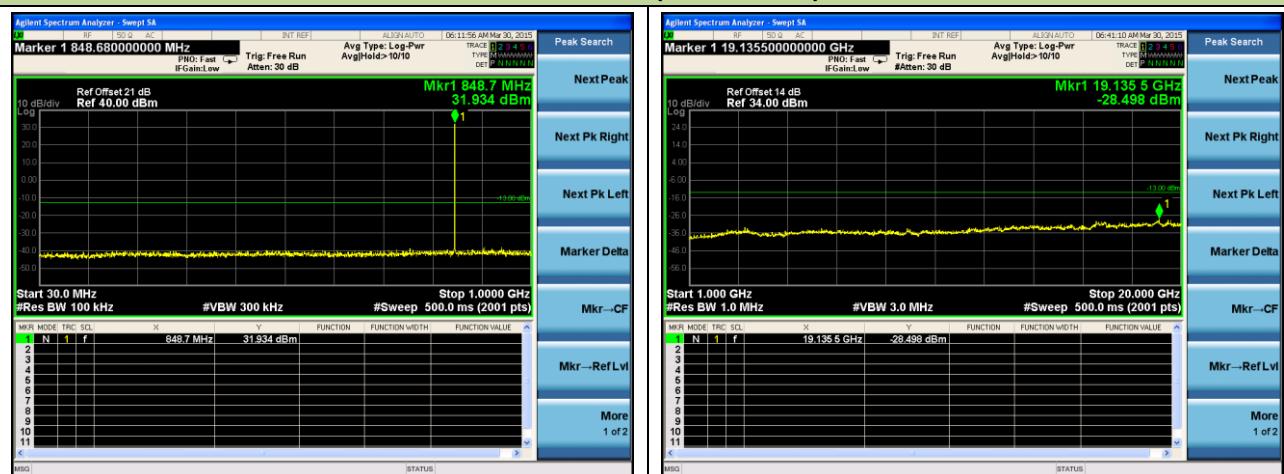

Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
PCS1900	512	1850.20	GMSK	Pass
PCS1900	661	1880.00	GMSK	Pass
PCS1900	810	1909.80	GMSK	Pass




Channel 661 (1880.00MHz)



Channel 810 (1909.80MHz)



Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
WCDMA Band II	9262	1852.40	QPSK	Pass
WCDMA Band II	9400	1880.00	QPSK	Pass
WCDMA Band II	9538	1907.60	QPSK	Pass

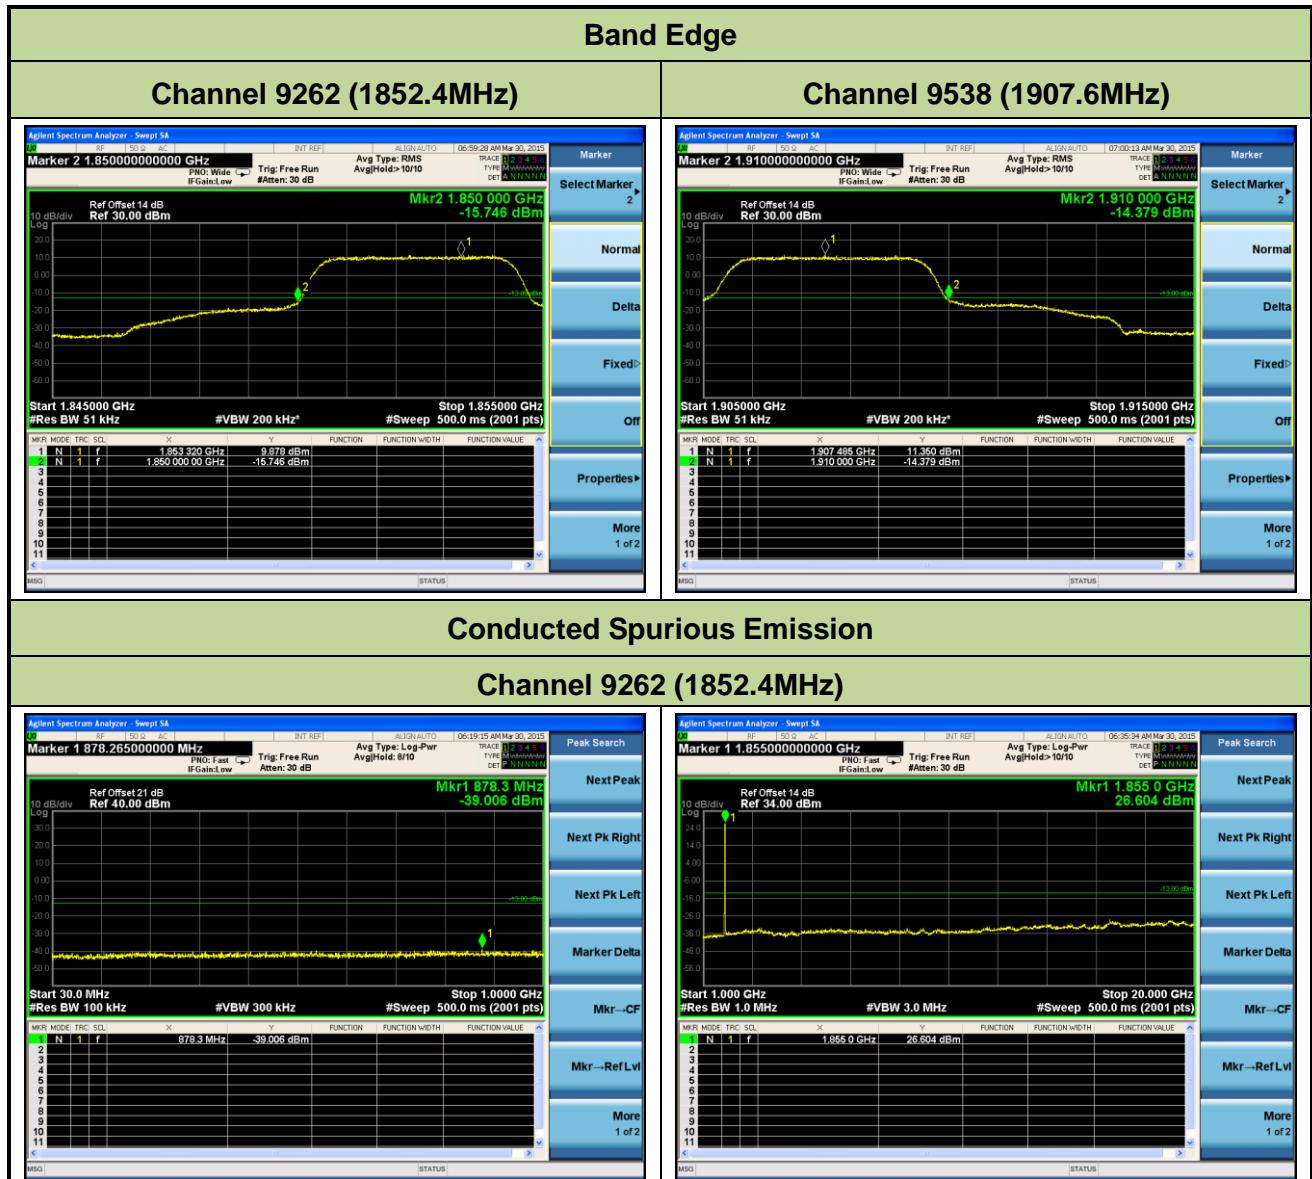

Channel 9400 (1880.0MHz)




Channel 9538 (1907.6MHz)




Mode	Channel No.	Frequency (MHz)	Modulation	Test Result
WCDMA Band V	4132	826.40	QPSK	Pass
WCDMA Band V	4182	836.40	QPSK	Pass
WCDMA Band V	4233	846.60	QPSK	Pass


Band Edge

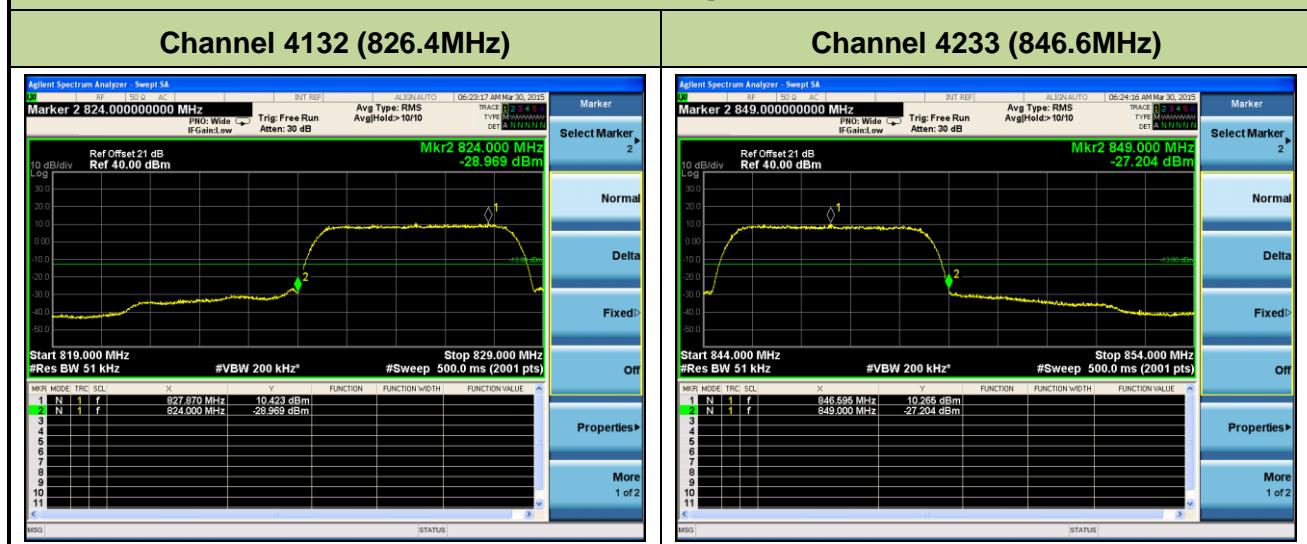


Conducted Spurious Emission

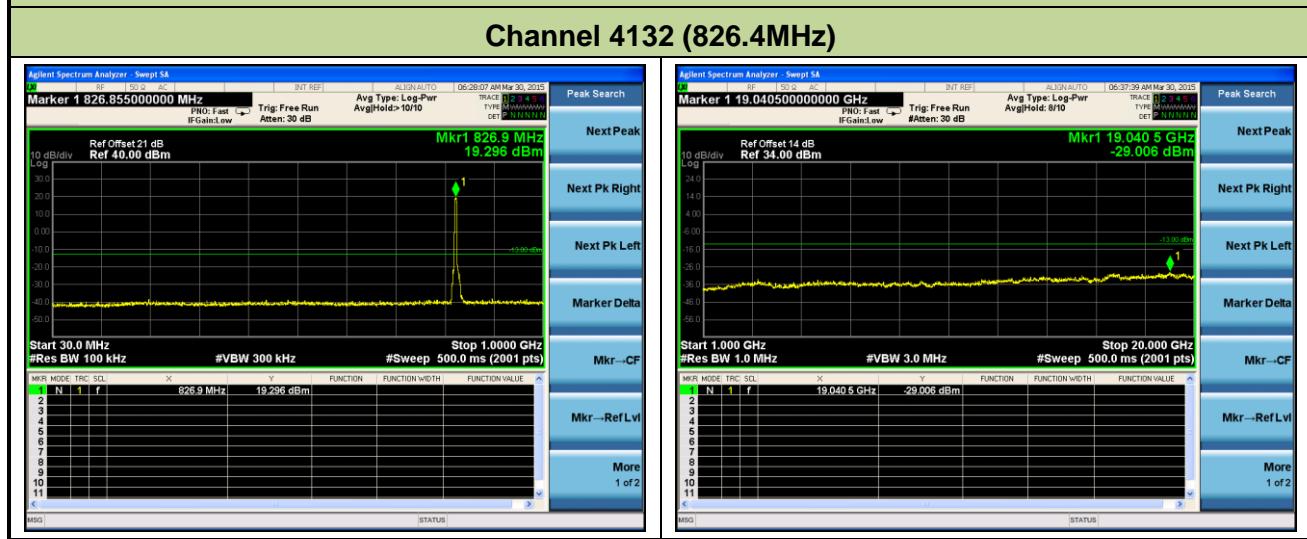

Channel 4182 (836.4MHz)

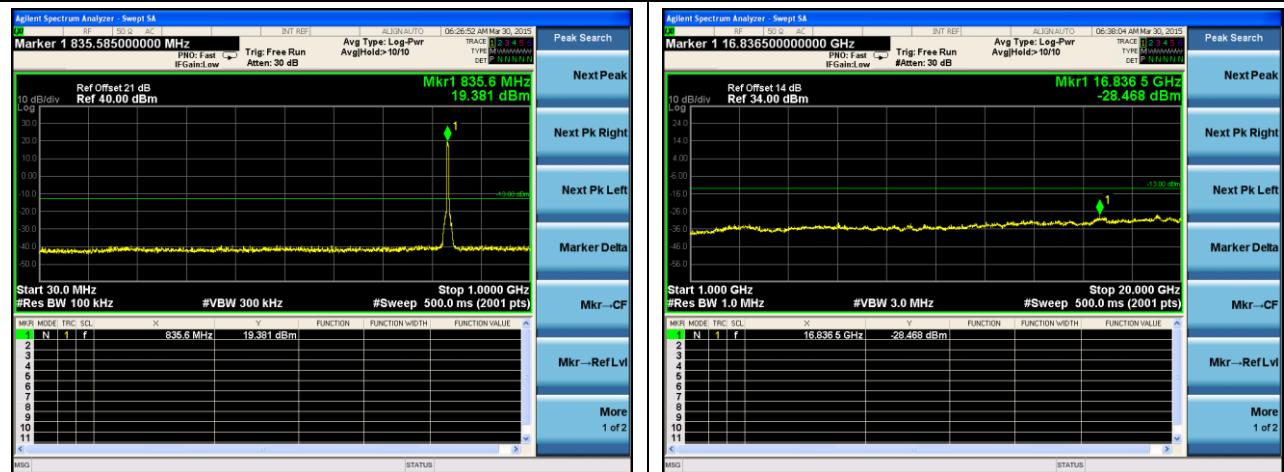

Channel 4233 (846.6MHz)

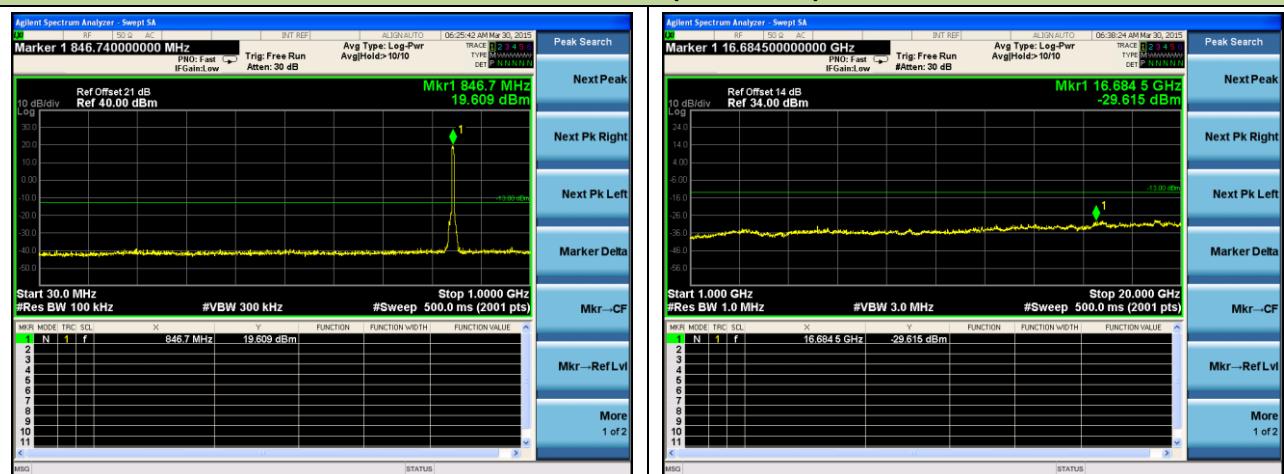

7.4. Conducted & Radiated Power and Radiated Spurious Emissions

7.4.1. Test Limit

Radiated Power

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

Radiated Spurious Emissions

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10\log(P)$ dB.

7.4.2. Test Procedure Used

KDB 971168 D01v02r02 - Section 7.0 & ANSI/TIA-603-C-2004


7.4.3. Test Setting

1. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
3. The output of the test antenna shall be connected to the measuring receiver.
4. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
5. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
6. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
7. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.


8. The maximum signal level detected by the measuring receiver shall be noted.
9. The transmitter shall be replaced by a substitution antenna.
10. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
11. The substitution antenna shall be connected to a calibrated signal generator.
12. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
13. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
14. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
16. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
17. Test site anechoic chamber refer to ANSI C63.4: 2009.

7.4.4. Test Setup

30MHz ~ 1GHz Test Setup:

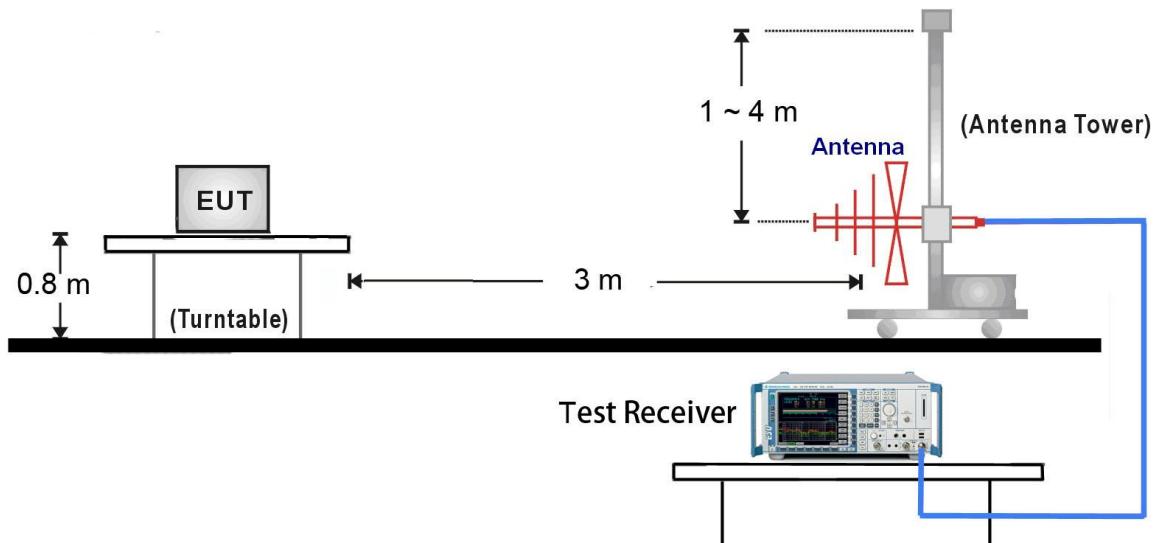

1GHz ~ 20GHz Test Setup:

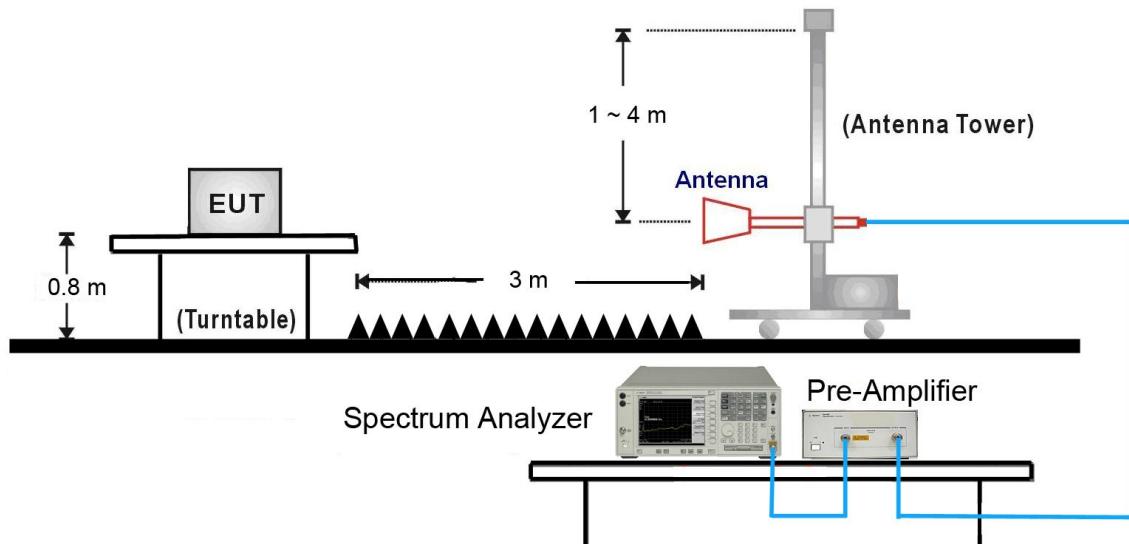

7.4.5. Test Result

Conducted Power

Mode	Frequency (MHz)	Avg. Burst Power (dBm)	Duty Cycle Factor (dB)	Frame Power (dBm)
GSM850	824.2	32.20	-9.19	23.01
	836.4	32.32	-9.19	23.13
	848.8	32.47	-9.19	23.28
GPRS850(1 Slot)	824.2	32.18	-9.19	22.99
	836.4	32.29	-9.19	23.10
	848.8	32.45	-9.19	23.26
GPRS850(2 Slot)	824.2	29.28	-6.16	23.12
	836.4	29.33	-6.16	23.17
	848.8	29.48	-6.16	23.32
GPRS850(3 Slot)	824.2	27.58	-4.42	23.16
	836.4	27.80	-4.42	23.38
	848.8	27.87	-4.42	23.45
GPRS850(4 Slot)	824.2	26.28	-3.18	23.10
	836.4	26.42	-3.18	23.24
	848.8	26.50	-3.18	23.32
PCS1900	1850.2	30.86	-9.19	21.67
	1880.0	30.60	-9.19	21.41
	1909.8	30.71	-9.19	21.52
GPRS1900(1 Slot)	1850.2	30.83	-9.19	21.64
	1880.0	30.57	-9.19	21.38
	1909.8	30.68	-9.19	21.49
GPRS1900(2 Slot)	1850.2	27.76	-6.16	21.60
	1880.0	27.51	-6.16	21.35
	1909.8	27.73	-6.16	21.57
GPRS1900(3 Slot)	1850.2	26.10	-4.42	21.68
	1880.0	25.87	-4.42	21.45

	1909.8	26.13	-4.42	21.71
GPRS1900(4 Slot)	1850.2	24.69	-3.18	21.51
	1880.0	24.45	-3.18	21.27
	1909.8	24.66	-3.18	21.48

Note: Frame Power (dBm) = Avg. Burst Power (dBm) + Duty Cycle Factor (dB)

Mode	3GPP Subtest	Conducted Power (dBm)						MPR	
		Band II Channel			Band V Channel				
		9262	9400	9538	4132	4182	4233		
WCDMA R99	1	23.23	22.64	22.97	22.25	22.14	22.15	N/A	
Rel5 HSDPA	1	22.94	22.47	22.61	21.98	21.49	21.63	0	
	2	22.89	22.44	22.58	21.94	21.46	21.59	0	
	3	22.41	21.93	22.04	21.45	20.92	21.13	0.5	
	4	22.38	21.91	22.01	21.47	20.89	21.11	0.5	
Rel6 HSUPA	1	22.96	22.47	22.54	22.03	21.52	21.60	0.0	
	2	20.91	20.42	20.49	20.01	19.48	19.53	2.0	
	3	21.98	21.50	21.51	21.05	20.54	20.62	1.0	
	4	20.95	20.44	20.46	19.99	19.41	19.49	2.0	
	5	22.94	22.42	22.51	22.00	21.49	21.55	0.0	

Radiated Power

GSM850

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)							
824.2	H	20.36	1.78	6.52	25.10	38.5	-13.40
824.2	V	23.42	1.78	6.38	28.02	38.5	-10.48
Middle Channel 189 (836.40MHz)							
836.4	H	18.94	1.80	6.63	23.77	38.5	-14.73
836.4	V	21.95	1.80	6.15	26.30	38.5	-12.20
High Channel 251 (848.80MHz)							
848.8	H	14.58	1.82	6.80	19.56	38.5	-18.94
848.8	V	21.10	1.82	6.54	25.82	38.5	-12.68

PCS1900

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)							
1850.2	H	23.78	2.70	4.64	25.72	33	-7.28
1850.2	V	20.55	2.70	4.64	22.49	33	-10.51
Middle Channel 661 (1880.00MHz)							
1880.0	H	23.69	2.72	4.59	25.56	33	-7.44
1880.0	V	20.38	2.72	4.59	22.25	33	-10.75
High Channel 810 (1909.80MHz)							
1909.8	H	22.14	2.75	4.54	23.93	33	-9.07
1909.8	V	19.15	2.75	4.54	20.94	33	-12.06

WCDMA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)							
1852.4	H	20.84	2.70	4.64	22.78	33	-10.22
1852.4	V	18.36	2.70	4.64	20.30	33	-12.70
Middle Channel 9400 (1880.00MHz)							
1880	H	20.92	2.72	4.59	22.79	33	-10.21
1880	V	18.30	2.72	4.59	20.17	33	-12.83
High Channel 9538 (1907.60MHz)							
1907.6	H	19.75	2.75	4.55	21.55	33	-11.45
1907.6	V	17.59	2.75	4.55	19.39	33	-13.61

WCDMA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)							
826.4	H	14.08	1.79	6.50	18.79	38.5	-19.71
826.4	V	17.19	1.79	6.30	21.70	38.5	-16.80
Middle Channel 4182 (836.40MHz)							
836.4	H	12.42	1.80	6.63	17.25	38.5	-21.25
836.4	V	17.18	1.80	6.15	21.53	38.5	-16.97
High Channel 4233 (846.60MHz)							
846.6	H	10.97	1.82	6.80	15.95	38.5	-22.55
846.6	V	16.35	1.82	6.51	21.04	38.5	-17.46

NOTES:

1. ERP (dBm) / EIRP (dBm)= SG Reading (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd)
2. This device was tested under all configurations and the highest power is reported in GSM mode. This device employs UMTS technology with WCDMA (AMR/RMC), HSDPA, HSUPA and GSM/GPRS/EDGE capabilities. For WCDMA and HSPA transmission, all configurations were investigated and the worst case UMTS emissions were found in RMC WCDMA mode at 12.2kbps rate.
3. This unit was tested with its standard adapter.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The "H" positioning is defined with the EUT lying flat on the test surface, the "H2" positioning is defined with the EUT standing up on its side, and the "V" positioning is defined with the EUT standing upright. The worst case test configuration was found in the EUT in the H positioning. The data reported in the table above was measured in this test setup.

Radiated Spurious Emission

GSM850

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)							
1646.0	V	-43.31	0.67	5.13	-38.85	-13	-25.85
2470.5	V	-49.68	0.82	5.54	-44.96	-13	-31.96
1646.0	H	-41.79	0.67	5.10	-37.36	-13	-24.36
1901.0	H	-42.55	0.70	4.56	-38.69	-13	-25.69
Middle Channel 189 (836.40MHz)							
1671.5	V	-44.58	0.67	5.05	-40.20	-13	-27.20
2513.0	V	-48.22	0.84	5.64	-43.42	-13	-30.42
1671.5	H	-43.28	0.70	5.05	-38.93	-13	-25.93
2513.0	H	-47.14	0.80	5.64	-42.31	-13	-29.31
High Channel 251 (848.80MHz)							
1697.0	V	-51.57	0.68	4.97	-47.27	-13	-34.27
2547.0	V	-48.73	0.84	5.73	-43.83	-13	-30.83
1697.0	H	-47.49	0.68	4.97	-43.20	-13	-30.20
2547.0	H	-52.26	0.84	5.73	-47.37	-13	-34.37

Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. ERP (dBm) = SG Reading (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd)

PCS1900

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)							
3703.0	V	-57.63	1.03	7.88	-50.78	-13	-37.78
5547.5	V	-55.59	1.25	10.10	-46.74	-13	-33.74
3703.0	H	-58.52	1.03	7.88	-51.66	-13	-38.66
5547.5	H	-60.54	1.25	10.10	-51.69	-13	-38.69
Middle Channel 661 (1880.00MHz)							
3762.5	V	-57.24	1.03	7.93	-50.35	-13	-37.35
5641.0	V	-49.11	1.27	10.10	-40.28	-13	-27.28
3762.5	H	-58.51	1.03	7.93	-51.61	-13	-38.61
5641.0	H	-57.50	1.27	10.10	-48.67	-13	-35.67
High Channel 810 (1909.80MHz)							
3822.0	V	-60.23	1.04	8.07	-53.20	-13	-40.20
5726.0	V	-49.19	1.29	10.10	-40.38	-13	-27.38
3822.0	H	-57.99	1.04	8.07	-50.96	-13	-37.96
5726.0	H	-47.77	1.29	10.10	-38.96	-13	-25.96

Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. EIRP (dBm) = SG Reading (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd)

WCDMA Band II

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)							
3703.0	V	-55.56	1.03	7.88	-48.70	-13	-35.70
5564.5	V	-61.08	1.25	10.10	-52.23	-13	-39.23
3703.0	H	-56.63	1.03	7.88	-49.78	-13	-36.78
5564.5	H	-58.93	1.25	10.10	-50.08	-13	-37.08
Middle Channel 9400 (1880.00MHz)							
3762.5	V	-61.67	1.03	7.93	-54.78	-13	-41.78
5641.0	V	-53.21	1.27	10.10	-44.38	-13	-31.38
3762.5	H	-58.95	1.03	7.93	-52.05	-13	-39.05
5641.0	H	-55.35	1.27	10.10	-46.52	-13	-33.52
High Channel 9538 (1907.60MHz)							
3813.5	V	-59.33	1.04	8.05	-52.32	-13	-39.32
5717.5	V	-50.64	1.28	10.10	-41.82	-13	-28.82
3822.0	H	-57.12	1.04	8.07	-50.09	-13	-37.09
5717.5	H	-53.66	1.30	10.10	-44.86	-13	-31.86

Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. EIRP (dBm) = SG Reading (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd)

WCDMA Band V

Frequency (MHz)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Substitute Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)							
2479.0	V	-50.71	0.83	5.56	-45.98	-13	-32.98
4961.0	V	-65.30	1.19	9.71	-56.78	-13	-43.78
2487.5	H	-48.96	0.83	5.58	-44.21	-13	-31.21
3303.5	H	-61.42	0.98	6.94	-55.46	-13	-42.46
Middle Channel 4182 (836.40MHz)							
2504.5	V	-39.50	0.83	5.61	-34.72	-13	-21.72
5020.5	V	-65.32	1.19	9.81	-56.70	-13	-43.70
2513.0	H	-46.26	0.84	5.64	-41.46	-13	-28.46
3346.0	H	-61.52	0.97	7.12	-55.37	-13	-42.37
High Channel 4233 (846.60MHz)							
2547.0	V	-42.53	0.84	5.73	-37.64	-13	-24.64
5071.5	V	-65.36	1.20	9.83	-56.73	-13	-43.73
2547.0	H	-37.23	0.84	5.73	-32.33	-13	-19.33
4757.0	H	-65.34	1.16	9.22	-57.28	-13	-44.28

Note:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. ERP (dBm) = SG Reading (dBm) - Cable Loss (dB) + Substitute Antenna Gain (dBd)

7.5. Peak-Average Ratio


7.5.1. Test Limit

The transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.


7.5.2. Test Procedure


KDB 971168 D01v02r02 - Section 5.7 & ANSI/TIA-603-C-2004

7.5.3. Test Setup

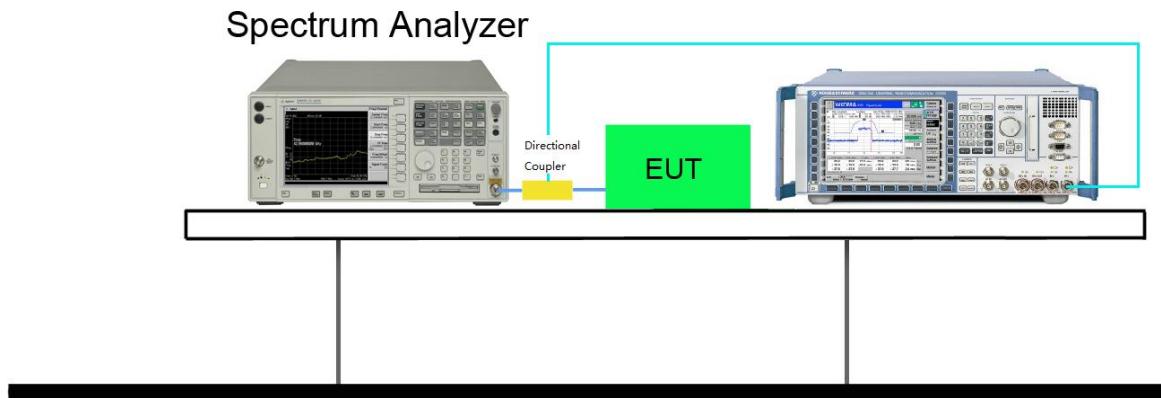

7.5.4. Test Result

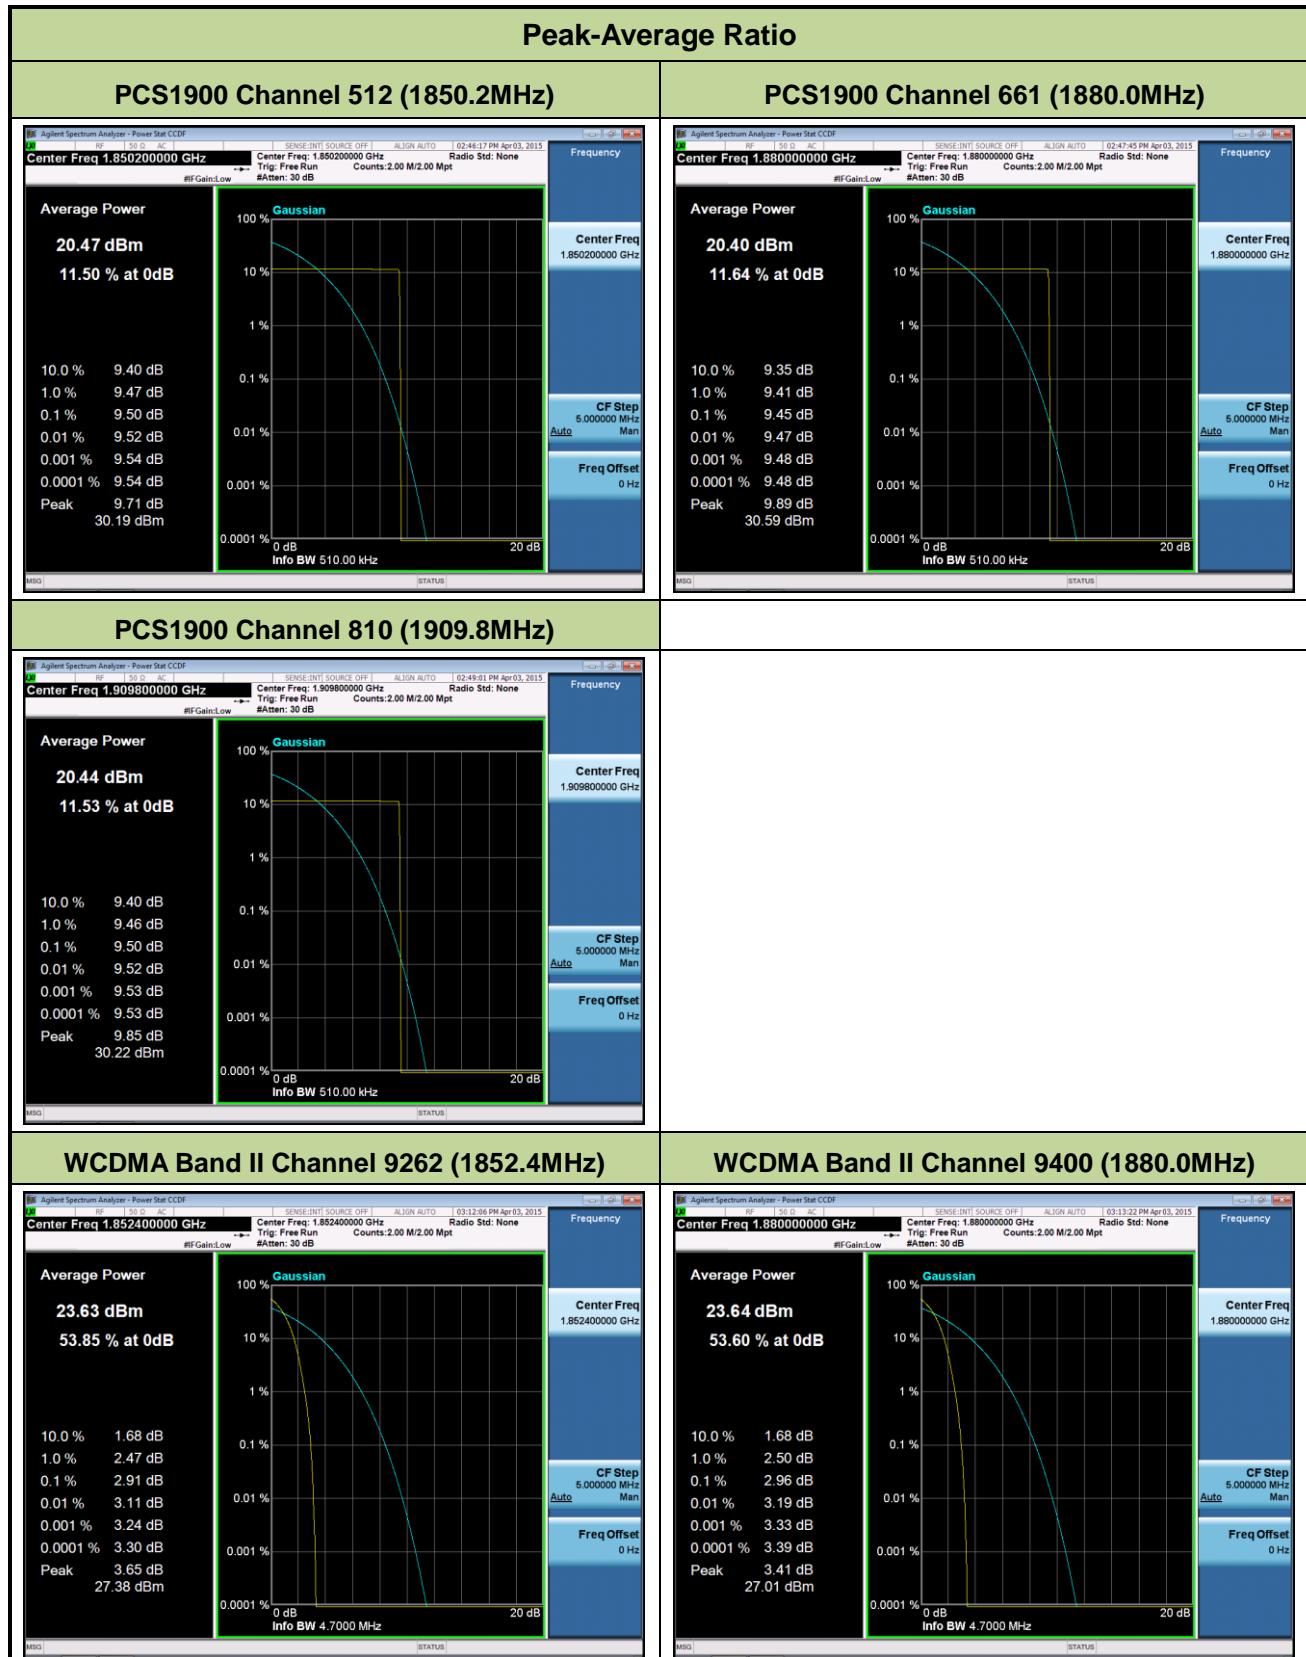

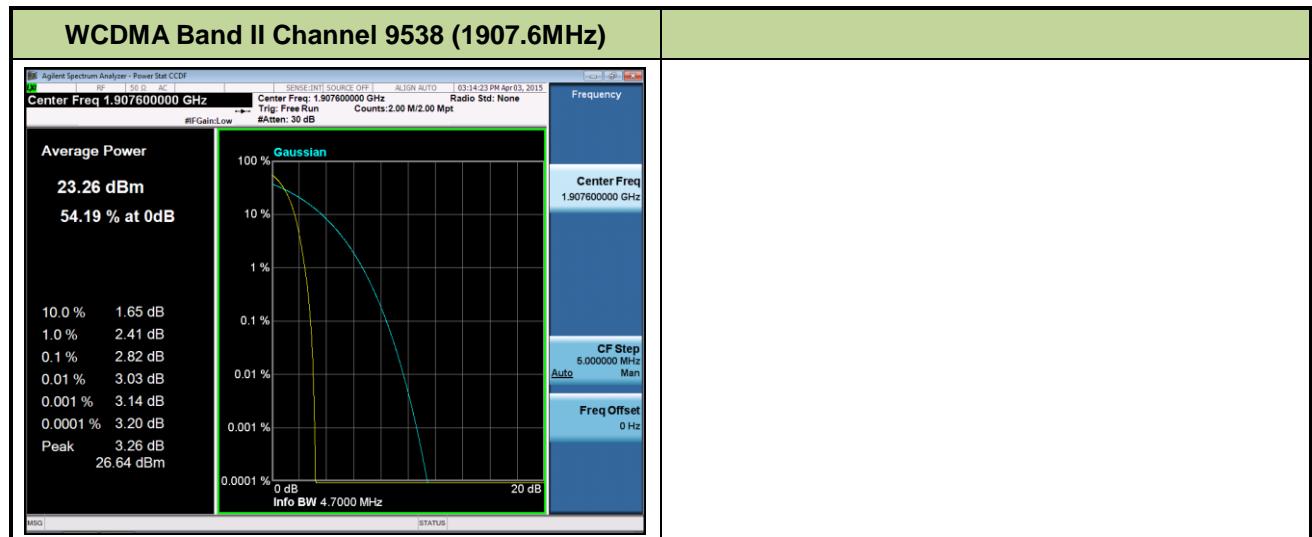

7.6. Frequency Stability Under Temperature & Voltage Variations

7.6.1. Test Limit


The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Limit	$< \pm 2.5 \text{ ppm}$
-------	-------------------------

7.6.2. Test Procedure

KDB 971168 D01v02r02 - Section 9.0 & ANSI/TIA-603-C-2004

7.6.3. Test Setup

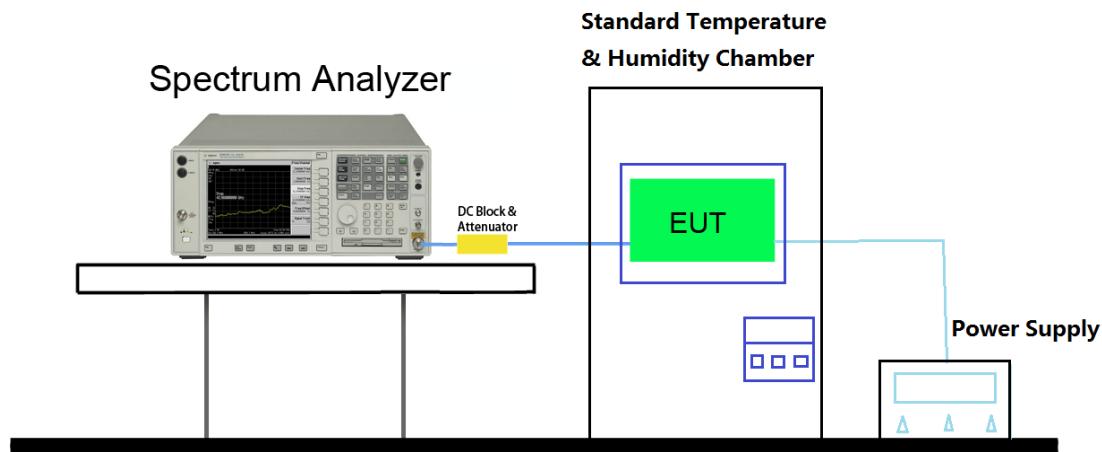

7.6.4. Test Result

Operating Frequency	836,400,000 Hz
Channel	189
Test Mode	GSM850
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	836,400,000	54	0.00000646
100%		-30	836,400,000	41	0.00000490
100%		-20	836,400,000	43	0.00000514
100%		-10	836,400,000	32	0.00000383
100%		0	836,400,000	-32	-0.00000383
100%		+10	836,400,000	-68	-0.00000813
100%		+20	836,400,000	29	0.00000347
100%		+30	836,400,000	35	0.00000418
100%		+40	836,400,000	-21	-0.00000251
100%		+50	836,400,000	-32	-0.00000383
115%	4.2	+20	836,400,000	18	0.00000215
BAT.ENDPOINT	3.6	+20	836,400,000	-9	-0.00000108

Operating Frequency	1,880,000,000 Hz
Channel	661
Test Mode	PCS1900
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	1,880,000,000	-31	-0.00000165
100%		-30	1,880,000,000	62	0.00000330
100%		-20	1,880,000,000	36	0.00000191
100%		-10	1,880,000,000	-43	-0.00000229
100%		0	1,880,000,000	-49	-0.00000261
100%		+10	1,880,000,000	57	0.00000303
100%		+20	1,880,000,000	-42	-0.00000223
100%		+30	1,880,000,000	-26	-0.00000138
100%		+40	1,880,000,000	-29	-0.00000154
100%		+50	1,880,000,000	37	0.00000197
115%	4.2	+20	1,880,000,000	48	0.00000255
BAT.ENDPOINT	3.6	+20	1,880,000,000	61	0.00000324

Operating Frequency	1,880,000,000 Hz
Channel	9400
Test Mode	WCDMA Band II
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	1,880,000,000	29	0.00000154
100%		-30	1,880,000,000	-18	-0.00000096
100%		-20	1,880,000,000	64	0.00000340
100%		-10	1,880,000,000	27	0.00000144
100%		0	1,880,000,000	-31	-0.00000165
100%		+10	1,880,000,000	27	0.00000144
100%		+20	1,880,000,000	39	0.00000207
100%		+30	1,880,000,000	-28	-0.00000149
100%		+40	1,880,000,000	27	0.00000144
100%		+50	1,880,000,000	51	0.00000271
115%	4.2	+20	1,880,000,000	63	0.00000335
BAT.ENDPOINT	3.6	+20	1,880,000,000	-18	-0.00000096

Operating Frequency	836,400,000 Hz
Channel	4182
Test Mode	WCDMA Band V
Reference Voltage	3.7 VDC
Deviation Limit	±0.00025% or 2.5ppm

Voltage (%)	Power (VDC)	TEMP (%)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.7	+20(Ref)	836,400,000	38	0.00000454
100%		-30	836,400,000	42	0.00000502
100%		-20	836,400,000	-29	-0.00000347
100%		-10	836,400,000	39	0.00000466
100%		0	836,400,000	31	0.00000371
100%		+10	836,400,000	-28	-0.00000335
100%		+20	836,400,000	53	0.00000634
100%		+30	836,400,000	-46	-0.00000550
100%		+40	836,400,000	33	0.00000395
100%		+50	836,400,000	-28	-0.00000335
115%	4.2	+20	836,400,000	49	0.00000586
BAT.ENDPOINT	3.6	+20	836,400,000	-32	-0.00000383

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Tablet PC FCC ID: WL6-TE69SA3** compliance with all the requirements of Parts 2, 22, 24 of the FCC Rules.

The End
