

Report No.: RZA2010-0989_15B



Part 15B TEST REPORT

Product Name	GSM /WCDMA dual mode mobile phone	
FCC ID	WLPW110	
Model	W110	
Applicant	Shanghai Longcheer3g Technology Co.,Ltd	



GENERAL SUMMARY

Product Name	GSM /WCDMA dual mode mobile phone	Model	W110	
FCC ID	WLPW110	Report No.	RZA2010-0989_15B	
Client	Shanghai Longcheer3g Technology Co.,L	td		
Manufacturer	Shanghai Longcheer3g Technology Co.,L	td		
Reference Standard(s)	FCC Part 15 Subpart B (2009-12) Radio frequency device. ANSI C63.4 (2003) Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40GHz.			
Conclusion	This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 2 of this test report are below limits specified in the relevant standards. General Judgment: Pass (Stamp) Date of issue: July 19th 2010			
Comment	The test result only responds to the meas	ured sample.		

Approved by Approv

Registration Num:428261 Page 3of 32 Report No.: RZA2010-0989_15B

TABLE OF CONTENT

1. Gene	ral Information	4
1.1. N	lotes of the test report	4
1.2. T	esting laboratory	4
1.3. A	Applicant Information	5
1.4. N	Manufacturer Information	5
1.5. Ir	nformation of EUT	6
	est Date	
2. Test li	nformation	8
2.1. S	Summary of test results	8
2.2. R	Radiated Emission	9
2.3. C	Conducted Emission1	9
3. Main	Test Instruments	9
ANNEX A:	: The EUT Appearance and Test Setup3	0
A.1 EUT	Г Appearance	0
	t Setup3	

Registration Num:428261

Report No.: RZA2010-0989_15B Page 4of 32

1. General Information

1.1. Notes of the test report

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report can not be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology** (Shanghai) Co., Ltd. and the Accreditation Bodies, if it applies.

1.2. Testing laboratory

Company: TA Technology (Shanghai) Co., Ltd.

Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Yang Weizhong

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: http://www.ta-shanghai.com

E-mail: yangweizhong@ta-shanghai.com

Registration Num:428261

Report No.: RZA2010-0989_15B Page 5of 32

1.3. Applicant Information

Company: Shanghai Longcheer3g Technology Co.,Ltd

Address: No.1, Building 5, 299 Bisheng Rd, Zhangjiang Hi-Tech Park, Pudong, Shanghai

City: Shanghai

Postal Code: 201204

Country: P.R. China

Contact Zhengfang hu

Telephone: +86-21-64088898

Fax: +86-21-54970816

1.4. Manufacturer Information

Company: Shanghai Longcheer3g Technology Co.,Ltd

Address: No.1, Building 5, 299 Bisheng Rd, Zhangjiang Hi-Tech Park, Pudong, Shanghai

City: Shanghai

Postal Code: 201204

Country: P.R. China

Telephone: +86-21-64088898

Fax: +86-21-54970816

Registration Num:428261 Page 6of 32

1.5. Information of EUT

Report No.: RZA2010-0989_15B

General information

Name of EUT:	GSM /WCDMA dual mode mobile phone				
Device Operating Configurations:					
IMEI:	355077010016854				
Operation Meda(s):	GSM 850(tested);	GSM 1900(tested)			
Operating Mode(s):	WCDMA Band II(to	ested); WCDMA Band	l V(tested)		
Power supply:	Battery or Charge	r			
Rated Power Supply Voltage:	3.7V				
Extreme Voltage:	Minimum: 3.5V Maximum: 4.2V				
Extreme Temperature:	Lowest: -10°C	Highest: +55°C			
	Band	Tx (MHz)	Rx (MHz)		
	GSM 850	824.2~848.8	869.2~893.8		
Operating Frequency Range(s)	GSM 1900	1850.2~1909.8	1930.2~1989.8		
	WCDMA Band II	1852.4~1907.6	1932.4~1987.6		
	WCDMA Band V	826.4~846.6	871.4~891.6		
Hardware Version:	LQWM232A				
Software Version:	LQWHM01.1.0				
Used Host Products:	IBM T61				

Registration Num:428261 Page 7of 32

Auxiliary equipment details

AE1: Battery

Model: BL-96

Report No.: RZA2010-0989_15B

Manufacture: i-mobile

S/N: BAK0810061300286

AE2: Headset

Model: TJ-090057

Manufacture: HONG Kong Tenji Technology Industrial Co., Ltd.

S/N: /

AE3: Notebook

Model: IBM T61 S/N: L3-C9644

Equipment Under Test (EUT) is GSM /WCDMA dual mode mobile phone with internal antenna. It consists of mobile phone, battery and headset and the detail about these is in chapter 1.5 in this report.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

1.6. Test Date

The test date is from July 2, 2010 to July 6, 2010.

Registration Num:428261 Page 8of 32 Report No.: RZA2010-0989_15B

2. Test Information

2.1. Summary of test results

Number	Test Case	Clause in FCC Rules	Verdict
1	Radiated Emission	15.109, ANSI C63.4-2003	PASS
2	Conducted Emission	15.107, ANSI C63.4-2003	PASS

Registration Num:428261

Report No.: RZA2010-0989_15B Page 9of 32

2.2. Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
24°C~26°C	45%~50%	102.5kPa


Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2003. Sweep the whole frequency band through the range from 30MHz to 5GHz. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. During the test, EUT is connected to a laptop via a USB cable in the case of USB mode. The EUT is used as the peripheral equipment of the PC. The model of laptop is IBM T61 8892-BAC and the serial number of laptop is L3-C9644. The phone modem drivers were installed on the laptop to be able to communicate with the EUT by continuously sending a querying text file (AT Command) to the phone using Hyper Terminal during the test.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Test Setup


Below 1GHz

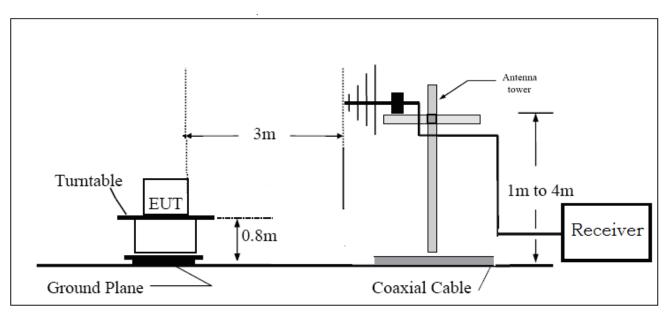

Registration Num:428261 Page 10of 32

Above 1GHz

Report No.: RZA2010-0989_15B

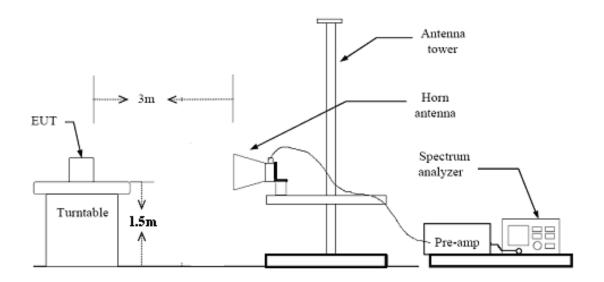

Limits

Frequency (MHz)	Field Strength (dBµV/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz,which is lower	54 74	Average Peak


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96. U= 3.92 dB.

Registration Num:428261 Page 11of 32 Report No.: RZA2010-0989_15B

Test Results

GSM 850

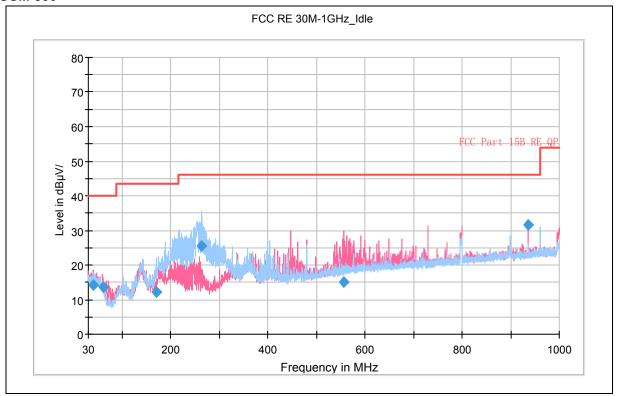


Note: Red trace is in vertical polarization Blue trace is in horizontal polarization

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Margin (dB)	Limit (dBµV/m)
40.022500	14.3	100.0	V	292.0	25.7	40.0
59.987500	13.6	100.0	V	97.0	26.4	40.0
171.007500	12.2	125.0	Н	112.0	31.3	43.5
263.812500	25.5	100.0	Н	9.0	20.5	46.0
555.542500	15.1	115.0	V	180.0	30.9	46.0
935.252500	31.7	100.0	V	9.0	14.3	46.0


Note: all emissions level measured above 1GHz was more than 10dB below the limit

Registration Num:428261 Page 12of 32 Report No.: RZA2010-0989_15B

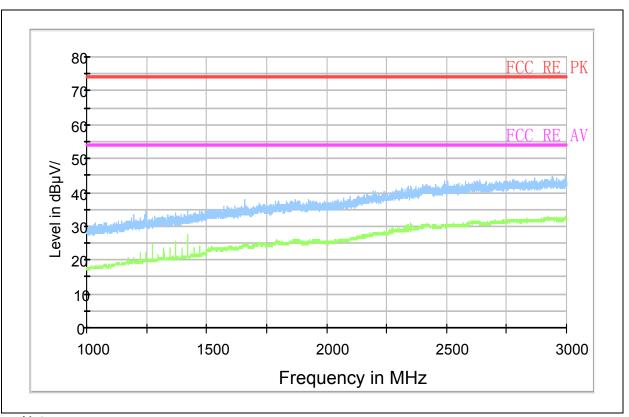

Note: Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 1GHz to 3GHz

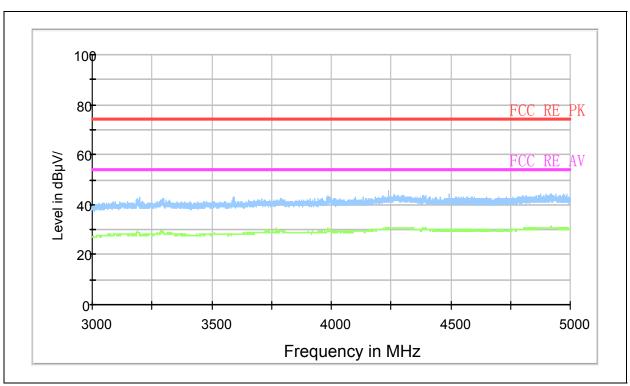


Note:Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 3GHz to 5GHz

Registration Num:428261 Page 13of 32 Report No.: RZA2010-0989_15B

GSM 1900

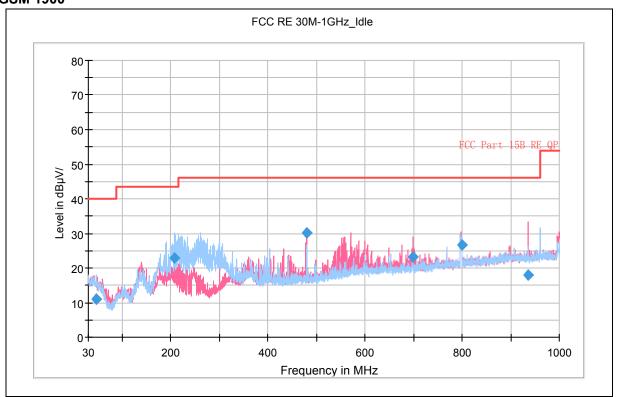

Note:Red trace is in vertical polarization


Blue trace is in horizontal polarization

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Margin (dB)	Limit (dBµV/m)
47.297500	11.0	116.0	Н	22.0	29.0	40.0
207.595000	22.8	125.0	Н	74.0	20.7	43.5
480.040000	30.1	100.0	V	86.0	15.9	46.0
698.737500	23.1	100.0	V	183.0	22.9	46.0
799.575000	26.6	100.0	V	281.0	19.4	46.0
935.252500	18.0	100.0	V	10.0	28.0	46.0


Note: all emissions level measured above 1GHz was more than 10dB below the limit

Registration Num:428261
Page 14of 32 Report No.: RZA2010-0989_15B

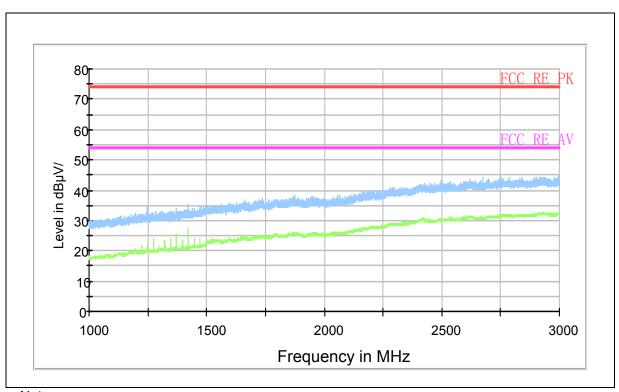

Note:Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 1GHz to 3GHz

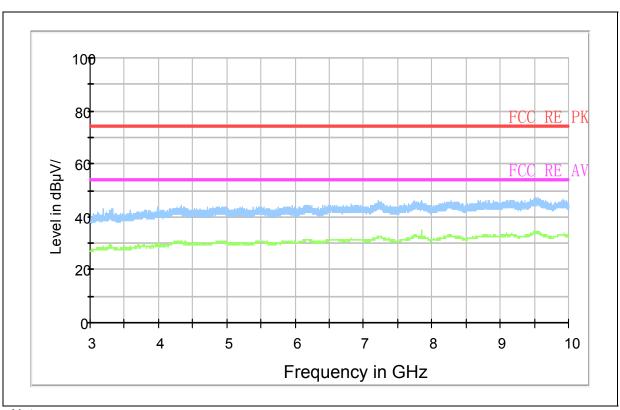


Note:Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 3GHz to 10GHz

Registration Num:428261 Page 15of 32 Report No.: RZA2010-0989_15B

WCDMA Band II

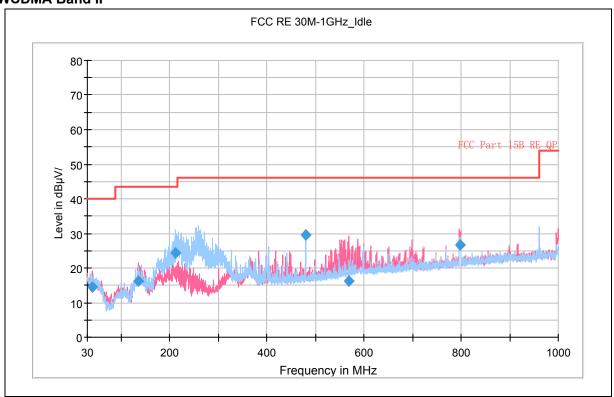

Note:Red trace is in vertical polarization


Blue trace is in horizontal polarization

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Margin (dB)	Limit (dBµV/m)
40.022500	14.4	100.0	V	292.0	25.6	40.0
134.562500	16.2	125.0	V	85.0	27.3	43.5
212.240000	24.4	100.0	Н	75.0	19.1	43.5
480.040000	29.7	100.0	V	85.0	16.3	46.0
568.472500	16.3	100.0	V	198.0	29.7	46.0
796.822500	26.8	100.0	V	202.0	19.2	46.0


Note: all emissions level measured above 1GHz was more than 10dB below the limit

Registration Num:428261 Page 16of 32 Report No.: RZA2010-0989_15B

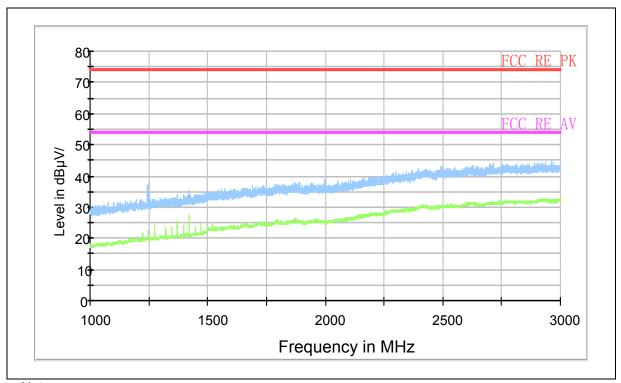

Note:Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 1GHz to 3GHz

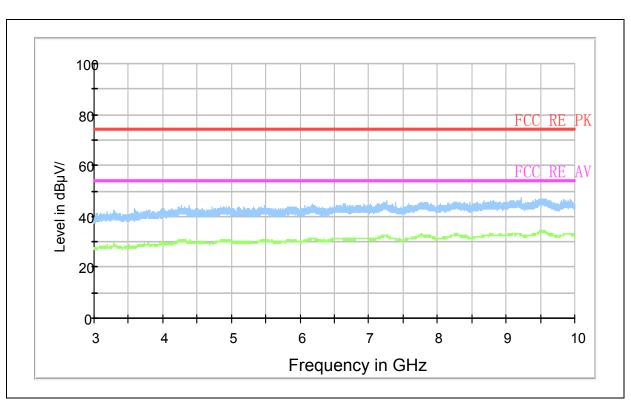


Green trace uses the average detection Note: Blue trace uses the peak detection

Radiated Emission from 3GHz to 10GHz

Registration Num:428261 Page 17of 32 Report No.: RZA2010-0989_15B

WCDMA Band V

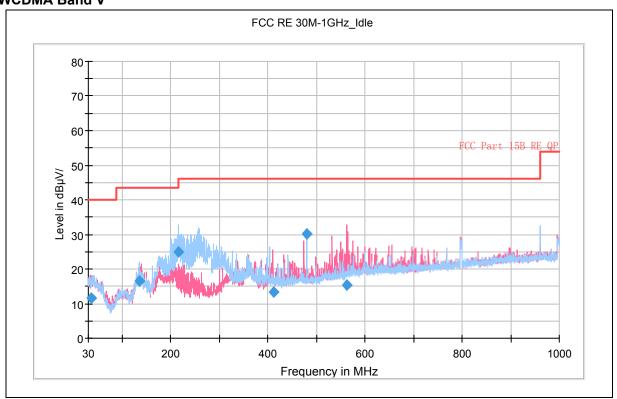

Note:Red trace is in vertical polarization


Blue trace is in horizontal polarization

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Margin (dB)	Limit (dBµV/m)
35.492500	11.5	125.0	V	22.0	28.5	40.0
134.395000	16.4	125.0	Н	22.0	27.1	43.5
216.002500	24.9	100.0	Н	2.0	21.1	46.0
411.082500	13.3	125.0	V	9.0	32.7	46.0
480.040000	30.2	100.0	V	85.0	15.8	46.0
561.925000	15.4	125.0	V	180.0	30.6	46.0


Note: all emissions level measured above 1GHz was more than 10dB below the limit

Registration Num:428261
Page 18of 32 Report No.: RZA2010-0989_15B

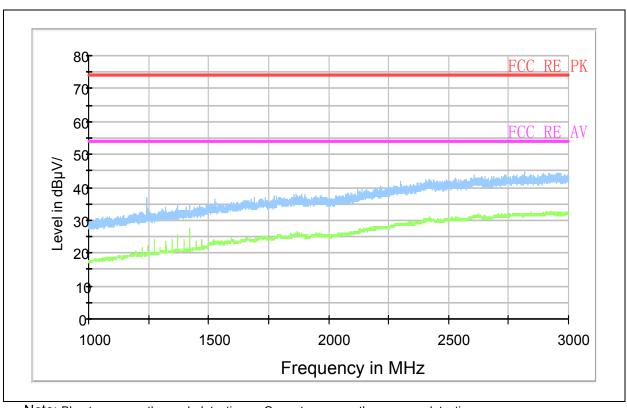

Note: Blue trace uses the peak detection Green trace uses the average detection

Radiated Emission from 1GHz to 3GHz

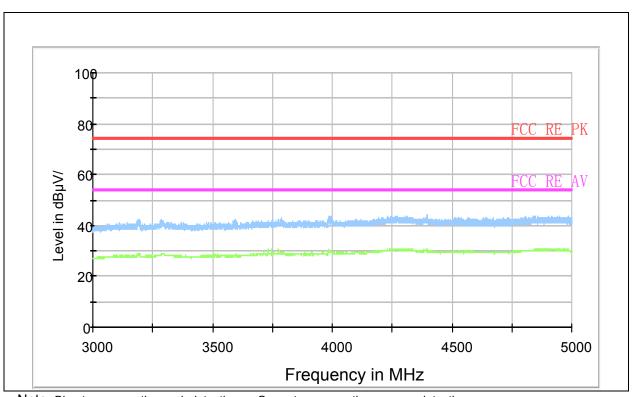

Green trace uses the average detection Note: Blue trace uses the peak detection

Radiated Emission from 3GHz to 5GHz

Registration Num:428261

Report No.: RZA2010-0989_15B Page 19of 32

2.3. Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
24°C ~26°C	50%~55%	102.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2003. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. The measurement result should include both L line and N line. During the test, EUT is connected to a laptop via a USB cable in the case of USB mode. The EUT is used as the peripheral equipment of the PC. The model of laptop is IBM T61 8892-BAC and the serial number of laptop is L3-C9644. The phone modem drivers were installed on the laptop to be able to communicate with the EUT by continuously sending a querying text file (AT Command) to the phone using Hyper Terminal during the test, and the EUT is worked at maximum output power.

Test Setup

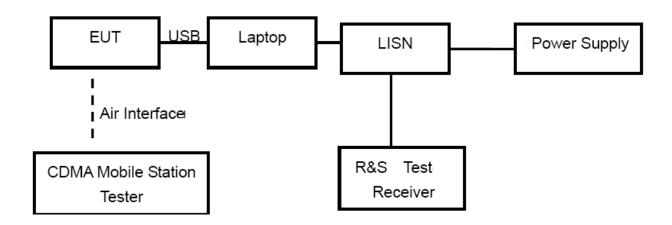

Note: Power Supply is AC Power source and it is used to change the voltage from 220V/50Hz to 110V/60Hz.

Registration Num:428261 Page 20of 32 Report No.: RZA2010-0989_15B

Limits

Frequency (MHz)	Conducted Limits(dBμV)				
	Quasi-peak	Average			
0.15 - 0.5	66 to 56 [*]	56 to 46 [*]			
0.5 - 5	56	46			
5 - 30 60 50		50			
* Decreases with the logarithm of the frequency.					


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96. U= 2.69 dB.

Registration Num:428261 Page 21of 32 Report No.: RZA2010-0989_15B

Test Results


GSM 850

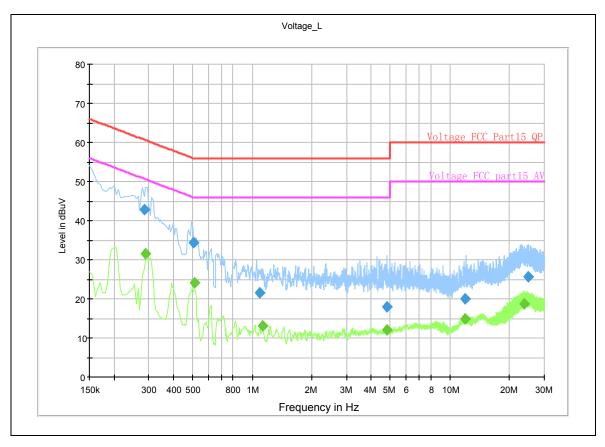

Note:Blue trace uses the peak detection Green trace uses the average detection L line Conducted Emission from 150 KHz to 30 MHz

Report No.: RZA2010-0989_15B

Registration Num:428261 Page 22of 32

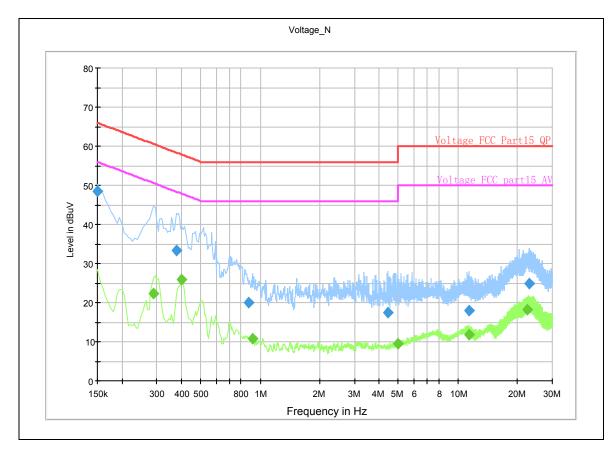


Note:Blue trace uses the peak detection Green trace uses the average detection N line

Frequency (MHz)	Detector	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)
0.915	Average	N	10.8	46	35.2
1.135	Average	L	13.1	46	32.9
4.785	Average	L	12	46	34
5	Average	N	9.5	50	40.5
11.35	Average	N	11.9	50	38.1
11.99	Average	L	14.8	50	35.2
0.87	Quasi-peak	N	20	56	36
1.09	Quasi-peak	L	21.7	56	34.3
4.41	Quasi-peak	N	17.3	56	38.7
4.8	Quasi-peak	L	18	56	38
11.385	Quasi-peak	N	17.8	60	42.2
11.995	Quasi-peak	L	19.9	60	40.1

Registration Num:428261 Page 23of 32 Report No.: RZA2010-0989_15B


GSM 1900

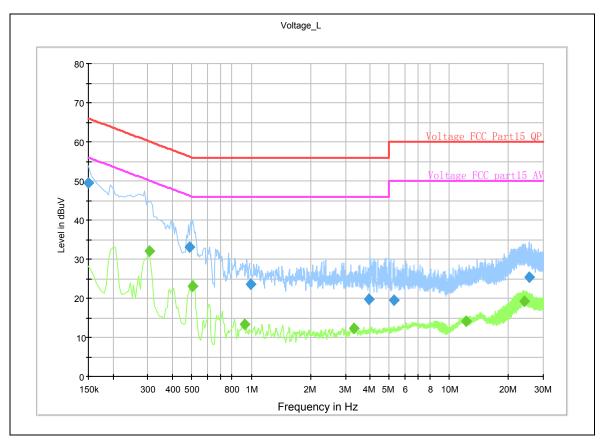

Note:Blue trace uses the peak detection Green trace uses the average detection L line

Report No.: RZA2010-0989_15B

Registration Num:428261 Page 24of 32

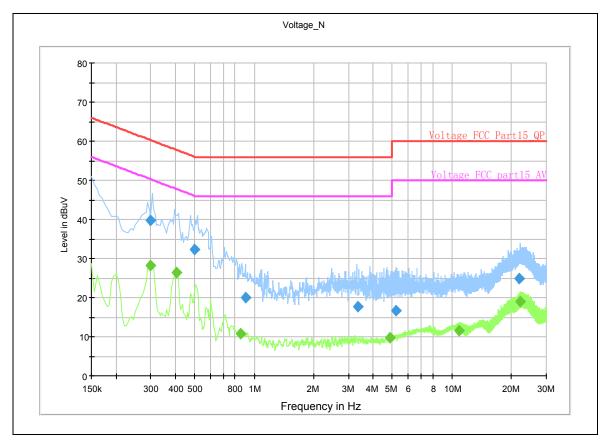


Note:Blue trace uses the peak detection Green trace uses the average detection N line

Frequency (MHz)	Detector	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)
0.855	Average	N	10.8	46	35.2
0.925	Average	L	13.3	46	32.7
3.3	Average	L	12.3	46	33.7
4.88	Average	N	9.9	46	36.1
10.905	Average	N	11.5	50	38.5
12.27	Average	L	14.1	50	35.9
0.9	Quasi-peak	N	20.1	56	35.9
0.99	Quasi-peak	L	23.5	56	32.5
3.34	Quasi-peak	N	17.6	56	38.4
3.945	Quasi-peak	L	19.7	56	36.3
5.195	Quasi-peak	N	16.5	60	43.5
5.27	Quasi-peak	L	19.4	60	40.6

Registration Num:428261 Page 25of 32 Report No.: RZA2010-0989_15B


WCDMA Band II

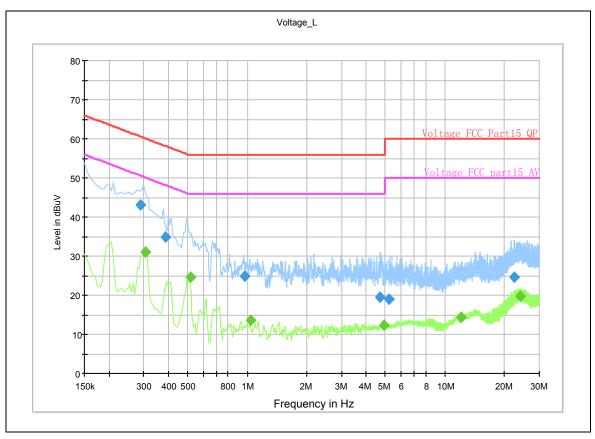

Note:Blue trace uses the peak detection Green trace uses the average detection L line

Report No.: RZA2010-0989_15B

Registration Num:428261 Page 26of 32

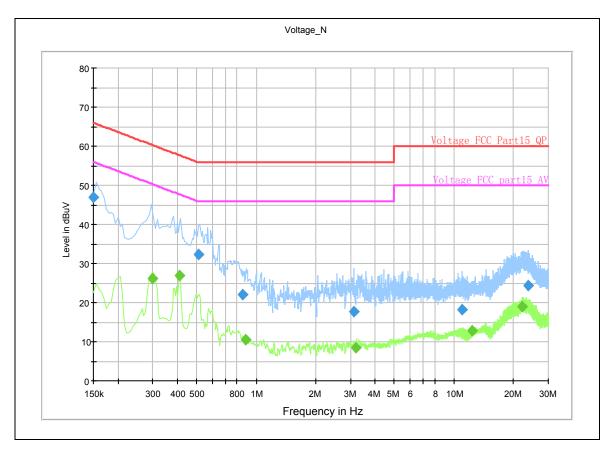


Note:Blue trace uses the peak detection Green trace uses the average detection N line

Frequency (MHz)	Detector	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)
0.88	Average	N	10.5	46	35.5
1.035	Average	L	13.5	46	32.5
3.195	Average	N	8.4	46	37.6
4.94	Average	L	12.2	46	33.8
12.125	Average	L	14.3	50	35.7
12.345	Average	N	12.8	50	37.2
0.855	Quasi-peak	N	22.2	56	33.8
3.12	Quasi-peak	N	17.6	56	38.4
4.71	Quasi-peak	L	19.4	56	36.6
5.23	Quasi-peak	L	18.9	60	41.1
11	Quasi-peak	N	18.1	60	41.9
23.66	Quasi-peak	N	24.4	60	35.6

Registration Num:428261 Page 27of 32 Report No.: RZA2010-0989_15B


WCDMA Band V

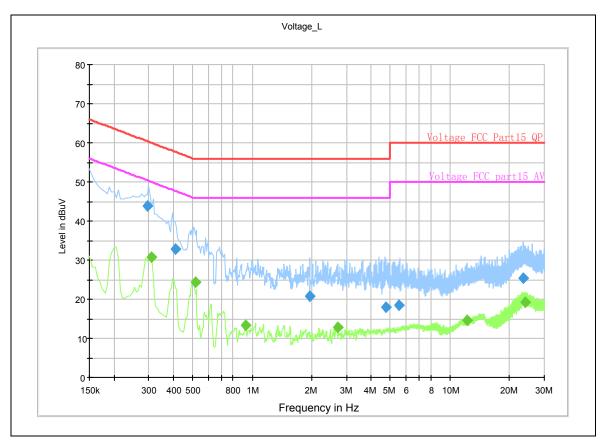

Note:Blue trace uses the peak detection Green trace uses the average detection L line

Report No.: RZA2010-0989_15B

Registration Num:428261 Page 28of 32

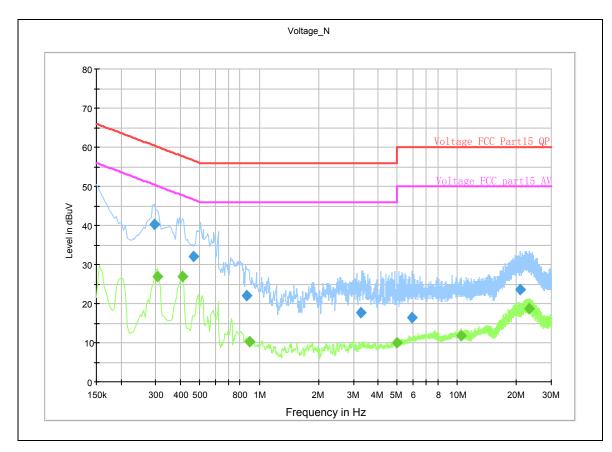

Note:Blue trace uses the peak detection Green trace uses the average detection N line

Frequency (MHz)	Detector	Line	Level (dBµV)	Limit (dBµV)	Margin (dB)
0.89	Average	N	10.3	46	35.7
0.93	Average	L	13.3	46	32.7
2.7	Average	L	12.7	46	33.3
4.975	Average	N	9.9	46	36.1
10.505	Average	N	11.9	50	38.1
12.265	Average	L	14.5	50	35.5
0.86	Quasi-peak	N	22.1	56	33.9
1.95	Quasi-peak	L	20.7	56	35.3
3.28	Quasi-peak	N	17.7	56	38.3
4.73	Quasi-peak	L	17.8	56	38.2
5.54	Quasi-peak	L	18.3	60	41.7
5.945	Quasi-peak	N	16.5	60	43.5

Registration Num:428261 Page 29of 32 Report No.: RZA2010-0989_15B

3. Main Test Instruments

No.	Name	Туре	Manufacturer	Serial Number	Calibration Date	Valid Period
01	Base Station Simulator	CMU200	R&S	118133	2010-05-27	One year
02	Signal Analyzer	FSV	R&S	100815	2010-06-28	One year
03	Signal generator	SMR27	R&S	100365	2010-07-01	One year
04	EMI Test Receiver	ESCI	R&S	100948	2010-07-01	One year
05	Trilog Antenna	VULB 9163	SCHWARZB ECK	9163-391	2009-05-14	Two years
06	Horn Antenna	HF907	R&S	100126	2009-07-02	Two years
07	LISN	3816/2	EMCO	00084033	2009-12-04	Two years
08	AC Power Source	AFC-11005G	APC	F309040118	2009-08-03	Three years
09	Semi-Anechoic Chamber	9.6*6.7*6.6m	ETS-Lindgren	NA	NA	NA
10	Shielding room	5*4*4m	ETS-Lindgren	NA	NA	NA
11	EMI test software	ES-K1	R&S	NA	NA	NA

*****END OF REPORT BODY*****

Registration Num:428261

Page 30of 32

ANNEX A: The EUT Appearance and Test Setup

A.1 EUT Appearance

Report No.: RZA2010-0989_15B



Picture 1-1: EUT



Picture 1-2: Battery

Registration Num:428261 Page 31of 32 Report No.: RZA2010-0989_15B



Picture 1-3: Earphone

Picture 1 EUT


Registration Num:428261 Page 32of 32

Report No.: RZA2010-0989_15B

A.2 Test Setup



Picture 1 Radiated Emission Test Setup

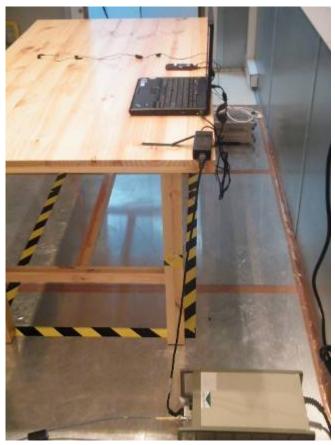

Picture 2 Conducted Emission Test Setup