

# **DFS Test Report**

Report No.: RF140729D01A-4

FCC ID: WLQOMNISB1PLUSTX

Test Model: Omni SB1 Plus Soundbar

Received Date: Dec. 10, 2015

**Test Date:** Dec. 15, 2015

**Issued Date:** Dec. 22, 2015

Applicant: Polk Audio

Address: 5601 Metro Drive Baltimore Maryland 21215 United States

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

(R.O.C.)

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City

33383, TAIWAN (R.O.C.)





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Report No.: RF140729D01A-4 Page No. 1 / 24 Report Format Version: 6.1.1 Reference No.: 140729D01, 151210D10



## **Table of Contents**

R	eleas	e Control Record	3
1	(	Certificate of Conformity	4
2	E	EUT Information	5
	2.1 2.2 2.3 2.4 2.5 2.6 2.7	Operating Frequency Bands and Mode of EUT.  EUT Software and Firmware Version.  Description Of Available Antennas to The EUT.  EUT Maximum Conducted Power.  EUT Maximum E.I.R.P. Power.  Transmit Power Control (TPc).  Statement of Maunfacturer.	5 5 6 7
3	. (	U-NII DFS Rule Requirements	9
	3.1 3.2	Working Modes and Required Test Items Test Limits And Radar Signal Parameters	
4	. 7	Test & Support Equipment List	13
	4.1 4.2	Test Instruments  Description of Support Units	
5	. 7	Test Procedure	14
	5.1 5.2 5.3 5.4 5.4.1	ADT DFS Measurement System Calibration of DFS Detection Threshold Level. Deviation From Test Standard Radiated Test Setup Configuration Client Without Radar Detection Mode	15 15 16
6	. 7	Test Results	17
	6.2.3 6.2.4	Summary of Test Results Test Results Test Mode: Device Operating In Client Without Radar Detection Mode. Channel Closing Transmission And Channel Move Time Non-Occupancy Period Non-Associated Test Non- Co-Channel Test	18 18 19 21 23
7	. 1	nformation on The Testing Laboratories	24



### **Release Control Record**

Issue No.	Description	Date Issued
RF140729D01A-4	Original release.	Dec. 22, 2015

Report No.: RF140729D01A-4 Page No. 3 / 24 Report Format Version: 6.1.1



#### 1 Certificate of Conformity

Product: Soundbar

**Brand:** 



Test Model: Omni SB1 Plus Soundbar

Sample Status: Engineering sample

Applicant: Polk Audio

**Test Date:** Dec. 15, 2015

**Standards:** FCC Part 15, Subpart E (Section 15.407)

KDB 905462 D02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by: Anne Chang, Date: Dec. 22, 2015

Annie Chang / Senior Specialist

**Approved by:** , **Date:** Dec. 22, 2015

Rex Lai / Assistant Manager



### 2 EUT Information

## 2.1 Operating Frequency Bands and Mode of EUT

TABLE 1: OPERATING FREQUENCY BANDS AND MODE OF EUT

Operational Mode	Operating Frequency Range					
Operational Mode	5250~5350MHz	5470~5725MHz				
Client without radar detection and ad hoc function	✓	<b>✓</b>				

The EUT doesn't operate in 5600 ~ 5650MHz via software controls.

### 2.2 EUT Software and Firmware Version

Table 2: The Eut Software/Firmware Version

No.	Product	Model No.	Software/Firmware Version
1	Soundbar	Omni SB1 Plus Soundbar	Play fi V069 MCU 0042

### 2.3 Description Of Available Antennas to The EUT

Table 3: Antenna List

ANT No.	Antenna Type	Operation Frequency Range (MHz)	MIN. Gain (dBi)
1	PIFA	5250-5350 MHz	2.04
1	PIFA	5470-5725 MHz	2.04

Report No.: RF140729D01A-4 Page No. 5 / 24 Report Format Version: 6.1.1



#### 2.4 **EUT Maximum Conducted Power**

Table 4: The Measured Conducted Output Power

### 802.11a

ANT No.	Frequency Band (MHz)	MAX. F	Power		
	. , ,	Output Power(dBm)			
1	5250~5350	13.09	20.4		
1	5470~5725	13.04	20.1		

### 802.11n HT20

ANT No.	Frequency Band (MHz)	MAX. Power					
	, , ,	Output Power(dBm)					
1	5250~5350	11.45	14.0				
1	5470~5725	11.41	13.8				

### 802.11n HT40

ANT No.	Frequency Band (MHz)	MAX. Power					
	, ,	Output Power(dBm)	Output Power(mW)				
1	5250~5350	11.24	13.3				
1	5470~5725	11.05	12.7				

Page No. 6 / 24 Report Format Version: 6.1.1



#### 2.5 **EUT Maximum E.I.R.P. Power**

Table 5: The Eirp Output Power List

### 802.11a

ANT No.	Frequency Band (MHz)	MAX. F	Power		
	. , ,	Output Power(dBm)			
1	5250~5350	15.13	32.584		
1	5470~5725	15.08	32.211		

### 802.11n HT20

ANT No.	Frequency Band (MHz)	MAX. Power					
	, , ,	Output Power(dBm)	Output Power(mW)				
1	5250~5350	13.49	22.336				
1	5470~5725	13.45	22.131				

### 802.11n HT40

ANT No.	Frequency Band (MHz)	MAX. Power					
	. , ,	Output Power(dBm)					
1	5250~5350	13.28	21.281				
1	5470~5725	13.09	20.370				

Page No. 7 / 24 Report Format Version: 6.1.1



### 2.6 Transmit Power Control (TPC)

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW. Maximum EIRP of this device is **32.584**mW which less than 500mW, therefore it's not require TPC function.

#### 2.7 Statement of Maunfacturer

hand											
Waveforms is	not availabl	e to the end	user	. And the de	vice doesr	ı't ha	ave Ad Hoc r	noc	de or	DFS free	uency
Manufacturer	statement	confirming	that	information	regarding	the	parameters	of	the	detected	Radar

Report No.: RF140729D01A-4 Page No. 8 / 24 Report Format Version: 6.1.1



#### 3. U-NII DFS Rule Requirements

### 3.1 Working Modes and Required Test Items

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 6 and 7 for the applicability of DFS requirements for each of the operational modes.

Table 6: Applicability of DFS Requirements Prior To Use a Channel

	Operational Mode			
Requirement	Master	Client without radar detection	Client with radar detection	
Non-Occupancy Period	✓	Not required	✓	
DFS Detection Threshold	✓	Not required	✓	
Channel Availability Check Time	✓	Not required	Not required	
U-NII Detection Bandwidth	✓	Not required	✓	

Table 7: Applicability of DFS Requirements During Normal Operation.

	Operational Mode			
Requirement	Master or Client with radar detection	Client without radar detection		
DFS Detection Threshold	✓	Not required		
Channel Closing Transmission Time	✓	✓		
Channel Move Time	✓	✓		
U-NII Detection Bandwidth	✓	Not required		

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks.

Report No.: RF140729D01A-4 Page No. 9 / 24 Report Format Version: 6.1.1



#### 3.2 Test Limits And Radar Signal Parameters

#### **Detection Threshold Values**

Table 8: DFS Detection Thresholds For Master Devices And Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)	
EIRP ≥ 200 milliwatt	-64 dBm	
EIRP < 200 milliwatt and	-62 dBm	
power spectral density < 10 dBm/MHz	-02 UBIII	
EIRP < 200 milliwatt that do not meet the	64 dDm	
power spectral density requirement	-64 dBm	

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

Table 9: DFS Response Requirement Values

Parameter	Value	
Non-occupancy period	Minimum 30 minutes	
Channel Availability Check Time	60 seconds	
Channel Move Time	10 seconds See Note 1.	
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.  See Notes 1 and 2.	
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3	

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Report No.: RF140729D01A-4 Page No. 10 / 24 Report Format Version: 6.1.1



### **Parameters of DFS Test Signals**

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 10: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials			
0	1	1428	18	See Note 1	See Note 1			
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a  Test B: 15 unique PRI values randomly selected within the range of 518-3066 $\mu$ sec, with a minimum increment of 1 $\mu$ sec, excluding PRI values selected in Test A	Roundup $ \begin{cases} \left(\frac{1}{360}\right) \\ \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}}\right) \end{cases} $	60%	30			
2	1-5	150-230	23-29	60%	30			
3	6-10	200-500	16-18	60%	30			
4	11-20	200-500	12-16	60%	30			
Note 1: C	Aggregate (Radar Types 1-4) 80% 120  Note 1: Short Pulse Padar Type 0 should be used for the detection bandwidth test							

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.



Table 11: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number Of Pulses Per Burst	Number Of Bursts	Minimum Percentage Of Successful Detection	Minimum Number Of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

# Table 12: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses PER HOP	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage Of Successful Detection	Minimum Number Of Trials
6	1	333	9	0.333	300	70%	30

Page No. 12 / 24 Report Format Version: 6.1.1



## 4. Test & Support Equipment List

### 4.1 Test Instruments

Table 13: Test Instruments List

Description & Manufacturer	Model No.	Brand	Date Of Calibration	Due Date Of Calibration
R&S Spectrum analyzer	ESR	R&S	2015/01/14	2016/01/13
Signal generator	8645A	Agilent	2015/08/05	2016/08/04

### 4.2 Description of Support Units

Table 14: Support Unit Information.

No.	Product	Brand	Model No.	Fcc Id	Gain
1	Router	D-Link	DIR-868L	RRK2012060056-1	5G Ant gain : 3.428dB Maximum EIRP : 27.64dBm

**NOTE:** This device was functioned as a Master Slave device during the DFS test.

Table 15: Software/Firmware Information.

No.	Product	Model No.	Software/Firmware Version
1.	Router	DIR-868L	1.00

Report No.: RF140729D01A-4 Page No. 13 / 24 Report Format Version: 6.1.1




#### 5. Test Procedure

### 5.1 ADT DFS Measurement System

A complete ADT DFS Measurement System consists of two subsystems: (1) the Radar Signal Generating Subsystem and (2) the Traffic Monitoring Subsystem. The control PC is necessary for generating the Radar waveforms in Table 10, 11 and 12. The traffic monitoring subsystem is specified to the type of unit under test (UUT).

## Radiated Setup Configuration Of ADT DFS Measurement System

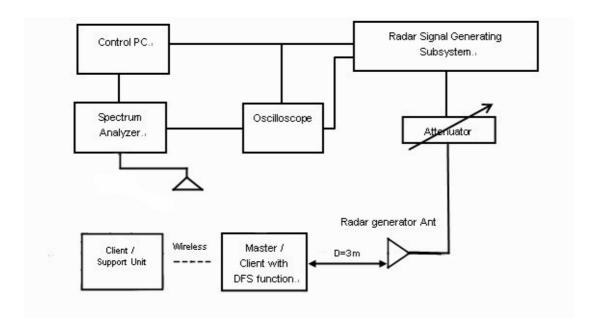

System testing will be performed with channel-loading using means appropriate to the data types that are used by the unlicensed device. The following requirements apply:

	a) The data file must be of a type that is typical for the device (i.e., MPEG-2, MPEG-4, WAV, MP3, MP4, AVI, etc.) and must generally be transmitting in a streaming mode.
	b) Software to ping the client is permitted to simulate data transfer but must have random ping intervals.
V	c) Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater.
	d) Unicast or Multicast protocols are preferable but other protocols may be used. The appropriate protocol used must be described in the test procedures.

Report No.: RF140729D01A-4 Reference No.: 140729D01, 151210D10 Page No. 14 / 24


Report Format Version: 6.1.1



#### 5.2 Calibration of DFS Detection Threshold Level

The measured channel is 5500MHz and 5510MHz. The radar signal was the same as transmitted channels, and injected into the antenna of AP (master) or Client Device with Radar Detection, measured the channel closing transmission time and channel move time. The calibrated conducted detection threshold level is set to -64dBm. The tested level is lower than required level hence it provides margin to the limit.

### Radiated setup configuration of Calibration of DFS Detection Threshold Level

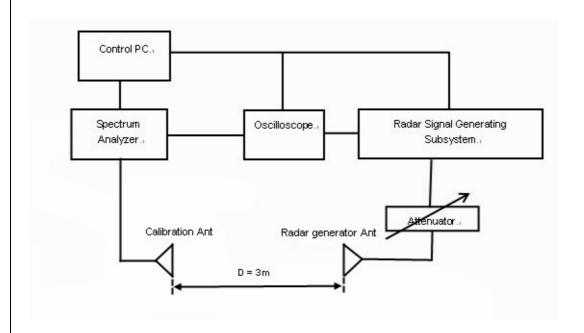

#### 5.3 Deviation From Test Standard

No deviation.


Report No.: RF140729D01A-4 Reference No.: 140729D01, 151210D10 Page No. 15 / 24

Report Format Version: 6.1.1



# 5.4 Radiated Test Setup Configuration

### 5.4.1 Client Without Radar Detection Mode

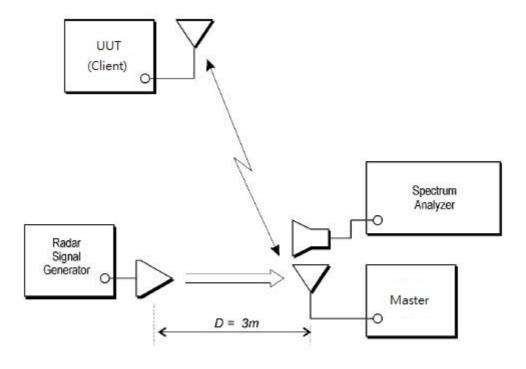



Report Format Version: 6.1.1

## 6. Test Results

# 6.1 Summary of Test Results

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Not Applicable	NA
15.407	Channel Availability Check Time	Not Applicable	NA
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Not Applicable	NA
15.407	U-NII Detection Bandwidth	Not Applicable	NA
15.407	Non-associated test	Applicable	Pass
15.407	Non-Co-Channel test	Applicable	Pass

Report No.: RF140729D01A-4 Page No. 17 / 24 Reference No.: 140729D01, 151210D10




#### 6.2 Test Results

6.2.1 Test Mode: Device Operating In Client Without Radar Detection Mode.

Client with injection at the Master. (The radar test signals are injected into the Master Device)

### **DFS Detection Threshold**

For a detection threshold level of -64dBm, the required signal strength at EUT antenna location is -64 dBm. The tested level is lower than required level hence it provides margin to the limit.

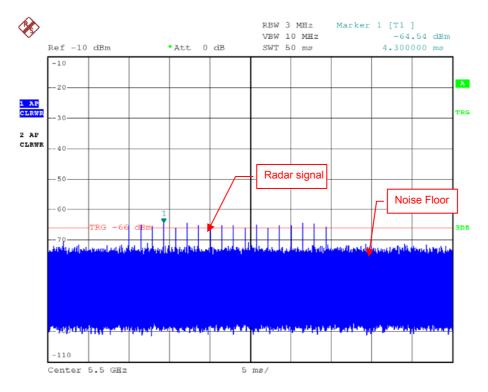


Radar Signal 0




### 6.2.2 Channel Closing Transmission And Channel Move Time

### Radar Signal 0

#### 802.11n HT20

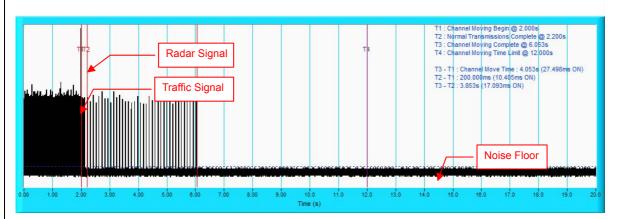

**NOTE:** T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time.T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

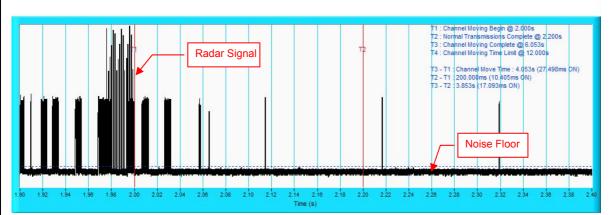


**NOTE:** An expanded plot for the device vacates the channel in the required 500ms.




### Radar Signal 0

#### 802.11n HT40

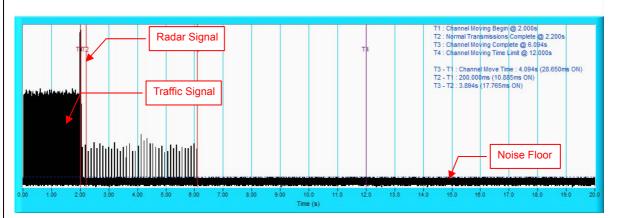

**NOTE:** T1 denotes the start of Channel Move Time upon the end of the last Radar burst. T2 denotes the data transmission time of 200ms from T1. T3 denotes the end of Channel Move Time.T4 denotes the 10 second from T1 to observe the aggregate duration of transmissions.

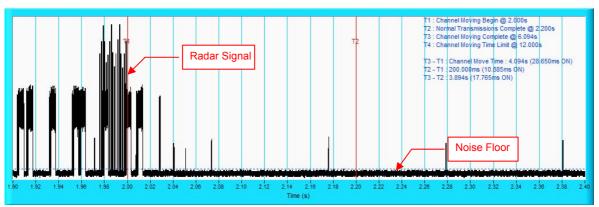

**NOTE:** An expanded plot for the device vacates the channel in the required 500ms.




### 6.2.3 Non-Occupancy Period

#### **Associate test:**


During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.

1) EUT (Client) links with master on 5500MHz.

# Waveform of EUT links up with Master



2) Client plays specified files via master.

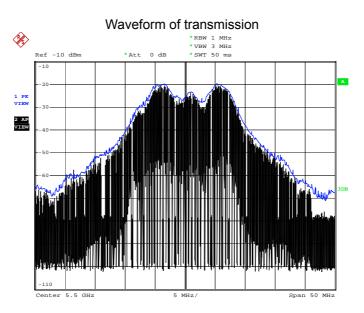

Report No.: RF140729D01A-4


Reference No.: 140729D01, 151210D10

Page No. 21 / 24

Report Format Version: 6.1.1




3) Radar signal 0 is applied to the Master device and WiFi traffic signal stop immediately.

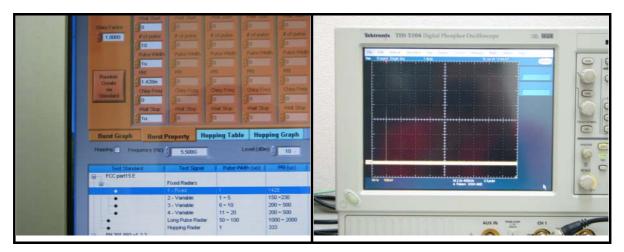

4) 5500MHz has been monitored in 30 minutes period. In this period, no any transmission occurs.

Plot of 30minutes period

### 802.11n HT20

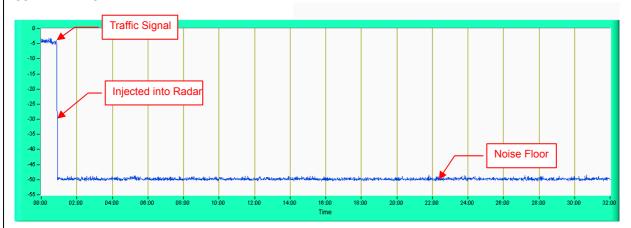


NOTE: Test setup are shown on Test set up photo.pdf



## 6.2.4 Non-Associated Test

Master was off.

During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

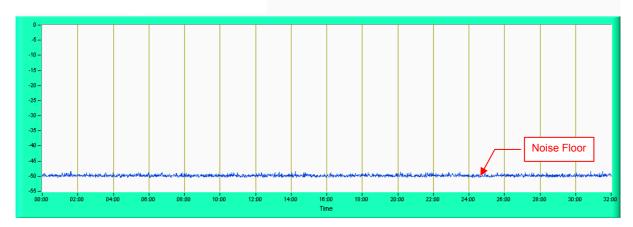

### 6.2.5 Non- Co-Channel Test

The UUT was investigated after radar was detected the channel and made sure no co-channel operation with radars.



### 7. Information on The Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF/Telecom Lab:

Tel: 886-2-26052180 Tel: 886-3-6668565 Fax: 886-2-26051924 Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab:

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: <a href="mailto:service.adt@tw.bureauveritas.com">service.adt@tw.bureauveritas.com</a>
Web Site: <a href="mailto:www.bureauveritas-adt.com">www.bureauveritas-adt.com</a>

The address and road map of all our labs can be found in our web site also.

--- END ---

Report No.: RF140729D01A-4 Page No. 24 / 24 Report Format Version: 6.1.1