

FCC Part 15C TEST REPORT

of

PLAYSTATION (R) GAME CONTROLLER DEVICE

FCC ID: WLZ18LA16FS168

Model No.: Access Controller Device

Serial No.: 080900001

Report No.: FCC08-8021

Date: November 11, 2008

Prepared for

eDimensional, Inc.

2885 Jupiter Park Dr. Suite 1200, Jupiter, FL33401, USA

Prepared by

ShenZhen Electronic Product Quality Testing Center

Electronic Testing Building, Shahe Road, Xili, Nanshan District, ShenZhen, 518055, P.R.China Tel: 86 755 26627338 Fax: 86 755 26627238

This test report consists of 27 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.



Table of Contents

1	Test Report Certification	3
2	General Information	4
	2.1 Description of EUT	4
	2.3 Test Standards and Results	5
	2.4 List of Test Equipments Used	5
	2.5 Test Facility	6
	2.6 Environmental conditions	6
3	Radiated Emission Test	7
	3.1 Limits of Radiated Emission	7
	3.2 Test Procedure	7
	3.3 Test Setup	8
	3.4 EUT Setup and Operating Conditions	9
	3.5 Test Results	9
4	Bandwidth Test	25
	4.1 Limit of bandwidth test	25
	4.2 Test Procedure	25
	4.3 Test Setup	26
	4.4 EUT Setup and Operating Conditions	26
	4.5 Test Results	26



1 Test Report Certification

Product: PLAYSTATION (R) GAME CONTROLLER DEVICE

FCC ID: WLZ18LA16FS168

Model No.: PLAYSTATION (R) GAME CONTROLLER DEVICE

Applicant: eDimensional, Inc.

Applicant Address: 2885 Jupiter Park Dr. Suite 1200, Jupiter, FL33401, USA

Manufacturer: eDimensional, Inc.

Manufacturer Address: 2885 Jupiter Park Dr. Suite 1200, Jupiter, FL33401, USA

Test Standards: 47 CFR Part 2

47 CFR Part 15, Subpart C

ANSI 63.4 2003

Test Result: PASS

We, Shenzhen Electronic Product Quality Testing Center, hereby certify that the submitted samples of the above item, as detailed in chapter 2.1 of this report, has been tested in our facility. The test record, data evaluation and test configuration represented herein are true and accurate accounts of measurements of the sample's EMC characteristics under the conditions herein specified.

Tested by: Shong Yougan, Date: Nov. 18, 2008

Approved by: Wu Li An Date: Nov. 19. 2008



2 General Information

2.1 Description of EUT

Description:	PLAYSTATION (R) GAME CONTROLLER DEVICE
Model No.:	PLAYSTATION (R) GAME CONTROLLER DEVICE
Serial No.:	N.A.
Modulation	FHSS
Frequency:	2402MHz – 2480 MHz
Number of Channels:	79
Rated Power:	≤0dBm
RF Antenna:	Permanent attached
Power Supply:	4.5VDC
Ports:	

NOTE:

- 1. The EUT is a PLAYSTATION (R) GAME CONTROLLER DEVICE. It works like the principle of Bluetooth, operating at 2.4GHz ISM band. It is Frequency Hopping Spread Spectrum (FHSS). The Channels and transmitter center frequencies are: F(MHz)=2402+1*n, $0 \le n \le 78$.
- 2. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 Objective

Perform EMC test according to FCC Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiator).



2.3 Test Standards and Results

The EUT has been tested according to 47 CFR

- Part 2 Frequency Allocations and Radio Treaty Matters: General Rules and Regulations (10-1-05 Edition)
- Part 15 Radio Frequency Devices (2006-10-01 Edition)

Test items and the results are as bellow:

№	FCC Rules	Test Type	Result	Test Date
1	§15.249	Radiated Emission	PASS	2008.10.27
2	§15.215	Bandwidth	PASS	2008.11.19

2.4 List of Test Equipments Used

Description	Manufacturer	Model No.	Cal. Due Date	Serial No.
Test Receiver	Rohde & Schwarz	ESIB26	2009.06.05	A0304218
Loop Antenna	Rohde & Schwarz	HFH2-Z2	2009.06.05	A0304220
Ultra Broadband Ant.	Rohde & Schwarz	HL562	2009.06.05	A0304224
Horn Ant.	Rohde & Schwarz	HF906	2009.06.05	100150
Shield Room	Nanbo Tech	Site 1	2009.01.10	A0304188
Anechoic Chamber	Albatross	EMC12.8×6.8×	2009.04.10	A0304210
Anechoic Chamber	Aluanuss	6.4(m)	2003.04.10	A0304210



2.5 Test Facility

Shenzhen Electronic Product Quality Testing Center (SET) is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS). according to ISO/IEC 17025. The accreditation certificate number is L1659.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)), and the radiated and conducted Emission test equipments of SET are constructed and calibrated to meet the FCC requirements ANSI C63.4:2001 and CISPR 22/EN 55022. The FCC Registration Number is **261302**.

The EMC chamber site No.1 (EMC12.8×6.8×6.4(m)) also complies with Canada standard RSS 212, and acceptable to Industry Canada for the performance of radiated measurements. The Industry Canada Registration Number is IC 5915.

2.6 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C - Humidity: 30-60 %

- Atmospheric pressure: 86-106 kPa



3 Radiated Emission Test

3.1 Limits of Radiated Emission

According to FCC §15.249(a), the field strength of emissions from intentional radiators shall comply with the followings:

Frequency	Field Strength	of Fundamental	Field Strength of Harmonics		
MHz	(mV/m @3m)	(dBuV/m@3m)	(uV/m @3m)	(dBuV/m @3m)	
2400-2483.5	50	94 (Average)	500	54 (Average)	
		114 (Peak)		74 (Peak)	

According to FCC §15.209 (a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency(MHz)	Field Strength(µV/m)	Measurement Distance(m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules,


3.2 Test Procedure

- a. The EUT was placed on the top of a ratable 0.8 meters above the ground at a semi-anechoic chamber.
- b. In the frequency range of 9 kHz to 30 MHz, magnetic field was measured with loop antenna. The antenna was positioned with its plane vertical at 1 m distance from the EUT. The center of the loop was 1 m above the ground. During the measurement the loop antenna rotated about its vertical axis for maximum response at each azimuth about the EUT.



- c. In the frequency range above 30MHz, ultra-broadband bi-log antenna (30 MHz to 1 GHz) and horn antenna (above 1GHz) were used. Antenna was 3 meters away from the EUT. Antenna height was varied from one meter to four meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emission that did not have 10 dB margins would be retested one by one using the quasi-peak method.
- e. The test-receiver system was set to Peak Detector Function and Specified Bandwidth with Maximum Hold Mode.
- f. In the frequency range below 30MHz, the RBW/VBW on the test receiver (R&S ESIB 26) is 9kHz/9kHz; In the frequency range below 1GHz, the RBW/VBW on the test receiver (R&S ESIB 26) is 120kHz/120kHz; In the frequency range above 1GHz, the RBW/VBW on the test receiver (R&S ESIB 26) is 1MHz/1MHz.

3.3 Test Setup

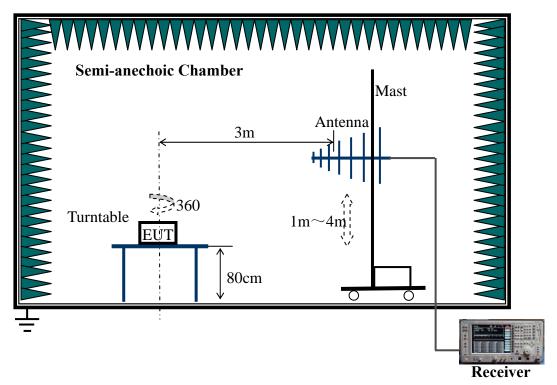

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.



3.4 EUT Setup and Operating Conditions

A test program was provided by the applicant to control the EUT's working channel. The lowest, middle and highest channel were all tested to find the worst emission.

When testing, the EUT was installed new batteries in.

Since the EUT is considered a potable unit, it was pre-tested on the positioned of each 3 axis. There for only the test data of the worse case- y axis was used for Radiated test.

3.5 Test Results

I. Fundamental Emissions

No.	EUT Operating	Antenna		on Level V/m)	Emission Limits (dBµV/m)	
	Chanel	Polarization	PK	AV	PK	AV
1	СНО	Vertical	90.23	76.18	114	94
1		Horizontal	91.58	77.25	114	94
2	СН39	Vertical	91.52	76.28	114	94
2		Horizontal	89.76	78.96	114	94
2	CH78	Vertical	90.25	78.97	114	94
3		Horizontal	89.48	79.28	114	94

II. Spurious Emissions

Test Result 1: CH0

No.	Harmonic	Antenna	Emission Level (dBμV/m)		Emission Limits (dBµV/m)	
		Polarization	PK	AV	PK	AV
1	2 nd	Vertical	48.93		74	54
1	2	Horizontal	47.68		74	54
2	3 rd	Vertical	49.63		74	54
2		Horizontal	46.75		74	54
3	4 th	Vertical			74	54
3		Horizontal			74	54
4	5 th	Vertical			74	54
4		Horizontal			74	54
5	>6 th	Vertical			74	54
3	>6	Horizontal			74	54

Test Result 1: CH39

No.	Harmania	Antenna	Emission Level	QP Limits
	Harmonic	Polarization	(dBµV/m)	$(dB\mu V/m)$



			PK	AV	PK	AV
1	2 nd	Vertical	48.93		74	54
1	2	Horizontal	47.28		74	54
2	3 rd	Vertical	48.37		74	54
2	3	Horizontal	49.57		74	54
2	$4^{ m th}$	Vertical			74	54
3	4	Horizontal			74	54
4	5 th	Vertical			74	54
4		Horizontal			74	54
5	>6 th	Vertical			74	54
5	>6 th	Horizontal			74	54

Test Result 1: CH78

No.	Harmonic	Antenna	Emission Level (dBμV/m)		QP Limits (dBμV/m)	
		Polarization	PK	AV	PK	AV
1	2 nd	Vertical	49.37		74	54
1	Ho	Horizontal	48.29		74	54
2	3 rd	Vertical	49.63		74	54
2	3	Horizontal	48.37		74	54
2	4 th	Vertical			74	54
3	4	Horizontal			74	54
4	5 th	Vertical			74	54
4	3	Horizontal			74	54
-	>6 th	Vertical			74	54
5	>0	Horizontal			74	54

III. Band Edge


Freq.(MHz)	EUT Operating Chanel	Antenna Polarization	Emission Level (dBµV/m)		Emission Limits (dBµV/m)	
		Polarization	PK	AV	PK	AV
2402	CHO	Vertical	39.41		74	54
2402	CH0	Horizontal	38.46		74	54
2483.5	CH70	Vertical	39.18	-	74	54
2483.3	CH78	Horizontal	38.46		74	54


NOTE: "--" in the table above means that the emissions are too small to be measured and are at least 10 dB below the limit.




Test Plots


1. Lowest channel, Antenna Vertical

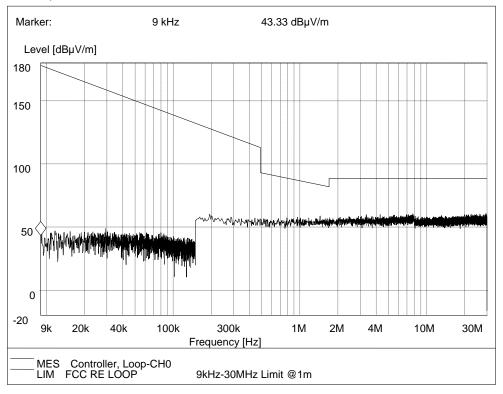

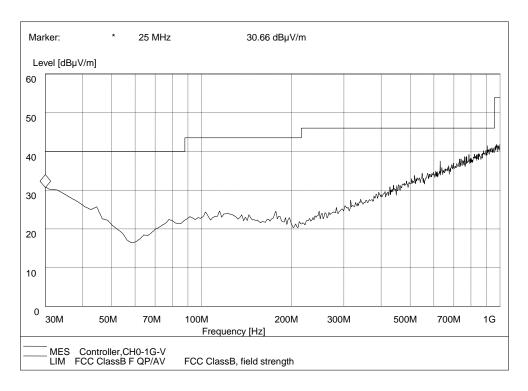




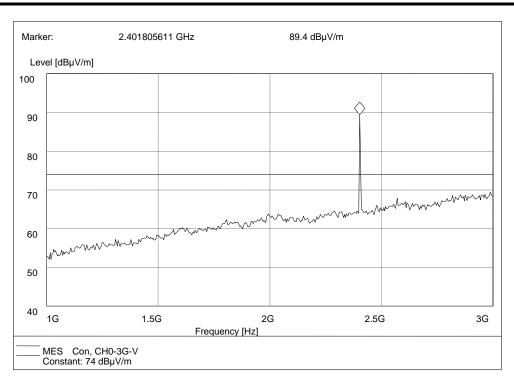


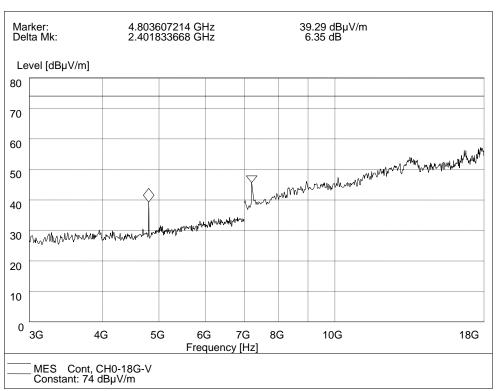




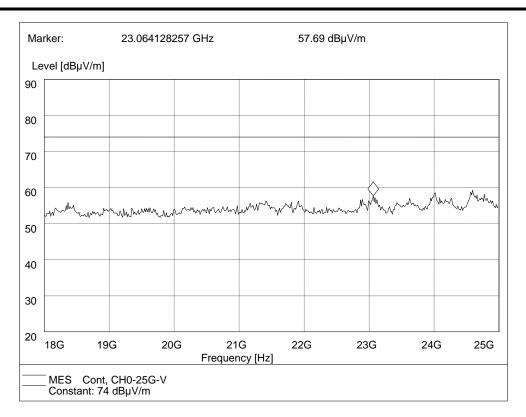


2. Lowest channel, Antenna Horizontal

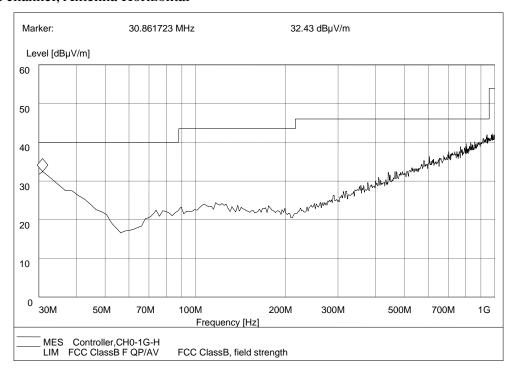




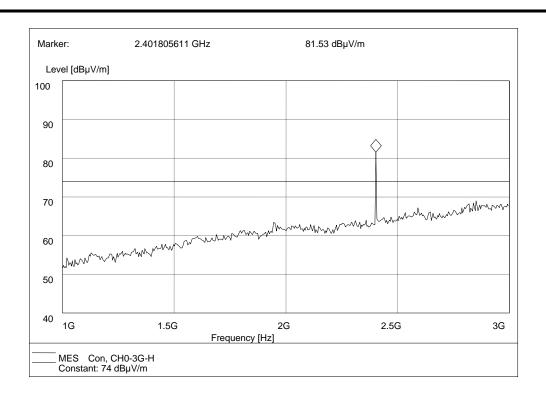


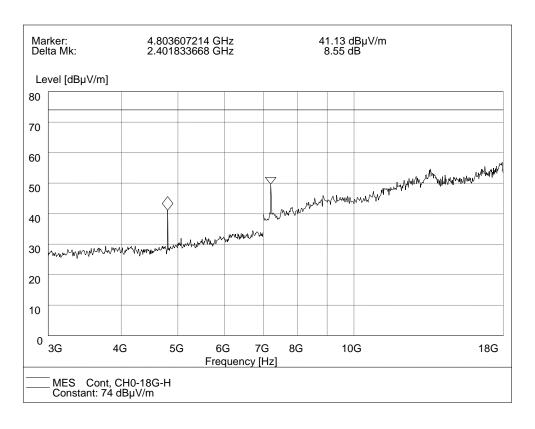




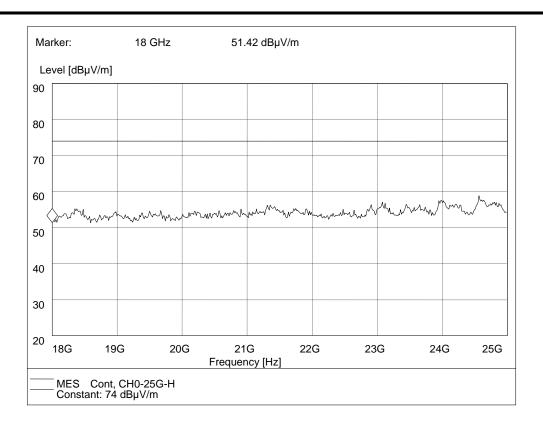


3. Middle channel, Antenna Vertical

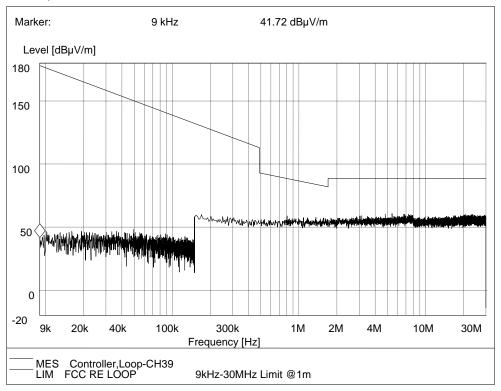





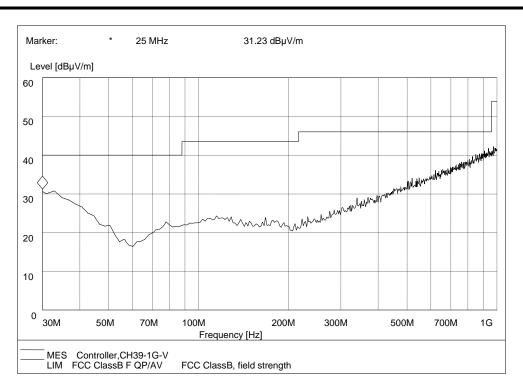

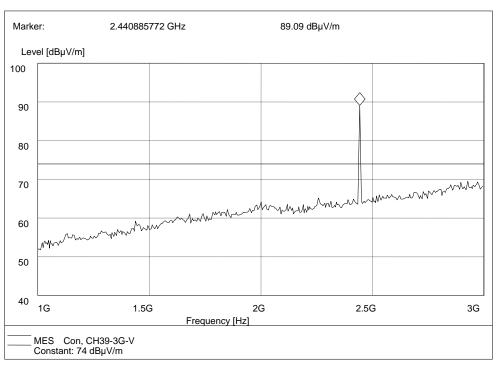




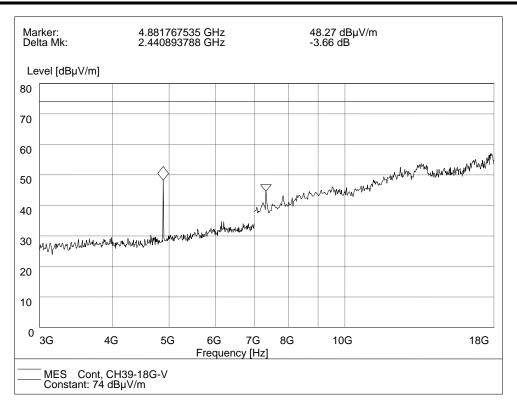


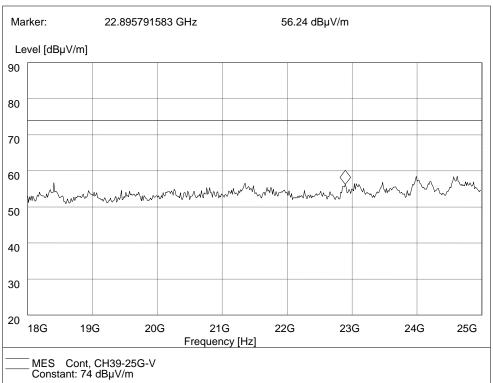


4. Middle channel, Antenna Horizontal




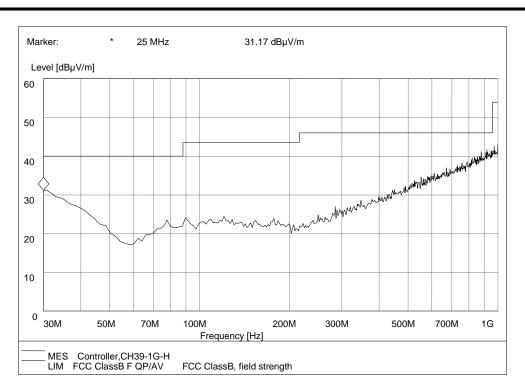

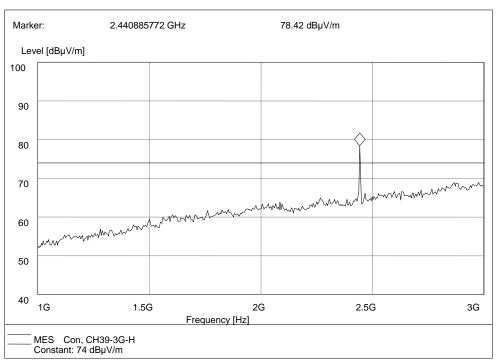




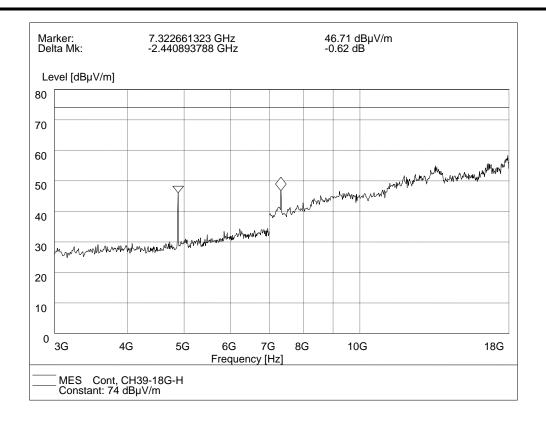


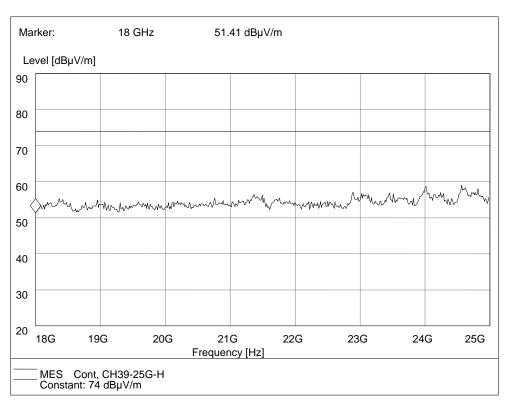


5. Highest channel, Antenna Vertical




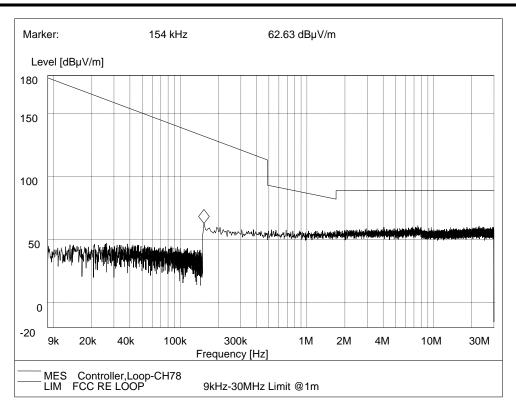

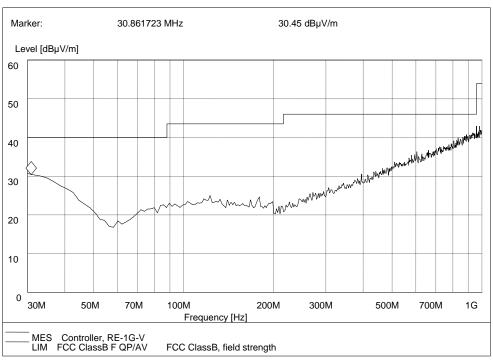




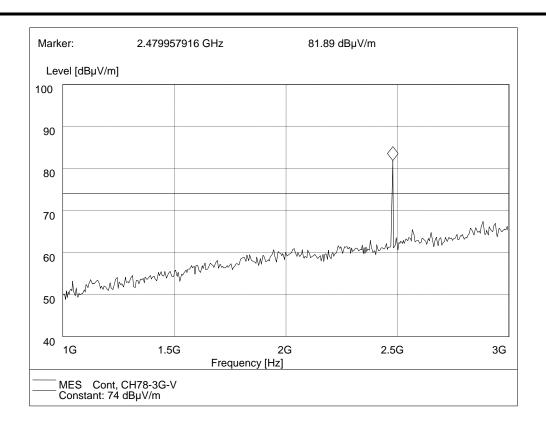


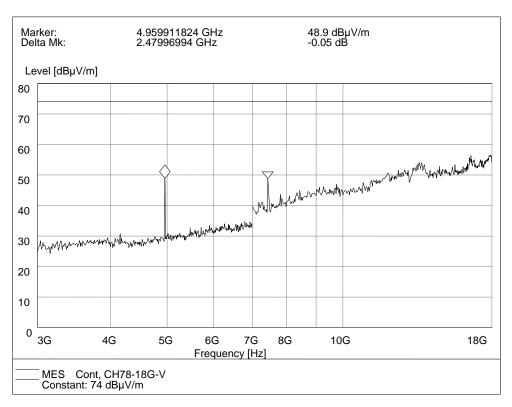




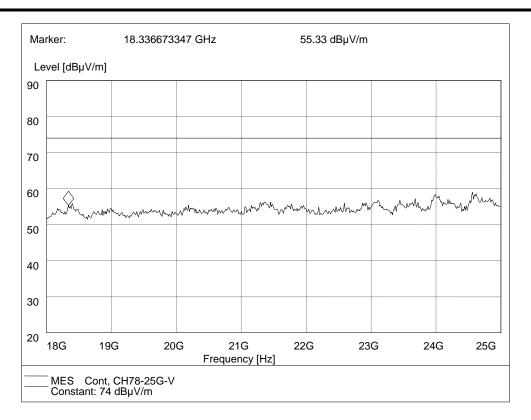


6. Highest channel, Antenna Horizontal

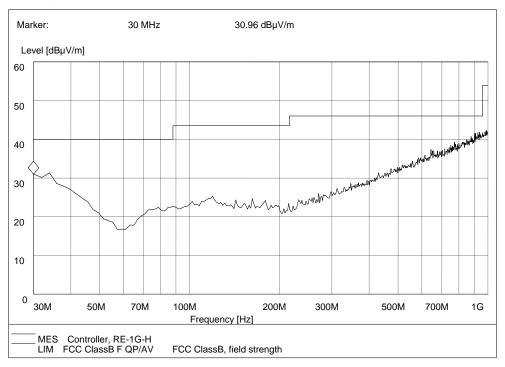




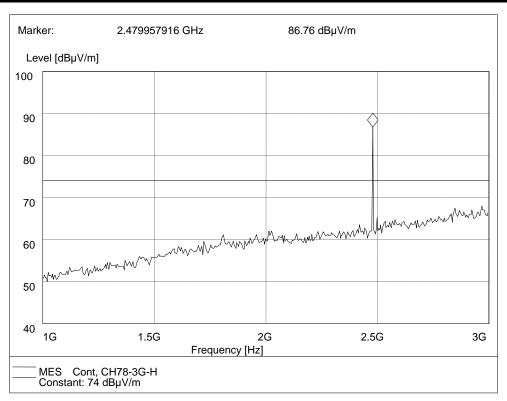

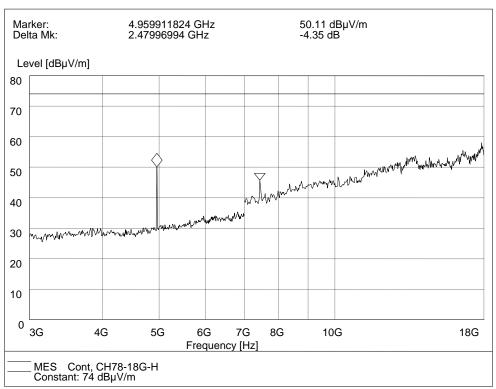



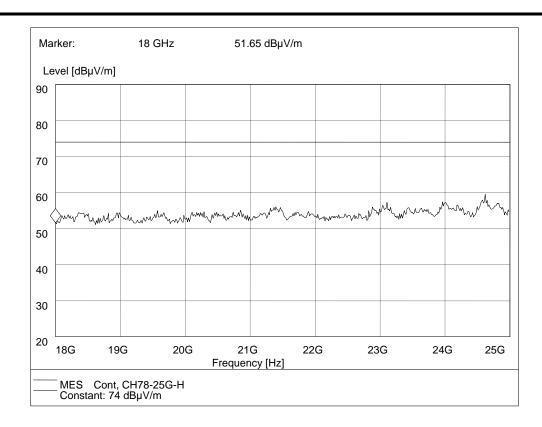



4 Bandwidth Test

4.1 Limit of bandwidth test


Intentional radiators operating under the alternative provisions to the general emission limits, as contained in 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2 Test Procedure

- a. The bandwidth measurement was performed in a full anechoic chamber. The air lost of the site and the factors of the test system is pre-calibrated using substitution method.
- b. The EUT was placed on the vertical axis of a turntable 1.8 meters above the ground. The table was turned from 0 degrees to 360 degrees to find the maximum reading.
- c. In the frequency range 30 MHz to 3 GHz, ultra-broadband bi-log antenna was used. The antenna was at the same height as the EUT. Since the there was no reflection from the chamber floor and the site was pre-calibrated, the antenna height need not to be changed as the open site method. The measurement was performed with the antenna at horizontal and vertical polarization respectively, and the worse plot was recorded..
- d. The spectrum analyzer was set to Maxpeak Detector function and Maximum Hold mode. The resolution bandwidth was set to 100kHz.



4.3 Test Setup

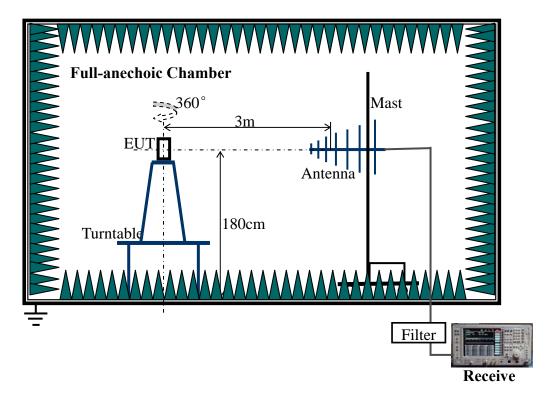

For the actual test configuration, please refer to the related item-Photographs of the Test Configuration.

4.4 EUT Setup and Operating Conditions

The EUT was set to transmit the highest RF power, both at the lowest and highest channel.

4.5 Test Results

Test Conditions		Frequency (MHz)	
		Lowest	Highest
RF channel	0	2401.66	/
RF channel	78	/	2481.37





