

# Emissions Test Report

**EUT Name:** Defibtech low-power RF transmitter

**EUT Model:** DFB-2000A

FCC Title 47, Part 15, SubpartC and RSS-210 Issue 7

FCC ID: WMR DFB-2000A

IC: 7925A-DFB2000A

Tel: (919) 554-3668, Fax: (919) 554-3542

*Prepared for:*

Ed Naclerio  
Defibtech, LLC  
741 Boston Post Road, Suite 201  
Guilford, CT 06437  
Tel: (203) 453-6654  
Fax: (203) 453-6657

*Prepared by:*

TUV Rheinland of North America  
762 Park Avenue  
Youngsville, NC 27596  
Tel: (919) 554-0901  
Fax: (919) 556-2043  
<http://www.tuv.com/>

*Report/Issue Date:* 18 June 2008

*Report Number:* 30861614.001 Test Report Rev. A

## Table of Contents

*Manufacturer:* Defibtech, LLC  
741 Boston Post Road, Suite 201  
Guilford, CT 06437  
(203) 453-6654

*Requester / Applicant:* Ed Naclerio

*Name of Equipment:* Defibtech low-power RF transmitter

*Operation Frequency Range* 433.92 MHz

*Type of Equipment:* Intentional Radiator

*Application of Regulations:* FCC Title 47, Part 15, SubpartC and RSS-210 Issue 7

*Test Dates:* 3 June 2008 to 22 Setember 2008

### *Guidance Documents:*

Emissions: FCC 47 CFR Part 15, RSS-210 Issue 7

### *Test Methods:*

Emissions: FCC 47 CFR Part 15, RSS-210 Issue 7

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland of North America, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that a sample of one, of the equipment described above, has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government. This report contains data that are not covered by NVLAP accreditation. This report shall not be reproduced except in full, without the written authorization of the laboratory.

9 October 2008

---

NVLAP Signatory

Date



Industry Canada

90552 and  
100881

IC3755



200094-0

## Table of Contents

<b>1</b>	<b>EXECUTIVE SUMMARY.....</b>	<b>5</b>
1.1	SCOPE.....	5
1.2	PURPOSE.....	5
1.3	SUMMARY OF TEST RESULTS.....	5
1.4	SPECIAL ACCESSORIES.....	5
1.5	EQUIPMENT MODIFICATIONS .....	5
<b>2</b>	<b>LABORATORY INFORMATION .....</b>	<b>6</b>
2.1	ACCREDITATIONS & ENDORSEMENTS .....	6
2.2	TEST FACILITIES.....	7
2.3	MEASUREMENT UNCERTAINTY.....	7
2.4	CALIBRATION TRACEABILITY .....	7
<b>3</b>	<b>PRODUCT INFORMATION .....</b>	<b>8</b>
3.1	EQUIPMENT CONFIGURATION .....	8
3.2	LIMITED MODULAR SUBMISSION JUSTIFICATION.....	8
<b>4</b>	<b>FCC PART 15.231 AND RSS-210 ISSUE 7, ANNEX 1 REQUIREMENTS.....</b>	<b>9</b>
4.1	DEACTIVATION PERIOD OF TRANSMITTER FCC PART 15.231(A)(2) AND RSS-210 A1.1.1(B) .....	9
4.2	BANDWIDTH FCC PART 15.231(C).....	10
4.3	BANDWIDTH RSS-210 SECTION A1.1.3 .....	11
4.4	BAND EDGE COMPLIANCE FCC PART 15.215(C).....	12
4.5	FUNDAMENTAL AND SPURIOUS EMISSIONS FCC - 15.231(B) AND RSS-210 - A1.1.2 .....	13
<b>5</b>	<b>CONDUCTED EMISSIONS.....</b>	<b>24</b>
<b>6</b>	<b>TEST EQUIPMENT USE LIST .....</b>	<b>24</b>
6.1	TEST EQUIPMENT USE LIST .....	24

## 1 Executive Summary

### 1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Title 47, Part 15, Subpart C and RSS-210 Issue 7 based on the results of testing performed on 3 June 2008 through 22 September 2008 on the *Defibtech low-power RF transmitter* Model No. *DFB-2000A* manufactured by Defibtech, LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

### 1.3 Summary of Test Results

Table 1 - Summary of Test Results

Test	Test Method(s)	Test Parameters	Measurement	Result
Deactivation period of transmitter	FCC Part 15.231(a)(2) And RSS A1.1.1(b)	Deactivate within 5 seconds	Less than 5 seconds	compliant
Bandwidth (20dB) Bandwidth (99%)	FCC Part 15.231(c) And RSS-210 A1.1.3	1.08 MHz	13.73 kHz 23.15 kHz	compliant compliant
Band edge Compliance	FCC Part 15.215(c)	Containment of 20 dB bandwidth	See section	compliant
Fundamental Frequency Field Strength	FCC Part 15.231(b)(2) and RSS-210 A1.1.2	11000 uV or 80.83 dBuV/m	79.06 dBuV/m	compliant
Spurious Emissions Field Strength	FCC Part 15.231(b)(3) and RSS-210 A1.1.2	1100 uV or 60.83 dBuV/m	60.65 dBuV/m	compliant
Spurious Emissions in Restricted Bands	FCC Part 15.231(b)(2) and RSS-210 2.6	Table FCC Part 15.209 Table 1 RSS-210	See section	compliant
Frequency Stability - Input Power Variations	FCC Part 15.31(e) and RSS-210 A1.1.4	New Battery installed	See section	compliant

### 1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

### 1.5 Equipment Modifications

No modifications were found to be necessary in order to achieve compliance.

---

## 2 Laboratory Information

### 2.1 *Accreditations & Endorsements*

#### 2.1.1 US Federal Communications Commission

TUV Rheinland of North America at the 762 Park Ave. Youngsville, N.C 27596, address is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, 18, and 90. The accreditation is updated every 3 years.

#### 2.1.2 NIST / NVLAP

TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 25 and ISO 9002 (Lab code 200094-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Canada – Industry Canada

Registration No. IC3755

#### 2.1.4 Japan - VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. R-1174 and C-1236).

#### 2.1.5 Acceptance By Mutual Recognition Arrangement

The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland of North America at the 762 Park Ave. Youngsville, N.C 27596 address test results and test reports within the scope of the laboratory NIST / NVLAP accreditation will be accepted by each member country.

## 2.2 Test Facilities

All of the test facilities are located at 762 Park Ave., Youngsville, North Carolina 27596, USA.

### 2.2.1 Emission Test Facility

The Open Area Test Site and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:2003. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:2003, at a test distance of 3 and 10 meters. This site has been described in reports dated May 12, 1997, submitted to the FCC, and accepted by letter dated June 25, 1997 (31040/SIT 1300F2). The site is listed with the FCC and accredited by NVLAP (code 200094-0). The 5m semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:2003, at a test distance of 3 meters. A report detailing this site can be obtained from TUV Rheinland of North America.

## 2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1<sup>st</sup> addition, 1995.

*The Combined Standard Uncertainty* is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities, equal to the positive square root of a sum of terms, the terms being the variances or co-variances of these other quantities weighted according to how the measurement result varies with changes in these quantities. The term standard uncertainty is the result of a measurement expressed as a standard deviation.

Radiated emissions measurements is $\pm 3.3$ dB
Conducted emissions measurements is $\pm 2.18$ dB
Harmonic current and flicker measurements is $\pm 5.0$ %
ESD immunity measurements is $\pm 8.2$ %
Radiated immunity measurements is $\pm 4.10$ dB
EFT fast transient immunity measurements is $\pm 5.84$ %
Surge immunity measurements is $\pm 5.84$ %
Conducted immunity measurements is $\pm 3.66$ dB
Magnetic field immunity measurements is $\pm 11.6$ %
Voltage variation and interruption measurements is $\pm 3.48$ %

## 2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Guide 25.

## 3 Product Information

### 3.1 Equipment Configuration

The EUT is a battery operated device, and was tested using battery packs provided by the manufacturer. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

Two units were provided for testing. One has is a normal operational device, and the second has been modified to transmit continuously, using a standard data stream. The second device was used for most of the transmitter tests.

There is no provision to connect directly to the transmitter output, so all measurements were made over the air in a complainant semi-anechoic test chamber.

The final configuration was selected to produce worse case radiation and place the EUT in the most susceptible state.

The transmitter is a single channel device that employs periodic operation on 433.2 MHz which falls under FCC part 15.231. Additional information demonstrating compliance with this section is provided in the test section of this report.

### 3.2 Limited Modular submission justification.

The transmitter is being submitted as a Limited Modular design under FCC Part 15.212(b) and RSS-GEN section 7.1.1.

The manufacturer states that the EUT will be used in the DDU-2000 series of defibrillators that will consist of 4 models; DDU-2100, DDU-2200, DDU-2300, and DDU-2400. The DDU-2200, DDU-2300, and DDU-2400 will have identical hardware. These models will be differentiated by the information that will be displayed on the LCD. The DDU-2100 will use the same control board as the other models. It will have a scaled down user-interface board, consisting only of LEDs and pushbutton switches. The control board incorporates all the primary functions to support defibrillation, as well as the radio transmitter circuit in its entirety. The different user interfaces have no functional or physical connection to the transmitter and would not effect the transmitter's operation. Therefore all interface and power connections of all four models to the transmitter will be identical to that submitted for testing.

## 4 FCC Part 15.231 and RSS-210 Issue 7, Annex 1 Requirements

Testing was performed in accordance with 47 CFR Part 15, RSS-210 Issue 7, Annex 1 and ANSI C63.4:2003. These test methods are listed under the laboratory's NVLAP Scope of Accreditation.

### 4.1 Deactivation period of transmitter FCC Part 15.231(a)(2) and RSS-210 A1.1.1(b)

A transmitter activated automatically shall cease transmission within 5 seconds after activation.

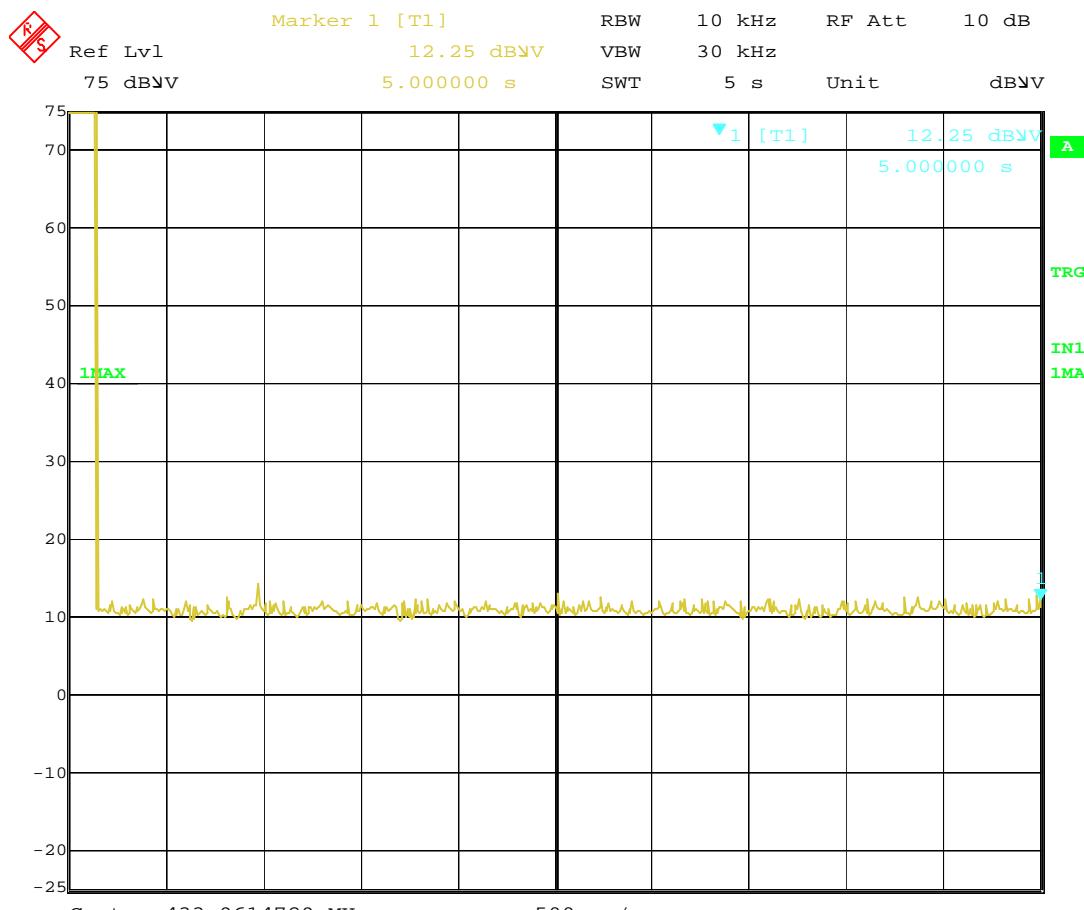


Figure 1 – Deactivation Period

Spectrum Analyzer Parameters:

RBW=10kHz

Span=0

VBW= 30kHz

LOG dB/div.= 10dB

Sweep = 5 S, front edge triggered on signal

The deactivation of transmitter is much less than a half a second, which is well below the 5 second requirement. The EUT is compliant to the requirements of 15.321(a)(2) and RSS-210 A1.1.1

## 4.2 Bandwidth FCC part 15.231(c)

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70-900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The limit of the bandwidth would be 0.25% of 433.94MHz is 1.08 MHz. The measured -20dB bandwidth is 13.73 kHz.

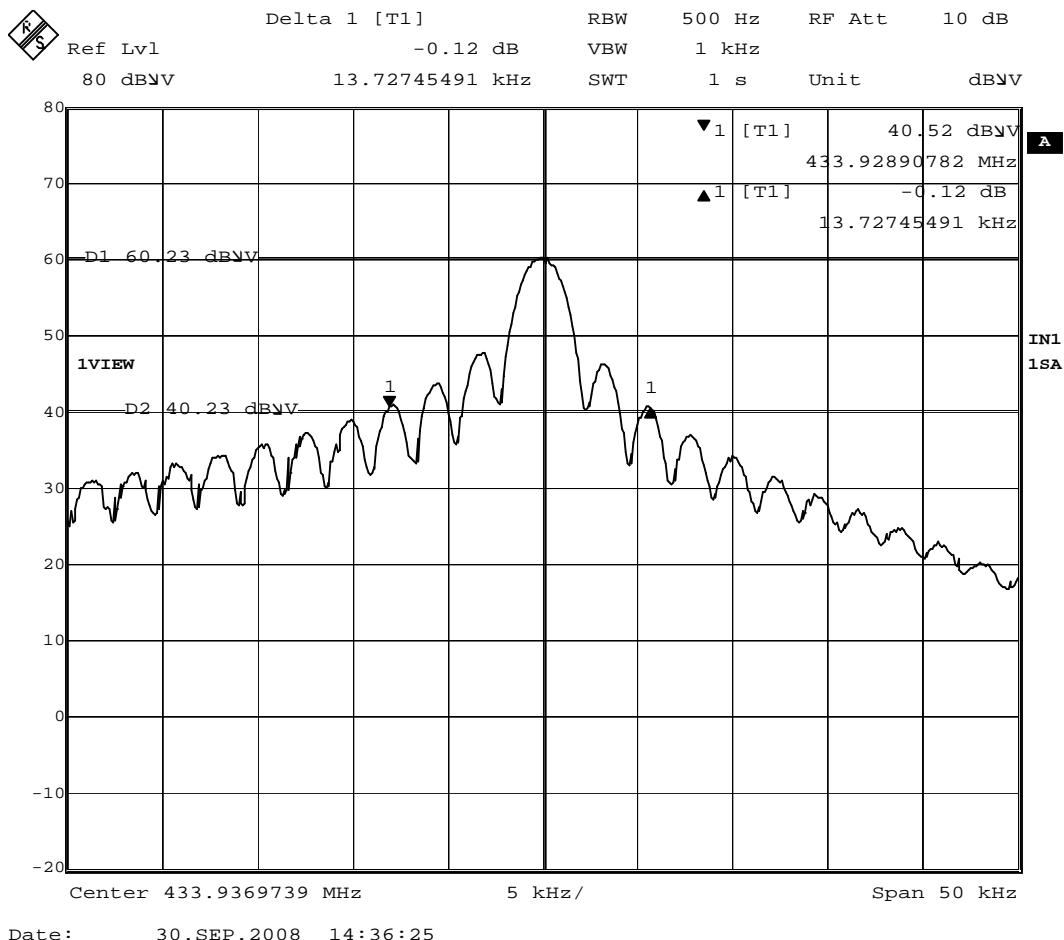


Figure 2 – 20 dB Bandwidth

Spectrum Analyzer Parameters:

RBW=500Hz

Span=50kHz

VBW=1kHz

LOG dB/div.= 10dB

Sweep = Auto

Detector = sample detector, max hold

The EUT is compliant to the requirements of part 15.231(c).

### 4.3 Bandwidth RSS-210 Section A1.1.3

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than .25% of the center frequency for devices operating between 70-900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

Using the procedures of RSS-GEN section 4.6.1, the 500 Hz resolution bandwidth is 1% of the 50 kHz span. The Video bandwidth of 1 kHz was chosen because it was the closest value to the 3x RBW value {600 Hz} that the EMC receiver would accept.

The limit of the bandwidth would be 0.25% of 433.94MHz is 1.08 MHz. The measured 99% bandwidth is 23.15 kHz.

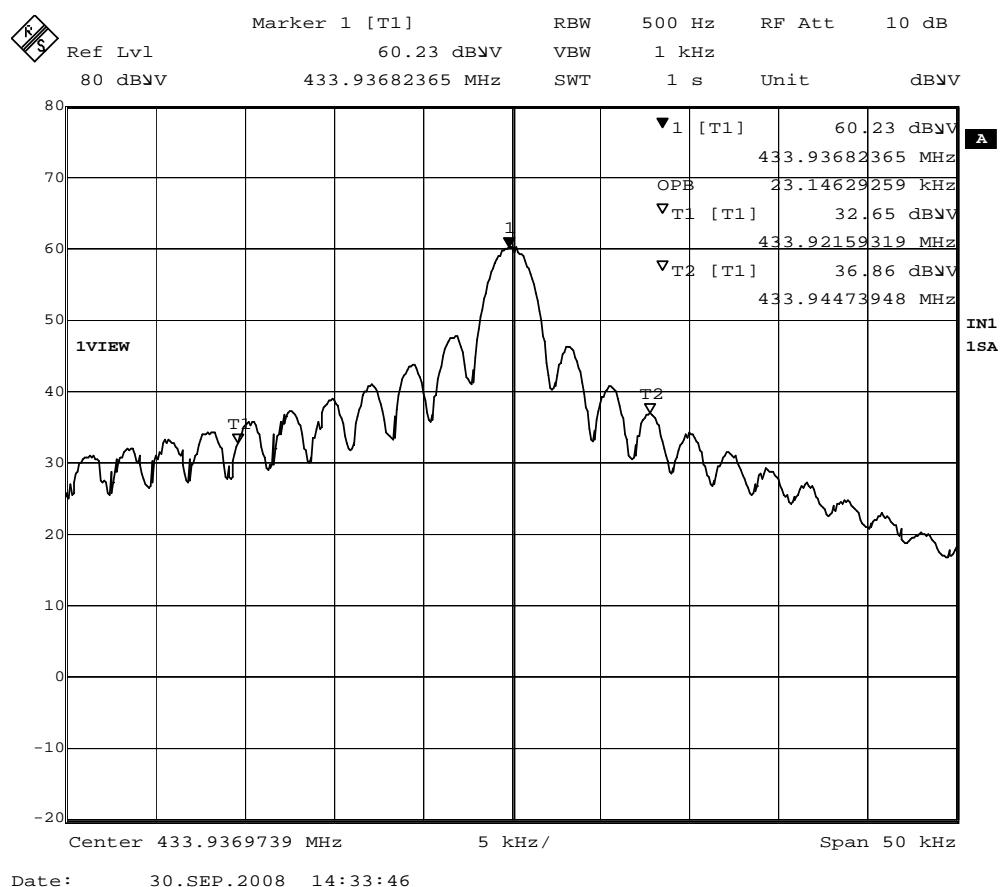


Figure 3 – 99% Bandwidth

Spectrum Analyzer Parameters:

RBW=500Hz

Span=50kHz

VBW= 1kHz

LOG dB/div.= 10dB

Sweep = Auto

Detector = sample detector, max hold

The EUT is compliant to the requirements of RSS-210 A1.1.3

#### 4.4 Band Edge Compliance FCC Parts 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

The -20dB frequencies of the signal are: 433.92880 MHz and 433.942535 MHz (13.73 kHz bandwidth)

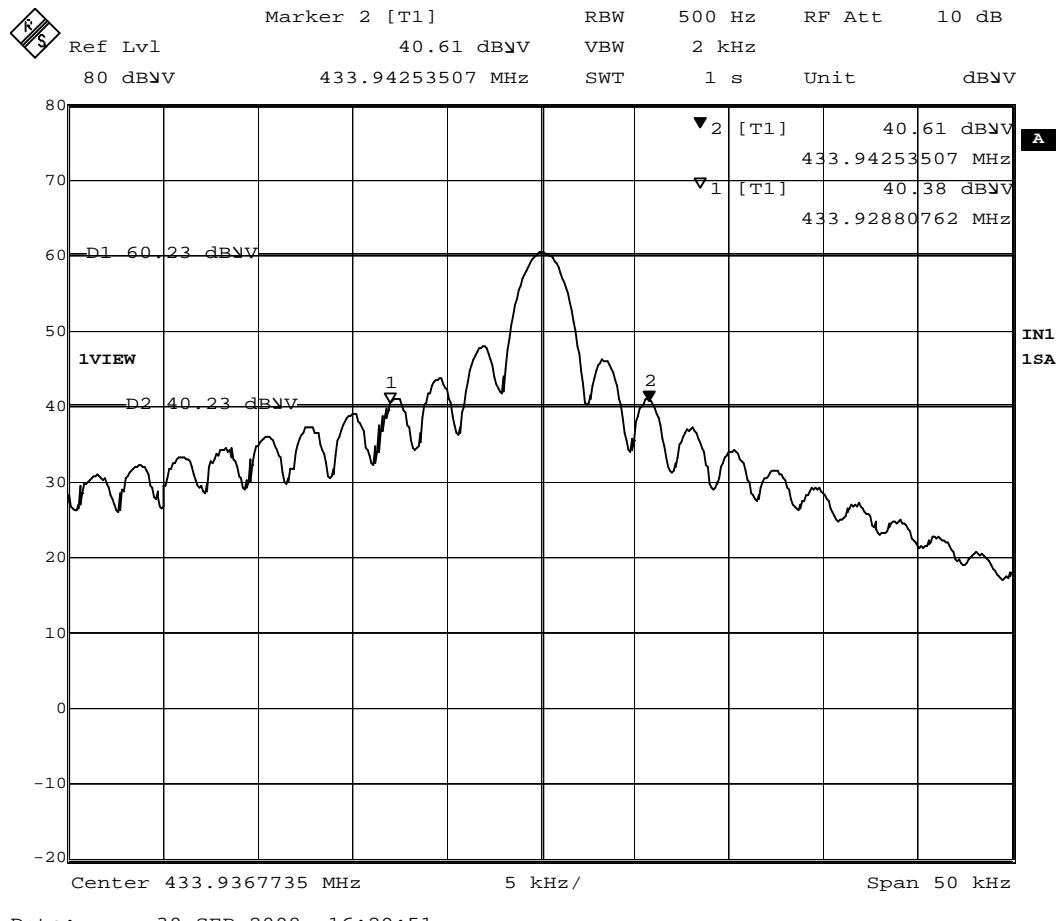


Figure 4 Band edge Compliance

Spectrum Analyzer Parameters:

RBW=500Hz

Span=50kHz

VBW= 1kHz

LOG dB/div.= 10dB

Sweep = Auto

Detector = sample detector, max hold

Both the upper and lower -20dB frequencies are well within the inner 80% of the band. The EUT is compliant to the requirements of part 15.215(c).

---

## **4.5 Fundamental and Spurious Emissions FCC - 15.231(b) and RSS-210 - A1.1.2**

### **4.5.1 Radiated Emissions**

Testing was performed in accordance with FCC 47 CFR Part 15 and RSS-210 Issue 7. The limit is derived by linear interpolation of frequency as described in FCC Part 15.231(b) and table 4 of RSS-210.

For the frequency of 433.92 MHz the limit will be 11,000 $\mu$ V at 3m, which is equivalent to 80.83dB $\mu$ V

#### **4.5.1.1 Test Methodology**

##### **4.5.1.1.1 Final Test**

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, than the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

##### **4.5.1.1.2 Deviations**

There were no deviations from this test methodology.

#### 4.5.1.2 Test Results

Fundamental measurements:

SOP 1 Radiated Emissions								Tracking # 30861614.001	Page 1 of 2	
Test Report								Rev. A		
EUT Name Defibtech low-power RF transmitter								Date 1 July 2008		
EUT Model DFB-2000A								Temp / Hum in 74 deg. F / 41 %rh		
EUT Serial N/A								Temp / Hum out N/a		
Standard FCC 47 CFR Part 15, RSS-210 Issue 7								Line AC / Freq. Internal Battery		
Deg/sweep 12 degrees								RBW / VBW 120kHz / 300kHz		
Dist/Ant Used 3 meters / 6140								Performed by Randy Sherian		
Configuration Z-plane Fundamental Emissions										
Emission	ANT	ANT	Table	FIM	Amp	Cable	ANT	E-Field	Spec	Spec
Freq (MHz)	Polar (H/V)	Pos (m)	Pos (deg)	Value (dBuV)	Gain (dB)	Loss (dB)	Factor (dB/m)	Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
Peak Measurements										
433.92	H	2.29	0	54.02	0.00	2.29	16.12	72.44		
433.92	V	1.0	104	65.71	0.00	2.29	16.84	84.84		
Average based on pulse averaging										
				Peak E-Field Value			Correction Factor	Corrected Value		
433.92	H	2.29	0	72.44			-5.78	66.66	80.83	-14.17
433.92	V	1.0	104	84.84			-5.78	79.06	80.83	-1.77
Peak Sample calculation										
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor $\pm$ Uncertainty										
Average Sample Calculation										
Spec Margin = Corrected Value - Limit, Corrected Value = Peak E-Field Value + Correction Factor										
Notes: Testing was performed in the 3 orthogonal planes to determine worse case.										
Calculation for Pulsed devices.										
Short pulses = 79 pulses at 521 uSec in 100 mSec period										
Long pulses = 10 pulses at 1.022 mSec in 100 mSec period										
Short pulses = 41.159 mSec in 100 mSec = $(79 * 521 \text{ uSec}) / (100 \text{ mSec})$										
Long pulses = 10.22 mSec in 100 mSec = $(10 * 1.022 \text{ mSec}) / (100 \text{ mSec})$										
Total on time in 100 mSec: $51.379 \text{ mSec} = (0.22 + 41.159)$										
Duty Cycle = $51.379 / 100$										
Duty Cycle = $51.379 \%$										
Correction Factor = $20 \log (.51379)$										
Correction Factor = -5.78 dB										
See plots below for supporting documentation										

As originally tested, the EUT was found to be compliant to the requirements of FCC - 15.231(b) and RSS-210 - A1.1.2.

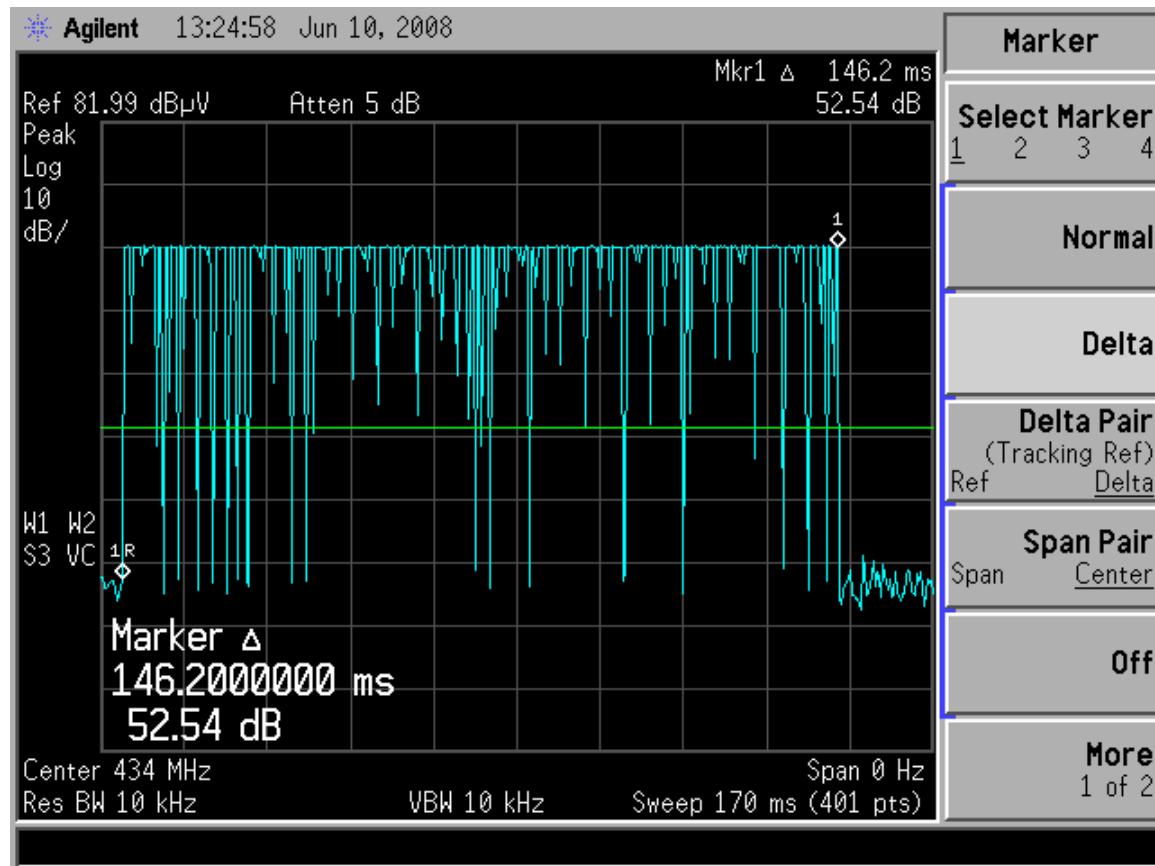


Figure 5 – Total length of Pulse Train

See table in section 4.5.1.2 of this report for calculation(s)

Spectrum Analyzer Parameters:


RBW=10kHz

Span=0

VBW= 10kHz

LOG dB/div.= 10dB

Sweep = 170 mS

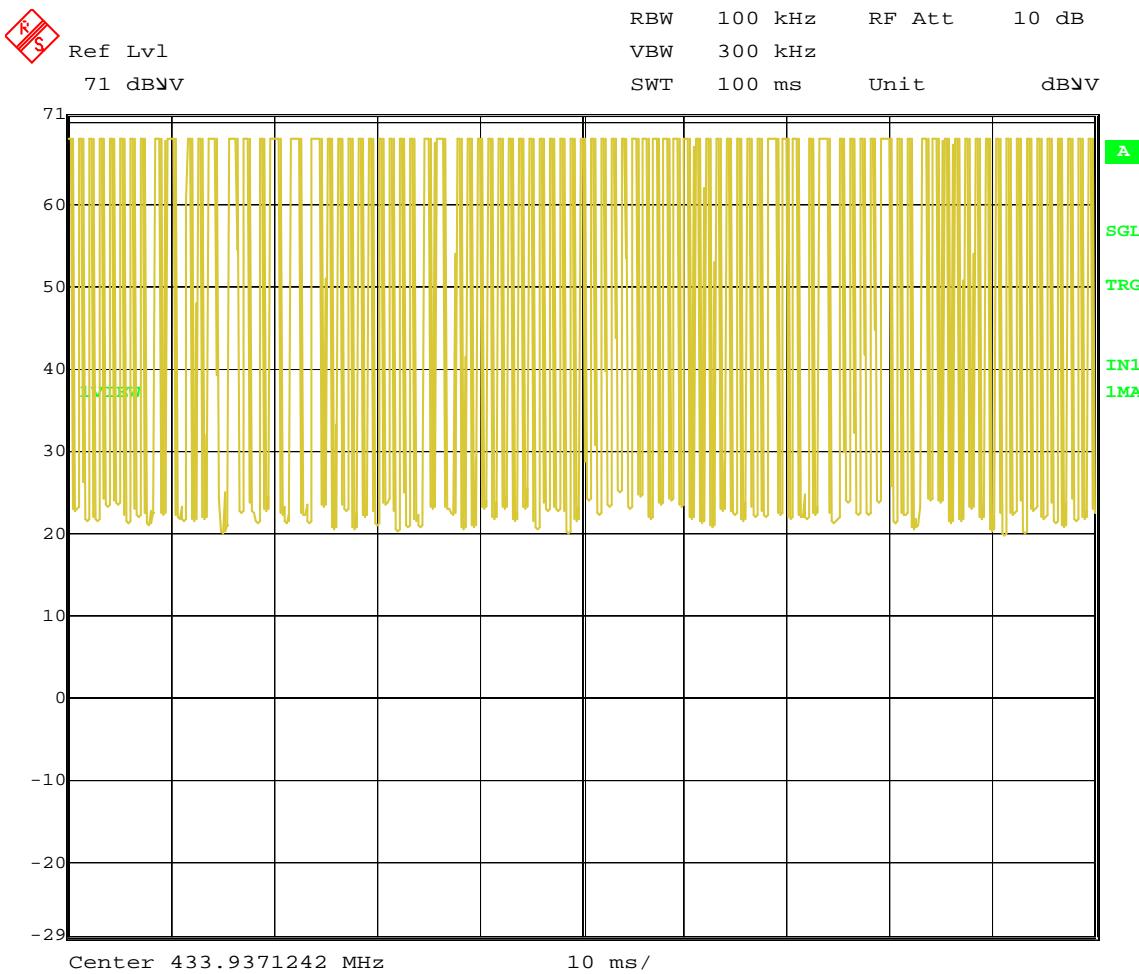

Date: 7.JUL.2008 22:57:05

Figure 6 Worse-Case in 100 ms

See table in section 4.5.1.2 of this report for calculation(s)

Spectrum Analyzer Parameters:


RBW=100kHz

Span=0

VBW= 300kHz

LOG dB/div.= 10dB

Sweep = 100 mS

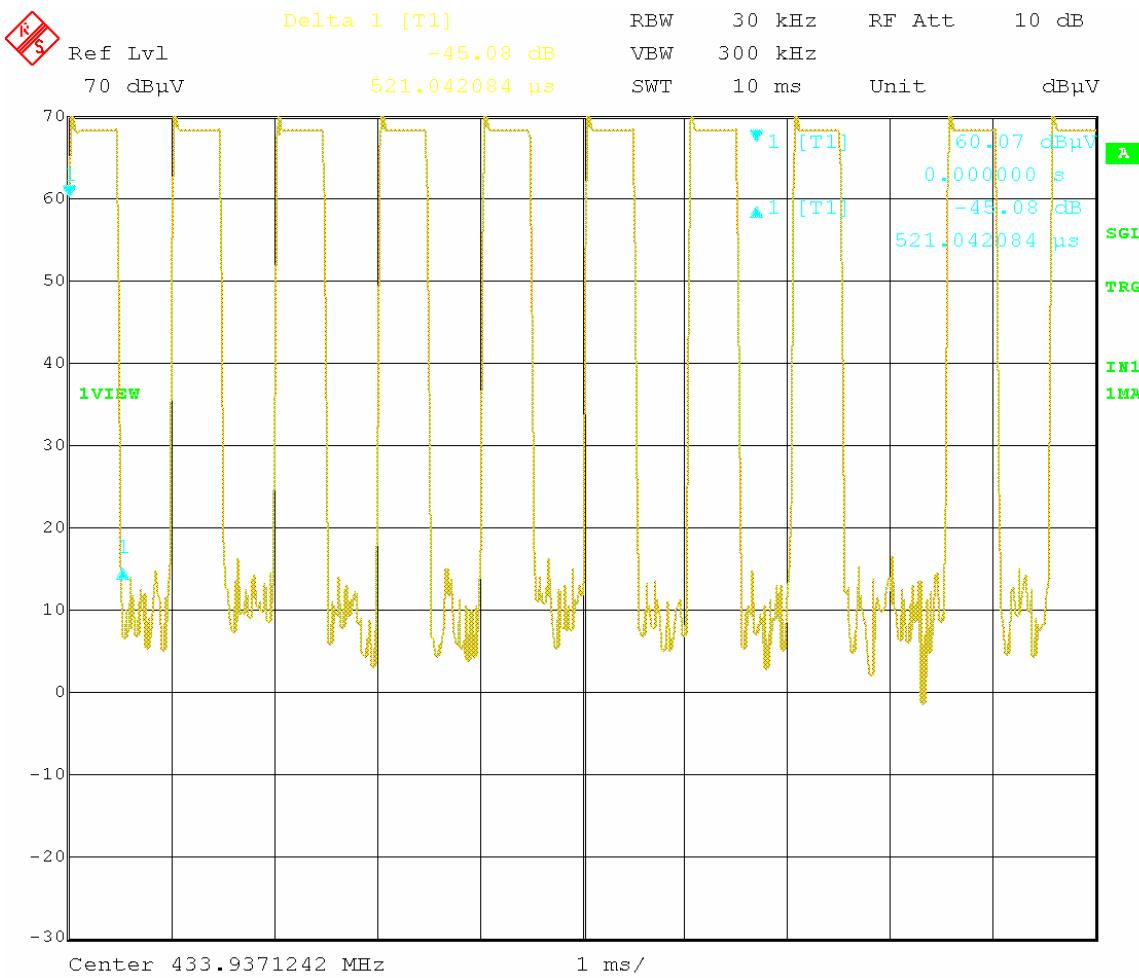

Date: 7.JUL.2008 22:25:27

Spectrum Analyzer Parameters:

RBW=120kHz

Span=200kHz


VBW= 300kHz

LOG dB/div.= 10dB

Sweep = 5 mS

Figure 7 Short Pulse

See table in section 4.5.1.2 of this report for calculation(s)

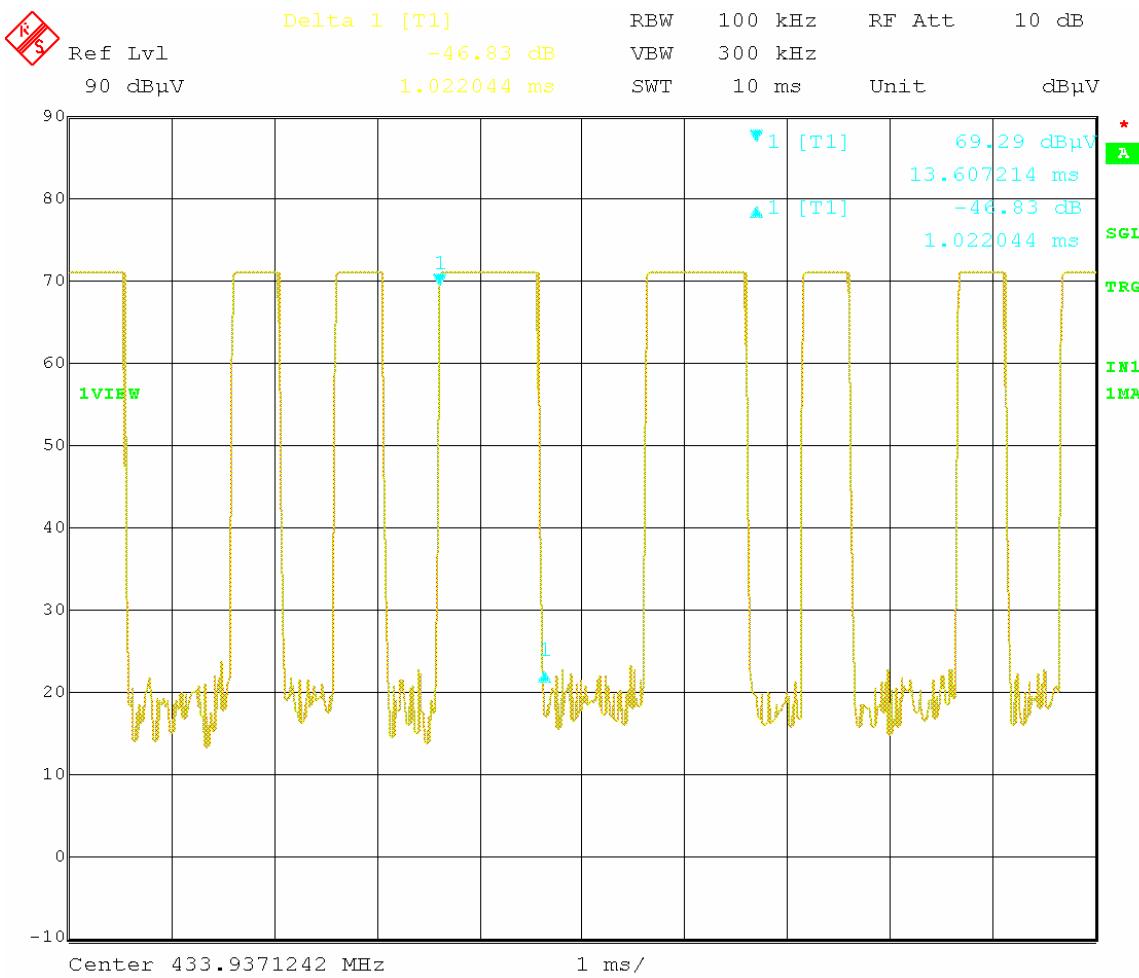

Date: 7.JUL.2008 22:51:07

Spectrum Analyzer Parameters:

RBW=100kHz

Span=0

VBW= 300kHz

LOG dB/div.= 10dB

Sweep = 10 mS

Figure 8 Long Pulse

See table in section 4.5.1.2 of this report for calculation(s)

Worst case Harmonic emissions measurements:

SOP 1 Radiated Emissions							Tracking # 30861614.001 Page 2 of 2 Test Report Rev. A				
<b>EUT Name</b>	Defibtech low-power RF transmitter						<b>Date</b>	1 July 2008			
<b>EUT Model</b>	DFB-2000A						<b>Temp / Hum in</b>	74 deg. F / 41 %rh			
<b>EUT Serial</b>	N/A						<b>Temp / Hum out</b>	N/a			
<b>Standard</b>	FCC 47 CFR Part 15, RSS-210 Issue 7						<b>Line AC / Freq.</b>	Internal Battery			
<b>Deg/sweep</b>	12 degrees						<b>RBW / VBW</b>	See notes below			
<b>Dist/Ant Used</b>	3 meters / 6140						<b>Performed by</b>	Randy Sherian			
<b>Configuration</b>	Z-plane Spurious Emissions										
Emission	ANT Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
Peak Measurements											
867.92	H	1.0	341	40.96	0.00	3.35	22.10	66.41	80.83	-14.42	
867.92	V	1.09	140	43.89	0.00	3.35	21.80	69.04	80.83	-11.79	
1735.84	H	1.0	233	44.99	36.28	6.13	26.48	41.33	80.83	-39.5	
1735.84	V	1.08	149	48.33	36.28	6.13	26.30	44.48	80.83	-36.35	
Average Measurements											
867.92	H	1.0	341	33.13	0.00	3.35	22.10	58.58	60.83	-2.25	
867.92	V	1.09	140	35.50	0.00	3.35	21.80	60.65	60.83	-0.18	
1735.84	H	1.0	233	33.51	36.28	6.13	26.48	29.85	60.83	-30.98	
1735.84	V	1.08	149	37.19	36.28	6.13	26.30	33.34	60.83	-27.49	
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor $\pm$ Uncertainty											
Notes: Testing was performed in the 3 orthogonal planes to determine worse case. The RBW / VBW during measurements above 1GHz was 1 MHz / 3 MHz The RBW / VBW during measurements below 1GHz was 120 kHz / 300 kHz											
60.83 dB $\mu$ V is equivalent to 1100 $\mu$ V (the limit for 433.92MHz per table 4 of RSS-210).											

Spectrum Analyzer Parameters:

RBW=120kHz

VBW= 300kHz



LOG dB/div.= 10dB

Sweep = Auto

Detectors = Peak (digital averaging used for average values)



Using the provisions of part 15.35 for averaging pulsed emissions and for limiting peak emissions apply. The digital averaging was calculated, and 20dB was added to the Average limit for the Peak emissions requirements of that same part.

Per part 15.33(a)(1), the EUT will be tested for spurs and harmonics to the 10<sup>th</sup> harmonic of the highest frequency. The highest frequency is 433.92 MHz. The 10<sup>th</sup> harmonic would be 4.24 GHz. The EUT was investigated to 5 GHz.

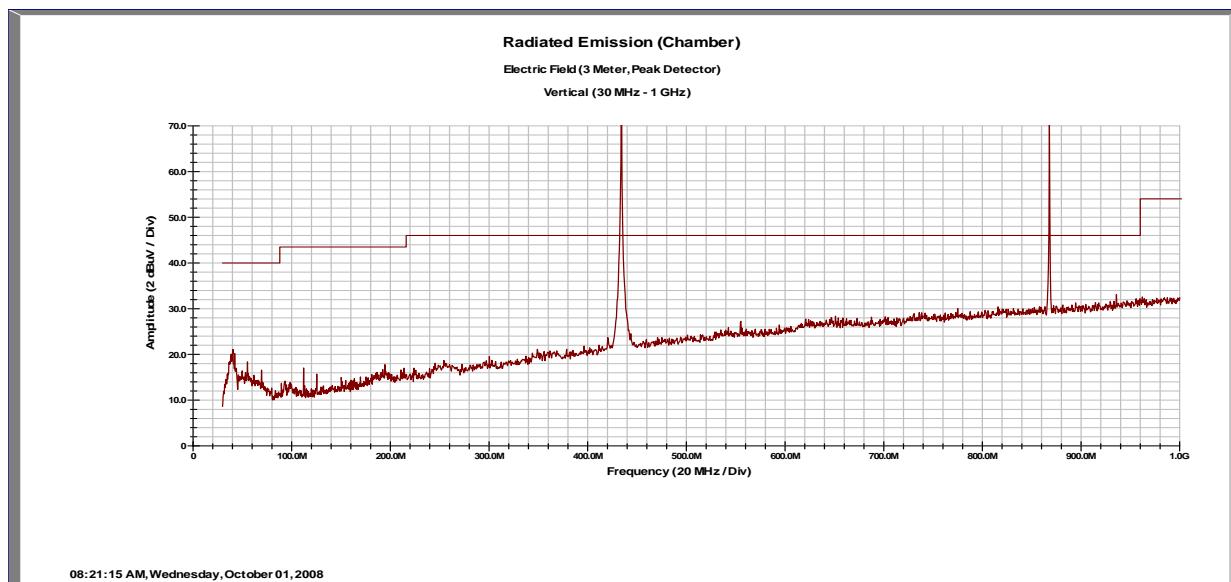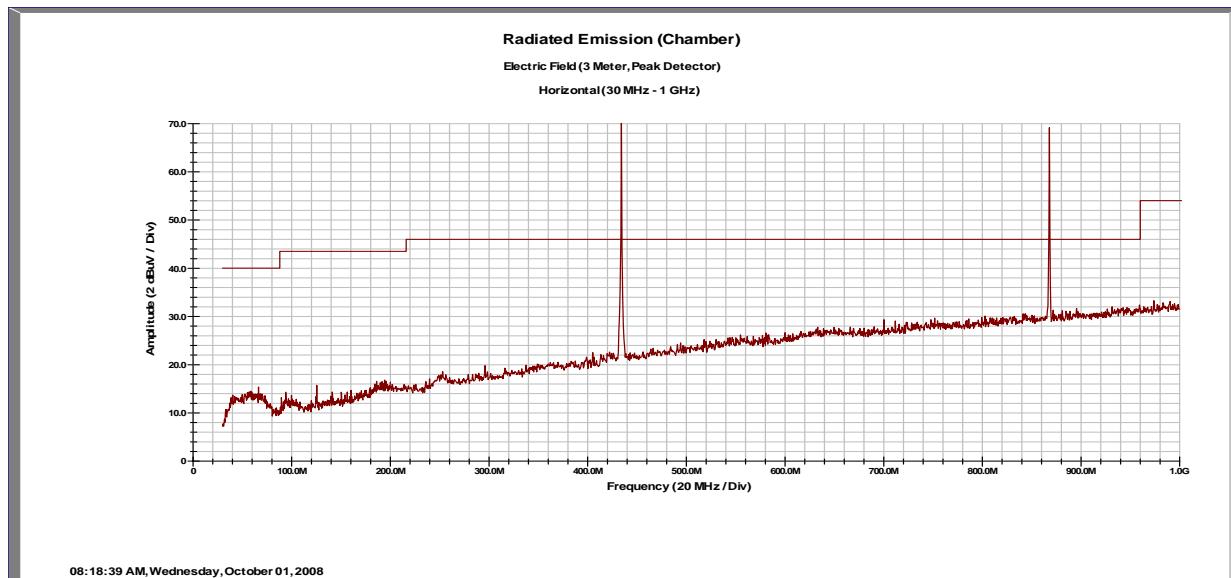

#### Transmit spurs and harmonics Plot 30MHz – 1 GHz

15.209 average limit line shown (applicable only to spurs and harmonic emissions in the restricted bands)

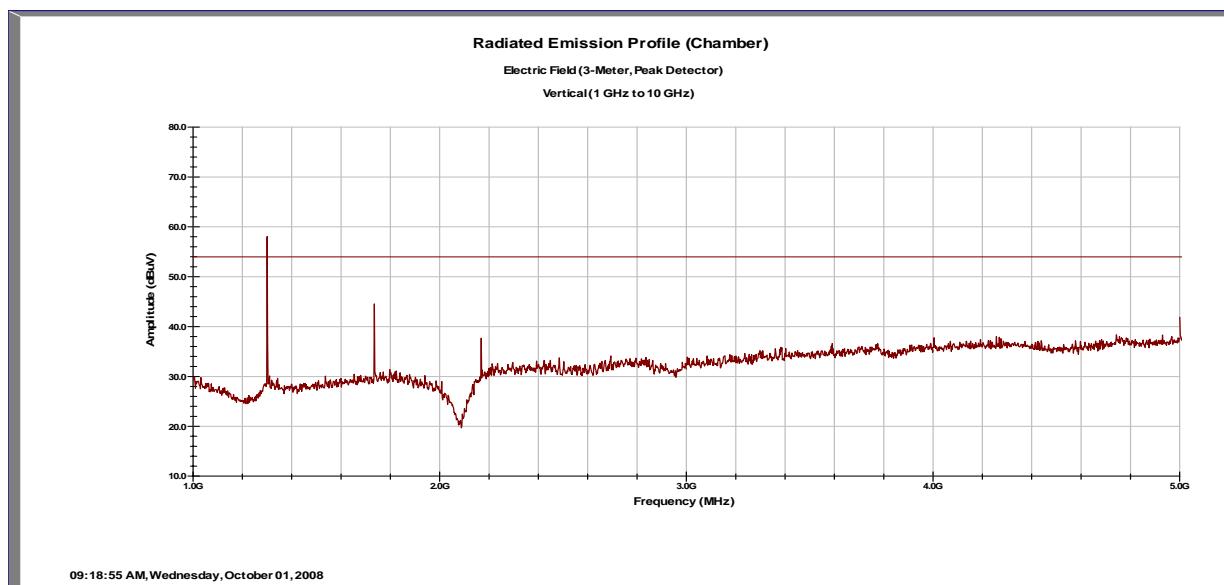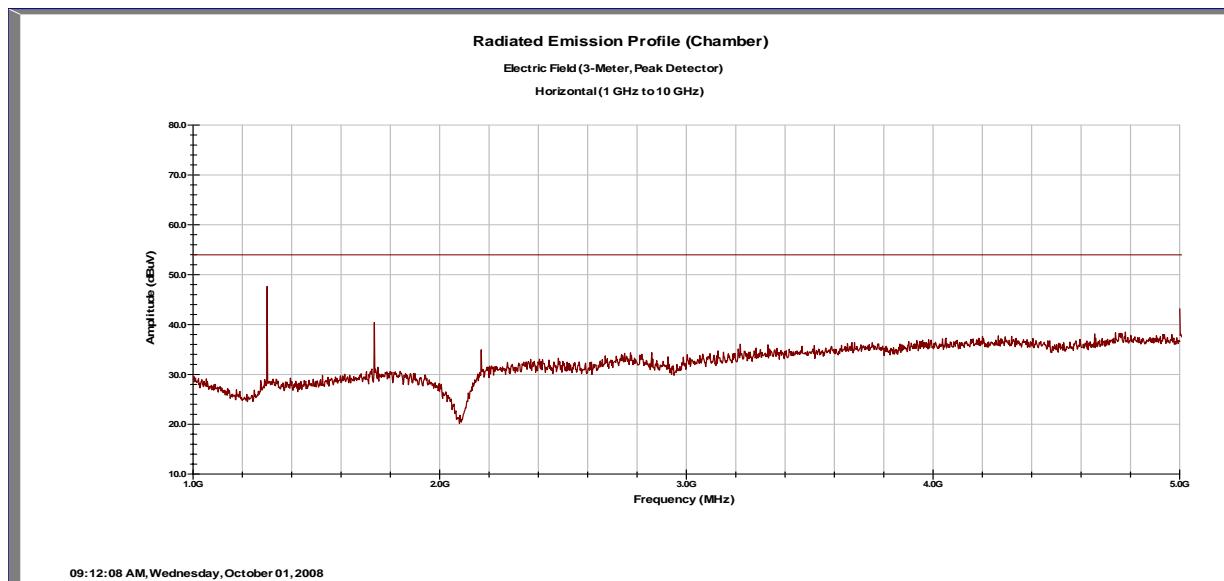

#### Transmit spurs and harmonics Plot 1 GHz – 5 GHz

15.209 average limit line shown (applicable to restricted bands)

Note: Except for the fundamental and up to the 3<sup>rd</sup> harmonic, all measured emissions (using a peak detector) are well below the Part 15.209 average limit. See section 4.5.2 of this test report for the 3<sup>rd</sup> harmonic measurement in the restricted band.

## 4.5.2 Restricted Band Measurements FCC part 15.231(b)(2) and RSS-210 2.6

### 4.5.2.1 Test Methodology

#### 4.5.2.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 300 kHz and provide a reading at each frequency for each 6° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

#### 4.5.2.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT is the same as for preliminary testing and is shown in the test setup photographs.

#### 4.5.2.1.3 Deviations

There were no deviations from this test methodology.

### 4.5.2.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of part 15.231(b)(2) and RSS-210 2.6.

**SOP 1 Radiated Emissions**

Tracking # 30861614.001 Page 1 of 1  
 Test Report  
 Rev. A

<b>EUT Name</b>	Defibtech low-power RF transmitter						<b>Date</b>	1 July 2008		
<b>EUT Model</b>	DFB-2000A						<b>Temp / Hum in</b>	74 deg. F / 41 %rh		
<b>EUT Serial</b>	N/A						<b>Temp / Hum out</b>	N/a		
<b>Standard</b>	FCC 47 CFR Part 15, RSS-210 Issue 7						<b>Line AC / Freq.</b>	Internal Battery		
<b>Deg/sweep</b>	12 degrees						<b>RBW / VBW</b>	1 MHz / 3MHz		
<b>Dist/Ant Used</b>	3 meters / 3115						<b>Performed by</b>	Randy Sherian		
<b>Configuration</b>	Z-plane									
Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
Peak										
1301.88	H	1.09	186	62.90	36.58	5.26	24.81	56.39	74.00	-17.61
1301.88	V	1.0	262	69.18	36.58	5.26	24.85	62.71	74.00	-11.29
Average										
1301.88	H	1.09	186	55.06	36.58	5.26	24.81	48.55	54.00	-5.45
1301.88	V	1.0	262	60.40	36.58	5.26	24.85	53.93	54.00	-0.07
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor $\pm$ Uncertainty										
Notes: Refer to plots in section 4.5.1.2 in this test report										
Testing was performed in the 3 orthogonal planes to determine worse case.										

Spectrum Analyzer Parameters:

RBW=1MHz

VBW= 3MHz

LOG dB/div.= 10dB

Sweep = Auto

#### 4.5.3 Variations in Voltage FCC Part 15.31(e) and RSS-210 A1.1.4

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

Voltage	Peak E-Field Reading Before New Battery	Peak E-Field Reading After New Battery	Results
New Internal Battery	84.83 dBuV/m	84.83 dBuV/m	Pass

Spectrum Analyzer Parameters:

RBW=120kHz

Span=200kHz

VBW= 300kHz

LOG dB/div.= 10dB

Sweep = 5 mS

As originally tested, the EUT was found to be compliant to the requirements of Part 15.31(e) and RSS-210 A1.1.4

## 5 Conducted Emissions

The EUT is battery operated; therefore testing in accordance with FCC 47 CFR Part 15 and RSS-210 Issue 7 is not applicable.

## 6 Test Equipment Use List

### 6.1 Test Equipment use list

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mmm/yy	Next Cal dd/mmm/yy
SOP 1 - Radiated Emissions (5 Meter Chamber)					
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	30-Jan-2008	30-Jan-2009
Antenna Horn 1-18GHz	EMCO	3115	2236	25-Jan-2007	25-Jan-2009
Ant. BiconiLog	Chase	CBL6140A	1108	13-Jun-2008	13-Jun-2010
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	9-Jun-2008	9-Jun-2009
Spectrum Analyzer	Agilent Tec.	E7405A	US39440161	29-Jun-2007	29-Jun-2008
Cable, Coax	Andrew	FSJ1-50A	003	30-Jan-2008	30-Jan-2009
Cable, Coax	Andrew	FSJ1-50A	030	30-Jan-2008	30-Jan-2009
Cable, Coax	Andrew	FSJ1-50A	045	30-Jan-2008	30-Jan-2009
General Laboratory Equipment					
Meter, Multi	Fluke	79-3	69200606	3-Dec-07	3-Dec-08
Meter, Temp/Humid/Barom	Fisher	02-400	01	3-Dec-07	3-Dec-08