



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No......: **CTC20221569E02**

FCC ID.....: **WNA-GN256VH**

Applicant.....: **Shenzhen Skyworth Digital Technology Co.,LTD**

Address.....: 14/F,Block A,Skyworth Building,Gaoxin Ave.1.S.,Nanshan District,Shenzhen,China

Manufacturer 1.....: Shenzhen Skyworth Digital Technology Co.,LTD

Address.....: 14/F,Block A,Skyworth Building,Gaoxin Ave.1.S.,Nanshan District,Shenzhen,China

Product Name.....: **GPON ONT**

Trade Mark.....: /

Model/Type reference: GN256VH

Listed Model(s): WN37A, GN256V, GN256

Standard.....: **FCC Part 15, Subpart E 15. 407**

Date of receipt of test sample...: Aug. 16, 2022

Date of testing.....: Aug. 16, 2022 to Oct.8, 2022

Date of issue.....: Oct. 9, 2022

Result.....: **PASS**

Compiled by:

(Printed name+signature) Lucy Lan

Lucy Lan

Supervised by:

(Printed name+signature) Miller Ma

Miller Ma

Approved by:

(Printed name+signature) Totti Zhao

Totti Zhao

Testing Laboratory Name: **CTC Laboratories, Inc.**

Address: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. ACCESSORY EQUIPMENT INFORMATION	10
2.4. OPERATION STATE	10
2.5. MEASUREMENT INSTRUMENTS LIST	12
3. TEST ITEM AND RESULTS	13
3.1. CONDUCTED EMISSION	13
3.2. RADIATED EMISSION	16
3.3. BAND EDGE EMISSIONS	92
3.4. BANDWIDTH TEST	175
3.5. OUTPUT POWER TEST	177
3.6. POWER SPECTRAL DENSITY TEST	179
3.7. FREQUENCY STABILITY MEASUREMENT	181
3.8. ANTENNA REQUIREMENT	182
APPENDIX A1: EMISSION BANDWIDTH	183
APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH	225
APPENDIX A3: MIN EMISSION BANDWIDTH	267
APPENDIX B: MAXIMUM CONDUCTED OUTPUT POWER	278
APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY	281
APPENDIX D: FREQUENCY STABILITY	324
APPENDIX E: DUTY CYCLE	332



1. TEST SUMMARY

1.1. Test Standards


The tests were performed according to following standards:

[FCC Part 15, Subpart E\(15.407\)](#) — for 802.11a/n/ac, the test procedure follows the FCC KDB 789033 D02 General UNII Test Procedures New Rules V02r01.

[RSS-Gen](#) — General Requirements for Compliance of Radio Apparatus

1.2. Report version

Revised No.	Date of issue	Description
01	Oct. 9, 2022	Original




1.3. Test Description

FCC Part 15 Subpart E (15.407)			
Test Item	Test require	Result	Test Engineer
	FCC		
Antenna Requirement	15.203	Pass	Alicia Liu
Conducted Emission	15.207	Pass	Alicia Liu
Band Edge Emissions	15.407(b)	Pass	Alicia Liu
26dB Bandwidth & 99% Bandwidth	15.407(a) (5)	Pass	Alicia Liu
6dB Bandwidth (only for UNII-3)	15.407(e)	Pass	Alicia Liu
Peak Output Power	15.407(a)	Pass	Alicia Liu
Power Spectral Density	15.407(a)	Pass	Alicia Liu
Transmitter Radiated Spurious Emission	15.407(b) & 15.209	Pass	Alicia Liu
Frequency Stability	15.407(g)	Pass	Alicia Liu
Dynamic Frequency Selection (DFS)	15.407(h)	Pass	Alicia Liu

Note:

1. "N/A" is not applicable. The measurement uncertainty is not included in the test result.
2. Dynamic Frequency Selection (DFS), please reference to the test report No.: CTC20221569E03





1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5365

CTC Laboratories, Inc. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation. Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.42 dB	(1)
Transmitter power Radiated	2.14 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.20 dB	(1)
Radiated Emissions 30~1000MHz	4.70 dB	(1)
Radiated Emissions 1~18GHz	5.00 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

1.6. Environmental conditions

Normal Condition	Temperature	22 °C ~ 28°C
	Relative humidity	50% ~ 65%
	Voltage	The equipment shall be the nominal voltage for which the equipment was designed.
Extreme Condition	Temperature	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer
	Voltage	Measurements shall be made over the extremes of the operating temperature range as declared by the manufacturer

Normal Condition	T _N =Normal Temperature	22 °C ~ 28°C
Extreme Condition	T _L =Lower Temperature	0 °C
	T _H =Higher Temperature	45 °C






2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen Skyworth Digital Technology Co.,LTD
Address:	14/F, Block A, Skyworth Building, Gaoxin Ave.1.S., Nanshan District, Shenzhen, China
Manufacturer 1:	Shenzhen Skyworth Digital Technology Co.,LTD
Address:	14/F, Block A, Skyworth Building, Gaoxin Ave.1.S.,Nanshan District, Shenzhen, China
Factory:	Shenzhen Skyworth Digital Technology Co.,LTD. Baoan Branch Factory
Address:	2-5F,Integration Multi-Storied Building, Skyworth Science and Technology Industrial Park, Tangtou Industrial Zone, Shiyan Street, Baoan District, Shenzhen city, China



2.2. General Description of EUT

Product Name:	GPON ONT
Trade Mark:	/
Model/Type reference:	GN256VH
Listed Model(s):	WN37A, GN256V, GN256
Product Appearance Description:	All these models are identical in the same PCB, layout and electrical circuit, Different is trade mark and model number.
Power supply:	DC12V 1.5A from AC/DC Adapter
Adapter Model:	BY-SKY120150U70P ^{Note1} Input: 100-240V~ 50/60Hz 0.6A Output: 12Vdc/1.5A
Hardware version:	/
Software version:	/
Antenna Type:	External Antenna
Antenna Gain 1:	5dBi
Antenna Gain 2:	5dBi

Note :

1. BY-SKY120150UYYP(YY=00-99, 2 digits, Represent different marketing purpose only, does not affect the safety and electromagnetic compatibility)



Technical index for 5G WIFI					
Operation Band:	☒ U-NII-1	☒ U-NII-2A	☒ U-NII-2C		☒ U-NII-3
Operation Frequency Range:	U-NII-1:	5150MHz~5250MHz			
	U-NII-2A:	5250MHz~5350MHz			
	U-NII-2C:	5470MHz~5600MHz; 5650MHz~5725MHz			
	U-NII-3:	5725MHz~5850MHz			
Support bandwidth:	802.11a	☒ 20MHz			
	802.11n	☒ 20MHz	☒ 40MHz		
	802.11ac	☒ 20MHz	☒ 40MHz	☒ 80MHz	☐ 160MHz
Modulation:	802.11a: OFDM (BIT/SK, QPSK, BPSK, 16QAM) 802.11n: OFDM (BIT/SK, QPSK, BPSK, 16QAM, 64QAM) 802.11ac: OFDM (BIT/SK, QPSK, BPSK, 16QAM, 64QAM, 256QAM)				
Bit Rate of Transmitter:	802.11a: 6/9/12/18/24/36/48/54 Mbps 802.11n: up to 300Mbps 802.11ac: at most 866.7 Mbps				

Remark: This device does not transmit any beacons or initiate any transmissions in UNII Band 2A or 2C.



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14 G3ACL	/	Lenovo

2.4. Operation state


Operation Frequency List:

Band (MHz)	20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	36	5180	38	5190	42	5210
	40	5200				
	44	5220	46	5230		
	48	5240				
U-NII-2A	52	5260	54	5270	58	5290
	56	5280				
	60	5300	62	5310		
	64	5320				
U-NII-2C	100	5500	102	5510	106	5530
	104	5520				
	108	5540	110	5550		
	112	5560				
	116	5580	134	5670		
	132	5660				
	136	5680				
	140	5700				
U-NII-3	149	5745	151	5755	155	5775
	153	5765				
	157	5785	159	5795		
	161	5805				
	165	5825				

Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain(dBi)
1	NA	NA	External Antenna	IPEX	5
2	NA	NA	External Antenna	IPEX	5

Note: Antenna Gain=5dBi. This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain = $G_{Ant} + 10\log(N)$ dBi, that is Directional gain = $5 + 10\log(2)$ dBi = 8; So, the UNII-1, UNII-3 output power limit is $30 - 8 + 6 = 28$, the UNII-2A, UNII-2C output power limit is $23.98 - 8 + 6 = 21.98$. The UNII-1 power spectral density limit is $17 - 8 + 6 = 15$, UNII-2A, UNII-2C power spectral density limit is $11 - 8 + 6 = 9$, the UNII-3 power spectral density limit is $30 - 8 + 6 = 28$.



Test channel is below:

Operating Band	Test Channel	20MHz		40MHz		80MHz	
		Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
U-NII-1	CH _L	36	5180	38	5190	/	/
	CH _M	40	5200	/	/	42	5210
	CH _H	48	5240	46	5230	/	/
U-NII-2A	CH _L	52	5260	54	5270	/	/
	CH _M	56	5280	/	/	58	5290
	CH _H	64	5320	62	5310	/	/
U-NII-2C	CH _L	100	5500	102	5510	/	/
	CH _M	116	5580	110	5550	106	5530
	CH _H	140	5700	134	5670	/	/
U-NII-3	CH _L	149	5745	151	5755	/	/
	CH _M	157	5785	/	/	155	5775
	CH _H	165	5825	159	5795	/	/


Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11a	6Mbps
802.11n(HT20)/ 802.11n(HT40)	HT-MCS8
802.11ac(VHT20)/ 802.11ac(VHT40)/ 802.11ac(VHT80)	VHT-MCS0

Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Keysight	N9020A	MY46471737	Dec.23, 2022
2	Spectrum Analyzer	Rohde & Schwarz	FUV40-N	101331	Mar. 15, 2023
3	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec.23, 2022
4	Signal Generator	Agilent	E8257D	MY46521908	Dec.23, 2022
5	Power Sensor	Agilent	U2021XA	MY5365004	Mar. 15, 2023
6	Power Sensor	Agilent	U2021XA	MY5365006	Mar. 15, 2023
7	Simultaneous Sampling DAQ	Agilent	U2531A	TW54493510	Mar. 15, 2023
8	Climate Chamber	TABAI	PR-4G	A8708055	Dec.23, 2022
9	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	116410	Dec.23, 2022
10	Climate Chamber	ESPEC	MT3065	/	Dec.23, 2022
11	300328 v2.2.2 test system	TONSCEND	v2.6	/	/

Radiated emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-759	Nov. 09, 2022
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 23, 2022
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 23, 2022
4	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 23, 2022
5	Microwave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 23, 2022
6	3m chamber 3	YIHENG	EE106	/	Sep. 09, 2023

Conducted emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 23, 2022
2	LISN	R&S	ENV216	101113	Dec. 23, 2022
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 23, 2022
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 23, 2022
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 23, 2022

Note: 1. The Cal. Interval was one year.

2. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

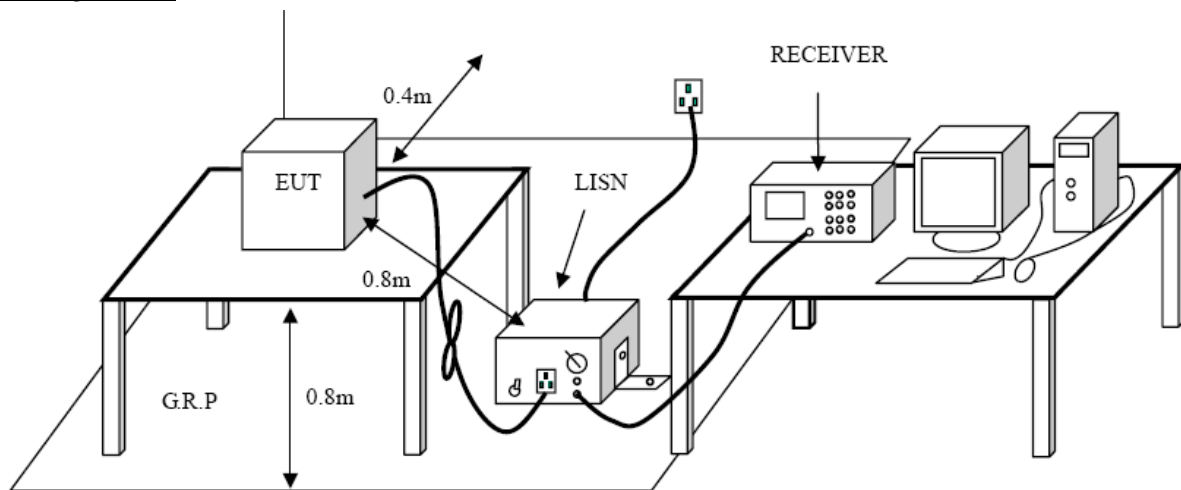

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

**Test Results**

Test Voltage:	AC 120V/60 Hz
Terminal:	Line

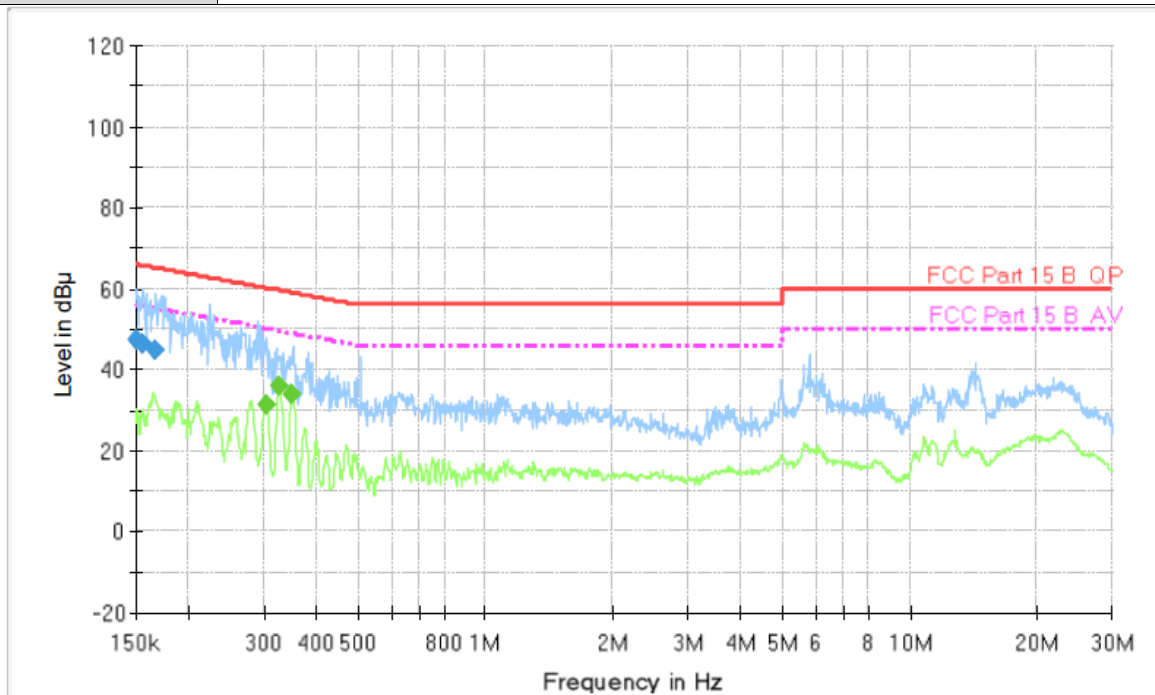**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150600	47.3	1000.00	9.000	On	L1	9.7	18.7	66.0	
0.155490	46.4	1000.00	9.000	On	L1	9.7	19.3	65.7	
0.167070	44.7	1000.00	9.000	On	L1	9.7	20.4	65.1	


Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.304060	31.5	1000.00	9.000	On	L1	9.7	18.6	50.1	
0.326710	35.7	1000.00	9.000	On	L1	9.7	13.8	49.5	
0.349650	33.8	1000.00	9.000	On	L1	9.7	15.2	49.0	

Emission Level= Read Level+ Correct Factor



Test Voltage:	AC 120V/60 Hz
Terminal:	Neutral

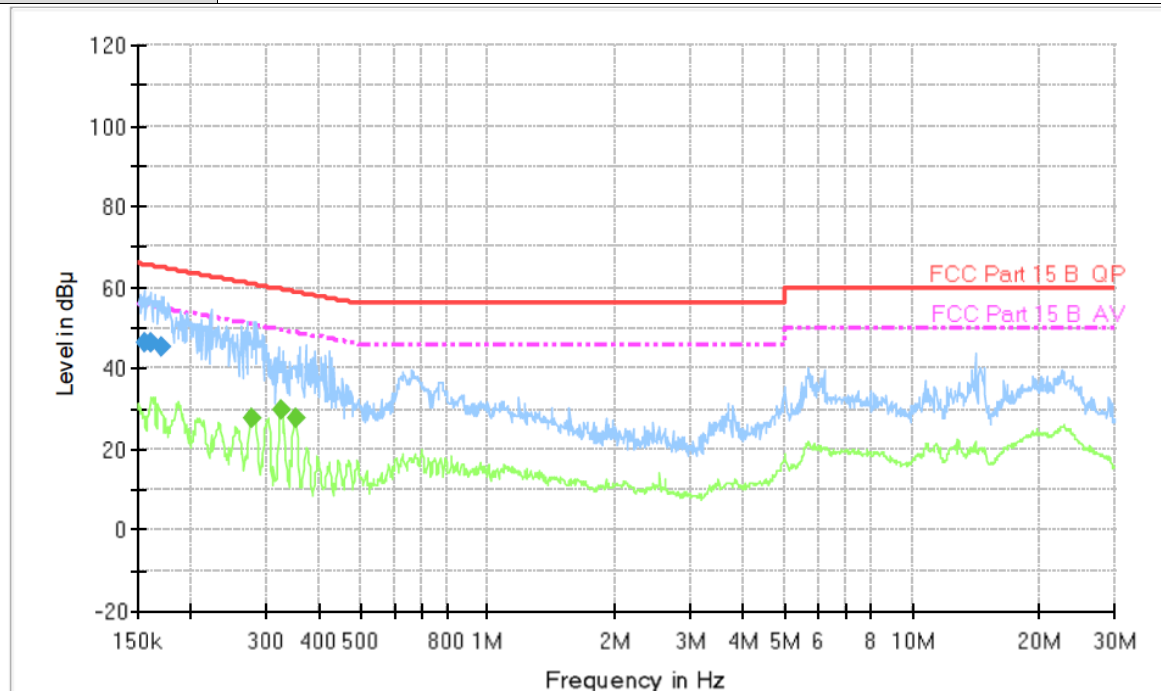

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.154870	46.4	1000.00	9.000	On	N	10.0	19.3	65.7	
0.159890	46.5	1000.00	9.000	On	N	10.0	19.0	65.5	
0.169760	45.4	1000.00	9.000	On	N	10.0	19.6	65.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.277390	27.9	1000.00	9.000	On	N	10.0	23.0	50.9	
0.324110	29.5	1000.00	9.000	On	N	10.0	20.1	49.6	
0.351050	27.6	1000.00	9.000	On	N	10.0	21.3	48.9	

Emission Level= Read Level+ Correct Factor



3.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)= 20log Emission Level (uV/m).

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart C Section 15.407(b)


Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field


strength: $E = \frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.


Test Configuration

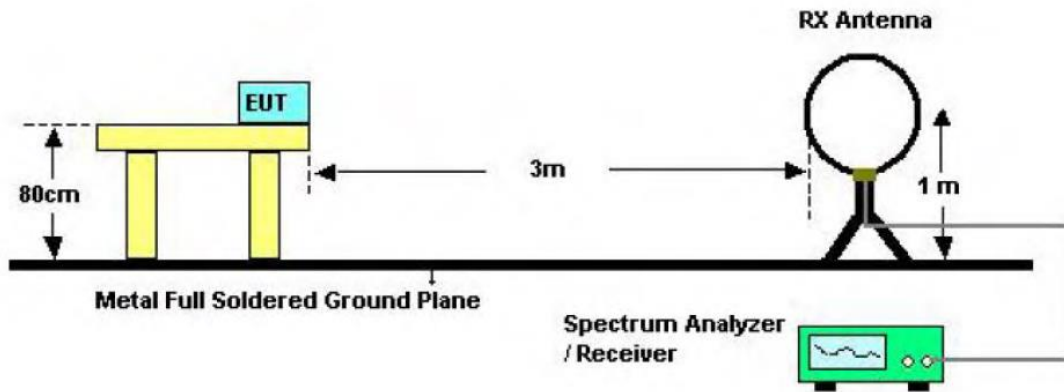

Below 30MHz Test Setup

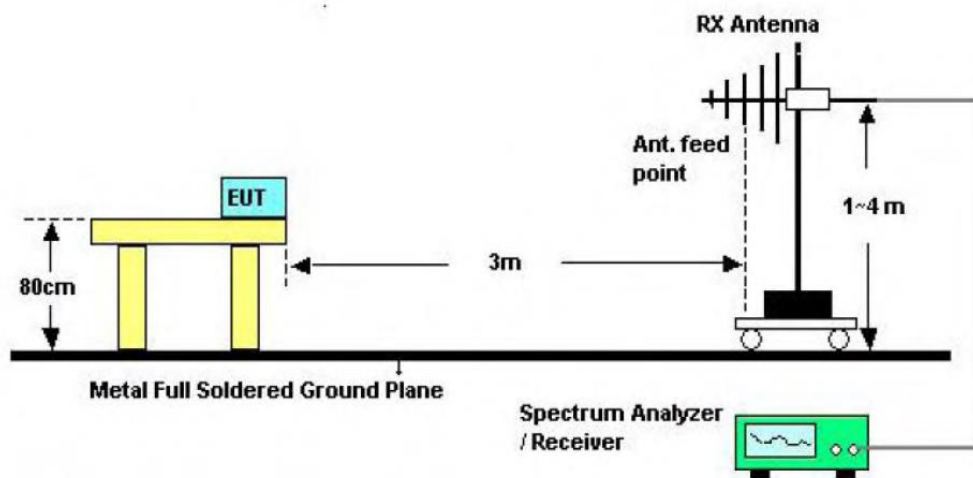

Below 1000MHz Test Setup

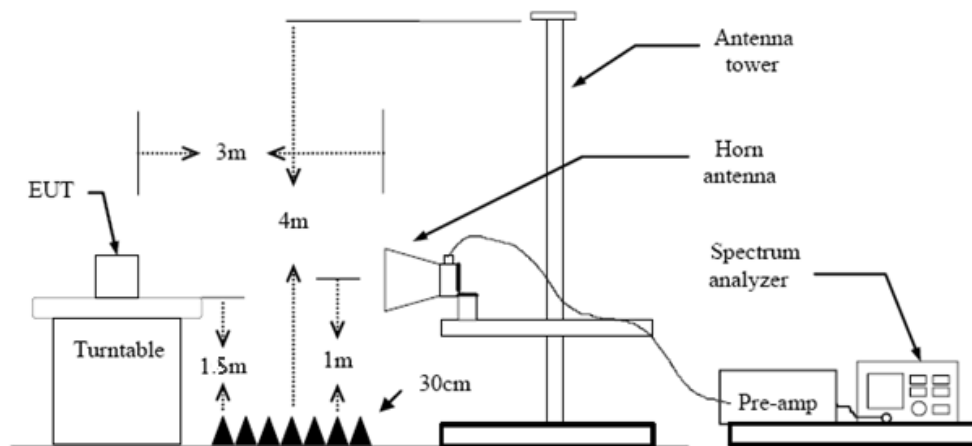

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.



3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

Test Mode

Please refer to the clause 2.4.

Test Result

9 KHz~30 MHz

From 9 KHz to 30 MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Pre-scan all antenna, only show the test data for worse case antenna on the test report.



30MHz-1GHz

Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported

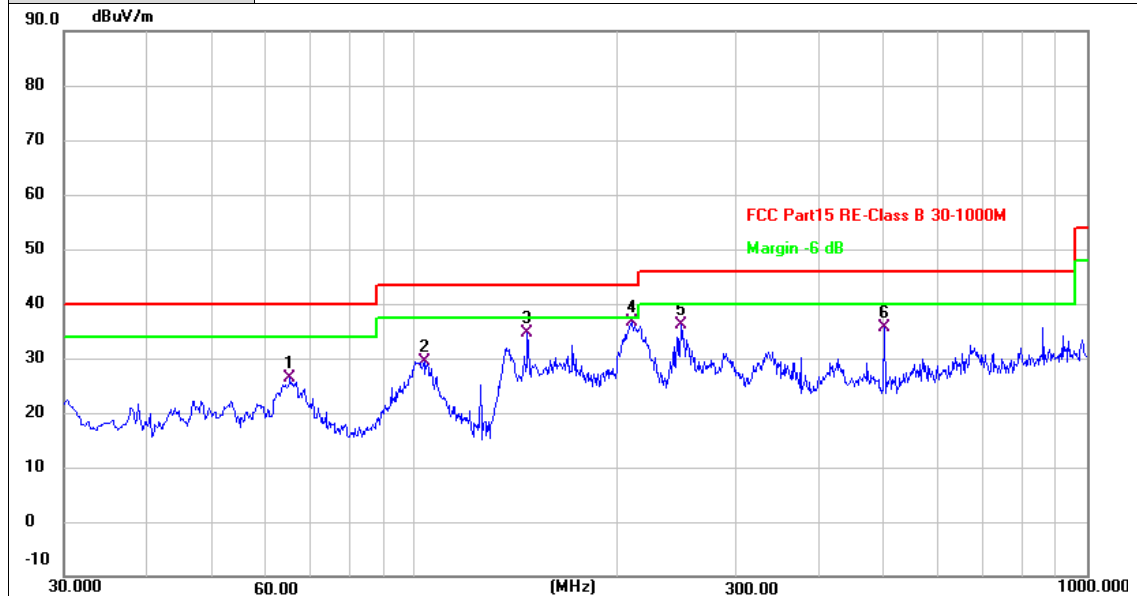

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.2433	43.65	-17.25	26.40	40.00	-13.60	QP
2	103.3966	45.86	-16.39	29.47	43.50	-14.03	QP
3	147.3700	54.41	-19.70	34.71	43.50	-8.79	QP
4 *	210.7433	52.45	-15.76	36.69	43.50	-6.81	QP
5	248.8967	50.88	-14.67	36.21	46.00	-9.79	QP
6	500.1267	44.93	-9.19	35.74	46.00	-10.26	QP


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value




Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	Only worse case is reported

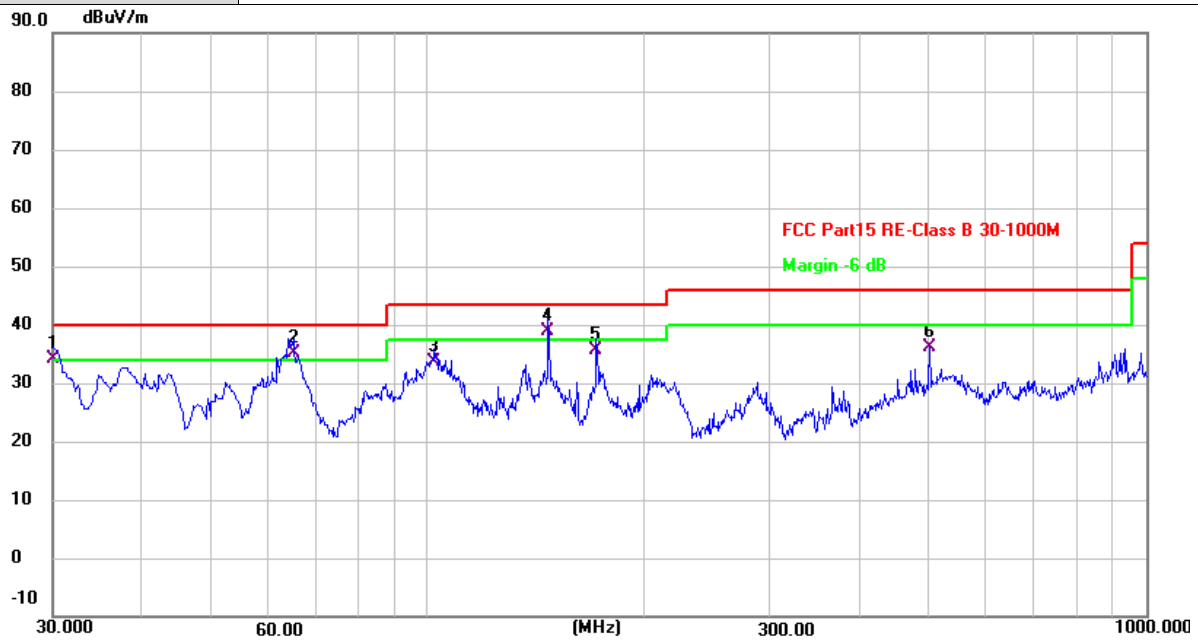

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	30.0000	50.21	-16.01	34.20	40.00	-5.80	QP
2 !	64.9200	52.18	-17.17	35.01	40.00	-4.99	QP
3	102.1033	50.08	-16.38	33.70	43.50	-9.80	QP
4 *	147.3700	58.54	-19.70	38.84	43.50	-4.66	QP
5	171.9433	54.21	-18.51	35.70	43.50	-7.80	QP
6	500.1267	45.26	-9.19	36.07	46.00	-9.93	QP

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Above 1GHz

Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.588	25.39	13.60	38.99	54.00	-15.01	AVG
2	10359.692	39.61	13.60	53.21	74.00	-20.79	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10359.799	25.69	13.60	39.29	54.00	-14.71	AVG
2	10359.900	39.73	13.60	53.33	74.00	-20.67	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10399.760	39.90	13.67	53.57	74.00	-20.43	peak
2 *	10399.921	25.10	13.67	38.77	54.00	-15.23	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.564	25.36	13.67	39.03	54.00	-14.97	AVG
2	10399.759	41.17	13.67	54.84	74.00	-19.16	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10480.080	25.12	13.80	38.92	54.00	-15.08	AVG
2	10480.343	39.44	13.80	53.24	74.00	-20.76	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10479.719	40.73	13.80	54.53	74.00	-19.47	peak
2 *	10479.832	25.80	13.80	39.60	54.00	-14.40	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11360.052	25.18	15.00	40.18	54.00	-13.82	AVG
2	11360.177	39.52	15.00	54.52	74.00	-19.48	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	ANT2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.766	25.18	13.60	38.78	54.00	-15.22	AVG
2	10360.221	39.84	13.60	53.44	74.00	-20.56	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value




Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.922	24.98	13.67	38.65	54.00	-15.35	AVG
2	10400.469	40.01	13.67	53.68	74.00	-20.32	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.889	25.15	13.67	38.82	54.00	-15.18	AVG
2	10400.329	39.70	13.67	53.37	74.00	-20.63	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10479.576	25.29	13.80	39.09	54.00	-14.91	AVG
2	10479.808	40.10	13.80	53.90	74.00	-20.10	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10479.581	40.17	13.80	53.97	74.00	-20.03	peak
2 *	10480.311	25.78	13.80	39.58	54.00	-14.42	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO
Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.909	25.34	13.60	38.94	54.00	-15.06	AVG
2	10360.154	40.01	13.60	53.61	74.00	-20.39	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.914	39.37	13.60	52.97	74.00	-21.03	peak
2 *	10360.477	25.26	13.59	38.85	54.00	-15.15	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10399.575	25.16	13.67	38.83	54.00	-15.17	AVG
2	10399.730	39.55	13.67	53.22	74.00	-20.78	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10399.889	25.14	13.67	38.81	54.00	-15.19	AVG
2	10400.271	39.70	13.67	53.37	74.00	-20.63	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10480.093	39.74	13.80	53.54	74.00	-20.46	peak
2 *	10480.482	25.46	13.80	39.26	54.00	-14.74	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10480.066	40.73	13.80	54.53	74.00	-19.47	peak
2 *	10480.305	25.51	13.80	39.31	54.00	-14.69	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.648	25.56	13.63	39.19	54.00	-14.81	AVG
2	10380.098	39.67	13.63	53.30	74.00	-20.70	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10380.090	39.47	13.63	53.10	74.00	-20.90	peak
2 *	10380.375	25.51	13.63	39.14	54.00	-14.86	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10459.693	39.60	13.77	53.37	74.00	-20.63	peak
2 *	10460.057	25.06	13.77	38.83	54.00	-15.17	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10459.907	39.96	13.77	53.73	74.00	-20.27	peak
2 *	10460.232	25.18	13.77	38.95	54.00	-15.05	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10359.619	25.52	13.60	39.12	54.00	-14.88	AVG
2	10359.831	40.28	13.60	53.88	74.00	-20.12	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5180MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10359.988	39.24	13.60	52.84	74.00	-21.16	peak
2 *	10360.464	25.40	13.59	38.99	54.00	-15.01	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10399.828	39.26	13.67	52.93	74.00	-21.07	peak
2 *	10400.314	25.17	13.67	38.84	54.00	-15.16	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5200MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10399.999	40.38	13.67	54.05	74.00	-19.95	peak
2 *	10400.202	24.95	13.67	38.62	54.00	-15.38	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10480.303	39.74	13.80	53.54	74.00	-20.46	peak
2 *	10480.338	25.56	13.80	39.36	54.00	-14.64	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5240MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10480.135	39.41	13.80	53.21	74.00	-20.79	peak
2 *	10480.181	25.12	13.80	38.92	54.00	-15.08	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10379.939	39.57	13.63	53.20	74.00	-20.80	peak
2 *	10380.236	26.09	13.63	39.72	54.00	-14.28	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5190MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10379.648	26.14	13.63	39.77	54.00	-14.23	AVG
2	10380.467	40.44	13.63	54.07	74.00	-19.93	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10459.615	25.04	13.77	38.81	54.00	-15.19	AVG
2	10460.083	39.56	13.77	53.33	74.00	-20.67	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5230MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10459.650	39.30	13.77	53.07	74.00	-20.93	peak
2 *	10460.053	24.68	13.77	38.45	54.00	-15.55	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10419.969	39.55	13.70	53.25	74.00	-20.75	peak
2 *	10420.346	25.58	13.70	39.28	54.00	-14.72	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5210MHz (U-NII-1)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10419.625	25.26	13.70	38.96	54.00	-15.04	AVG
2	10420.368	40.65	13.70	54.35	74.00	-19.65	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10519.664	39.66	13.89	53.55	74.00	-20.45	peak
2 *	10520.053	24.71	13.89	38.60	54.00	-15.40	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.596	39.77	13.89	53.66	74.00	-20.34	peak
2 *	10520.365	25.00	13.89	38.89	54.00	-15.11	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10560.429	40.08	13.97	54.05	74.00	-19.95	peak
2 *	10560.435	24.47	13.97	38.44	54.00	-15.56	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10560.203	25.02	13.97	38.99	54.00	-15.01	AVG
2	10560.444	40.66	13.97	54.63	74.00	-19.37	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.798	39.37	14.16	53.53	74.00	-20.47	peak
2 *	10640.049	24.91	14.16	39.07	54.00	-14.93	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.754	39.47	14.16	53.63	74.00	-20.37	peak
2 *	10639.858	24.95	14.16	39.11	54.00	-14.89	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10520.052	24.88	13.89	38.77	54.00	-15.23	AVG
2	10520.384	40.05	13.89	53.94	74.00	-20.06	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.547	39.52	13.89	53.41	74.00	-20.59	peak
2 *	10520.119	24.38	13.89	38.27	54.00	-15.73	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10559.715	40.35	13.97	54.32	74.00	-19.68	peak
2 *	10560.432	24.58	13.97	38.55	54.00	-15.45	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.616	39.65	13.97	53.62	74.00	-20.38	peak
2 *	10560.151	24.83	13.97	38.80	54.00	-15.20	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10639.820	39.72	14.16	53.88	74.00	-20.12	peak
2 *	10640.246	25.32	14.16	39.48	54.00	-14.52	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	ANT2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10640.012	39.60	14.16	53.76	74.00	-20.24	peak
2 *	10640.206	24.96	14.16	39.12	54.00	-14.88	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10519.834	24.54	13.89	38.43	54.00	-15.57	AVG
2	10519.923	39.80	13.89	53.69	74.00	-20.31	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10520.026	39.64	13.89	53.53	74.00	-20.47	peak
2 *	10520.451	24.66	13.89	38.55	54.00	-15.45	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10559.886	24.67	13.97	38.64	54.00	-15.36	AVG
2	10560.449	39.36	13.97	53.33	74.00	-20.67	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10560.190	24.63	13.97	38.60	54.00	-15.40	AVG
2	10560.357	39.66	13.97	53.63	74.00	-20.37	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10639.560	25.18	14.16	39.34	54.00	-14.66	AVG
2	10639.699	39.36	14.16	53.52	74.00	-20.48	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10639.654	25.00	14.16	39.16	54.00	-14.84	AVG
2	10639.759	39.59	14.16	53.75	74.00	-20.25	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10540.159	24.70	13.93	38.63	54.00	-15.37	AVG
2	10540.327	40.09	13.93	54.02	74.00	-19.98	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10540.000	39.55	13.93	53.48	74.00	-20.52	peak
2 *	10540.000	24.89	13.93	38.82	54.00	-15.18	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10619.857	39.73	14.11	53.84	74.00	-20.16	peak
2 *	10620.358	24.56	14.11	38.67	54.00	-15.33	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10620.000	40.26	14.11	54.37	74.00	-19.63	peak
2 *	10620.000	24.38	14.11	38.49	54.00	-15.51	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.552	39.51	13.89	53.40	74.00	-20.60	peak
2 *	10519.835	24.73	13.89	38.62	54.00	-15.38	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5260MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10519.885	38.97	13.89	52.86	74.00	-21.14	peak
2 *	10520.293	24.68	13.89	38.57	54.00	-15.43	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10559.813	39.41	13.97	53.38	74.00	-20.62	peak
2 *	10560.298	24.73	13.97	38.70	54.00	-15.30	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5280MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10559.559	24.49	13.97	38.46	54.00	-15.54	AVG
2	10559.650	39.44	13.97	53.41	74.00	-20.59	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10639.905	24.98	14.16	39.14	54.00	-14.86	AVG
2	10640.037	39.36	14.16	53.52	74.00	-20.48	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5320MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	10539.585	39.79	13.93	53.72	74.00	-20.28	peak
2 *	10540.362	25.05	13.93	38.98	54.00	-15.02	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5270MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10540.128	40.33	13.93	54.26	74.00	-19.74	peak
2 *	10540.207	24.85	13.93	38.78	54.00	-15.22	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10620.040	38.73	14.11	52.84	74.00	-21.16	peak
2 *	10620.453	24.88	14.11	38.99	54.00	-15.01	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5310MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10620.000	40.26	14.11	54.37	74.00	-19.63	peak
2 *	10620.000	24.38	14.11	38.49	54.00	-15.51	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac (VHT80) Mode 5290MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10580.052	24.91	14.02	38.93	54.00	-15.07	AVG
2	10580.458	39.31	14.02	53.33	74.00	-20.67	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5290MHz (U-NII-2A)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10579.600	24.62	14.02	38.64	54.00	-15.36	AVG
2	10580.407	40.00	14.02	54.02	74.00	-19.98	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10999.817	25.32	14.97	40.29	54.00	-13.71	AVG
2	11000.360	39.49	14.97	54.46	74.00	-19.54	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.615	25.14	14.97	40.11	54.00	-13.89	AVG
2	10999.697	40.05	14.97	55.02	74.00	-18.98	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.241	40.07	14.98	55.05	74.00	-18.95	peak
2 *	11160.434	25.68	14.98	40.66	54.00	-13.34	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value


Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11160.078	25.87	14.98	40.85	54.00	-13.15	AVG
2	11160.404	39.92	14.98	54.90	74.00	-19.10	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11400.240	39.19	14.99	54.18	74.00	-19.82	peak
2 *	11400.351	24.70	14.99	39.69	54.00	-14.31	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11399.523	39.36	14.99	54.35	74.00	-19.65	peak
2 *	11399.815	24.40	14.99	39.39	54.00	-14.61	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10999.662	25.22	14.97	40.19	54.00	-13.81	AVG
2	10999.753	39.55	14.97	54.52	74.00	-19.48	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	10999.579	25.43	14.97	40.40	54.00	-13.60	AVG
2	10999.799	39.85	14.97	54.82	74.00	-19.18	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.787	39.62	14.98	54.60	74.00	-19.40	peak
2 *	11160.279	25.73	14.98	40.71	54.00	-13.29	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	ANT2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5580MHz (U-NII-2C)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11160.130	40.70	14.98	55.68	74.00	-18.32	peak
2 *	11160.339	25.50	14.98	40.48	54.00	-13.52	AVG

Remarks:


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11399.650	24.29	14.99	39.28	54.00	-14.72	AVG
2	11399.913	39.62	14.99	54.61	74.00	-19.39	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11399.727	38.96	14.99	53.95	74.00	-20.05	peak
2 *	11400.066	24.46	14.99	39.45	54.00	-14.55	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10999.707	40.25	14.97	55.22	74.00	-18.78	peak
2 *	10999.960	25.19	14.97	40.16	54.00	-13.84	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.151	39.88	14.97	54.85	74.00	-19.15	peak
2 *	11000.153	25.29	14.97	40.26	54.00	-13.74	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11159.700	39.91	14.98	54.89	74.00	-19.11	peak
2 *	11160.202	25.62	14.98	40.60	54.00	-13.40	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11160.438	25.65	14.98	40.63	54.00	-13.37	AVG
2	11160.439	40.92	14.98	55.90	74.00	-18.10	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11399.686	39.95	14.99	54.94	74.00	-19.06	peak
2 *	11400.149	24.67	14.99	39.66	54.00	-14.34	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.730	24.35	14.99	39.34	54.00	-14.66	AVG
2	11400.068	38.50	14.99	53.49	74.00	-20.51	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11019.988	39.61	14.97	54.58	74.00	-19.42	peak
2 *	11020.103	25.80	14.97	40.77	54.00	-13.23	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11020.000	40.18	14.97	55.15	74.00	-18.85	peak
2 *	11020.000	25.24	14.97	40.21	54.00	-13.79	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11099.906	39.31	14.98	54.29	74.00	-19.71	peak
2 *	11100.057	25.39	14.98	40.37	54.00	-13.63	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11100.000	39.49	14.98	54.47	74.00	-19.53	peak
2 *	11100.000	25.51	14.98	40.49	54.00	-13.51	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11340.112	38.75	14.99	53.74	74.00	-20.26	peak
2 *	11340.333	25.41	14.99	40.40	54.00	-13.60	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11339.891	39.51	14.99	54.50	74.00	-19.50	peak
2 *	11340.040	24.56	14.99	39.55	54.00	-14.45	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11000.057	39.84	14.97	54.81	74.00	-19.19	peak
2 *	11000.163	25.37	14.97	40.34	54.00	-13.66	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5500MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	10999.996	25.34	14.97	40.31	54.00	-13.69	AVG
2	11000.106	39.19	14.97	54.16	74.00	-19.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11159.719	26.31	14.98	41.29	54.00	-12.71	AVG
2	11160.336	39.89	14.98	54.87	74.00	-19.13	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5580MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11159.586	40.15	14.98	55.13	74.00	-18.87	peak
2 *	11159.844	25.73	14.98	40.71	54.00	-13.29	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11399.841	24.71	14.99	39.70	54.00	-14.30	AVG
2	11400.067	39.71	14.99	54.70	74.00	-19.30	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5700MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11399.618	37.97	14.99	52.96	74.00	-21.04	peak
2 *	11400.056	24.63	14.99	39.62	54.00	-14.38	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11019.604	39.41	14.97	54.38	74.00	-19.62	peak
2 *	11020.137	25.23	14.97	40.20	54.00	-13.80	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5510MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11019.892	25.25	14.97	40.22	54.00	-13.78	AVG
2	11020.136	40.19	14.97	55.16	74.00	-18.84	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11099.672	25.69	14.98	40.67	54.00	-13.33	AVG
2	11100.053	40.23	14.98	55.21	74.00	-18.79	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5550MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11099.545	39.71	14.98	54.69	74.00	-19.31	peak
2 *	11100.091	25.18	14.98	40.16	54.00	-13.84	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11339.793	39.41	14.99	54.40	74.00	-19.60	peak
2 *	11340.393	25.06	14.99	40.05	54.00	-13.95	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT40) Mode 5670MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11340.069	24.84	14.99	39.83	54.00	-14.17	AVG
2	11340.308	39.56	14.99	54.55	74.00	-19.45	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11059.781	39.93	14.98	54.91	74.00	-19.09	peak
2 *	11059.972	25.62	14.98	40.60	54.00	-13.40	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5530MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11059.855	25.18	14.98	40.16	54.00	-13.84	AVG
2	11060.278	39.67	14.98	54.65	74.00	-19.35	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11219.587	25.74	14.98	40.72	54.00	-13.28	AVG
2	11220.294	40.47	14.98	55.45	74.00	-18.55	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5610MHz (U-NII-2C)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11220.064	25.39	14.98	40.37	54.00	-13.63	AVG
2	11220.254	40.85	14.98	55.83	74.00	-18.17	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11489.105	27.30	14.99	42.29	54.00	-11.71	AVG
2	11489.219	39.16	15.00	54.16	74.00	-19.84	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.568	42.46	15.00	57.46	74.00	-16.54	peak
2 *	11489.882	29.75	15.00	44.75	54.00	-9.25	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11569.686	39.83	15.06	54.89	74.00	-19.11	peak
2 *	11569.801	27.42	15.06	42.48	54.00	-11.52	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11569.257	29.13	15.06	44.19	54.00	-9.81	AVG
2	11570.174	41.51	15.07	56.58	74.00	-17.42	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT1						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.937	28.26	15.13	43.39	54.00	-10.61	AVG
2	11649.945	40.89	15.13	56.02	74.00	-17.98	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT1						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11650.242	28.63	15.14	43.77	54.00	-10.23	AVG
2	11650.531	41.43	15.14	56.57	74.00	-17.43	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11490.072	27.36	15.01	42.37	54.00	-11.63	AVG
2	11490.267	39.51	15.01	54.52	74.00	-19.48	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.410	39.70	15.00	54.70	74.00	-19.30	peak
2 *	11490.108	27.14	15.01	42.15	54.00	-11.85	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11570.299	39.72	15.07	54.79	74.00	-19.21	peak
2 *	11570.422	27.22	15.07	42.29	54.00	-11.71	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11570.237	27.13	15.07	42.20	54.00	-11.80	AVG
2	11570.411	40.18	15.07	55.25	74.00	-18.75	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	ANT2						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.640	39.37	15.14	54.51	74.00	-19.49	peak
2 *	11650.769	27.28	15.14	42.42	54.00	-11.58	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	ANT2						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11a Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11649.849	41.90	15.13	57.03	74.00	-16.97	peak
2 *	11649.877	28.86	15.13	43.99	54.00	-10.01	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11487.999	39.95	14.99	54.94	74.00	-19.06	peak
2 *	11490.651	25.81	15.01	40.82	54.00	-13.18	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.307	40.91	15.00	55.91	74.00	-18.09	peak
2 *	11489.517	29.87	15.00	44.87	54.00	-9.13	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11569.234	25.62	15.06	40.68	54.00	-13.32	AVG
2	11569.953	39.54	15.06	54.60	74.00	-19.40	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5785MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11570.366	27.89	15.07	42.96	54.00	-11.04	AVG
2	11570.772	40.74	15.07	55.81	74.00	-18.19	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11649.531	40.06	15.13	55.19	74.00	-18.81	peak
2 *	11650.477	25.85	15.14	40.99	54.00	-13.01	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.157	40.60	15.14	55.74	74.00	-18.26	peak
2 *	11650.461	28.13	15.14	43.27	54.00	-10.73	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11509.499	25.22	15.00	40.22	54.00	-13.78	AVG
2	11510.254	40.03	15.01	55.04	74.00	-18.96	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.511	39.73	15.00	54.73	74.00	-19.27	peak
2 *	11510.555	26.51	15.01	41.52	54.00	-12.48	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11590.140	25.00	15.09	40.09	54.00	-13.91	AVG
2	11590.423	39.52	15.09	54.61	74.00	-19.39	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11n(HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11590.049	26.26	15.09	41.35	54.00	-12.65	AVG
2	11590.371	38.75	15.09	53.84	74.00	-20.16	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11490.660	40.60	15.01	55.61	74.00	-18.39	peak
2 *	11490.791	26.21	15.01	41.22	54.00	-12.78	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT20) Mode 5745MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11489.976	39.61	15.00	54.61	74.00	-19.39	peak
2 *	11490.082	27.42	15.01	42.43	54.00	-11.57	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO
Ant. Pol.	Horizontal
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11569.530	25.70	15.06	40.76	54.00	-13.24	AVG
2	11569.895	41.00	15.06	56.06	74.00	-17.94	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant No.	MIMO
Ant. Pol.	Vertical
Test Mode:	TX 802.11ac(VHT20) Mode 5785MHz (U-NII-3)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11569.176	39.50	15.06	54.56	74.00	-19.44	peak
2 *	11570.247	27.09	15.07	42.16	54.00	-11.84	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value




Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11649.127	25.78	15.13	40.91	54.00	-13.09	AVG
2	11650.736	40.63	15.14	55.77	74.00	-18.23	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (VHT20) Mode 5825MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11650.019	40.39	15.13	55.52	74.00	-18.48	peak
2 *	11650.250	28.15	15.14	43.29	54.00	-10.71	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11510.760	39.32	15.01	54.33	74.00	-19.67	peak
2 *	11510.781	25.00	15.01	40.01	54.00	-13.99	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (HT40) Mode 5755MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11509.859	39.47	15.00	54.47	74.00	-19.53	peak
2 *	11510.987	26.68	15.01	41.69	54.00	-12.31	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac (HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1 *	11590.492	24.90	15.09	39.99	54.00	-14.01	AVG
2	11590.620	39.42	15.09	54.51	74.00	-19.49	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac (HT40) Mode 5795MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11590.869	26.39	15.09	41.48	54.00	-12.52	AVG
2	11590.870	39.16	15.09	54.25	74.00	-19.75	peak
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							



Ant No.	MIMO						
Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11550.049	40.04	15.05	55.09	74.00	-18.91	peak
2 *	11550.096	25.15	15.05	40.20	54.00	-13.80	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

Ant No.	MIMO						
Ant. Pol.	Vertical						
Test Mode:	TX 802.11ac(VHT80) Mode 5775MHz (U-NII-3)						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	11549.864	37.54	15.04	52.58	74.00	-21.42	peak
2 *	11550.721	25.22	15.05	40.27	54.00	-13.73	AVG
Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value							

3.3. Band Edge Emissions

Limit

Limits of unwanted emission out of the restricted bands

FCC CFR Title 47 Part 15 Subpart C Section 15.407(b)/ RSS-247 6.2.1.2 & RSS-247 6.2.4.2


Frequency (MHz)	EIRP Limits (dBm)	Equivalent Field Strength at 3m (dBuV/m)
5150~5250	-27	68.2
5250~5350	-27	68.2
5470~5725	-27	68.2
5725~5825	-27(Note 2)	68.2
	10(Note 2)	105.2
	15.6(Note 2)	110.8
	27(Note 2)	122.2

Note: 1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000\sqrt{30P}}{3}$ uV/m, where P is the eirp (Watts)

2. According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

Test Configuration

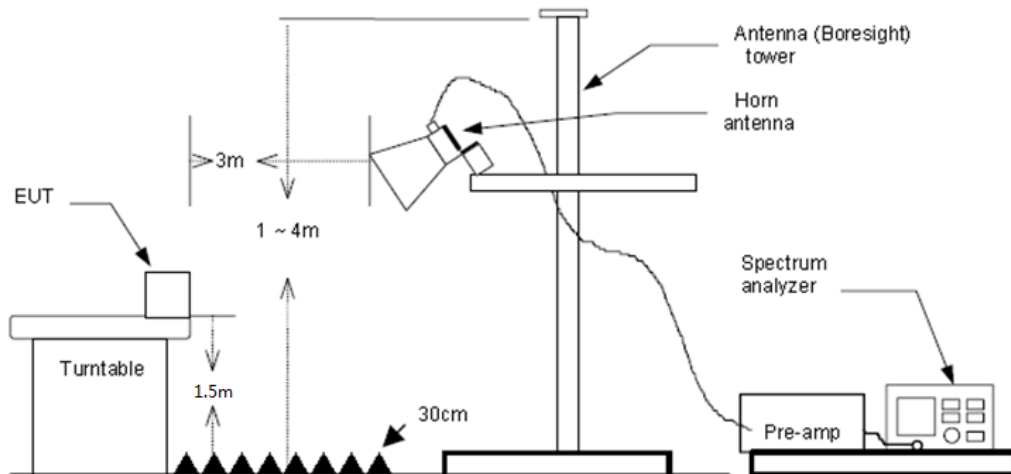

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:



RBW=1MHz, VBW=3MHz PEAK detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause Appendix E: Duty Cycle


Test Mode

Please refer to the clause 2.4.

Test Results

Pre-scan all antenna, only show the test data for worse case antenna on the test report.

Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

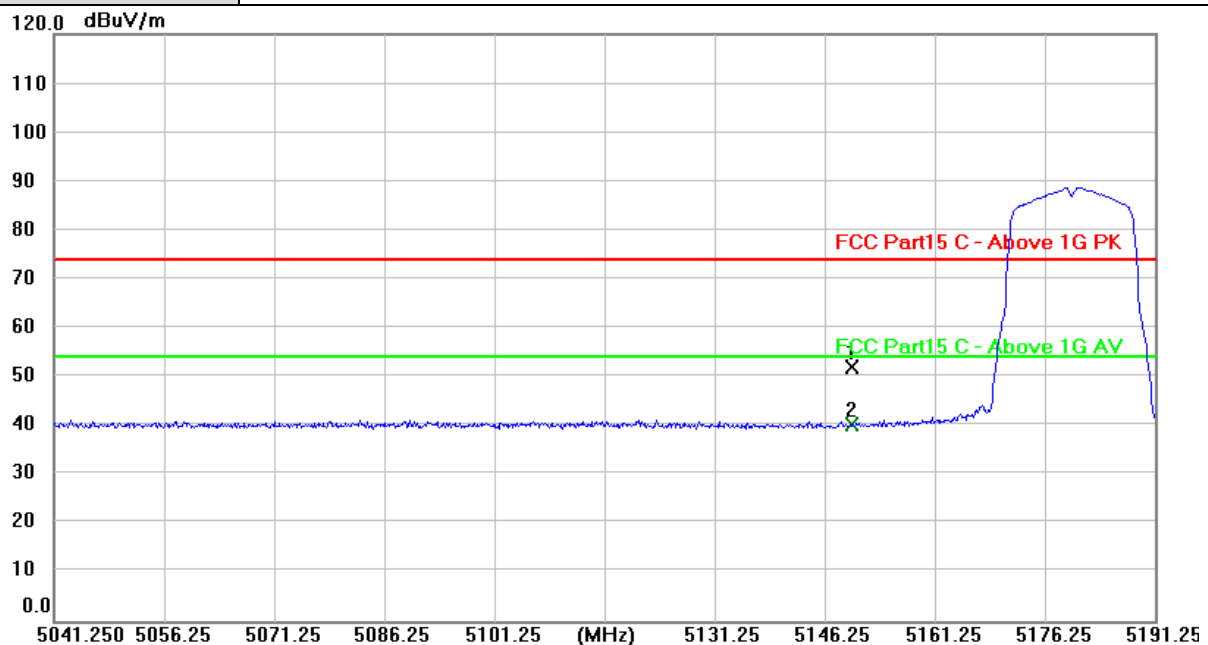

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	14.98	37.15	52.13	74.00	-21.87	peak
2 *	5150.000	3.30	37.15	40.45	54.00	-13.55	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011


Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn



Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

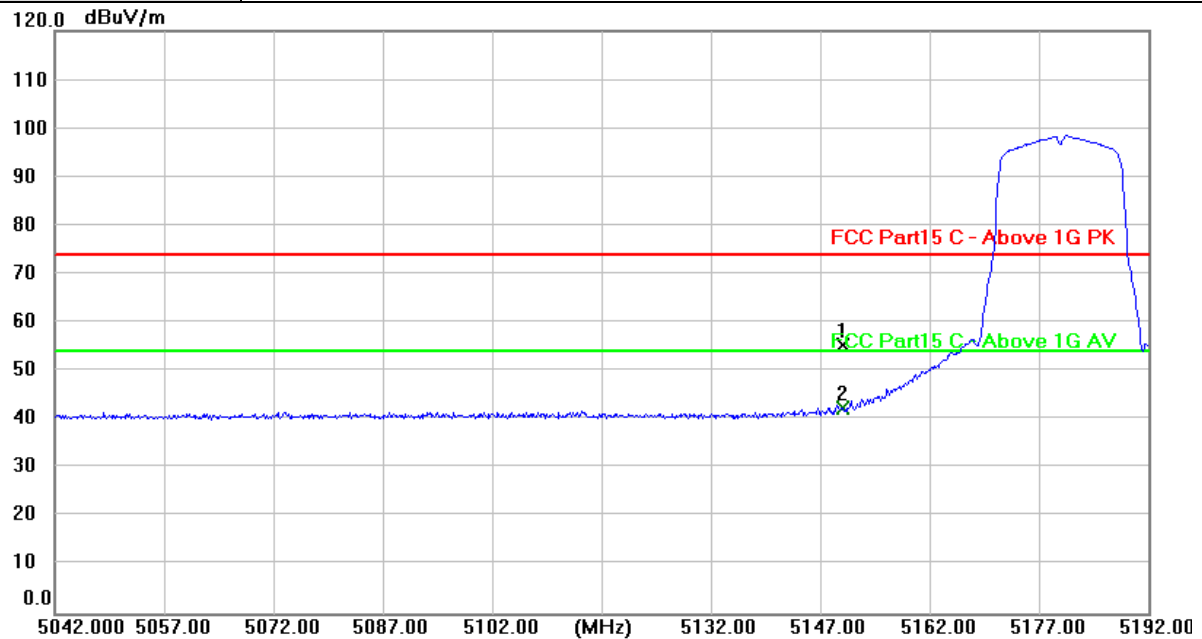

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	18.24	37.15	55.39	74.00	-18.61	peak
2 *	5150.000	5.31	37.15	42.46	54.00	-11.54	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

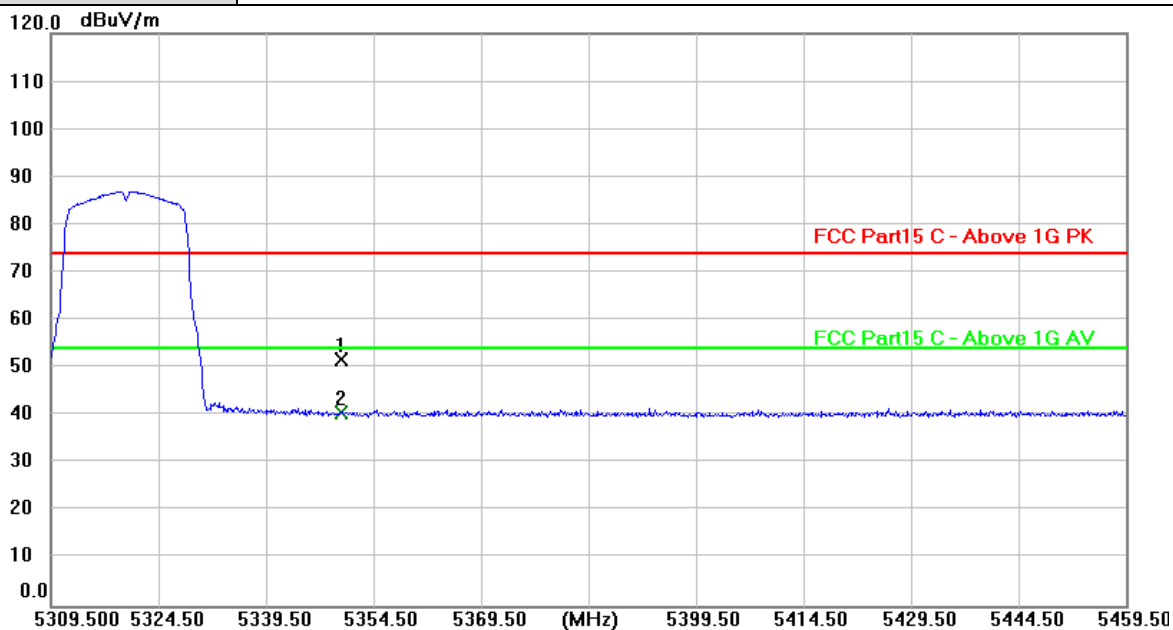

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.33	37.41	51.74	74.00	-22.26	peak
2 *	5350.000	3.30	37.41	40.71	54.00	-13.29	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT1
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

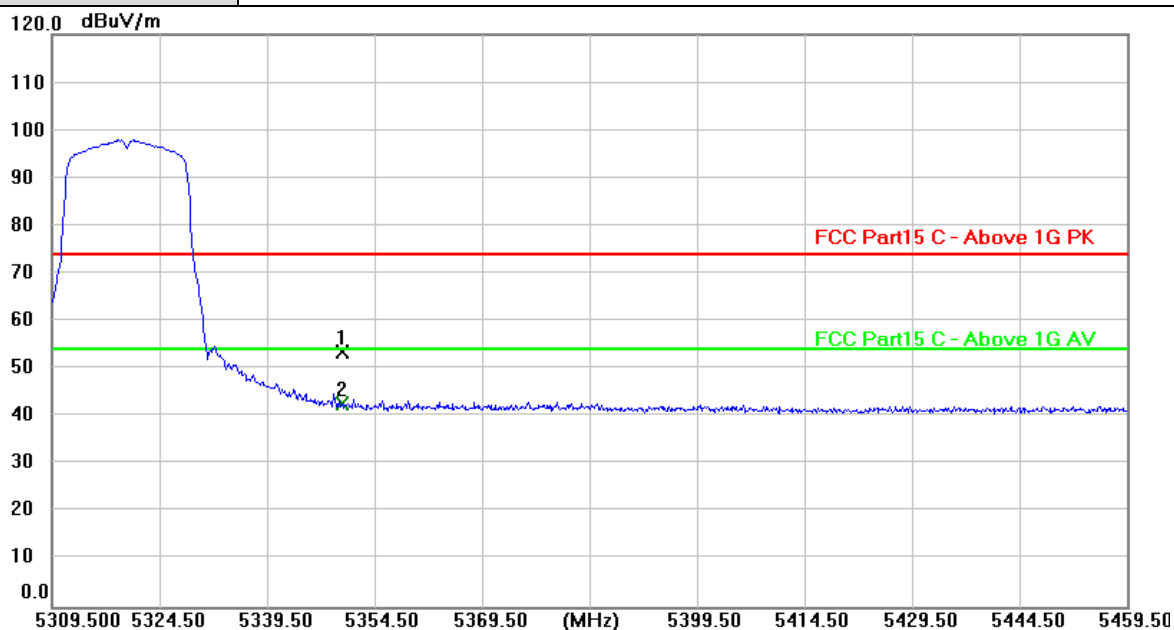

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	16.28	37.41	53.69	74.00	-20.31	peak
2 *	5350.000	5.22	37.41	42.63	54.00	-11.37	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	ANT2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

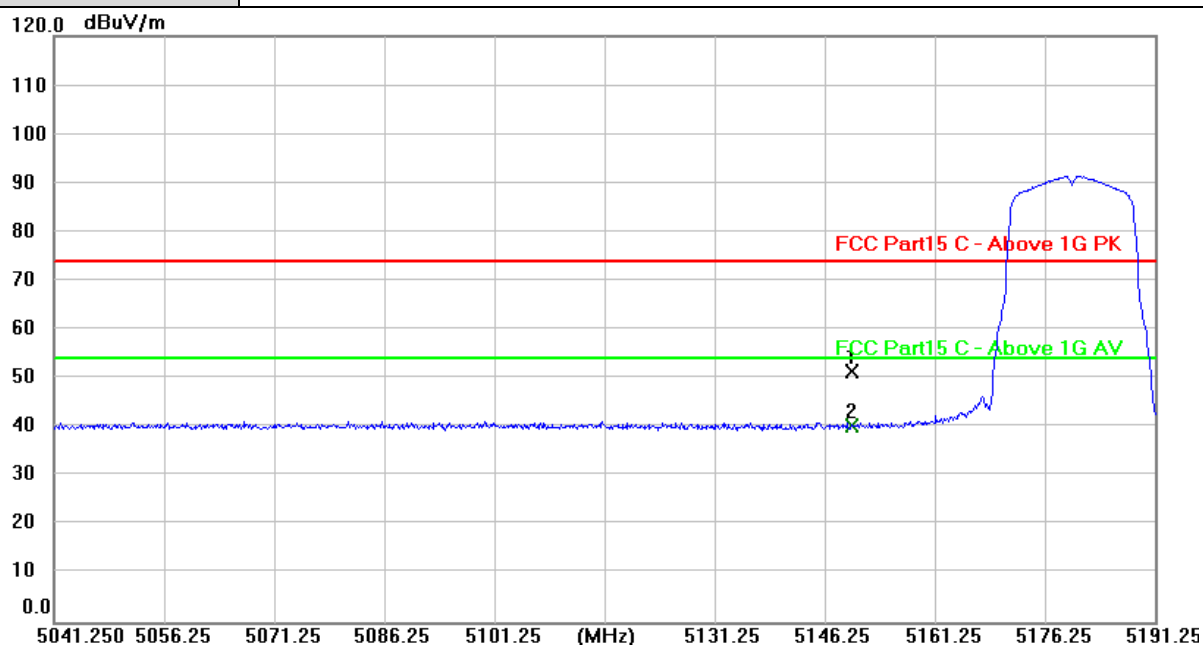

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	14.26	37.15	51.41	74.00	-22.59	peak
2 *	5150.000	3.30	37.15	40.45	54.00	-13.55	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	ANT2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5180MHz (U-NII-1)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

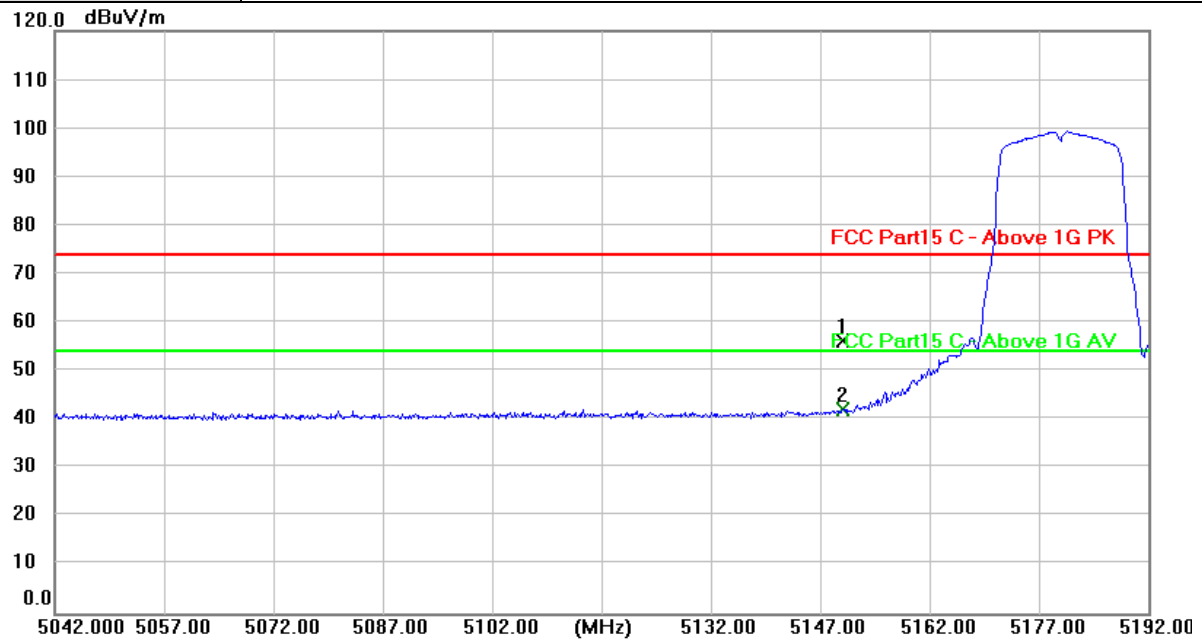

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5150.000	19.23	37.15	56.38	74.00	-17.62	peak
2 *	5150.000	4.88	37.15	42.03	54.00	-11.97	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant No.	ANT2
Ant. Pol.	Horizontal
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

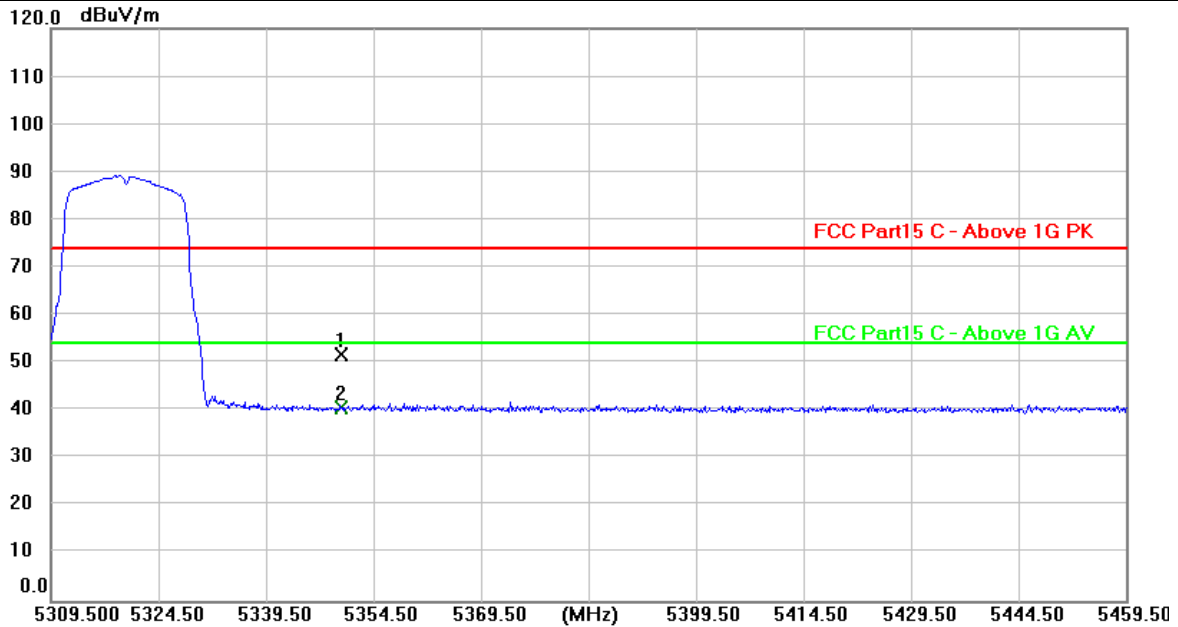


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	14.24	37.41	51.65	74.00	-22.35	peak
2 *	5350.000	3.28	37.41	40.69	54.00	-13.31	AVG


Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Ant No.	ANT2
Ant. Pol.	Vertical
Test Mode:	TX 802.11a Mode 5320MHz (U-NII-2A)
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

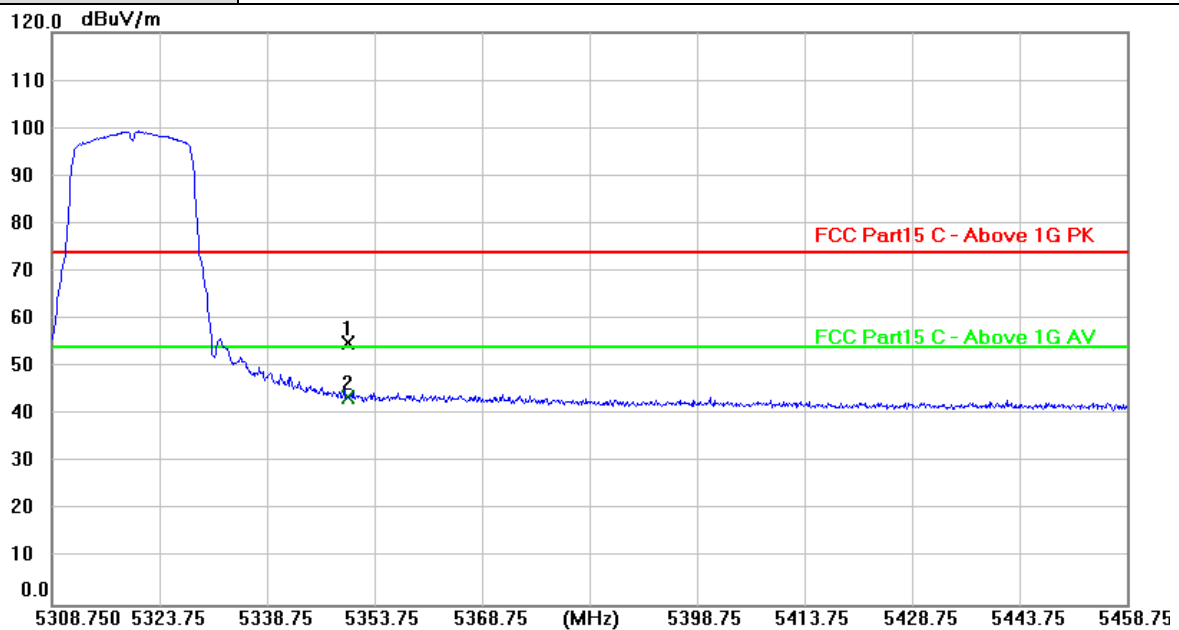

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.000	17.61	37.41	55.02	74.00	-18.98	peak
2 *	5350.000	6.16	37.41	43.57	54.00	-10.43	AVG

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value