


CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : www.cncacq.com

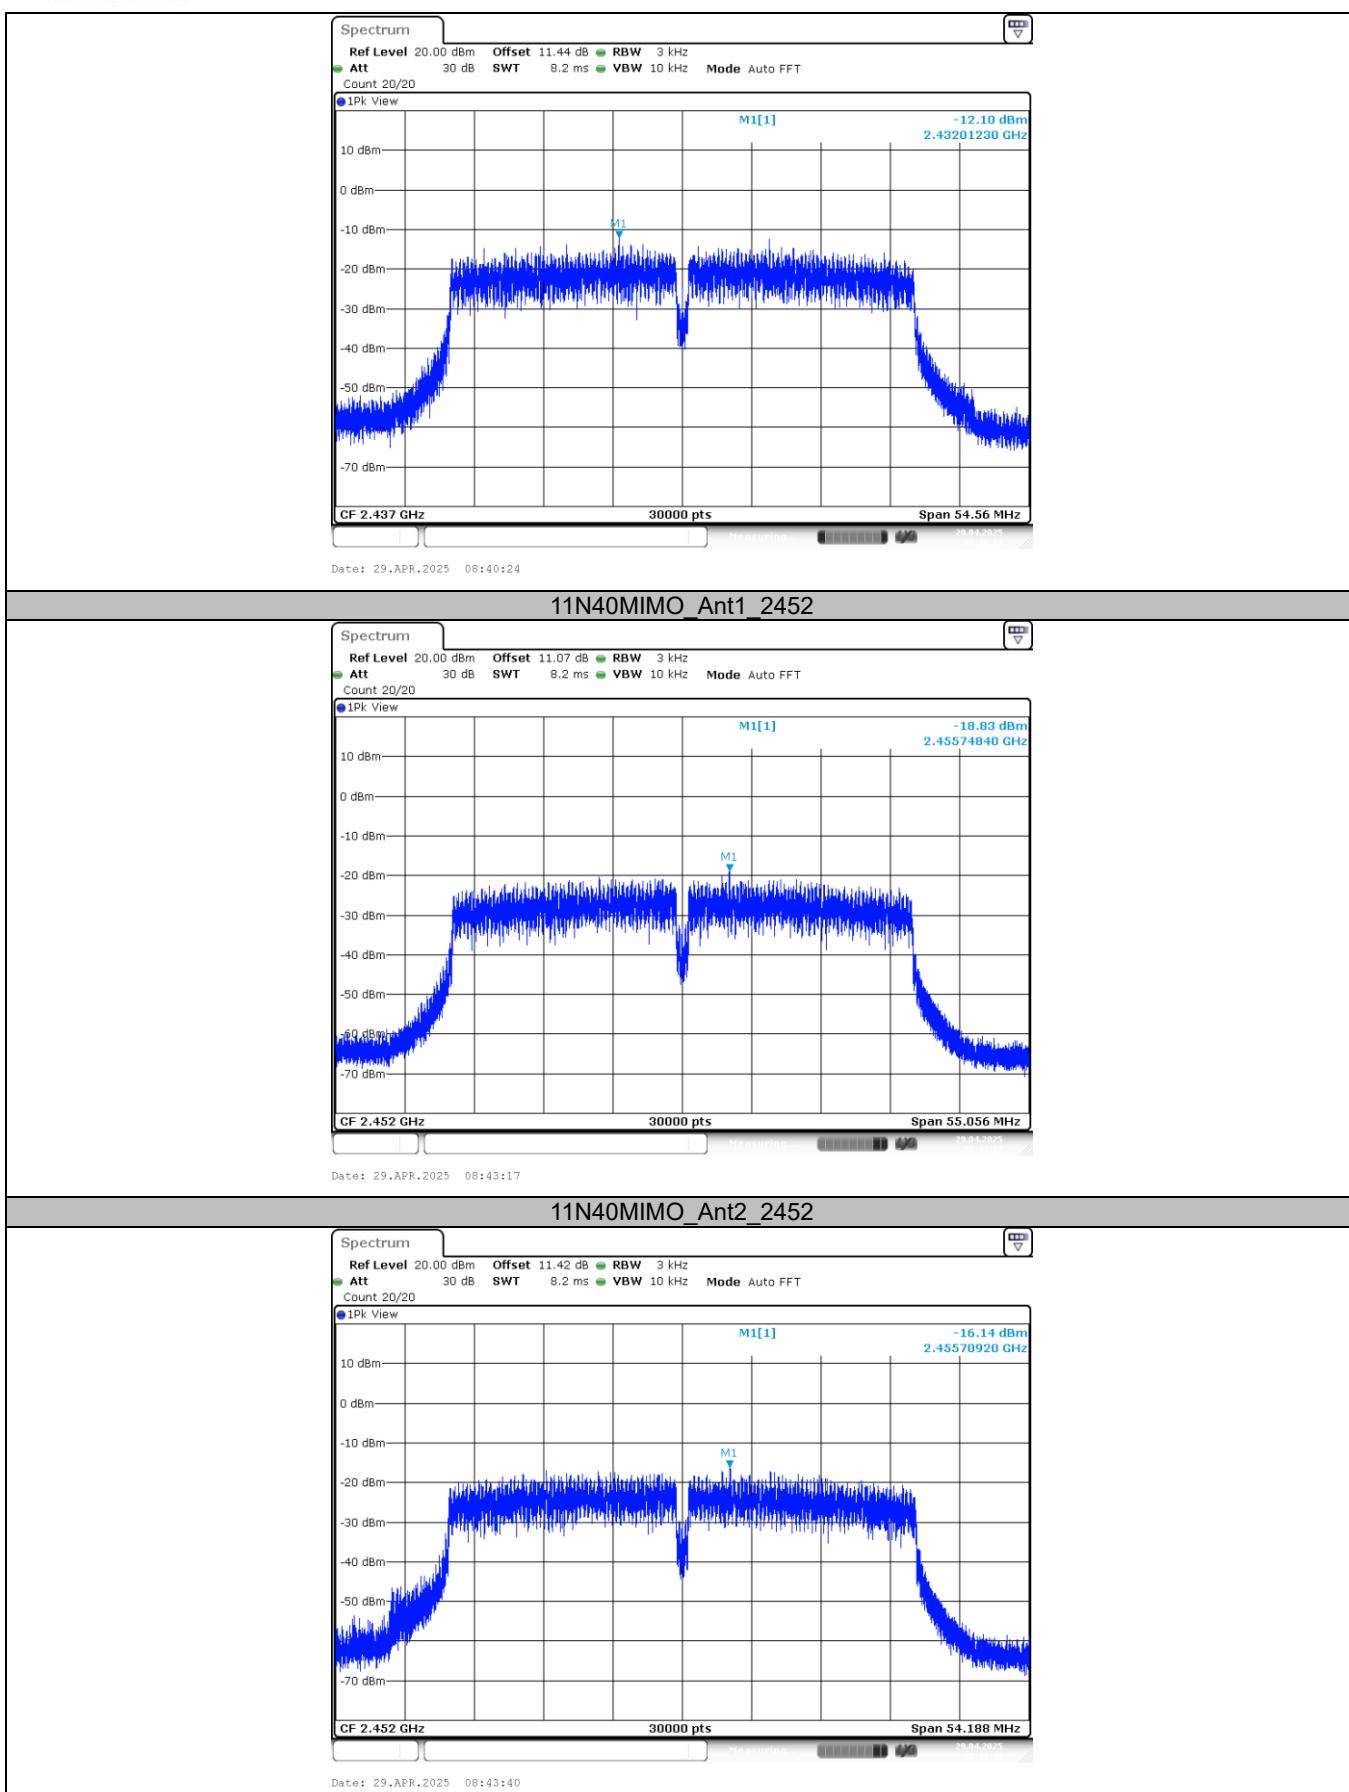




3.8. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:
Set analyzer center frequency to test channel center frequency.
Set the span to 0Hz.
Set the RBW to 10MHz.
Set the VBW to 10MHz.
Detector: Peak.
Sweep time: Auto.
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.4.

**Test Result**

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final Setting for VBW (kHz)
11B	Ant1	2412	12.42	12.90	96.28	0.08	1
	Ant2	2412	12.42	12.91	96.20	0.08	1
	Ant1	2437	12.42	12.89	96.35	0.08	1
	Ant2	2437	12.42	12.89	96.35	0.08	1
	Ant1	2462	12.42	12.87	96.50	0.08	1
	Ant2	2462	12.42	12.90	96.28	0.08	1
11G	Ant1	2412	2.07	2.30	90.00	0.48	1
	Ant2	2412	2.07	2.30	90.00	0.48	1
	Ant1	2437	2.06	2.26	91.15	0.49	1
	Ant2	2437	2.06	2.29	89.96	0.49	1
	Ant1	2462	2.06	2.29	89.96	0.49	1
	Ant2	2462	2.07	2.30	90.00	0.48	1
11N20MIMO	Ant1	2412	1.92	2.15	89.30	0.52	1
	Ant2	2412	1.92	2.15	89.30	0.52	1
	Ant1	2437	1.92	2.15	89.30	0.52	1
	Ant2	2437	1.92	2.15	89.30	0.52	1
	Ant1	2462	1.92	2.14	89.72	0.52	1
	Ant2	2462	1.92	2.14	89.72	0.52	1
11N40MIMO	Ant1	2422	0.95	1.24	76.61	1.05	2
	Ant2	2422	0.94	1.17	80.34	1.06	2
	Ant1	2437	0.94	1.15	81.74	1.06	2
	Ant2	2437	0.94	1.17	80.34	1.06	2
	Ant1	2452	0.94	1.16	81.03	1.06	2
	Ant2	2452	0.94	1.15	81.74	1.06	2

CTC Laboratories, Inc.

Room 107, 108, 207, 208, 303 of Building A, Room 101 of Building B, No.7, Lanqing 1st Road, Luhu Community, Guanhua Subdistrict, Longhua District, Shenzhen, Guangdong, China Tel.: (86)755-27521059 Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)

TRF No: CTC-TR-057_A2

For anti-fake verification, please visit the official website of China Inspection And Testing Society : [vz.cncaq.com](http://www.vz.cncaq.com)



3.9. Antenna Requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i)

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

Pass.

*****THE END OF REPORT*****