



No.198 Kezhu Road, Science Town Economic& Technology
Development District Guangzhou, China 510663
Telephone: +86 (0) 20 8215 5555 Fax: +86 (0) 20 8207 5059
Email: sgs_internet_operations@sgs.com

FEDERAL COMMUNICATIONS COMMISSION
Registration number: 556682

Report No.: SZEMO080804205RFF
Page: 1 of 11
FCC ID: WNLHS-828

TEST REPORT

Application No. : SZEMO080804205RF

Applicant: Qi Xing Electronics science and technology Ltd.

FCC ID: WNLHS-828

Fundamental Frequency : 88.2MHz

Equipment Under Test (EUT):

EUT Name: Wireless head phones

Model No.: HS-828

Standards: FCC PART 15, SUBPART C : 2007

Date of Receipt: 27 August 2008

Date of Test: 27 to 28 August 2008

Date of Issue: 28 August 2008

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART B: 2007	Section 15.207	PASS
Radiated Emission (30MHz to 1000MHz)	FCC PART 15 :2007	Section 15.239	PASS
Occupied Bandwidth	FCC PART 15 :2007	Section 15.215	PASS

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 DETAILS OF E.U.T.	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 TEST LOCATION	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER	4
5 TEST RESULTS	5
5.1 TEST INSTRUMENTS	5
5.2 E.U.T. OPERATION	5
5.3 TEST PROCEDURE & MEASUREMENT DATA	5
5.3.1 <i>Radiated Emissions</i>	5
5.3.2 <i>Conducted Emissions</i>	8
5.3.3 <i>Occupied Bandwidth</i>	11

FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

4 General Information

4.1 Client Information

Applicant Name: Qi Xing Electronics science and technology Ltd.
Applicant Address: The side of Union Paper products factory, the 2nd Industry District Nanshan,PengGang Town, DOngGuan City, Guangdong Province, China

4.2 Details of E.U.T.

EUT Name: Wireless head phones
Model No.: HS-828
Power Supply: 3.0V DC (2*1.5V "AAA" Size Batteries) for Tx.
Power Cord: N/A-

4.3 Description of Support Units

The EUT was tested as an independent unit.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu Road, Science Town Economic & Technology Development District Guangzhou, China 510663
Tel: +86 20 8215 5555 Fax: +86 20 8207 5059

4.5 Other Information Requested by the Customer

None.

5 Test Results

5.1 Test Instruments

R&TTE RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2007	15-06-2009
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	12-12-2007	11-12-2008
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	18-06-2008	17-06-2009
5	Coaxial cable	SGS	N/A	SEL0027	18-06-2008	17-06-2009
6	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	12-08-2008	11-08-2009
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	18-06-2008	17-06-2009
8	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	15-06-2008	14-06-2009

5.2 E.U.T. Operation

Input voltage:	3.0V DC
Operating Environment:	
Temperature:	24.0 °C
Humidity:	50% RH
Atmospheric Pressure:	1010mbar
EUT Operation:	Test the EUT in transmitting mode.
Modulation Signal:	FM 1KHz
FM deviation of modulation signal:	±75KHz

5.3 Test Procedure & Measurement Data

5.3.1 Radiated Emissions

Test Requirement:	FCC Part15 C Section 15.239
Test Method:	ANSI C63.4
Measurement Distance:	3m (Semi-Anechoic Chamber)
Requirements:	Carrier frequency will not exceed 80dBuV/m AT 3m. Out of band emissions shall not exceed: 40.0 dB μ V/m between 30MHz & 88MHz 43.5 dB μ V/m between 88MHz & 216MHz 46.0 dB μ V/m between 216MHz & 960MHz 54.0 dB μ V/m above 960MHz
Detector:	RBW=9KHz VBW=30KHz for 9kHz to 30MHz; RBW=120KHz VBW=300KHz for 30MHz to 1000MHz

FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Requirement:

- (a) Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.
- (b) The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in Section 15.35 for limiting peak emissions apply.
- (c) The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in Section 15.209.

Test Procedure:

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

7. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

The following measurements were performed on the modified modified EUT on 10 April 2007:
Test the EUT in transmitting mode.

Intentional emission

Test Frequency (MHz)	Peak (dBμV/m)		Limits (dBμV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
88.2	30.7	39.2	68.0	37.3	28.8

Test Frequency (MHz)	Average (dBμV/m)		Limits (dBμV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
88.2	26.5	35.1	48.0	21.5	12.9

Y: EUT as per photograph in section 5.3.3 of this report.

X: As Y, but rotate EUT by 90° clockwise.

Z: As X, but rotate EUT by 90° vertically.

Other emissions

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receive was scanned from 30MHz to 1000MHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. The worst case emissions were reported.

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities

Test the EUT in transmitting mode.

Horizontal.

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
175.50	1.36	9.71	27.29	48.92	32.70	43.50	-10.80
230.79	1.58	11.70	27.00	23.73	10.01	46.00	-35.99
262.80	1.74	12.57	26.86	56.48	43.93	46.00	-2.07
351.07	2.06	15.43	27.09	49.72	40.12	46.00	-5.88

Vertical.

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)
175.50	1.36	9.71	27.29	40.61	24.39	43.50	-19.11
261.83	1.73	12.55	26.87	53.37	40.78	46.00	-5.22
351.07	2.06	15.43	27.09	47.71	38.11	46.00	-7.89
439.34	2.37	16.68	27.54	42.01	33.52	46.00	-12.48

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

Test Results: The unit does meet the FCC Part 15 C Section 15.239 requirements.


FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

5.3.2 Conducted Emissions

Test Requirement: FCC Part15 B
Test Method: ANSI C63.4
Frequency Range: 150KHz to 30MHz
Class / Severity: Class B
Detector: Peak for pre-scan (9kHz Resolution Bandwidth)
Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit
Operating Environment:
Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1012 mbar
EUT Operation: Test in on mode connected with PC system.

Plan View of Test Setup

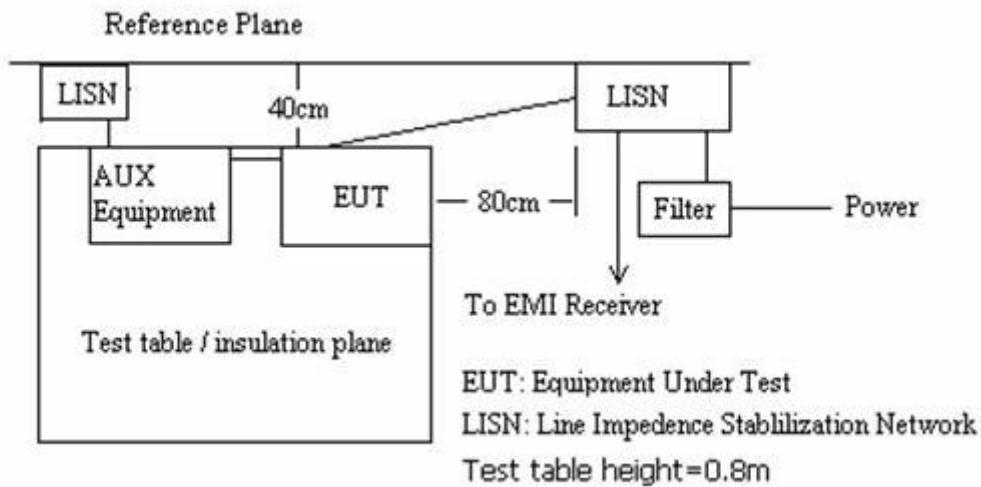

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

The following Quasi-Peak and Average measurements were performed on the EUT.

FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Live Line:

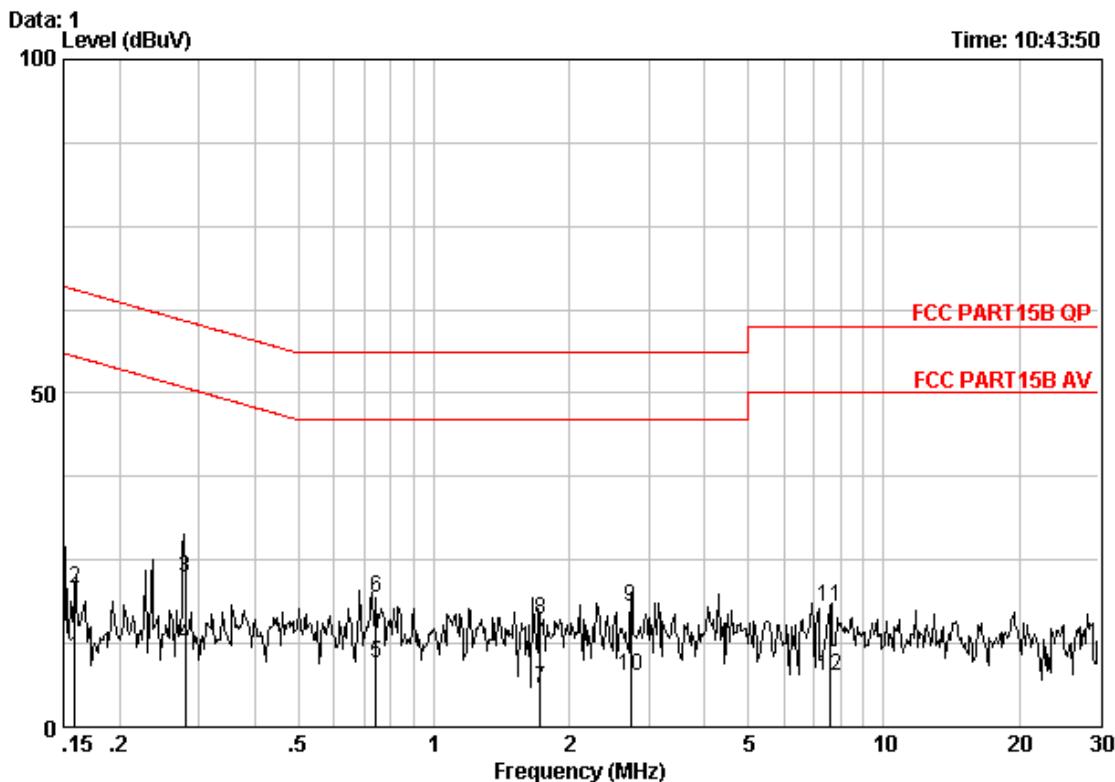


Site : Shielding Room
Condition : FCC PART15B QP CE LINE
EUT : wireless head phones
Job no : 4205RF
Test mode : ON
Test line : N/A

Freq	Cable	LISN	Read	Limit	Over	Remark	
	Loss	Factor	Level				
	MHz	dB	dB	dBuV	dBuV	dB	
1	0.15900	0.04	-0.05	10.34	10.33	55.52	-45.19 Average
2	0.15900	0.04	-0.05	20.71	20.69	65.52	-44.82 QP
3	0.28029	0.05	-0.04	22.40	22.40	60.81	-38.40 QP
4	0.28029	0.05	-0.04	12.31	12.32	50.81	-38.49 Average
5 @	0.74302	0.06	-0.05	9.48	9.50	46.00	-36.50 Average
6	0.74302	0.06	-0.05	19.28	19.30	56.00	-36.70 QP
7	1.725	0.11	-0.06	5.67	5.72	46.00	-40.28 Average
8	1.725	0.11	-0.06	15.93	15.98	56.00	-40.02 QP
9	2.736	0.14	-0.07	17.95	18.01	56.00	-37.99 QP
10	2.736	0.14	-0.07	7.65	7.71	46.00	-38.29 Average
11	7.606	0.20	-0.17	17.82	17.85	60.00	-42.15 QP
12	7.606	0.20	-0.17	7.56	7.59	50.00	-42.41 Average

FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

Neutral Line

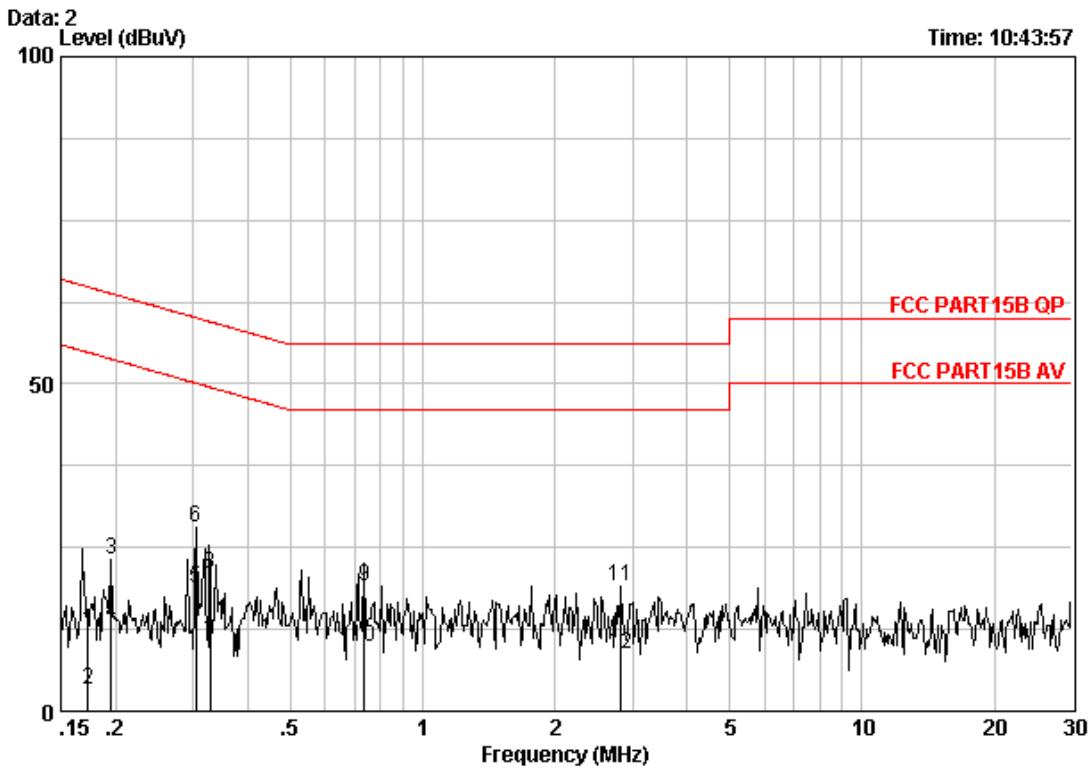

Site : Shielding Room
Condition : FCC PART15B QP CE NEUTRAL
EUT : wireless head phones
Job no : 4205RF
Test mode : ON
Test line : N/A

	Freq	Cable	LISN	Read	Limit	Over	Remark	
		MHz	Loss	Factor	Level	Level	Line	Limit
1	0.17307	0.04	-0.04	12.31	12.30	64.81	-52.51	QP
2	0.17307	0.04	-0.04	3.32	3.32	54.81	-51.50	Average
3	0.19550	0.04	-0.04	23.03	23.03	63.80	-40.77	QP
4	0.19550	0.04	-0.04	13.25	13.25	53.80	-40.55	Average
5 @	0.30509	0.05	-0.04	18.67	18.68	50.10	-31.42	Average
6	0.30509	0.05	-0.04	28.05	28.07	60.10	-32.04	QP
7	0.32858	0.05	-0.04	10.37	10.38	49.49	-39.10	Average
8	0.32858	0.05	-0.04	20.84	20.85	59.49	-38.64	QP
9	0.73519	0.06	-0.04	19.11	19.13	56.00	-36.87	QP
10	0.73519	0.06	-0.04	9.67	9.69	46.00	-36.31	Average
11	2.824	0.14	-0.07	18.89	18.95	56.00	-37.05	QP
12	2.824	0.14	-0.07	8.67	8.73	46.00	-37.27	Average

FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

5.3.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C Section 15.215 (C) and Section 15.239.

Test Method: ANSI C63.4

Operation within the band 88-108 MHz .


88-108MHz Mode.

Requirements:

(a) Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88-108 MHz.

Method of measurement:

The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector. The vertical Scale is set to 10dB per division. The horizontal scale is set to 10KHz per division.

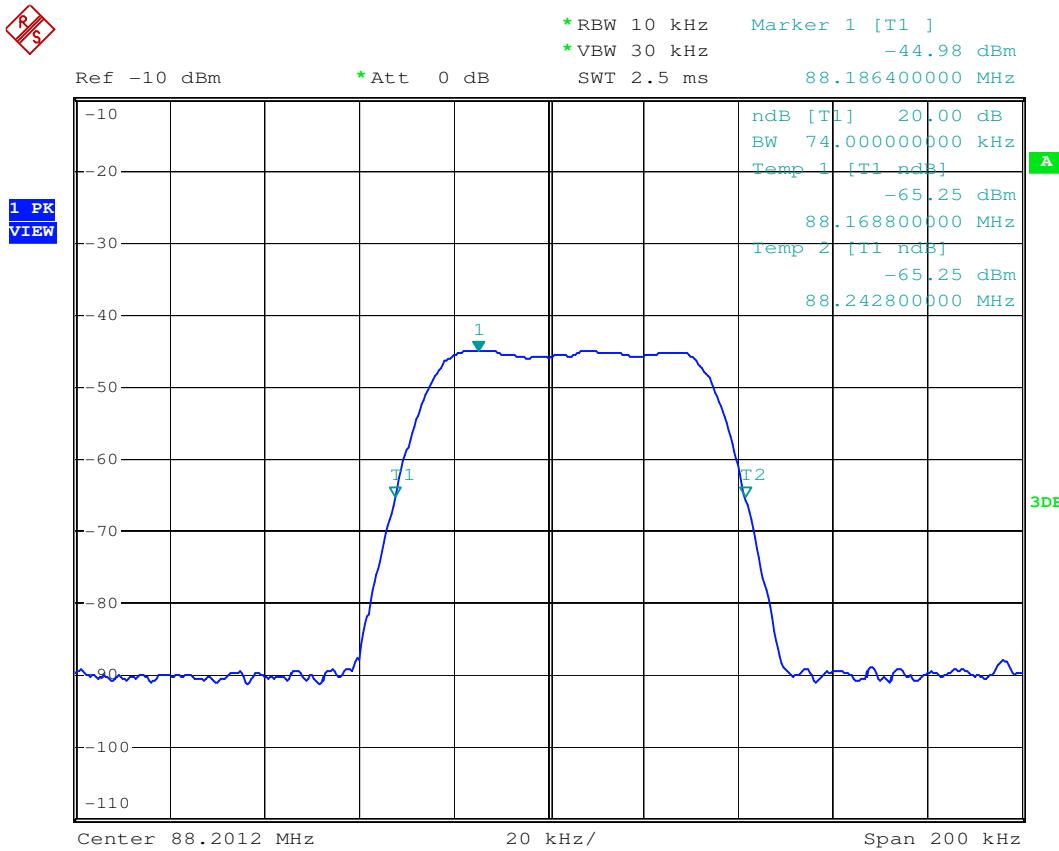

Date: 28.AUG.2008 15:07:10

The results: The unit does meet the FCC Part 15 C Section 15.215 requirements

FCC ID: WNLHS-828

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms_and_conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.