



DATE: 20 December 2012

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Precyse Technologies Inc

Equipment under test:
Micro Beacon EQ-55

BC91005002

Written by:

D. Shidowsky, Documentation

Approved by:

I. Siboni, Test Engineer

Approved by:

I. Raz, EMC Laboratory Manager

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



Measurement/Technical Report for Precyse Technologies Inc

Micro Beacon EQ-55

BC91005002

FCC ID: WONBC91005002

This report concerns: Original Grant: X

Class I Change:

Class II Change:

Equipment type: Digital Transmission System

Limits used:

47CFR15 Section 15.247

Measurement procedure used is according to KDB 558074 D01 18 January 2012 and ANSI 6.34: 2003.

Application for Certification
prepared by:

Ishaishou Raz

ITL (Product Testing) Ltd.

Kfar Bin Nun

D.N. Shimshon 99780

Israel

e-mail Sraz@itl.co.il

Applicant for this device:
(different from "prepared by")

Lior Bilia

Precyse Technologies Ltd.

Ha'amal 11

Rosh Ha'ayin 48092

Israel

Tel: +972-3-922-7093

Fax: +972-3-922-7515

e-mail: lbilia@precysetech.com



TABLE OF CONTENTS

1. GENERAL INFORMATION -----	5
1.1 Administrative Information.....	5
1.2 List of Accreditations	6
1.3 Product Description	7
1.4 Test Methodology	7
1.5 Test Facility	7
1.6 Measurement Uncertainty	7
2. SYSTEM TEST CONFIGURATION-----	8
2.1 Justification.....	8
2.2 EUT Exercise Software	8
2.3 Special Accessories	8
2.4 Equipment Modifications	8
2.5 Configuration of Tested System	8
3. TEST SETUP PHOTOS-----	8
4. 6 DB MINIMUM BANDWIDTH -----	13
4.1 Test Specification	13
4.2 Test Procedure.....	13
4.3 Test Results.....	13
4.4 6 dB Minimum Bandwidth Test Equipment Used.	15
5. MAXIMUM PEAK POWER OUTPUT-----	16
5.1 Test Specification	16
5.2 Test Procedure	16
5.3 Test Results.....	16
5.1 Maximum Peak Output Power Test Equipment Used.....	18
6. PEAK POWER OUTPUT OUT OF 902-928 MHZ BAND-----	19
6.1 Test Specification	19
6.2 Test Procedure	19
6.3 Test Results.....	19
6.4 Peak Power Output of 902-928 MHz Band Test Equipment Used.....	30
7. BAND EDGE SPECTRUM -----	31
7.1 Test Specification	31
7.2 Test Procedure	31
7.3 Test Results.....	31
7.4 Band Edge Spectrum Test Equipment Used.....	33
8. SPURIOUS RADIATED EMISSION, 9 KHZ – 30 MHZ -----	34
8.1 Test Specification	34
8.2 Test Procedure	34
8.3 Test Results.....	34
8.4 Field Strength Calculation	35
8.5 Spurious Radiated Emission, 9 kHz – 30 MHz Test Equipment Used	35
9. SPURIOUS RADIATED EMISSION 30 MHZ – 10 GHZ -----	36
9.1 Test Specification	36
9.2 Test Procedure	36
9.3 Test Results.....	37
9.4 Field Strength Calculation 30 – 1000 MHz	50
9.5 Spurious Radiated Emission 30 – 10000 MHz Test Equipment Used	51
10. TRANSMITTED POWER DENSITY -----	52
10.1 Test Specification	52
10.2 Test Procedure	52
10.3 Test Results.....	52
10.1 Test Equipment Used Transmitted Power Density.....	54



11. ANTENNA GAIN/INFORMATION	55
12. R.F EXPOSURE/SAFETY	56
13. APPENDIX A - CORRECTION FACTORS	58
13.1 Correction factors for CABLE	58
13.2 Correction factors for CABLE	59
13.3 Correction factors for CABLE	60
12.6 Correction factors for LOG PERIODIC ANTENNA	61
13.4 Correction factors for LOG PERIODIC ANTENNA	62
13.5 Correction factors for BICONICAL ANTENNA	63
13.6 Correction factors for ACTIVE LOOP ANTENNA	64



1. General Information

1.1 Administrative Information

Manufacturer: Precyse Technologies Inc

Manufacturer's Address: Ha'amal 11
Rosh Ha'ayin, 48092
Israel
Tel: +972-3-922-7093
Fax: +972-3-922-7515

Manufacturer's Representative: Lior Bilia

Equipment Under Test (E.U.T): Micro Beacon EQ-55

Equipment Model No.: BC91005002

Equipment Serial No.: Not Designated

Date of Receipt of E.U.T: 25.11.2012

Start of Test: 25.11.2012

End of Test: 29.11.2012

Test Laboratory Location: I.T.L (Product Testing) Ltd.
Kfar Bin Nun,
ISRAEL 99780

Test Specifications: 47CFR15 Section 15.247



1.2 *List of Accreditations*

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), Registration No. 90715.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-1350, R-1285.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025B-1.
6. TUV Product Services, England, ASLLAS No. 97201.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 *Product Description*

The Micro Beacon is used to define a location zone. It is based on a microcontroller and 4 RF transceivers.

It uses the iLocate proprietary protocol which provides a 2 way, half duplex communication with the base station and to transmit its ID to the SATs.

The unit is powered by an internal 3.6V battery pack.

1.4 *Test Methodology*

Radiated testing was performed according to the procedures in KDB 558074 D01 18 January 2012 and ANSI 63.4: 2003. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 *Test Facility*

The radiated emissions tests were performed at I.T.L.'s testing facility at Kfar Bin-Nun, Israel. This site is a FCC listed test laboratory (FCC Registration No. 90715, date of listing November 21, 2012).

I.T.L.'s EMC Laboratory is also accredited by A2LA, certificate No. 1152.01.

1.6 *Measurement Uncertainty*

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB



2. System Test Configuration

2.1 ***Justification***

The E.U.T. is a wall-mounted unit and was tested in the vertical position simulating wall-mounting.

The E.U.T. can use either an integral antenna (0dBi) or an external antenna (0 dBi). All tests except spurious radiated emission were performed conducted from the antenna port. Spurious radiated emission was tested using both the integral antenna and the external antenna.

Testing was performed using a DC power supply since the battery pack ran out of power.

2.2 ***EUT Exercise Software***

The unit was operated in continuous transmission mode.

In this mode the beacon transmits its ID packet continuously, with 3.2% duty cycle. The unit transmission channels were set to 0 (905.0MHz), 8 (911.4MHz) and 15 (917.0MHz).

2.3 ***Special Accessories***

No special accessories were needed to achieve compliance.

2.4 ***Equipment Modifications***

No modifications were necessary in order to achieve compliance.

2.5 ***Configuration of Tested System***

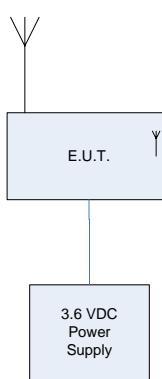


Figure 1. Configuration of Tested System

3. Test Setup Photos

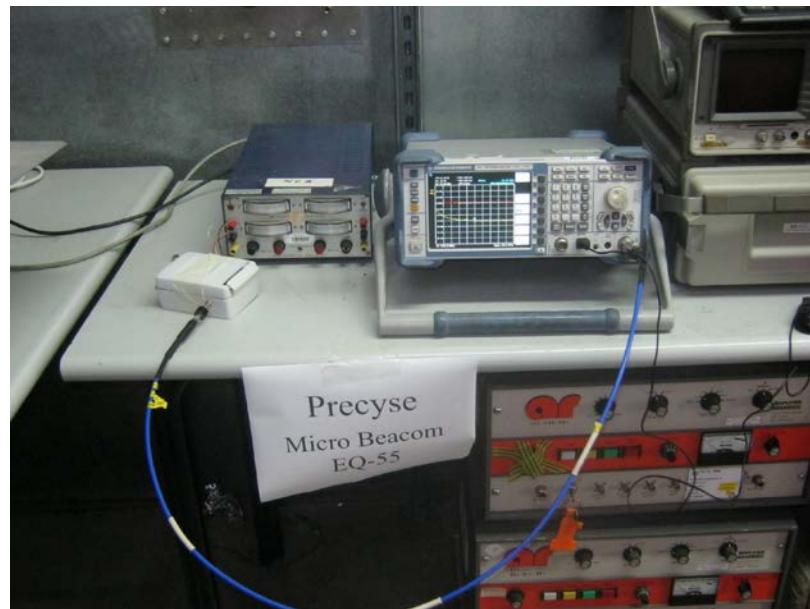


Figure 2. Conducted Emission From Antenna Ports Tests

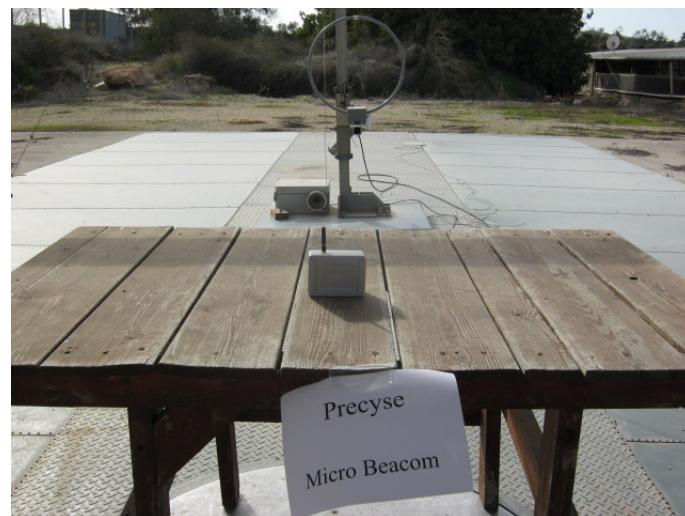


Figure 3. Radiated Emission Test External Antenna



Figure 4. Radiated Emission Test External Antenna



Figure 5. Radiated Emission Test External Antenna



Figure 6. Radiated Emission Test Internal Antenna



Figure 7. Radiated Emission Test Internal Antenna



Figure 8. Radiated Emission Test Internal Antenna



4. 6 dB Minimum Bandwidth

4.1 Test Specification

FCC Part 15, Subpart C Section 15.247-a2

4.2 Test Procedure

The E.U.T. was set to the applicable test frequency. The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (30 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 100 kHz resolution BW. The spectrum bandwidth of the E.U.T. at the point of 6 dB below maximum peak power was measured and recorded.

The E.U.T. was tested at 905.0, 911.4, and 917.0 MHz.

4.3 Test Results

Operation Frequency (MHz)	Reading (kHz)	Specification (kHz)
905.0	714.6	>500
911.4	706.6	>500
917.0	694.6	>500

Figure 9 — 6 dB Minimum Bandwidth Test Results Table

See additional information in Figure 10 to Figure 12.

JUDGEMENT: Passed

TEST PERSONNEL:

Tester Signature: I. Siboni

Date: 05.12.12

Typed/Printed Name: I. Siboni



6 dB Minimum Bandwidth

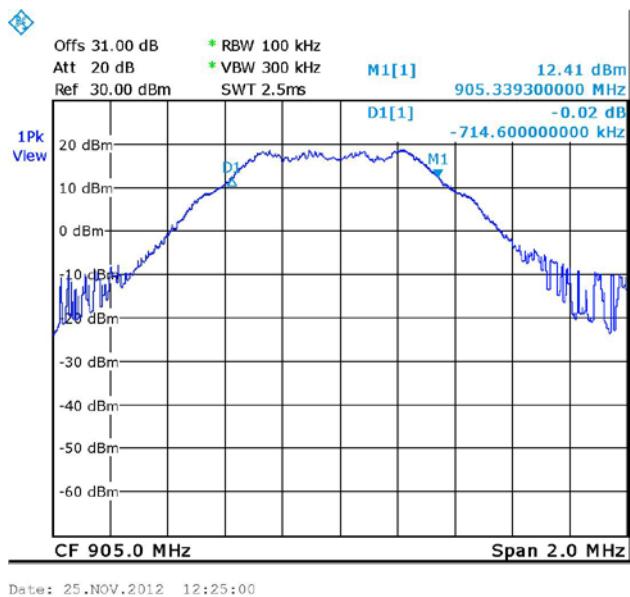


Figure 10 — 905.0 MHz

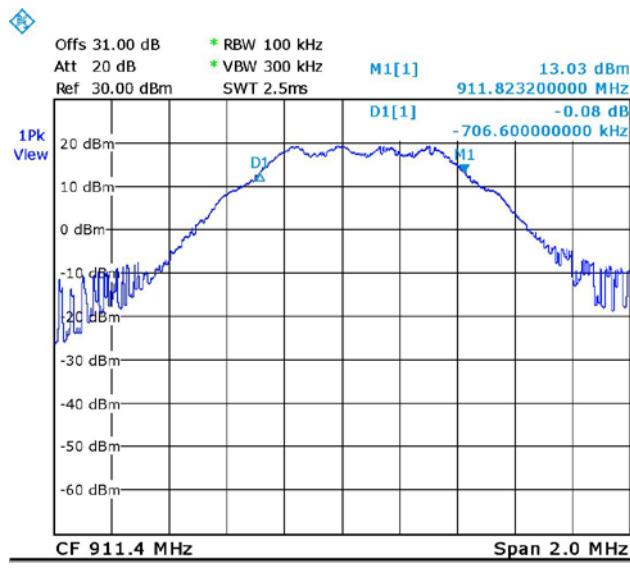


Figure 11 — 911.4 MHz



6 dB Minimum Bandwidth

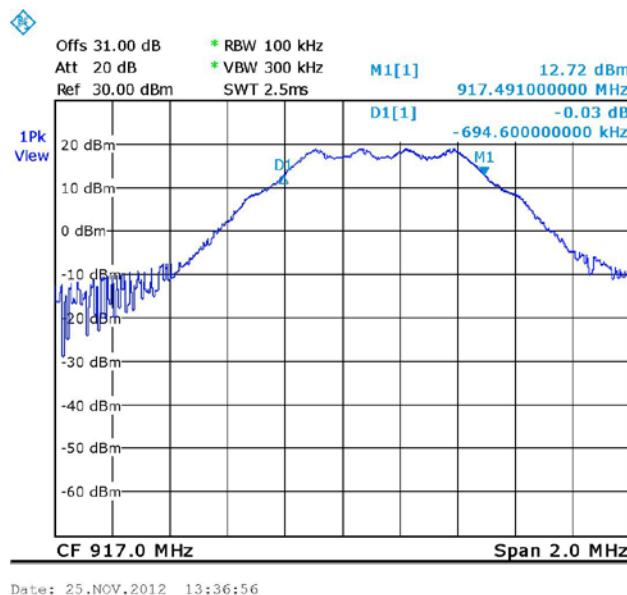


Figure 12 — 917.0MHz

4.4 6 dB Minimum Bandwidth Test Equipment Used.

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibration Date	Period
Spectrum Analyzer	ROHDE & SCHWARZ	FSL6	100194	November 1, 2012	1 year
Attenuator	MCL	Bw-s30w5	0533	August 14, 2012	1 year
Cable	Mini-Circuits	CBL-4FT-SMNM+	30084	August 28, 2012	1 year

Figure 13 Test Equipment Used



5. Maximum Peak Power Output

5.1 ***Test Specification***

FCC Part 15, Subpart C Section 15.247(b)

5.2 ***Test Procedure***

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator (30 dB) and an appropriate coaxial cable (cable loss = 1 dB). The Spectrum Analyzer was set to 1.0 MHz resolution BW. Peak power level was measured at selected operation frequencies.

The E.U.T. was tested at 905.0, 911.4, and 917.0 MHz.

5.3 ***Test Results***

Operation Frequency (MHz)	Power (dBm)	Specification (dBm)	Margin (dB)
905.0	21.15	30.0	-8.85
911.4	21.75	30.0	-8.25
917.0	21.32	30.0	-8.68

Figure 14 Maximum Peak Power Output Test Results Table

See additional information in Figure 15 to Figure 17.

JUDGEMENT: Passed by 8.25 dB

TEST PERSONNEL:

Tester Signature: I. Siboni

Date: 05.12.12

Typed/Printed Name: I. Siboni



Maximum Peak Power Output

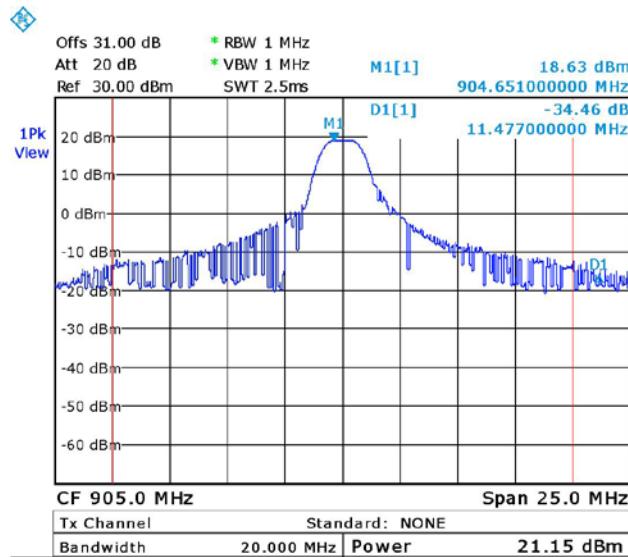


Figure 15 — 905.0 MHz


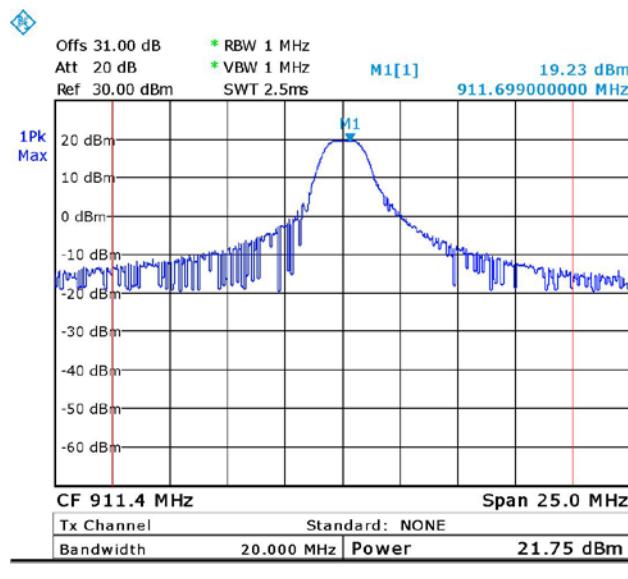


Figure 16 — 911.4 MHz

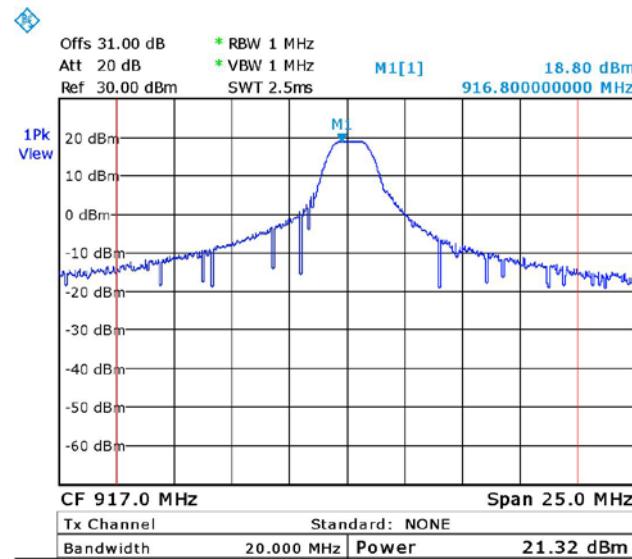

Maximum Peak Power Output

Figure 17 — 917.0 MHz

5.1 Maximum Peak Output Power Test Equipment Used

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibration Date	Period
Spectrum Analyzer	ROHDE & SCHWARZ	FSL6	100194	November 1, 2012	1 year
Attenuator	MCL	Bw-s30w5	0533	August 14, 2012	1 year
Cable	Mini-Circuits	CBL-4FT-SMNM+	30084	August 28, 2012	1 year

Figure 18 Test Equipment Used



6. Peak Power Output Out of 902-928 MHz Band

6.1 Test Specification

FCC Part 15, Subpart C, Section 15.247

6.2 Test Procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (30 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 1 MHz resolution BW except for the frequency range 9 kHz-150 kHz where the RBW was set to 1 kHz, the frequency range 150 kHz-1 MHz where the RBW was set to 10 kHz, and the frequency range 1 MHz-1 GHz where the RBW was set to 100 kHz. The frequency range from 9 kHz to 10 GHz was scanned. Level of spectrum components out of the 902-928 MHz was measured at the selected operation frequencies.

The E.U.T. was tested at 905.0, 911.4, and 917.0 MHz.

6.3 Test Results

Operation Frequency (MHz)	Reading (dBm)	Specification (dBm)	Margin (dB)
905.0	-26.8	1.2	-25.6
911.4	-27.6	1.8	-25.8
917.0	-26.7	1.3	-25.4

Figure 19 Peak Power Output of 902 - 928 MHz Band Test Results Table

See additional information in Figure 20 to Figure 39.

JUDGEMENT: Passed by 25.4 dB

TEST PERSONNEL:

Tester Signature:

Date: 05.12.12

Typed/Printed Name: I. Siboni



Peak Power Output Out of 902-928 MHz Band

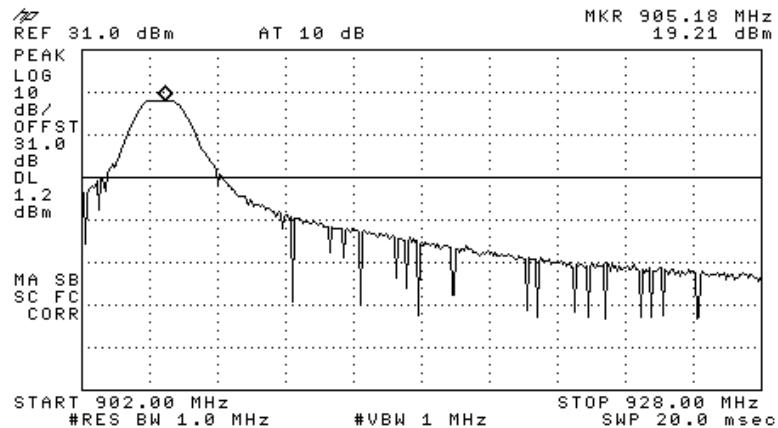


Figure 20 — 905.0 MHz

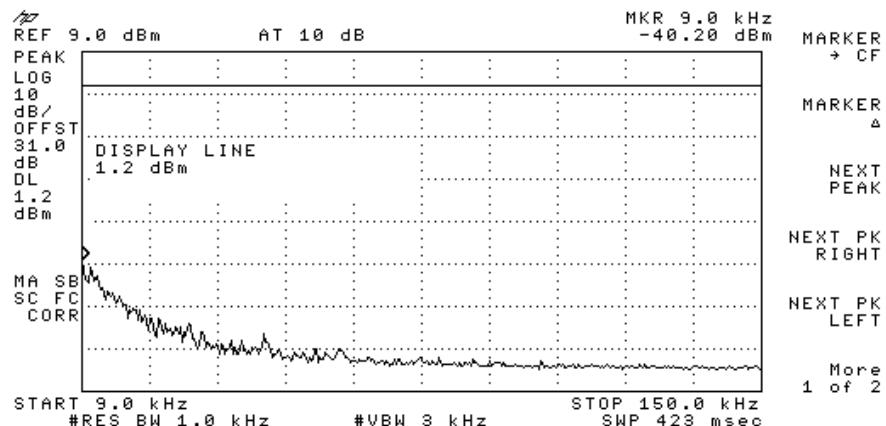


Figure 21 — 905.0 MHz



Peak Power Output Out of 902-928 MHz Band

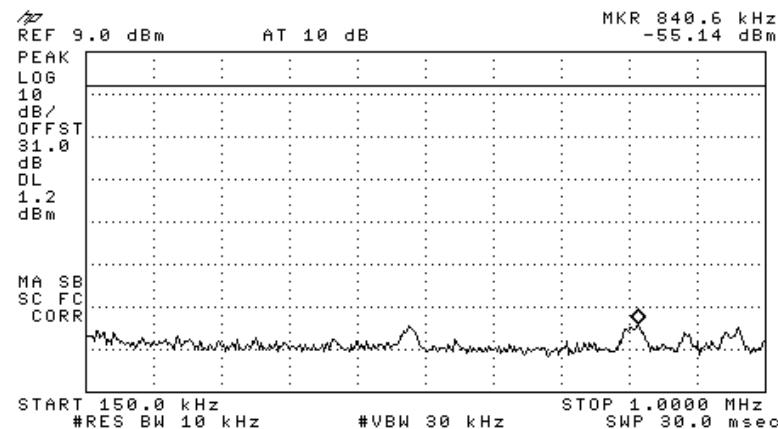


Figure 22 — 905.0 MHz

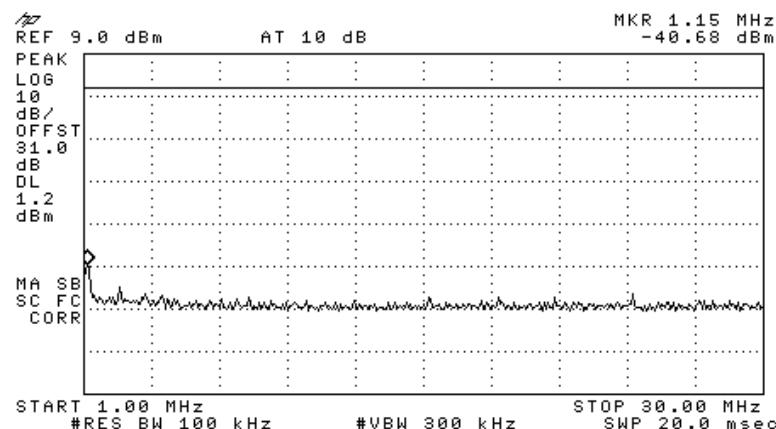


Figure 23 — 905.0 MHz



Peak Power Output Out of 902-928 MHz Band

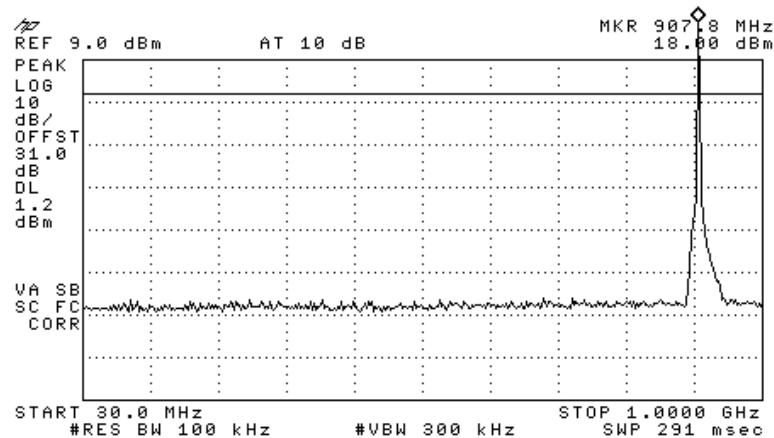


Figure 24 — 905.0 MHz

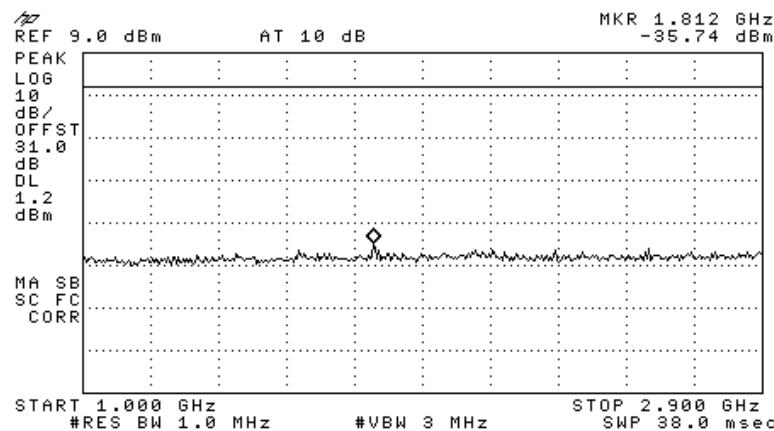


Figure 25 — 905.0 MHz



Peak Power Output Out of 902-928 MHz Band

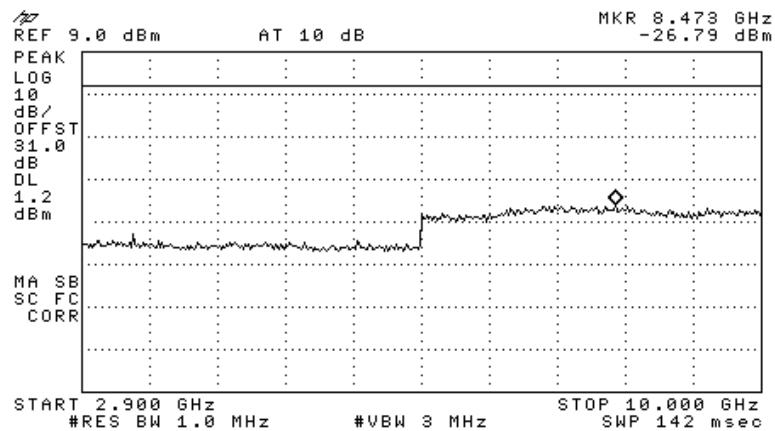


Figure 26 — 905.0 MHz

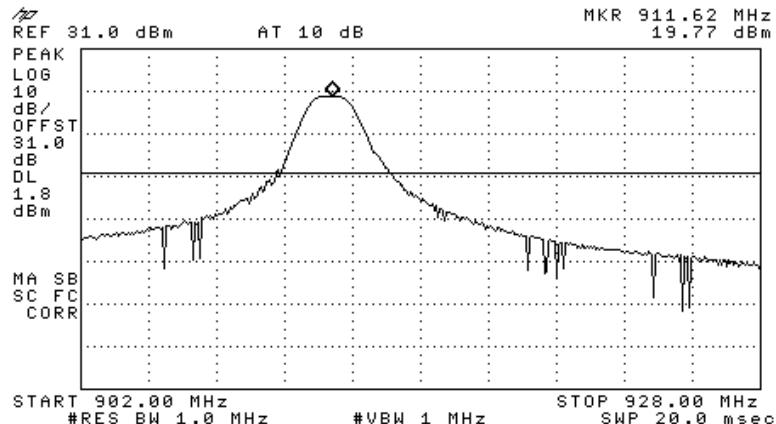


Figure 27 — 911.4 MHz



Peak Power Output Out of 902-928 MHz Band

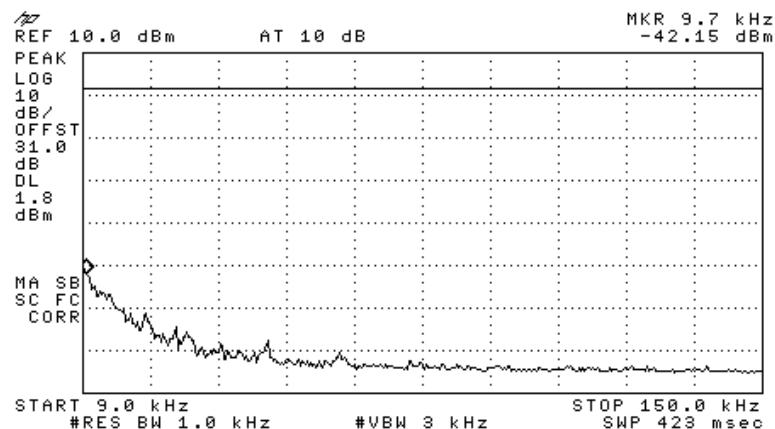


Figure 28 — 911.4 MHz

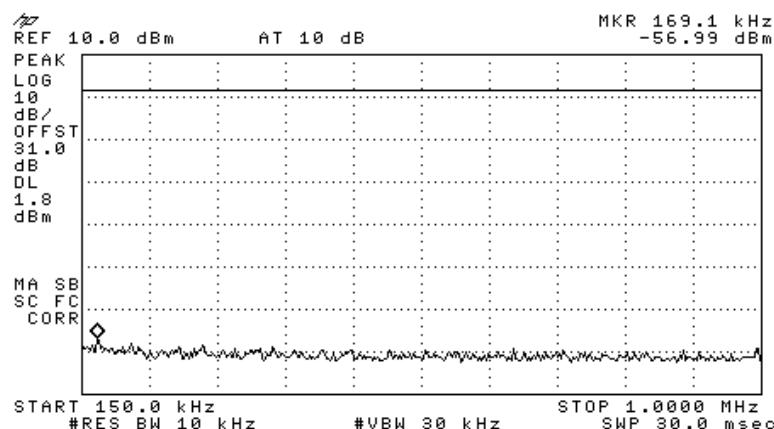


Figure 29 — 911.4 MHz



Peak Power Output Out of 902-928 MHz Band

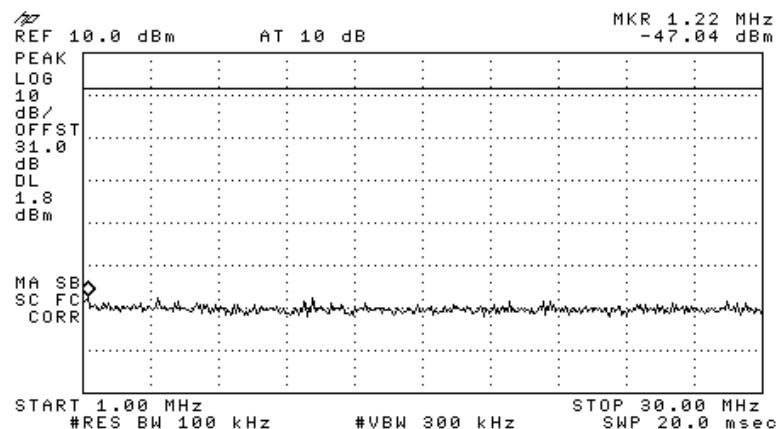


Figure 30 — 911.4 MHz

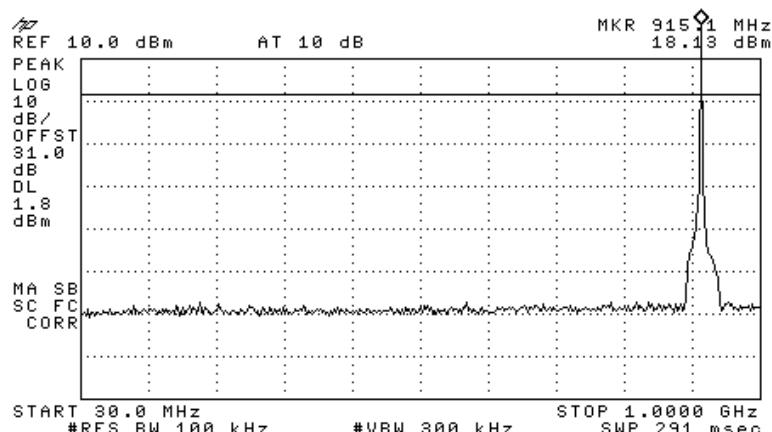


Figure 31 — 911.4 MHz



Peak Power Output Out of 902-928 MHz Band

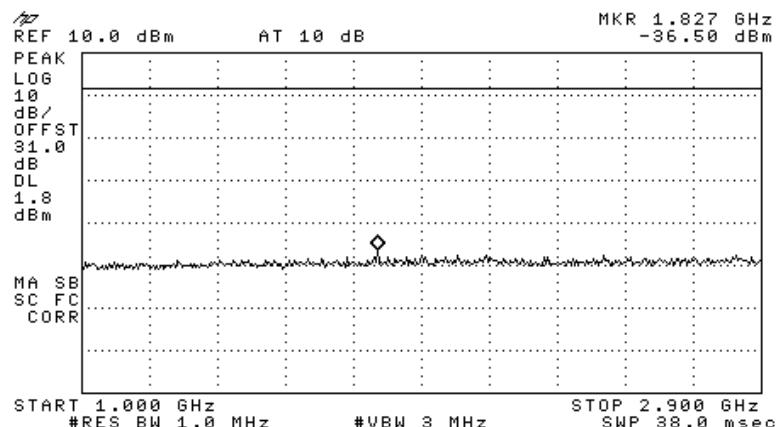


Figure 32 — 911.4 MHz

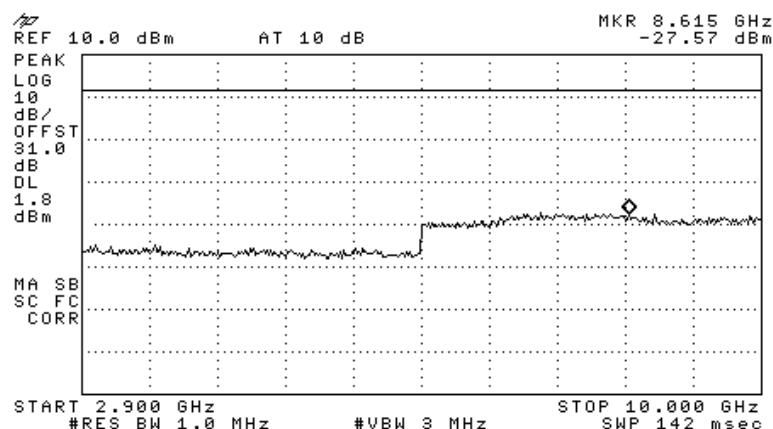


Figure 33 — 911.4 MHz



Peak Power Output Out of 902-928 MHz Band

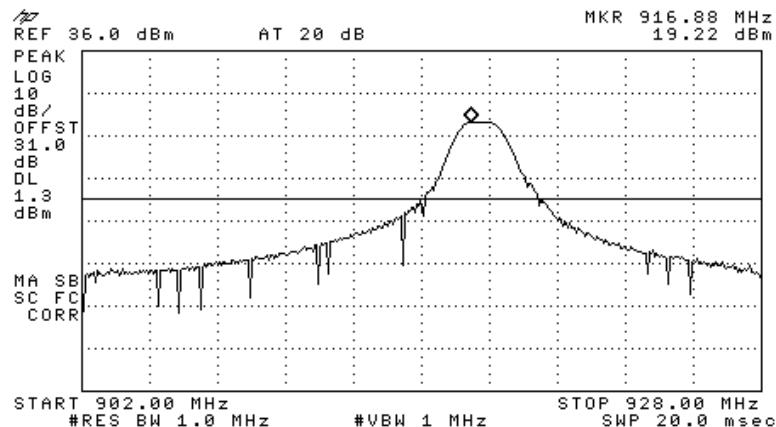


Figure 34 — 917.0 MHz

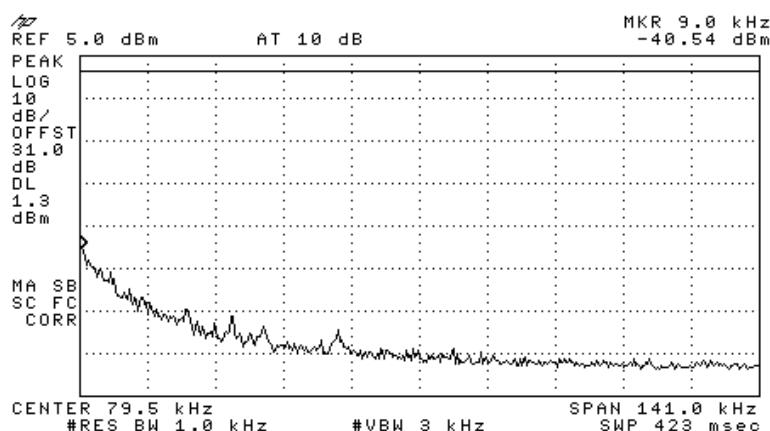


Figure 35 — 917.0 MHz



Peak Power Output Out of 902-928 MHz Band

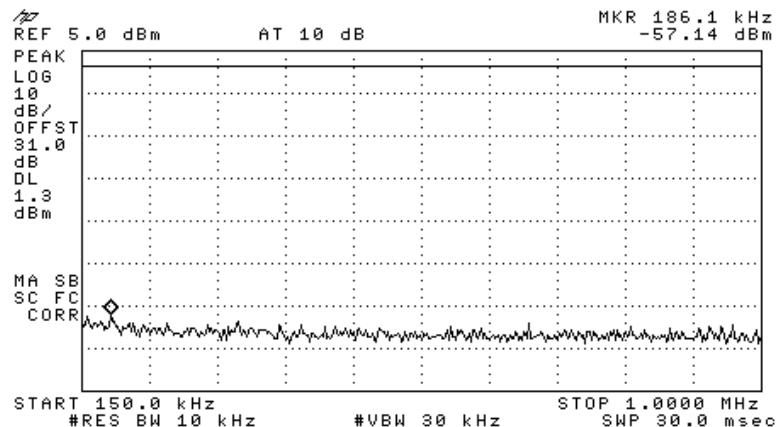


Figure 36 — 917.0 MHz

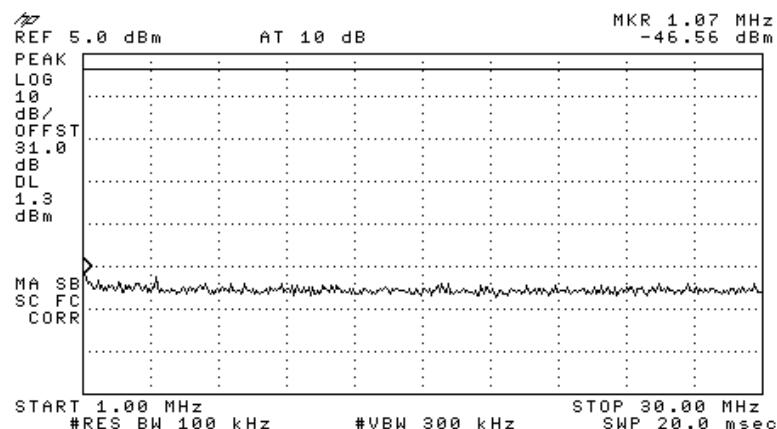


Figure 37 — 917.0 MHz



Peak Power Output Out of 902-928 MHz Band

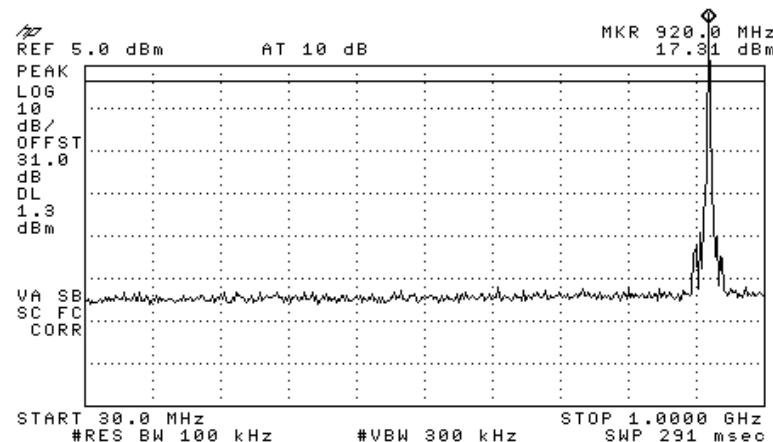


Figure 38 — 917.0 MHz

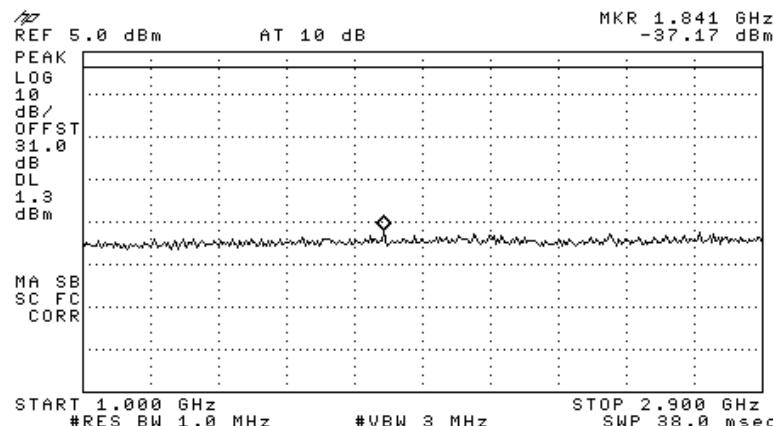


Figure 39 — 917.0 MHz



Peak Power Output Out of 902-928 MHz Band

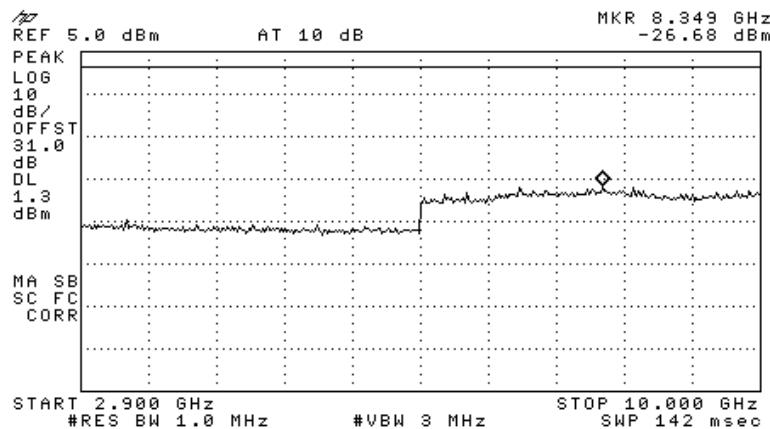


Figure 40 — 917.0 MHz

6.4 Peak Power Output of 902-928 MHz Band Test Equipment Used

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibration Date	Period
Spectrum Analyzer	HP	8592L	3826A01204	March 5, 2012	1 year
Attenuator	MCL	Bw-s30w5	0533	August 14, 2012	1 year
Cable	Mini-Circuits	CBL-4FT-SMNM+	30084	August 28, 2012	1 year

Figure 41 Test Equipment Used



7. Band Edge Spectrum

7.1 Test Specification

FCC Part 15, Subpart C, Section 15.247

7.2 Test Procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (30 dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 100 kHz resolution BW. Maximum power level below 902 MHz and above 928 MHz was measured relative to power level at 905.0 MHz, and 917.0 MHz correspondingly.

The E.U.T. was tested at the operation frequencies of 905.0 and 917.0 MHz.

7.3 Test Results

Operation Frequency (MHz)	Band Edge Frequency (MHz)	Spectrum Level (dBm)	Specification (dBm)	Margin (dB)
905.0	902.0	-22.19	1.15	-21.04
917.0	928.0	-32.35	1.32	-31.03

Figure 42 Band Edge Spectrum Test Results Table

See additional information in Figure 43 to Figure 44.

JUDGEMENT: Passed by 21.04 dB

TEST PERSONNEL:

Tester Signature: 

Date: 05.12.12

Typed/Printed Name: I. Siboni



Band Edge Spectrum

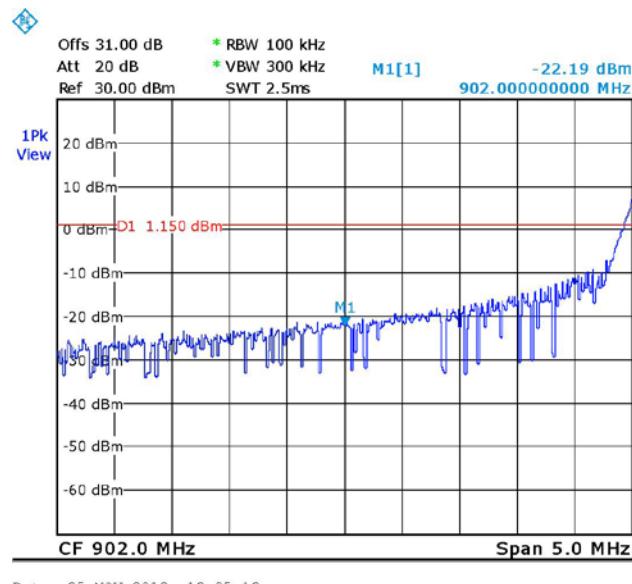


Figure 43 — 905.0 MHz

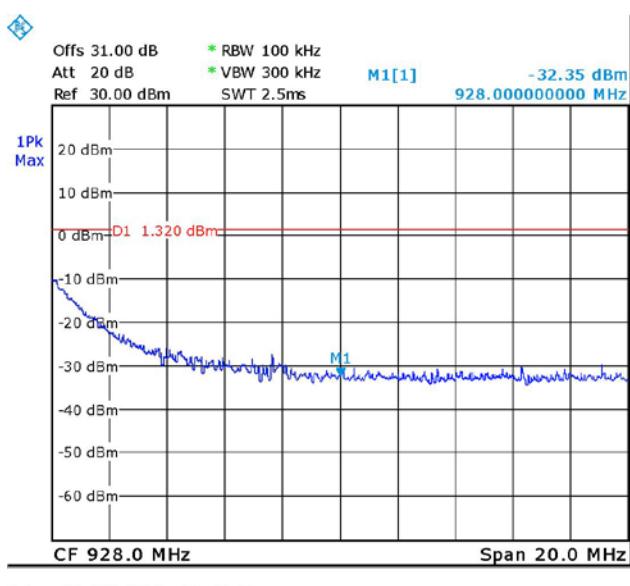


Figure 44 — 917.0 MHz



Band Edge Spectrum

7.4 *Band Edge Spectrum Test Equipment Used*

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibration Date	Period
Spectrum Analyzer	ROHDE & SCHWARZ	FSL6	100194	November 1, 2012	1 year
Attenuator	MCL	Bw-s30w5	0533	August 14, 2012	1 year
Cable	Mini-Circuits	CBL-4FT-SMNM+	30084	August 28, 2012	1 year

Figure 45 Test Equipment Used



8. Spurious Radiated Emission, 9 kHz – 30 MHz

8.1 Test Specification

9 kHz-30 MHz, FCC, Part 15, Subpart C, Section 209

8.2 Test Procedure

The E.U.T. operation mode and test set-up are as described in Section 3.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 9 kHz-30 MHz was scanned.

The emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 9 kHz-30MHz, the loop antenna was rotated on its vertical axis. The antenna height (center of loop) was 1 meter at a distance of 3 meters.

The E.U.T. was tested at the operating frequencies of 905.0, 911.4, and 917.0 MHz using both the integral and external antennas.

8.3 Test Results


JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C, Section 209 specification.

The results for all three operating frequencies were the same.

No signals were detected in the frequency range of 9 kHz – 30 MHz for both antennas.

TEST PERSONNEL:

Tester Signature: 

Date: 05.12.12

Typed/Printed Name: I. Siboni



Spurious Radiated Emission, 9 kHz – 30 MHz

8.4 Field Strength Calculation

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$FS = RA + AF + CF$$

FS: Field Strength [dB μ v/m]
RA: Receiver Amplitude [dB μ v]
AF: Receiving Antenna Correction Factor [dB/m]
CF: Cable Attenuation Factor [dB]

No external pre-amplifiers are used.

8.5 Spurious Radiated Emission, 9 kHz – 30 MHz Test Equipment Used

Instrument	Manufacturer	Model	Serial Number	Calibration	Period
EMI Receiver	HP	85422E	3906A00276	December 12, 2011	1 year
RF Section	HP	85420E	3705A00248	December 12, 2011	1 year
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2012	1 year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 46 Test Equipment Used



9. Spurious Radiated Emission 30 MHz – 10 GHz

9.1 ***Test Specification***

30 MHz - 10 GHz, F.C.C., Part 15, Subpart C

9.2 ***Test Procedure***

The E.U.T. operation mode and test set-up are as described in Section 3.

See Section 2.1 Justification of the System Test Configuration concerning the E.U.T. orientation for this test.

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The configuration tested is shown in Figure 1.

The frequency range 30 MHz - 10 GHz was scanned, and the list of the highest emissions was verified and updated accordingly.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

In the frequency range of 30 MHz – 2.9 GHz, the emissions were measured using a computerized EMI receiver complying to CISPR 16 requirements. The specification limits and applicable correction factors are loaded to the receiver via a 3.5" floppy disk.

In the frequency range 2.9 - 10 GHz, a spectrum analyzer including a low noise amplifier was used. During peak measurements, the I.F. bandwidth was 1 MHz, and video bandwidth 3 MHz. During average measurements, the I.F. bandwidth was 1 MHz and video bandwidth was 100 Hz.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. Verification of the E.U.T emissions was based on the following methods: turning the E.U.T on and off; using a frequency span less than 10 MHz; observation of the signal level during turntable rotation. (Background noise is not affected by the rotation of the E.U.T.).


The E.U.T. was tested at the operating frequencies of 905.0, 911.4, and 917.0 MHz using both the integral and external antennas.



9.3 **Test Results**

JUDGEMENT: Passed by 6.4 dB

TEST PERSONNEL:

Tester Signature:  Date: 05.12.12

Typed/Printed Name: I. Siboni

Integral antenna:

For the operation frequencies of 905.00, 911.40, and 917.00 MHz, no signals were detected in the frequency range of 30 – 1000 MHz.

For the operation frequency 905.00MHz, the margin between the emission level and the specification limit is 6.1 in the worst case at the frequency of 1810.00 MHz, vertical polarization.

For the operation frequency 911.40 MHz, the margin between the emission level and the specification limit is 2.2 in the worst case at the frequency of 1822.80 MHz, horizontal polarization.

For the operation frequency 917.00 MHz, the margin between the emission level and the specification limit is 2.8 in the worst case at the frequency of 1834.34 MHz, horizontal polarization.

External antenna:

For the operation frequencies of 905.00, 911.40, and 917.00 MHz, no signals were detected in the frequency range of 30 – 1000 MHz.

For the operation frequency 905.00MHz, the margin between the emission level and the specification limit is 4.6 in the worst case at the frequency of 1810.00 MHz, vertical polarization.

For the operation frequency 911.40 MHz, the margin between the emission level and the specification limit is 6.6 in the worst case at the frequency of 1822.80 MHz, horizontal polarization.

For the operation frequency 917.00 MHz, the margin between the emission level and the specification limit is 9.9 in the worst case at the frequency of 1834.34 MHz, horizontal polarization.

The details of the highest emissions are given in Figure 47 to Figure 58.



Spurious Radiated Emission, 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 905.0 MHz Integral Antenna

Frequency (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Margin (dB)
1810.99	H	63.7	74.0	-10.3
1810.00	V	67.9	74.0	-6.1
2715.61	H	62.2	74.0	-11.8
2715.19	V	56.1	74.0	-17.9

**Figure 47. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 905.0 MHz Integral Antenna

Frequency (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1810.99	H	30.7	54.0	-23.3
1810.10	V	31.5	54.0	-22.5
2715.48	H	43.4	54.0	-10.6
2715.69	V	41.9	54.0	-12.1

**Figure 48. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission, 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency : 911.4 MHz Integral Antenna

Frequency (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Margin (dB)
1822.80	H	71.8	74.0	-2.2
1822.80	V	68.4	74.0	-5.6
2733.90	H	63.4	74.0	-10.6
2724.67	V	57.1	74.0	-16.9

**Figure 49. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 911.4 MHz Integral Antenna

Frequency (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1822.80	H	32.3	54.0	-21.7
1822.80	V	31.6	54.0	-22.4
2734.32	H	47.4	54.0	-9.6
2733.94	V	42.2	54.0	-11.8

**Figure 50. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission, 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 917.0 MHz Integral Antenna

Frequency (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Margin (dB)
1834.34	H	71.2	74.0	-2.8
1833.82	V	63.9	74.0	-10.1
2751.12	H	62.7	74.0	-11.3
2751.91	V	57.1	74.0	-16.9

**Figure 51. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 917.0 MHz Integral Antenna

Operation Frequency (MHz)	Freq. (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1833.80	917.0	H	45.6	54.0	-8.4
1833.79	917.0	V	43.7	54.0	-10.3
2751.15	917.0	H	47.6	54.0	-6.4
2751.46	917.0	V	46.8	54.0	-7.2

**Figure 52. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission, 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 905.0 MHz External Antenna

Frequency (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Margin (dB)
1810.99	H	63.3	74.0	-10.7
1810.00	V	69.4	74.0	-4.6
2715.61	H	61.6	74.0	-12.4
2715.19	V	58.4	74.0	-15.6

**Figure 53. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 905.0 MHz External Antenna

Frequency (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1810.99	H	30.9	54.0	-23.1
1810.10	V	31.8	54.0	-22.2
2715.48	H	43.2	54.0	-10.8
2715.69	V	42.5	54.0	-11.5

**Figure 54. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission, 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency : 911.4 MHz External Antenna

Frequency (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Margin (dB)
1822.80	H	63.2	74.0	-10.8
1822.80	V	67.4	74.0	-6.6
2733.90	H	62.1	74.0	-11.9
2724.67	V	58.7	74.0	-15.3

**Figure 55. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 911.4 MHz External Antenna

Frequency (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1822.80	H	30.5	54.0	-23.5
1822.80	V	31.2	54.0	-22.8
2734.32	H	43.4	54.0	-10.6
2733.94	V	42.6	54.0	-11.4

**Figure 56. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission, 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Peak
Operation Frequency: 917.0 MHz External Antenna

Frequency (MHz)	Polarity (H/V)	Peak Reading (dB μ V/m)	Peak Specification (dB μ V/m)	Margin (dB)
1834.34	H	64.1	74.0	-9.9
1833.82	V	63.1	74.0	-10.9
2751.12	H	62.6	74.0	-11.4
2751.91	V	59.7	74.0	-14.3

**Figure 57. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL
Detector: Peak**

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Reading” includes correction factor.

“Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



Spurious Radiated Emission 30 MHz - 10 GHz

E.U.T Description Micro Beacon EQ-55
Part Number BC91005002
Serial Number: Not Designated

Specification: FCC, Part 15, Subpart C

Antenna Polarization: Horizontal/Vertical Frequency range: 1.0 GHz to 10.0 GHz
Test Distance: 3 meters Detector: Average
Operation Frequency: 917.0 MHz External Antenna

Operation Frequency (MHz)	Polarity (H/V)	Average Reading (dB μ V/m)	Average Specification (dB μ V/m)	Margin (dB)
1833.80	H	42.7	54.0	-11.3
1833.79	V	41.9	54.0	-12.1
2751.15	H	43.4	54.0	-10.6
2751.46	V	42.9	54.0	-11.1

**Figure 58. Radiated Emission. Antenna Polarization: HORIZONTAL / VERTICAL.
Detector: Average**

Notes:

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Average Reading” includes correction factor.

* Correction Factor = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



9.4 **Field Strength Calculation 30 – 1000 MHz**

The field strength is calculated directly by the EMI Receiver software, and a "Correction Factors" data disk, using the following equation:

$$[\text{dB}\mu\text{v}/\text{m}] \text{ FS} = \text{RA} + \text{AF} + \text{CF}$$

FS: Field Strength [dB μ v/m]

RA: Receiver Amplitude [dB μ v]

AF: Receiving Antenna Correction Factor [dB/m]

CF: Cable Attenuation Factor [dB]

Example: FS = 30.7 dB μ V (RA) + 14.0 dB (AF) + 0.9 dB (CF) = 45.6 dB μ V

No external pre-amplifiers are used.



9.5 ***Spurious Radiated Emission 30 – 10000 MHz Test Equipment Used***

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Period
EMI Receiver	HP	85422E	3906A00276	December 10, 2012	1 Year
RF Filter Section	HP	85420E	3705A00248	December 10, 2012	1 Year
Antenna Biconical	ARA	BCD 235/B	1041	November 12, 2012	1 Year
Antenna Log Periodic	ARA	LPD-2010/A	1038	March 29, 2012	1 Year
Antenna Log Periodic	A.H. Systems	SAS-200/511	253	January 27, 2011	2 Years
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	November 5, 2012	1 Year
Spectrum Analyzer	HP	8592L	3826A01204	March 5, 2012	1 Year
Antenna Mast	ARA	AAM-4A	1001	N/A	N/A
Turntable	ARA	ART-1001/4	1001	N/A	N/A
Mast & Table Controller	ARA	ACU-2/5	1001	N/A	N/A
Printer	HP	LaserJet 2200	JPKGC19982	N/A	N/A

Figure 59 Test Equipment Used



10. Transmitted Power Density

10.1 Test Specification

FCC Part 15, Subpart C, section 15.247(d)

10.2 Test Procedure

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator (30dB) and an appropriate coaxial cable (cable loss = 1 dB). The spectrum analyzer was set to 3 kHz resolution BW. and sweep time of 1 second for each 3 kHz “window”. The spectrum peaks were located at each of the 3 operating frequencies.

10.3 Test Results

Operation Frequency (MHz)	Reading Spectrum Analyzer (dBm)	Specification (dBm)	Margin (dB)
905.0	6.67	8.0	-1.33
911.4	7.01	8.0	-0.99
917.0	7.05	8.0	-0.95

Figure 60 Transmitted Power Density Test Results Table

See additional information in Figure 61 to Figure 63.

JUDGEMENT: Passed by 0.95 dB

TEST PERSONNEL:

Tester Signature: I. Siboni

Date: 05.12.12

Typed/Printed Name: I. Siboni



Transmitted Power Density

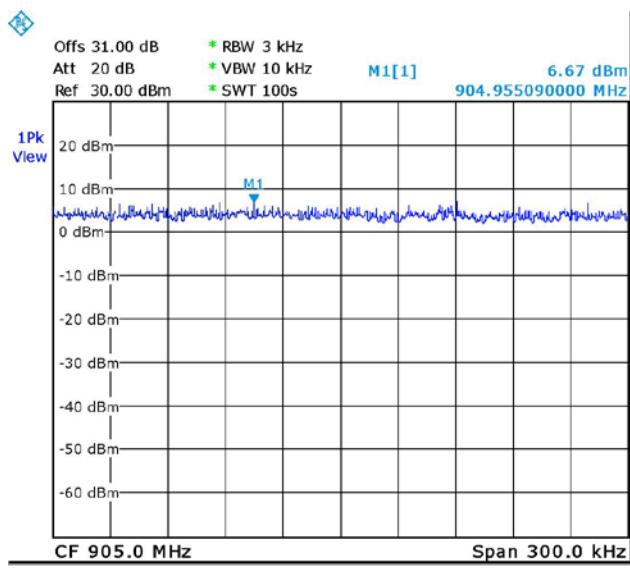


Figure 61 — 905.0 MHz

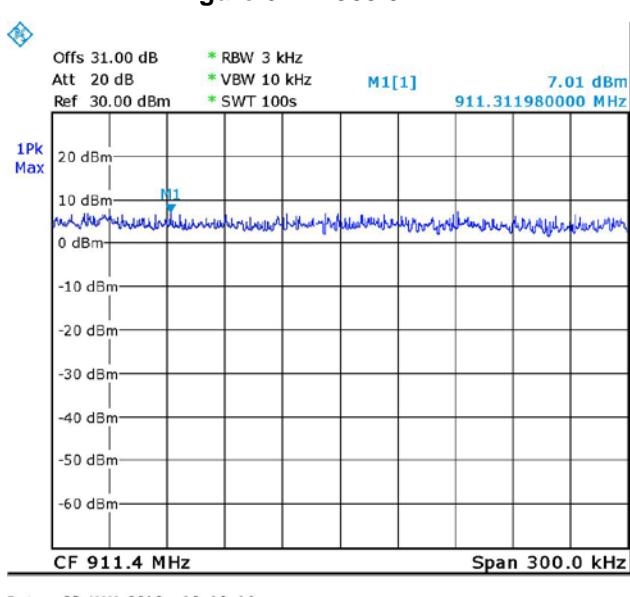


Figure 62 — 911.4 MHz



Transmitted Power Density

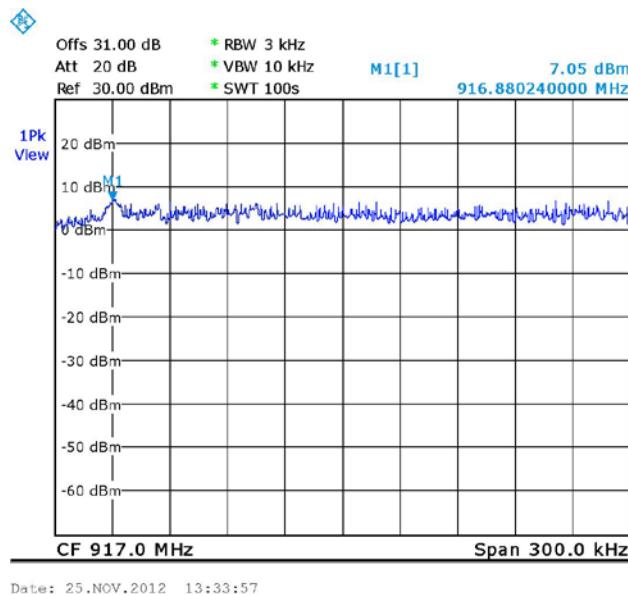


Figure 63 — 917.0 MHz

10.1 Test Equipment Used Transmitted Power Density

Instrument	Manufacturer	Model	Serial/Part Number	Calibration	
				Last Calibration Date	Period
Spectrum Analyzer	ROHDE & SCHWARZ	FSL6	1000194	November 1, 2012	1 year
Attenuator	MCL	Bw-s30w5	0533	August 14, 2012	1 year
Cable	Mini-Circuits	CBL-4FT-SMNM+	30084	August 28, 2012	1 year

Figure 64 Test Equipment Used



11. Antenna Gain/Information

The antenna gain is 0 dBi.



12. R.F Exposure/Safety

Typical use of the E.U.T. is defining a location zone. The typical placement of the E.U.T. is wall mounted. The distance between the E.U.T. and the user is 0.1 m.

Calculation of Maximum Permissible Exposure (MPE)

Based on Section 1.1307(b)(1) Requirements

(a) FCC limits at 905.0 MHz is: $\frac{f}{1500} = 0.603 \frac{mW}{cm^2}$

FCC limits at 911.4 MHz is: $\frac{f}{1500} = 0.608 \frac{mW}{cm^2}$

FCC limits at 917.0 MHz is: $\frac{f}{1500} = 0.611 \frac{mW}{cm^2}$

Using table 1 of Section 1.1310 limit for general population/uncontrolled exposures, the above level is an average over 30 minutes.

(b) The power density produced by the E.U.T. is

P_t - Transmitted Power

$$S = \frac{P_t G_t}{4\pi R^2}$$

G_t - Antenna Gain

R- Distance from Transmitter

(c) Transmitter peak power using source based time averaging of 20 % maximum, 20 msec “ON” time, “OFF” + “ON” time 1sec:

Frequency MHz	Pt dBm	Pt mW	Pt Source Based Time Averaging mW
905.0	21.15	130.32	26.06
911.4	21.75	149.62	29.92
917.0	21.32	135.52	27.10



(d) The peak power density (time averaging) is :

Frequency (MHz)	Pt (mW)	Antenna type	G _T (dBi)	R (cm)	S _{AV} (mW/cm ²)	Spec (mW/cm ²)
905.0	26.06	Internal	0	10	0.021	0.603
911.4	29.92	Internal	0	10	0.024	0.608
917.0	27.10	Internal	0	10	0.022	0.611

(e) The above are below the FCC limits.



13. APPENDIX A - CORRECTION FACTORS

13.1 *Correction factors for*

CABLE

**from EMI receiver
to test antenna
at 3 meter range.**

FREQUENCY (MHz)	CORRECTION FACTOR (dB)	FREQUENCY (MHz)	CORRECTION FACTOR (dB)
10.0	0.3	1200.0	7.3
20.0	0.6	1400.0	7.8
30.0	0.8	1600.0	8.4
40.0	0.9	1800.0	9.1
50.0	1.1	2000.0	9.9
60.0	1.2	2300.0	11.2
70.0	1.3	2600.0	12.2
80.0	1.4	2900.0	13.0
90.0	1.6		
100.0	1.7		
150.0	2.0		
200.0	2.3		
250.0	2.7		
300.0	3.1		
350.0	3.4		
400.0	3.7		
450.0	4.0		
500.0	4.3		
600.0	4.7		
700.0	5.3		
800.0	5.9		
900.0	6.3		
1000.0	6.7		

NOTES:

1. The cable type is RG-214.
2. The overall length of the cable is 27 meters.
3. The above data is located in file 27MO3MO.CBL on the disk marked "Radiated Emission Tests EMI Receiver".



13.2 Correction factors for

CABLE from EMI receiver to test antenna at 3 meter range.

FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.2
2.0	1.6
3.0	2.0
4.0	2.4
5.0	3.0
6.0	3.4
7.0	3.8
8.0	4.2
9.0	4.6
10.0	5.0
12.0	5.8

NOTES:

1. The cable type is RG-8.
2. The overall length of the cable is 10 meters.



13.3 Correction factors for

CABLE

from spectrum analyzer to test antenna above 2.9 GHz

FREQUENCY (GHz)	CORRECTION FACTOR (dB)	FREQUENCY (GHz)	CORRECTION FACTOR (dB)
1.0	1.9	14.0	9.1
2.0	2.7	15.0	9.5
3.0	3.5	16.0	9.9
4.0	4.2	17.0	10.2
5.0	4.9	18.0	10.4
6.0	5.5	19.0	10.7
7.0	6.0	20.0	10.9
8.0	6.5	21.0	11.2
9.0	7.0	22.0	11.6
10.0	7.5	23.0	11.9
11.0	7.9	24.0	12.3
12.0	8.3	25.0	12.6
13.0	8.7	26.0	13.0

NOTES:

1. The cable type is SUCOFLEX 104 E manufactured by SUHNER.
2. The cable is used for measurements above 2.9 GHz.
3. The overall length of the cable is 10 meters.



12.6 Correction factors for LOG PERIODIC ANTENNA

Type LPD 2010/A
at 3 and 10 meter ranges.

Distance of 3 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.1
250.0	10.2
300.0	12.5
400.0	15.4
500.0	16.1
600.0	19.2
700.0	19.4
800.0	19.9
900.0	21.2
1000.0	23.5

Distance of 10 meters

FREQUENCY (MHz)	AFE (dB/m)
200.0	9.0
250.0	10.1
300.0	11.8
400.0	15.3
500.0	15.6
600.0	18.7
700.0	19.1
800.0	20.2
900.0	21.1
1000.0	23.2

NOTES:

1. Antenna serial number is 1038.
2. The above lists are located in file number 38M30.ANT for a 3 meter range, and file number 38M100.ANT for a 10 meter range.
3. The files mentioned above are located on the disk marked "Radiated Emission Test EMI Receiver".



13.4 Correction factors for

LOG PERIODIC ANTENNA

Type SAS-200/511
at 3 meter range.

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
1.0	24.9
1.5	27.8
2.0	29.9
2.5	31.2
3.0	32.8
3.5	33.6
4.0	34.3
4.5	35.2
5.0	36.2
5.5	36.7
6.0	37.2
6.5	38.1

FREQUENCY (GHz)	ANTENNA FACTOR (dB)
7.0	38.6
7.5	39.2
8.0	39.9
8.5	40.4
9.0	40.8
9.5	41.1
10.0	41.7
10.5	42.4
11.0	42.5
11.5	43.1
12.0	43.4
12.5	44.4
13.0	44.6

NOTES:

1. Antenna serial number is 253.
2. The above lists are located in file number SAS3M0.ANT for a 3 meter range.
3. The files mentioned above are located on the disk marked "Antenna Factors".



13.5 Correction factors for

BICONICAL ANTENNA

**Type BCD-235/B,
at 3 meter range**

FREQUENCY (MHz)	AFE (dB/m)
20.0	19.4
30.0	14.8
40.0	11.9
50.0	10.2
60.0	9.1
70.0	8.5
80.0	8.9
90.0	9.6
100.0	10.3
110.0	11.0
120.0	11.5
130.0	11.7
140.0	12.1
150.0	12.6
160.0	12.8
170.0	13.0
180.0	13.5
190.0	14.0
200.0	14.8
210.0	15.3
220.0	15.8
230.0	16.2
240.0	16.6
250.0	17.6
260.0	18.2
270.0	18.4
280.0	18.7
290.0	19.2
300.0	19.9
310	20.7
320	21.9
330	23.4
340	25.1
350	27.0

NOTES:

1. Antenna serial number is 1041.
2. The above list is located in file 19BC10M1.ANT on the disk marked "Radiated Emissions Tests EMI Receiver".



13.6 Correction factors for ACTIVE LOOP ANTENNA

Model 6502
S/N 9506-2950

FREQUENCY (MHz)	Magnetic Antenna Factor (dB)	Electric Antenna Factor (dB)
.009	-35.1	16.4
.010	-35.7	15.8
.020	-38.5	13.0
.050	-39.6	11.9
.075	-39.8	11.8
.100	-40.0	11.6
.150	-40.0	11.5
.250	-40.0	11.6
.500	-40.0	11.5
.750	-40.1	11.5
1.000	-39.9	11.7
2.000	-39.5	12.0
3.000	-39.4	12.1
4.000	-39.7	11.9
5.000	-39.7	11.8
10.000	40.2	11.3
15.000	-40.7	10.8
20.000	-40.5	11.0
25.000	-41.3	10.2
30.000	42.3	9.2