



Hermon Laboratories Ltd.
Harakevet Industrial Zone, Binyamina 30500,
Israel
Tel. +972-4-6288001
Fax. +972-4-6288277
E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS) and subpart B,
RSS-210 issue 8 Annex 8, ICES-003 Issue 4:2004

FOR:

Visonic Ltd.
Touch screen keyprox
Model: KP 160 PG2

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary	4
6	EUT description	5
6.1	General information	5
6.2	Test configuration	5
6.3	Changes made in EUT	5
6.4	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation	11
7.3	Number of hopping frequencies	14
7.4	Average time of occupancy	17
7.5	Peak output power	20
7.6	Band edge radiated emissions	26
7.7	Field strength of spurious emissions	30
7.8	Antenna requirements	61
8	Unintentional emissions	62
8.1	Radiated emission measurements	62
9	APPENDIX A Test equipment and ancillaries used for tests	68
10	APPENDIX B Measurement uncertainties	69
11	APPENDIX C Test laboratory description	70
12	APPENDIX D Specification references	70
13	APPENDIX E Test equipment correction factors	71
14	APPENDIX F Abbreviations and acronyms	81

1 Applicant information

Client name: Visonic Ltd.
Address: Habarzel street 24, Tel Aviv 69710, Israel
Telephone: +972 3645 6714
Fax: +972 3645 6788
E-mail: aelshtein@visonic.com
Contact name: Mr. Arick Elshtain

2 Equipment under test attributes

Product name: Touch screen keyprox
Product type: Transceiver
Model(s): KP 160 PG2
Serial number: 0-101755
Hardware version: 0500 L 8-303351
Software release: V1.0.07
Receipt date 5/17/2011

3 Manufacturer information

Manufacturer name: Visonic Ltd.
Address: Habarzel street 24, Tel Aviv 69710, Israel
Telephone: +972 3645 6714
Fax: +972 3645 6788
E-Mail: aelshtein@visonic.com
Contact name: Mr. Arick Elshtain

4 Test details

Project ID: 22015
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 5/27/2011
Test completed: 7/13/2011
Test specification(s): FCC 47CFR part 15, subpart C, §15.247 (FHSS); subpart B;
RSS-210 issue 8 Annex 8, RSS-Gen issue 3, ICES-003 issue 4:2004

5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a1), RSS-210 section A8.1(a), The 20 dB bandwidth	Pass
FCC Section 15.247(a1), RSS-210 section A8.1(b), Frequency separation	Pass
FCC Section 15.247(a1), RSS-210 section A8.1(c), Number of hopping frequencies	Pass
FCC Section 15.247(a1), RSS-210 section A8.1(c), Average time of occupancy	Pass
FCC Section 15.247(b), RSS-210 section A8.4(1), Peak output power	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	Pass
FCC Section 15.203, RSS-Gen section 7.1.2, Antenna requirements	Pass
FCC Section 15.207(a), RSS-Gen section 7.2.2, Conducted emission	Not required
FCC Section 15.247(i), RSS-Gen, section 5.5, RF exposure	Pass, the exhibit to the application of certification is provided
Unintentional emissions	
FCC Section 15.107, ICES-003, Section 5.3, Conducted emission at AC power port	Not required
FCC Section 15.109, RSS-Gen section 6.1 / ICES-003, Section 5.5, Radiated emission	Pass

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mrs. E. Pitt, test engineer	July 13, 2011	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	August 9, 2011	
Approved by:	Mr. M. Nikishin, EMC and radio group manager	October 18, 2011	

6 EUT description


6.1 General information

The EUT, KP-160 PG2, is a 2-way wireless PowerG touch screen keyprox for the PowerMaster family control panels. The KP-160 PG2 enables most common everyday user functions:

- Arm and Disarm the alarm system.
- Initiate Emergency, Fire and Panic alarms.
- Control X-10 devices and PGM output.
- Perform one of the AUX (auxiliary) predefined functions.
- Review system Status.

The KP-160 PG2 includes a built-in proximity RFID tag reader. When authorization is required to arm or disarm the system, the user can present a valid proximity tag to the built-in tag reader. The EUT is equipped with an integral antenna and powered by 6 V internal battery.

6.2 Test configuration

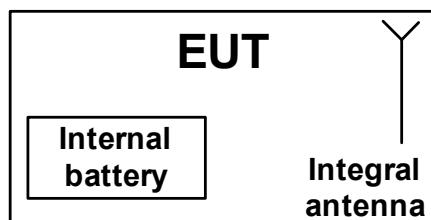

6.3 Changes made in EUT

No changes were implemented in the EUT.



6.4 Transmitter characteristics

Type of equipment						
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)					
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)					
	Plug-in card (Equipment intended for a variety of host systems)					
Intended use	Condition of use					
	fixed	Always at a distance more than 2 m from all people				
<input checked="" type="checkbox"/>	mobile	Always at a distance more than 20 cm from all people				
	portable	May operate at a distance closer than 20 cm to human body				
Assigned frequency ranges		902 – 928 MHz				
Operating frequencies		912.750 – 919.106 MHz				
Maximum rated output power		At transmitter 50 Ω RF output connector				
		Peak output power		19.7 dBm		
Is transmitter output power variable?		X	No			
		Yes		continuous variable		
				stepped variable with stepsize		dB
				minimum RF power		dBm
	maximum RF power		dBm			
Antenna connection						
unique coupling	standard connector	X	integral	with temporary RF connector		
		X		without temporary RF connector		
Antenna/s technical characteristics						
Type	Manufacturer	Model number		Gain		
Integral	Visonic	Built-in wire antenna		-10 dBi		
Transmitter aggregate data rate/s		50 kbps				
Type of modulation		GFSK				
Modulating test signal (baseband)		PRBS				
Maximum transmitter duty cycle in normal use		0.1%				
Transmitter power source						
X	Battery	Nominal rated voltage	6.0 VDC	Battery type	Alkaline	
	DC	Nominal rated voltage	VDC			
	AC mains	Nominal rated voltage	VAC	Frequency		
Common power source for transmitter and receiver			X	yes	no	
Spread spectrum technique used			X	Frequency hopping (FHSS)		
				Digital transmission system (DTS)		
				Hybrid		
Spread spectrum parameters for transmitters tested per FCC 15.247 only						
FHSS	Total number of hops		50			
	Bandwidth per hop		110.5 kHz			
	Max. separation of hops		131 kHz			

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	500	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and the associated plots.

Figure 7.1.1 The 20 dB bandwidth test setup



Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
 DETECTOR USED: Peak
 SWEEP TIME: Auto
 VIDEO BANDWIDTH: ≥ RBW
 MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
 FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, kbps	Symbol rate, Msymbols/s	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
912.750	GFSK	50	NA	107.0	500	-397.0	Pass
915.863				110.5	500	-389.5	
919.106				108.0	500	-392.0	


Reference numbers of test equipment used

HL 0034	HL 0415	HL 0812	HL 1425				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

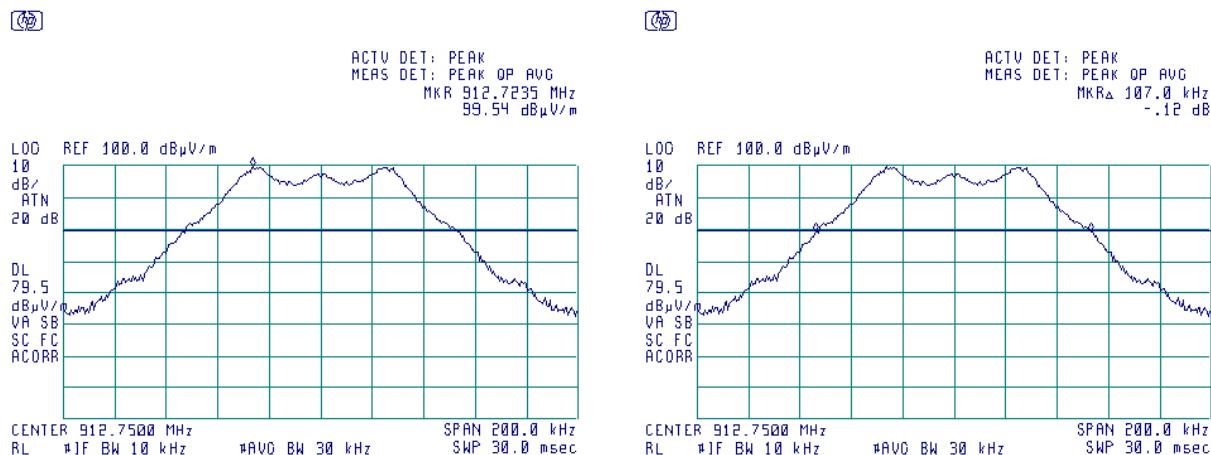


Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

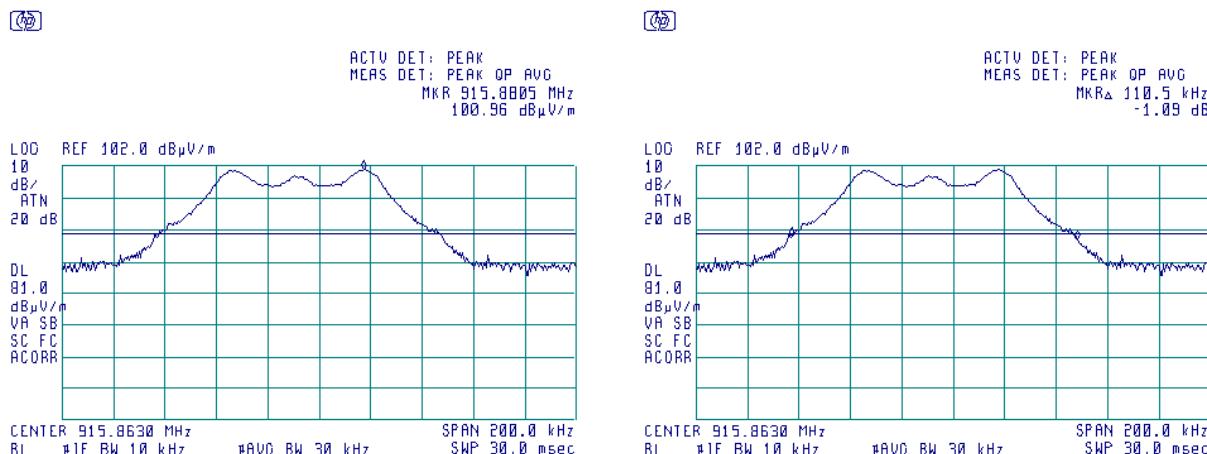

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

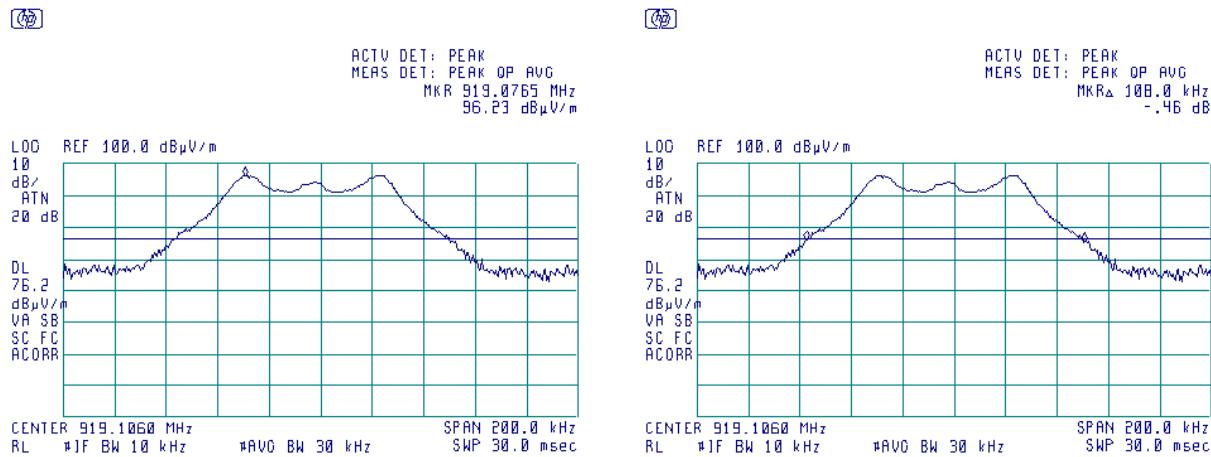

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	6/2/2011	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and the associated plot.

Figure 7.2.1 Carrier frequency separation test setup



Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	6/2/2011		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
 MODULATION: GFSK
 BIT RATE: 50 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: 110.5 kHz

Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
131.25	110.5	20.75	Pass

* - Margin = Carrier frequency separation – specification limit.


Reference numbers of test equipment used

HL 1984	HL 2909	HL 3119				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	6/2/2011		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

Plot 7.2.1 Carrier frequency separation

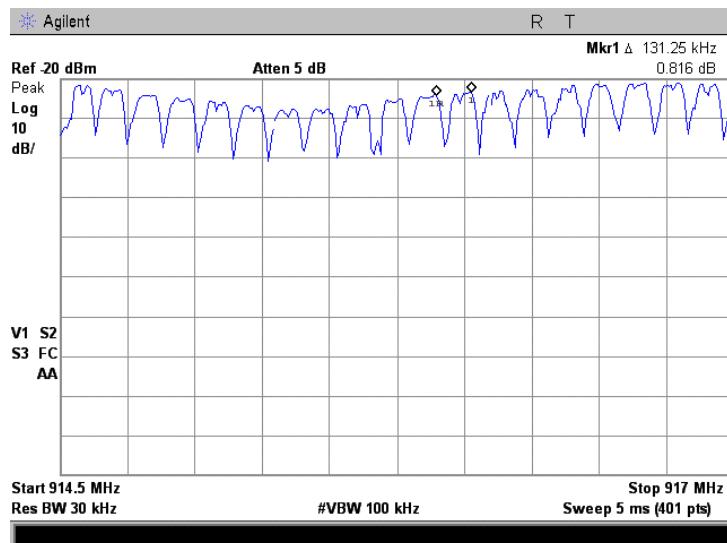

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	6/1/2011	Air Pressure: 1015 hPa	Relative Humidity: 46 %
Temperature: 24 °C		Power Supply: 6 V battery	
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup



Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	6/1/2011	PASS	
Temperature: 24 °C	Air Pressure: 1015 hPa	Relative Humidity: 46 %	Power Supply: 6 V battery
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
 MODULATION: GFSK
 BIT RATE: 50 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: \geq 1% of the span
 VIDEO BANDWIDTH: \geq RBW
 FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
50	50	0	Pass


* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 1984	HL 2909	HL 3119				
---------	---------	---------	--	--	--	--

Full description is given in Appendix A.


Plot 7.3.1 Number of hopping frequencies in the frequency range 912 –914.5 MHz (fourteen)

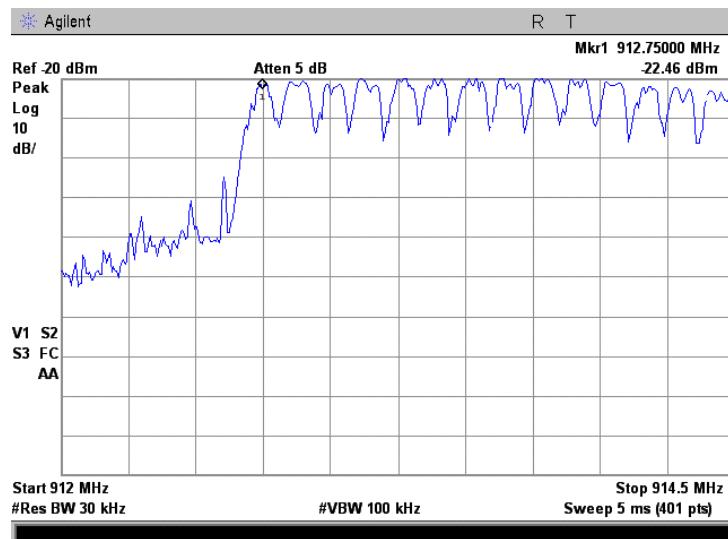




Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance		
Date(s):	6/1/2011		
Temperature: 24 °C	Air Pressure: 1015 hPa	Relative Humidity: 46 %	Power Supply: 6 V battery
Remarks:			

Plot 7.3.2 Number of hopping frequencies in the frequency range 914.5 – 917.0 MHz (nineteen)

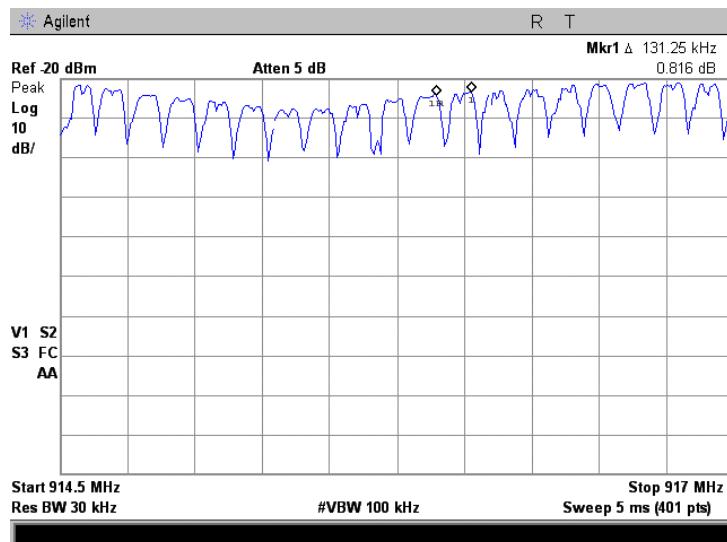

Plot 7.3.3 Number of hopping frequencies in the frequency range 917 –919.5 MHz (seventeen)

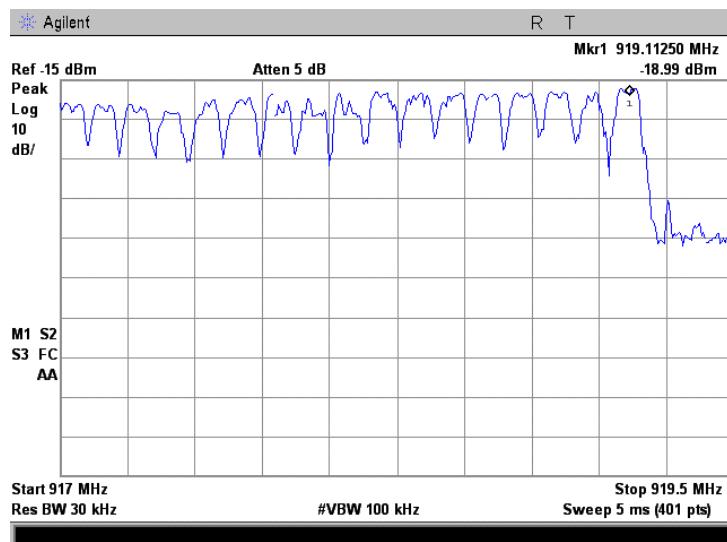

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	6/2/2011		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test results provided in Table 7.4.2 and the associated plots.

Figure 7.4.1 Average time of occupancy test setup



Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	6/2/2011	Air Pressure: 1013 hPa	Relative Humidity: 48 %
Temperature: 24 °C		Power Supply: 6 V battery	
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
 MODULATION: GFSK
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 NUMBER OF HOPPING FREQUENCIES: 50
 INVESTIGATED PERIOD: 20 s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single transmission duration, s	Single transmission period, s	Average time of occupancy*, s	Bit rate, kbps	Limit, s	Margin, s**	Verdict
915.863	0.004312	2	0.043	50	0.4	-0.357	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period) / Single transmission period.

** - Margin = Average time of occupancy – specification limit.


Reference numbers of test equipment used

HL 1984	HL 2909					
---------	---------	--	--	--	--	--


Full description is given in Appendix A.

Test specification:	FCC section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	6/2/2011		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

Plot 7.4.1 Single transmission duration

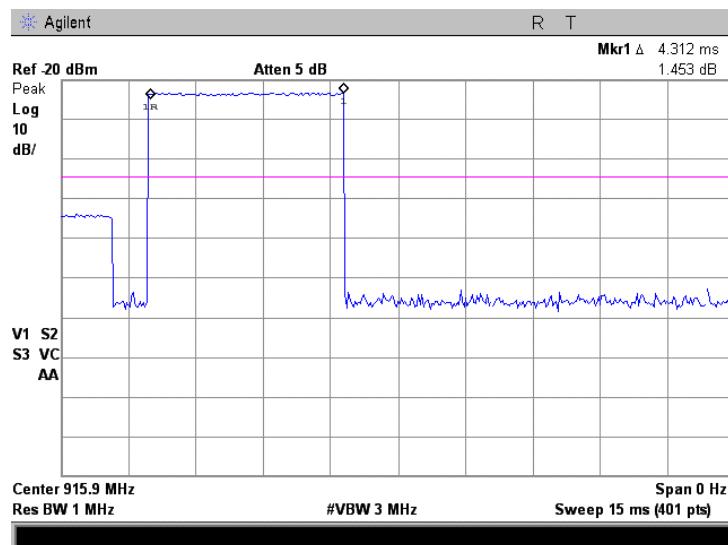

Plot 7.4.2 Single transmission period

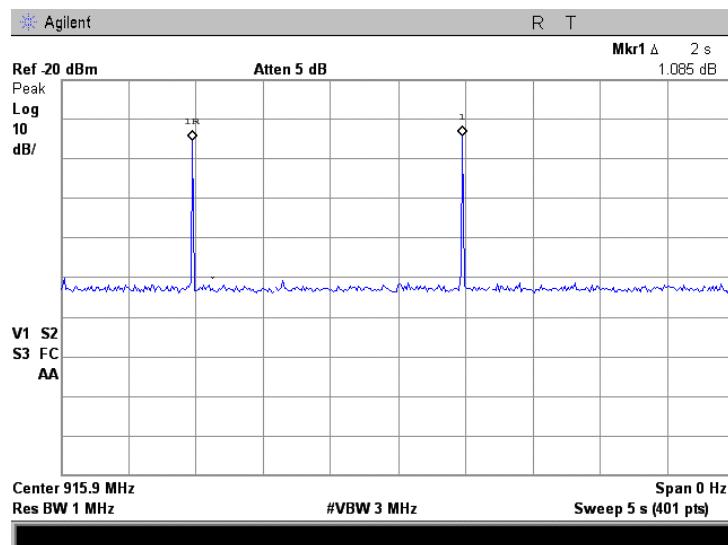

Test specification:	FCC section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	1.0	30.0	131.2	6.0*
2400.0 – 2483.5	0.125 (<75 hopping channels) 1.0 (≥75 hopping channels)	21.0 (<75 hopping channels) 30.0 (≥75 hopping channels)	122.2 (<75 hopping channels) 131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

**- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.

7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.

7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.

7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.

7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.


The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$

7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.

Test specification:	FCC section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

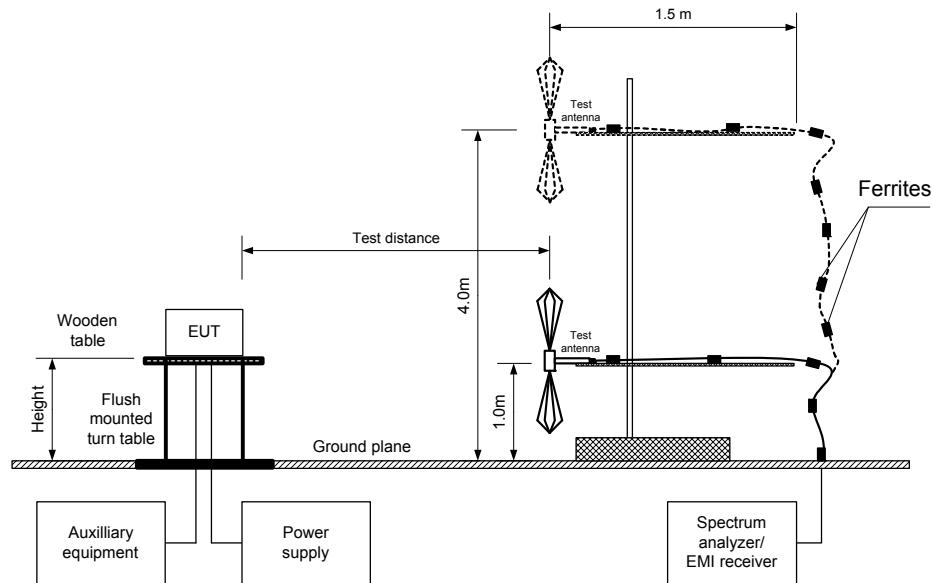

Test specification:	FCC section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY BAND:	902-928 MHz
TEST DISTANCE:	3 m
TEST SITE:	OATS
EUT HEIGHT:	0.8 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
MODULATION:	GFSK
BIT RATE:	50 kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
EUT 20 dB BANDWIDTH:	102 kHz
RESOLUTION BANDWIDTH:	120 kHz
VIDEO BANDWIDTH:	300 kHz
FREQUENCY HOPPING:	Disabled
NUMBER OF FREQUENCY HOPPING CHANNELS:	50

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
912.750	98.04	H	1.0	336	-10	12.84	30	-17.16	Pass
915.863	104.89	H	1.0	327	-10	19.69	30	-10.31	Pass
919.106	96.11	H	1.0	330	-10	10.91	30	-19.09	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.


Reference numbers of test equipment used

HL 0034	HL 0415	HL 0812	HL 1425			
---------	---------	---------	---------	--	--	--


Full description is given in Appendix A.

Test specification:	FCC section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.5.1 Field strength of carrier at low frequency in vertical antenna polarization

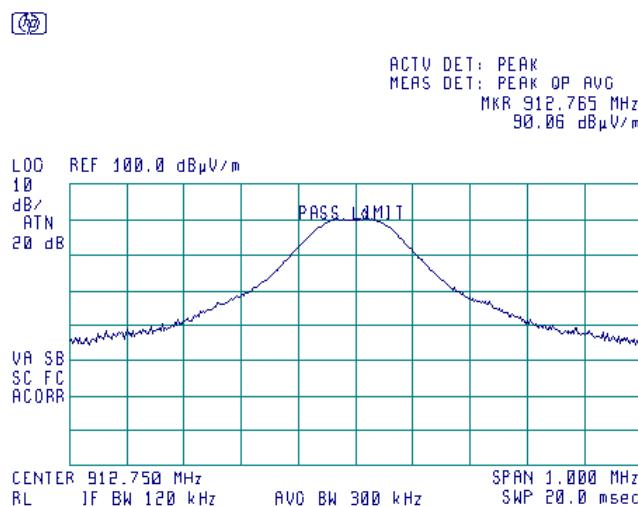


Plot 7.5.2 Field strength of carrier at low frequency in horizontal antenna polarization

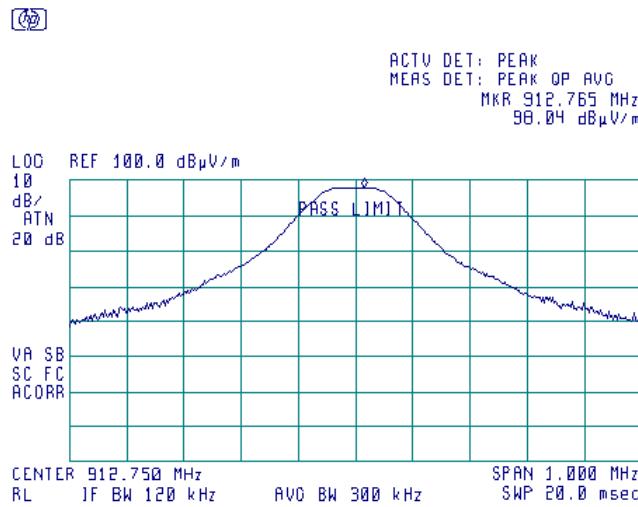


Test specification:	FCC section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.5.3 Field strength of carrier at mid frequency in vertical antenna polarization

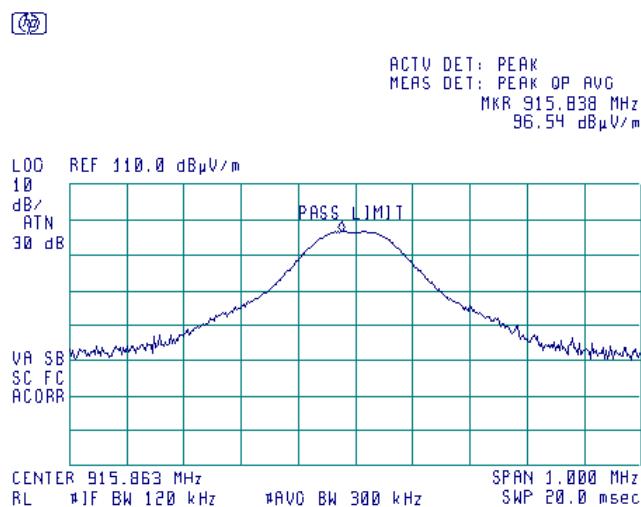


Plot 7.5.4 Field strength of carrier at mid frequency in horizontal antenna polarization

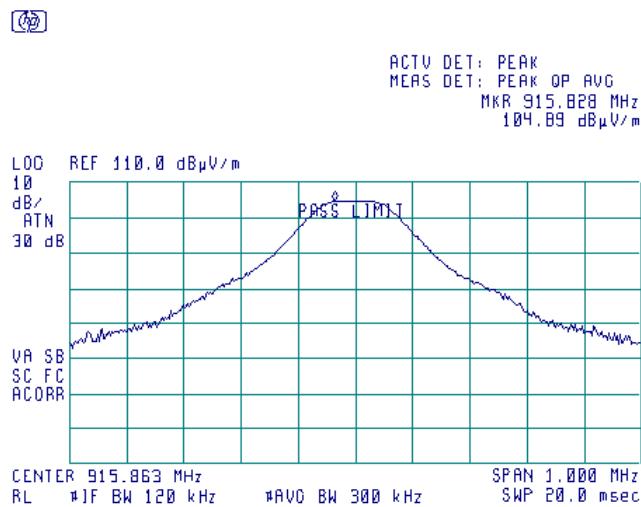


Test specification:	FCC section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.5.5 Field strength of carrier at high frequency in vertical antenna polarization

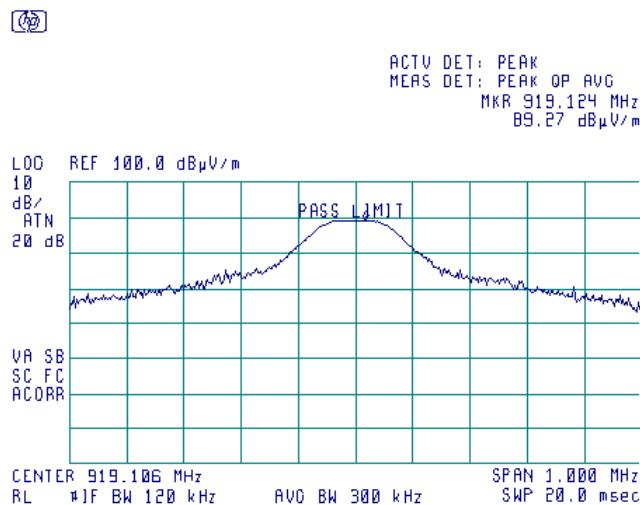

Plot 7.5.6 Field strength of carrier at high frequency in horizontal antenna polarization

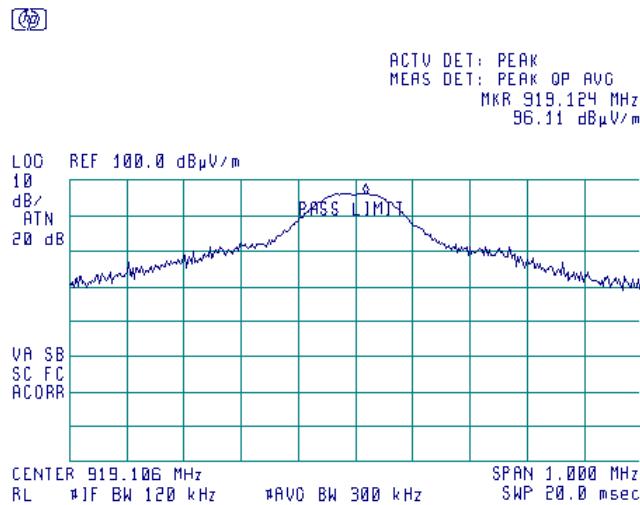

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	6/2/2011	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

7.6 Band edge radiated emissions

7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
		Peak	Average
902.0 – 928.0			
2400.0 – 2483.5	20.0	74.0	54.0
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup



Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	6/2/2011	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

Table 7.6.2 Band edge emission test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 50 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902	-79.10	-30.79	48.31	20.0	28.31	Pass
928	-85.85	-31.82	54.03		34.03	
Frequency hopping enabled						
902	-70.60	-20.22	50.38	20.0	30.38	Pass
928	-77.12	-14.72	62.40		42.40	

*- Margin = Attenuation below carrier – specification limit.


Reference numbers of test equipment used

HL 1552	HL 1984	HL 2909				
---------	---------	---------	--	--	--	--


Full description is given in Appendix A.

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	
Date(s):	6/2/2011	PASS	
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

Plot 7.6.1 The highest band edge emission at low carrier frequency with hopping function disabled

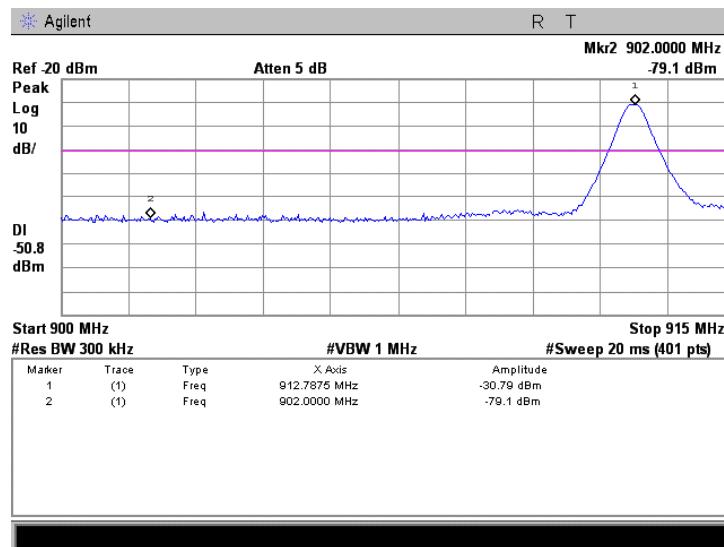


Plot 7.6.2 The highest band edge emission at high carrier frequency with hopping function disabled

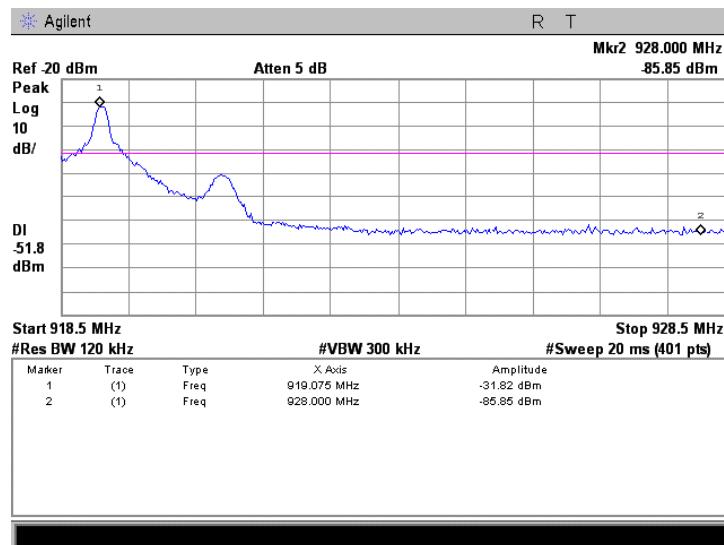


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	6/2/2011		
Temperature: 24 °C	Air Pressure: 1013 hPa	Relative Humidity: 48 %	Power Supply: 6 V battery
Remarks:			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function enabled

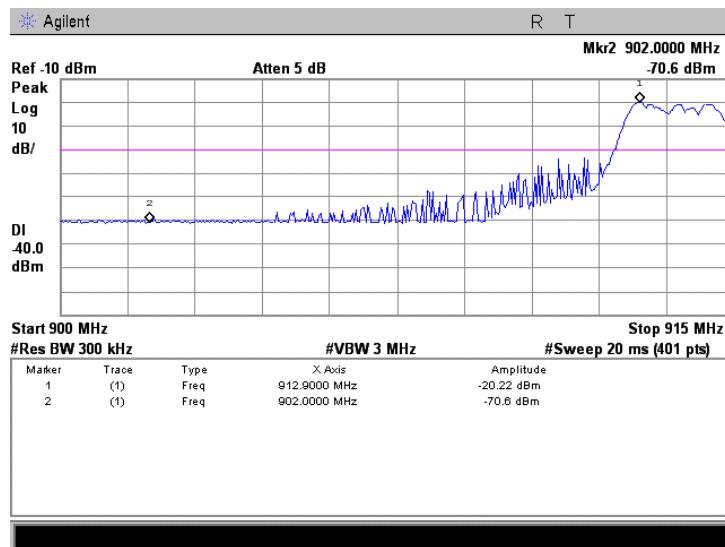

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function enabled

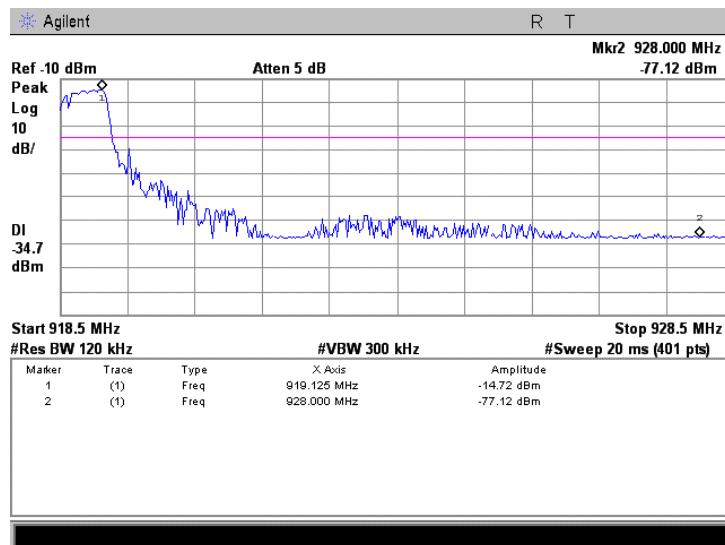

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***	
	Peak	Quasi Peak	Average		
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0	
0.090 – 0.110	NA	108.5 – 106.8**	NA		
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**		
0.490 – 1.705	NA	73.8 – 63.0**	NA		
1.705 – 30.0*		69.5			
30 – 88		40.0			
88 – 216		43.5			
216 – 960		46.0			
960 – 1000		54.0			
1000 – 10 th harmonic	74.0	NA	54.0		

* - The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S2} = \text{Lim}_{S1} + 40 \log \left(\frac{S_1}{S_2} \right)$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

** - The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.

7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.

7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


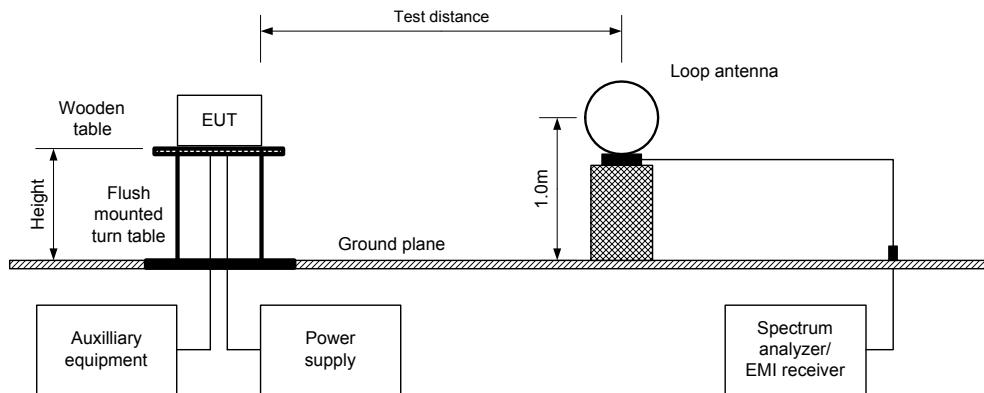


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz

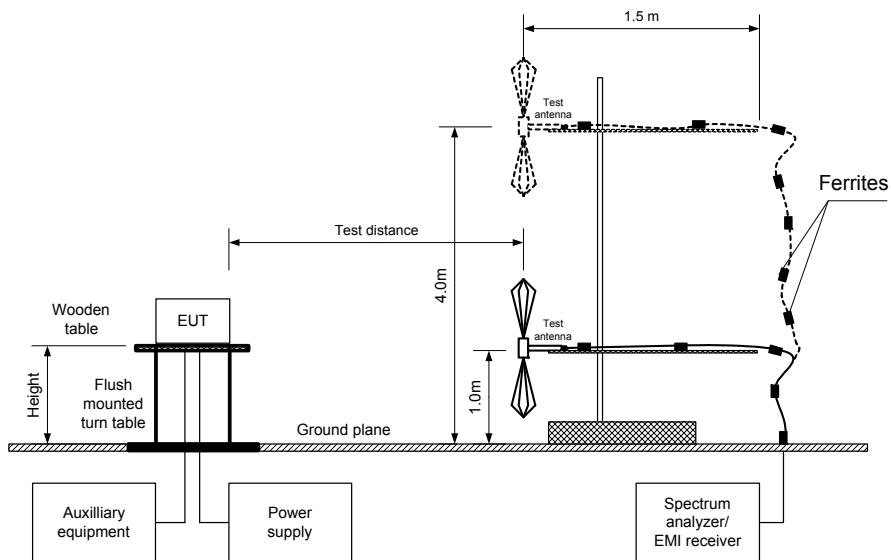

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY BAND:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 - 10000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	50 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
FREQUENCY HOPPING:	Disabled
ASSIGNED FREQUENCY RANGE:	902-928 MHz

Frequency MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
1825.515	51.48	V	1.1	185	90.11	-38.63	20.0	-18.63	Pass
5476.335	64.42	V	1.0	180		-25.69		-5.69	
6389.015	61.45	V	1.0	175		-28.66		-8.66	
Mid carrier frequency									
1831.741	56.93	V	1.1	185	96.58	-39.65	20.0	-19.65	Pass
5494.973	66.12	V	1.0	175		-23.99		-3.99	
6410.811	62.50	V	1.0	170		-27.61		-7.61	
High carrier frequency									
1838.225	51.11				89.19	-38.08	20.0	-18.08	Pass
5514.721	57.38	V	1.0	180		-32.73		-12.73	
6433.517	51.16	V	1.0	170		-38.95		-18.95	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance		Verdict:
Date(s):	5/27/2011		PASS
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY BAND: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 10000 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 BIT RATE: 50 kbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled
 ASSIGNED FREQUENCY RANGE: 902-928 MHz

frequency MHz	Antenna		Azimuth degrees	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict
	polarization	height m		Measured dB(µV/m)	Limit, IB(µV/m)	Margin, dB**	Measured dB(µV/m)	Calculated dB(µV/m)	Limit, IB(µV/m)	
Low carrier frequency										
2738.250	H	1.3	175	60.83	74	-13.17	55.54	28.23	54	-25.77
3650.900	H	1.3	170	62.84	74	-11.16	53.98	26.67	54	-27.33
4563.700	H	1.0	180	64.92	74	-9.08	58.64	31.33	54	-22.67
7301.977	V	1.9	180	55.51	74	-18.49	53.06	25.75	54	-28.25
8214.702	V	1.5	180	54.75	74	-19.25	51.82	24.51	54	-29.49
9127.465	V	1.5	180	56.85	74	-17.15	55.28	27.97	54	-26.03
Mid carrier frequency										
2747.589	H	1.3	180	63.52	74	-10.48	59.61	32.3	54	-21.70
3663.414	H	1.0	180	65.36	74	-8.64	59.54	32.23	54	-21.77
4579.315	V	1.0	180	68.84	74	-5.16	65.40	38.09	54	-15.91
7326.842	V	1.6	180	51.02	74	-22.98	50.03	22.72	54	-31.28
8242.655	V	1.5	180	50.62	74	-23.38	48.43	21.12	54	-32.88
9158.580	V	1.5	180	59.69	74	-14.31	59.24	31.93	54	-22.07
High carrier frequency										
2757.306	H	1.3	180	62.47	74	-11.53	57.12	29.81	54	-24.19
3676.436	H	1.1	180	63.67	74	-10.33	54.35	27.04	54	-26.96
4595.480	V	1.0	180	66.00	74	-8.00	61.72	34.41	54	-19.59
7352.786	V	1.4	180	53.87	74	-20.13	53.36	26.05	54	-27.95
8271.817	V	1.1	180	52.22	74	-21.78	48.26	20.95	54	-33.05
9190.885	V	1.0	180	57.71	74	-16.29	54.47	27.16	54	-26.84

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
4.312	2000	NA	NA	NA	-27.31

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY BAND:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
MODULATING SIGNAL:	PRBS
BIT RATE:	50 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled
ASSIGNED FREQUENCY RANGE:	902-928 MHz

-frequency MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB [†]				
No emission were found								

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Table 7.7.6 Restricted bands

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	Above 38.6
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	

Reference numbers of test equipment used


HL 0446	HL 0604	HL 2432	HL 2871	HL 3119	HL 3121	HL 3472	HL 3533
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.1 Radiated emission measurements at the low carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

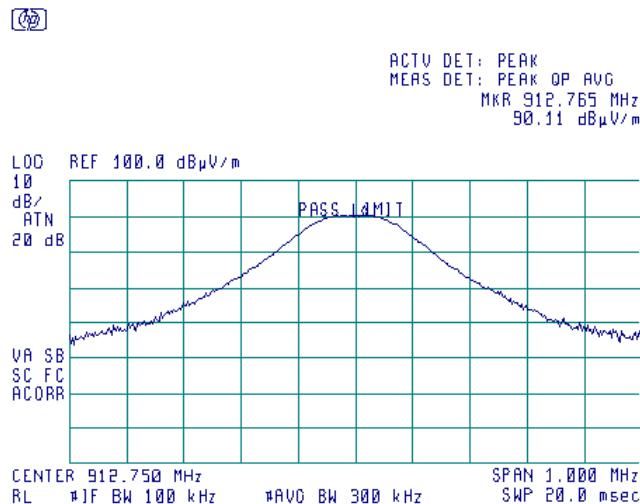

Plot 7.7.2 Radiated emission measurements at the low carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

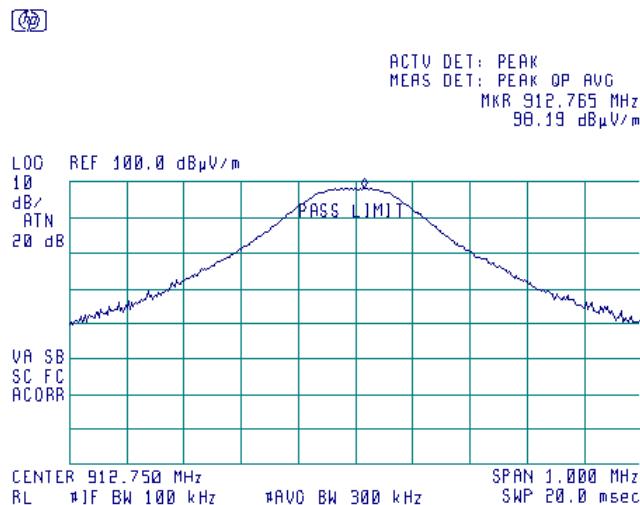

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.3 Radiated emission measurements at the mid carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

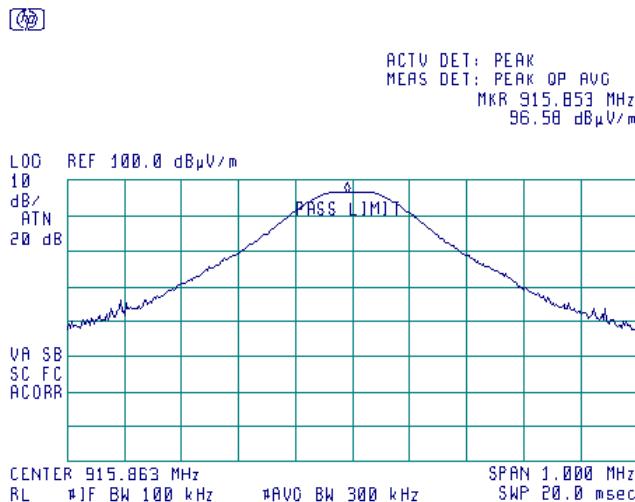

Plot 7.7.4 Radiated emission measurements at the mid carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

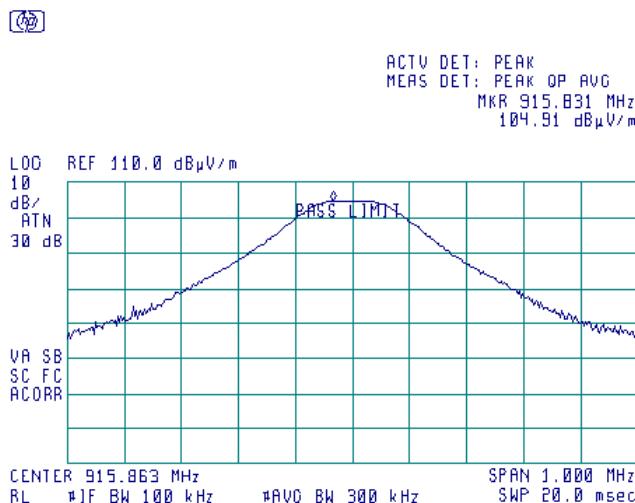

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.5 Radiated emission measurements at the high carrier frequency

TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

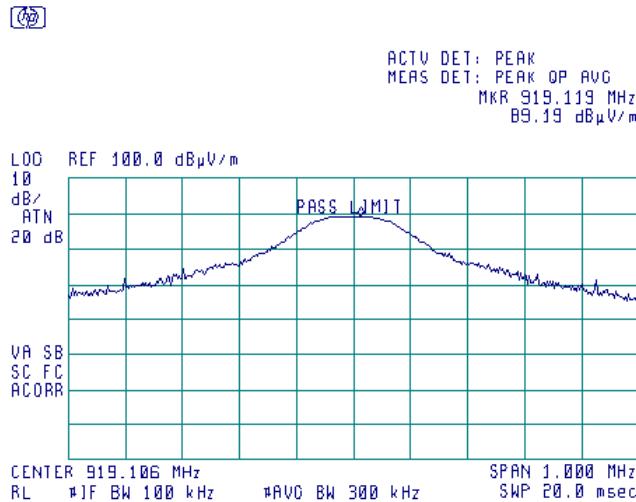

Plot 7.7.6 Radiated emission measurements at the high carrier frequency


TEST SITE: OATS
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

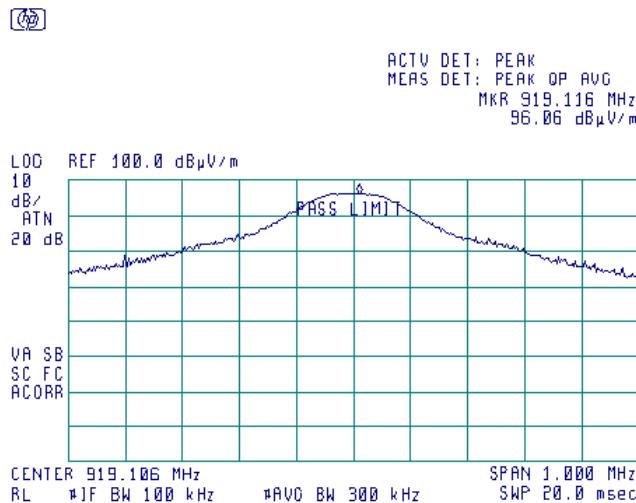

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.7 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

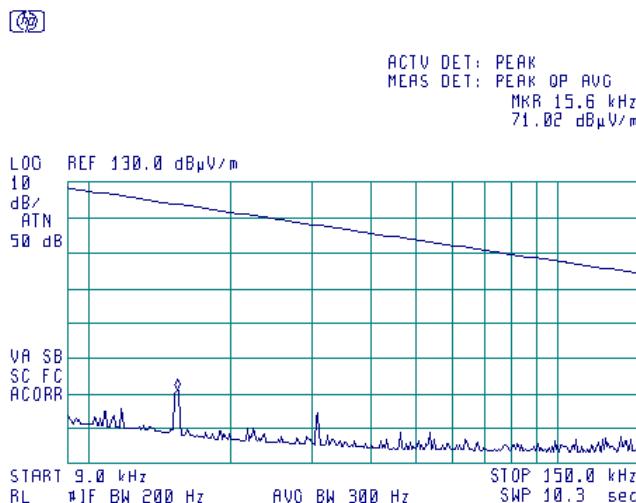

Plot 7.7.8 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

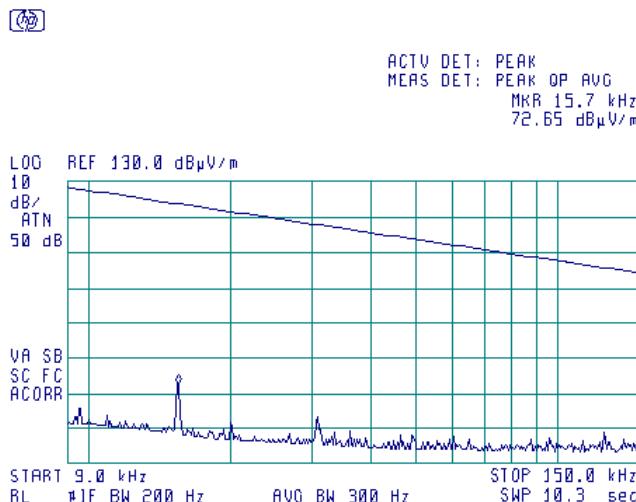


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.9 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MRR 15.7 kHz
74.50 dB μ V/m

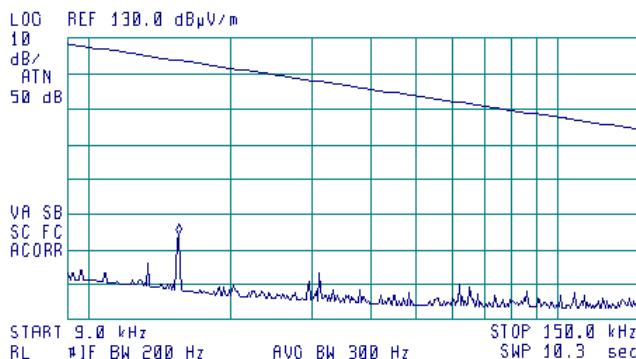


Plot 7.7.10 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MRR 150 kHz
57.10 dB μ V/m

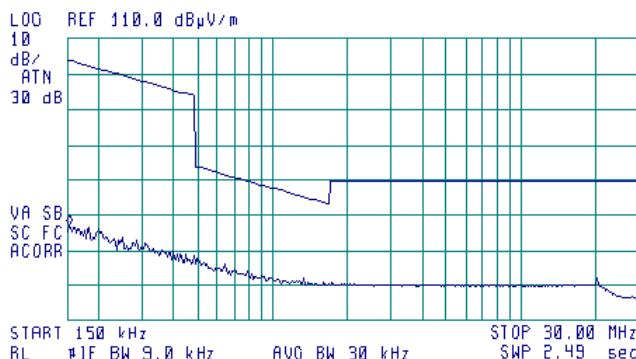

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.11 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 160 kHz
57.82 dB μ V/m




Plot 7.7.12 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical




ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 160 kHz
57.83 dB μ V/m

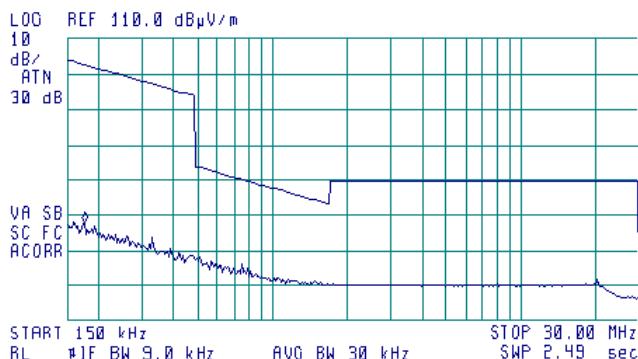

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.13 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

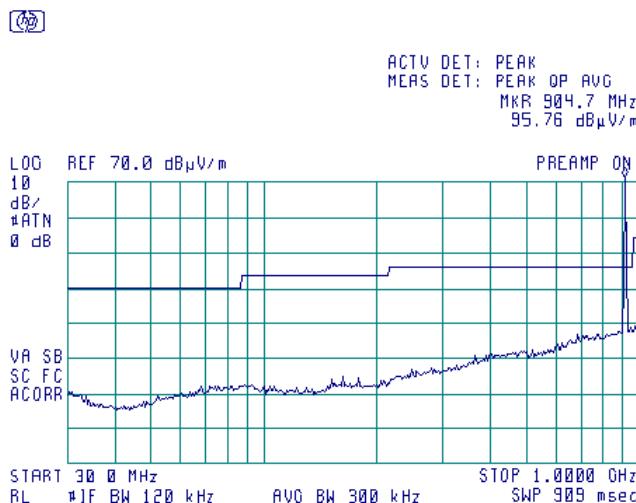

Plot 7.7.14 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

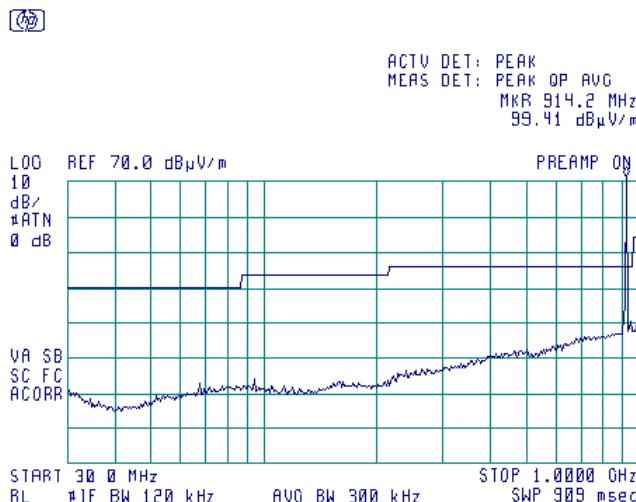

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.15 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

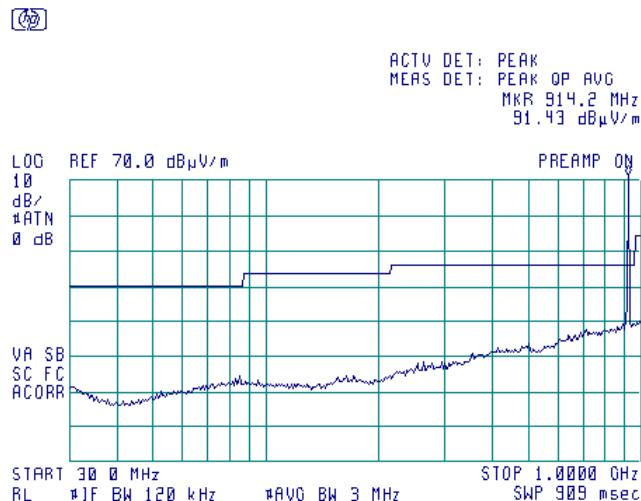

Plot 7.7.16 Radiated emission measurements from 1000 to 6000 MHz at the low carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

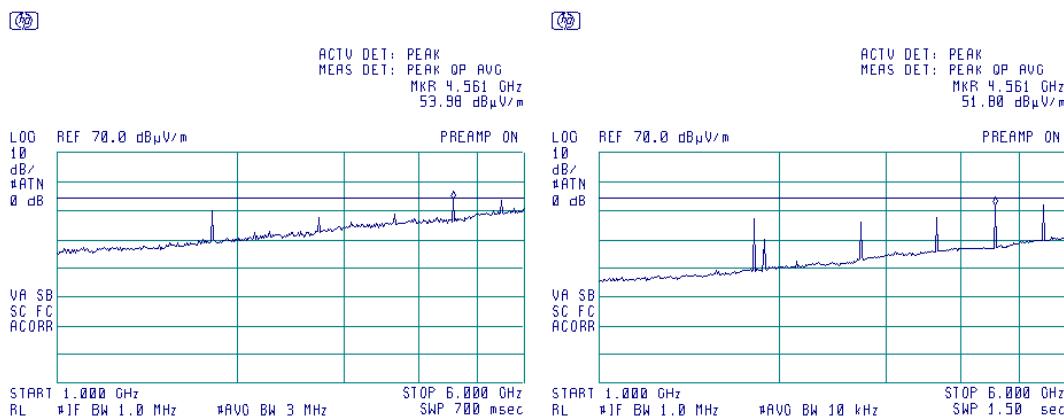

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.17 Radiated emission measurements from 1000 to 6000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

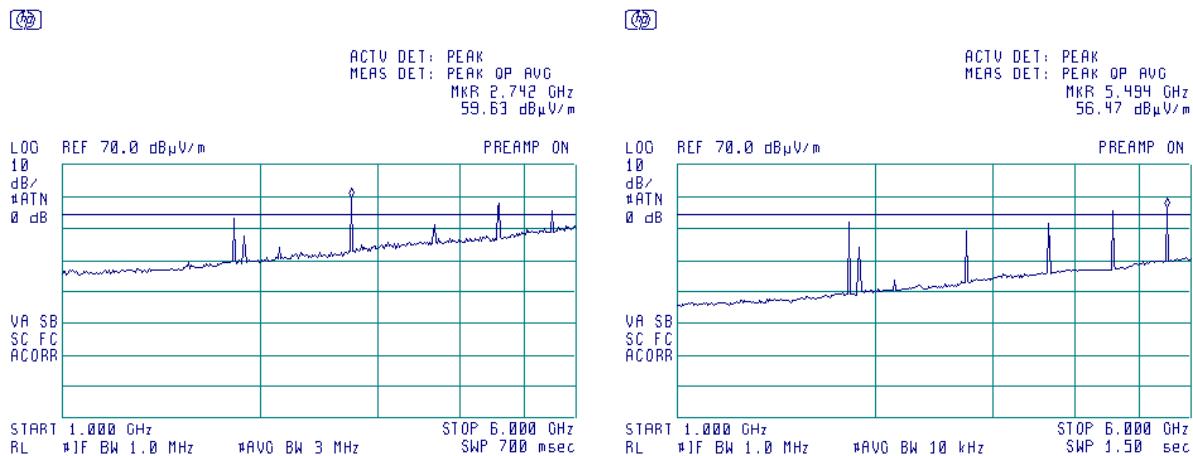

Plot 7.7.18 Radiated emission measurements from 1000 to 6000 MHz at the high carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

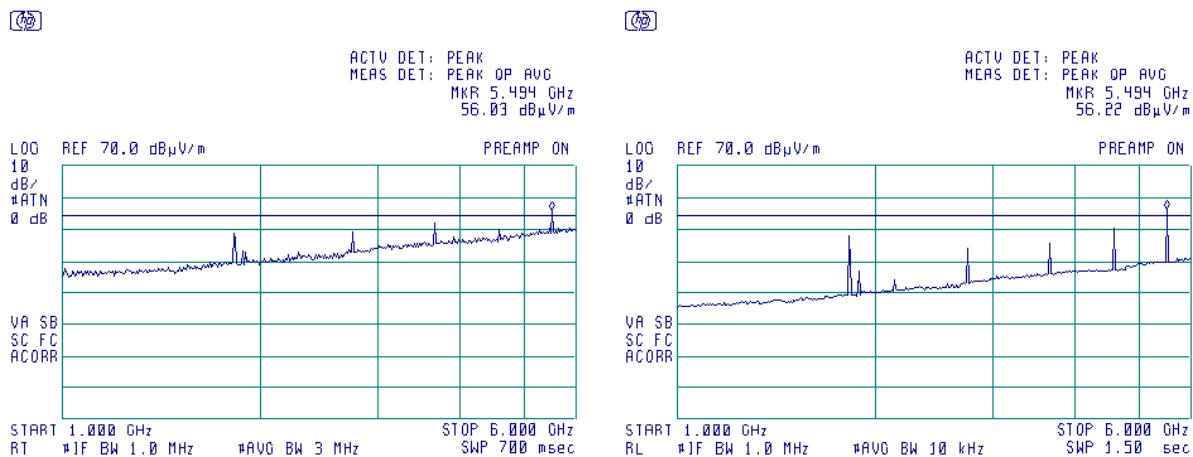

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.19 Radiated emission measurements from 6000 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

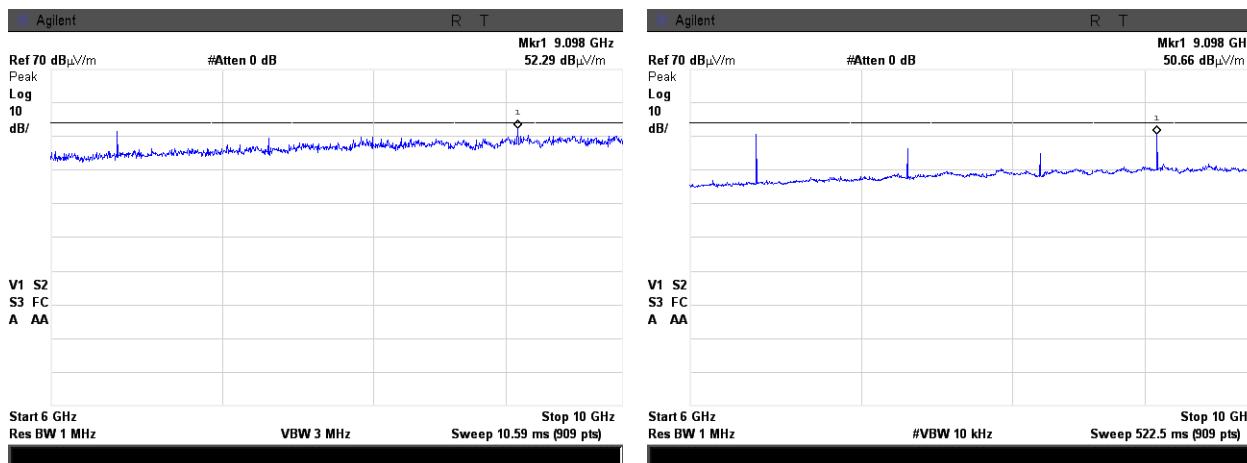

Plot 7.7.20 Radiated emission measurements from 6000 to 10000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

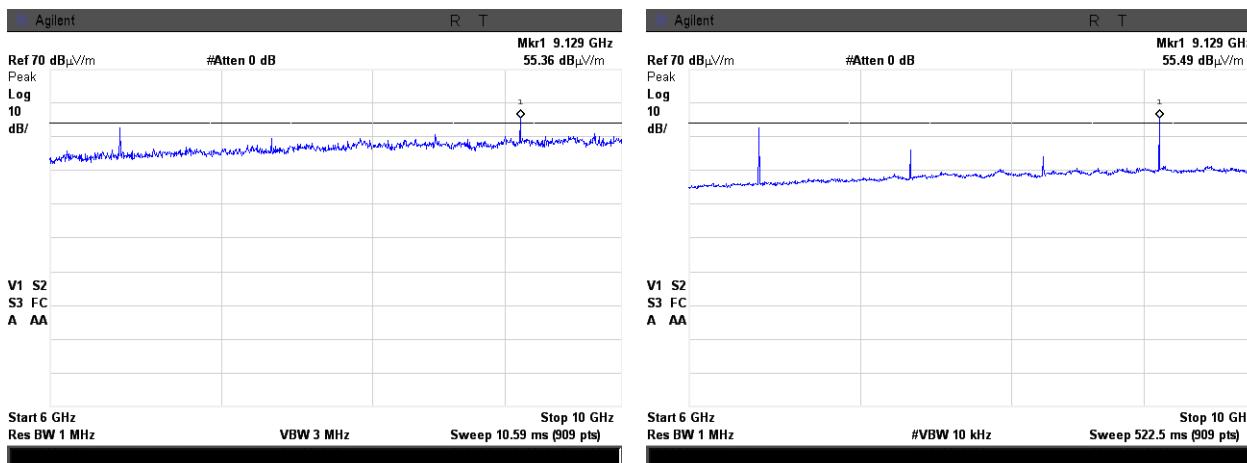

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.21 Radiated emission measurements from 6000 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

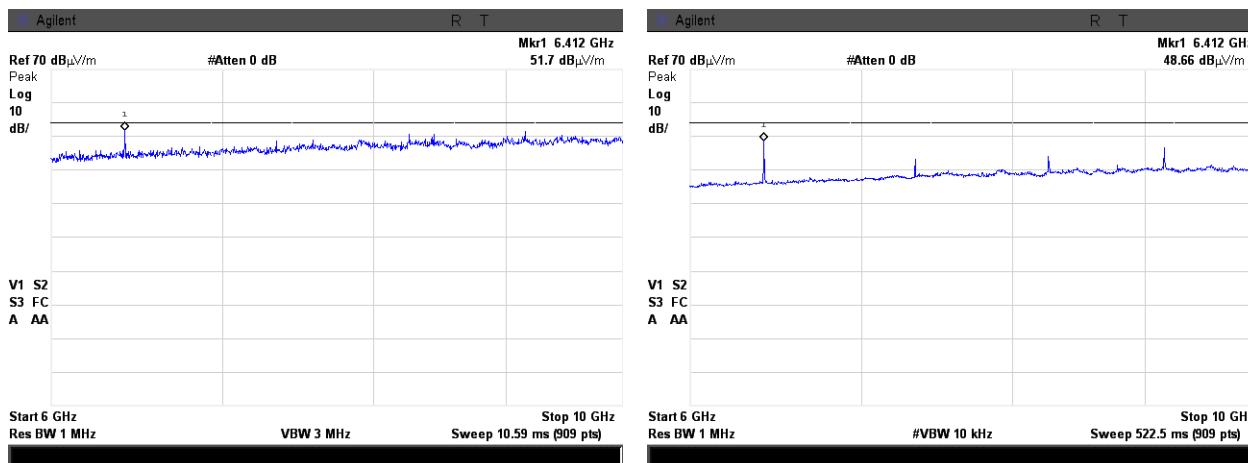




Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.22 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

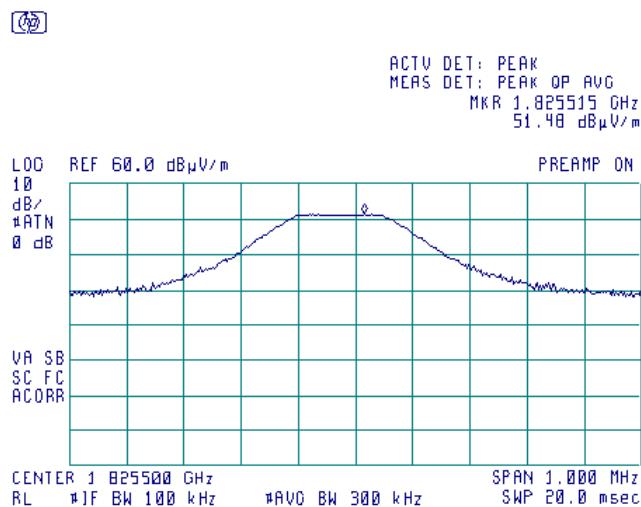

Plot 7.7.23 Radiated emission measurements at the second harmonic of mid carrier frequency


TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m

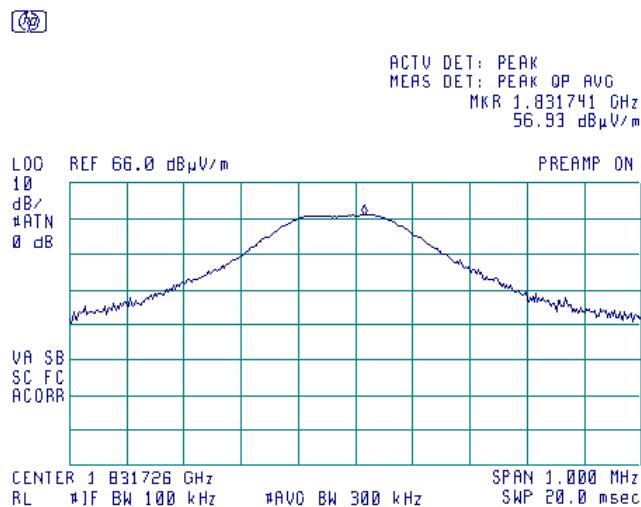

Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			


Plot 7.7.24 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Anechoic Semi anechoic chamber
TEST DISTANCE: 3 m

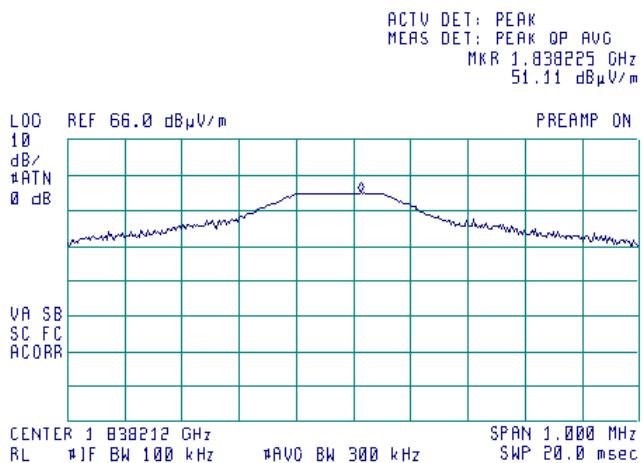


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.25 Radiated emission measurements at the third harmonic of low carrier frequency

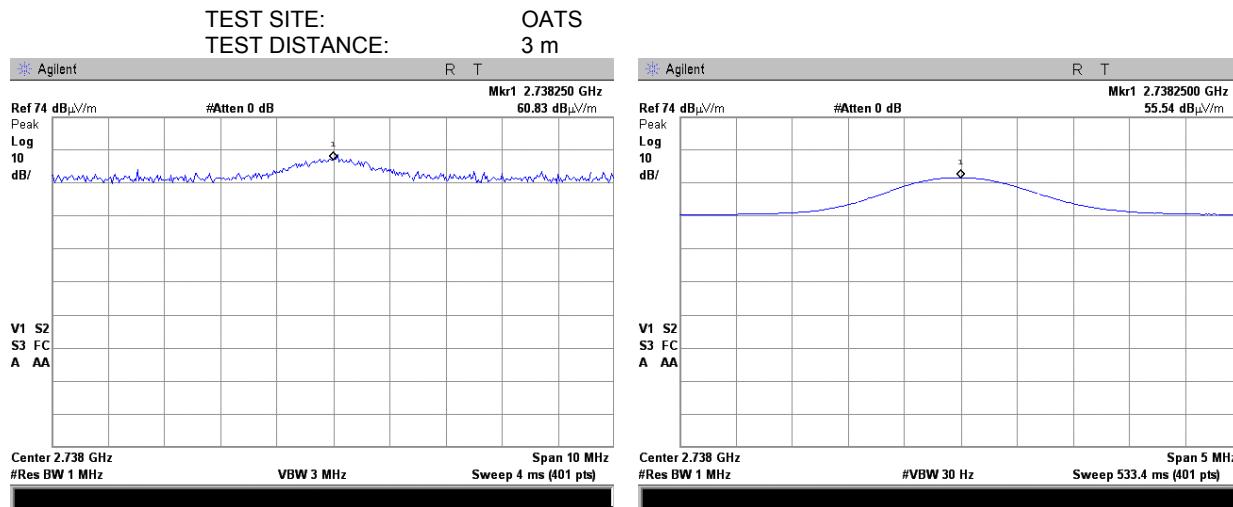


Plot 7.7.26 Radiated emission measurements at the third harmonic of mid carrier frequency

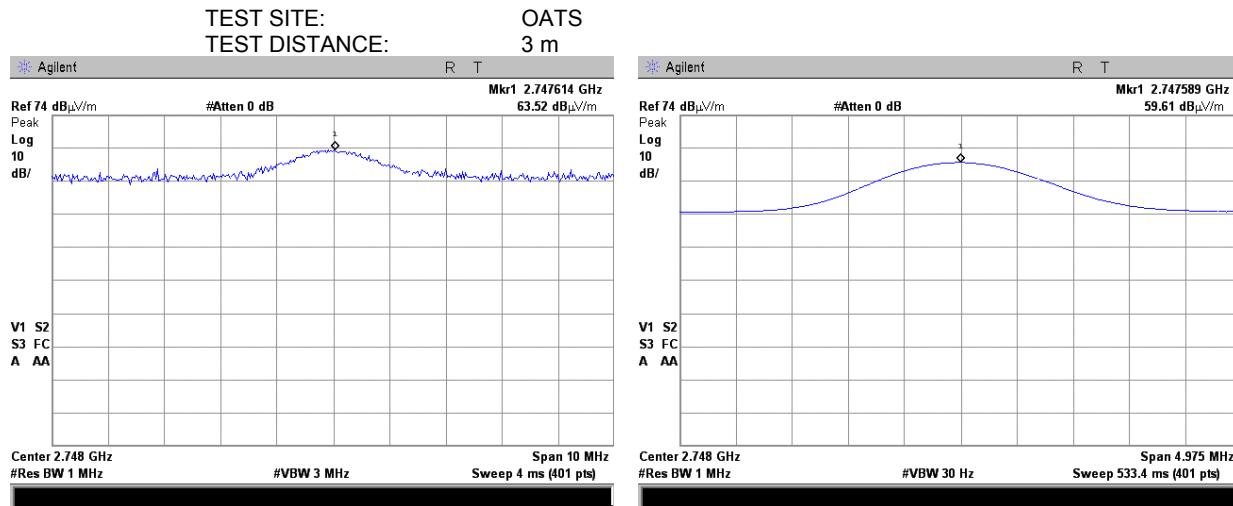


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.27 Radiated emission measurements at the third harmonic of high carrier frequency

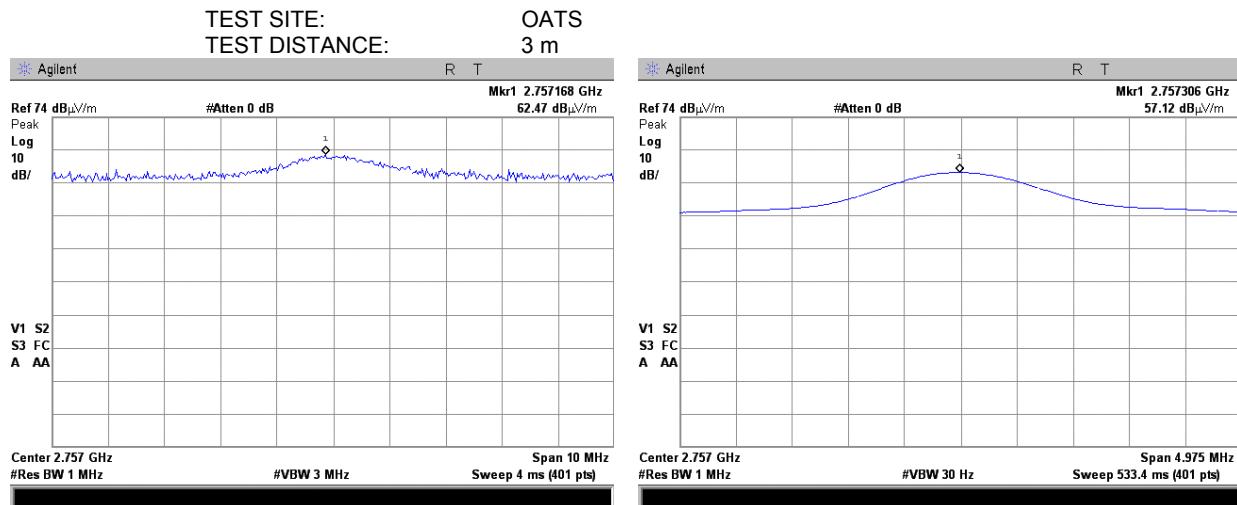


Plot 7.7.28 Radiated emission measurements at the fourth harmonic of low carrier frequency

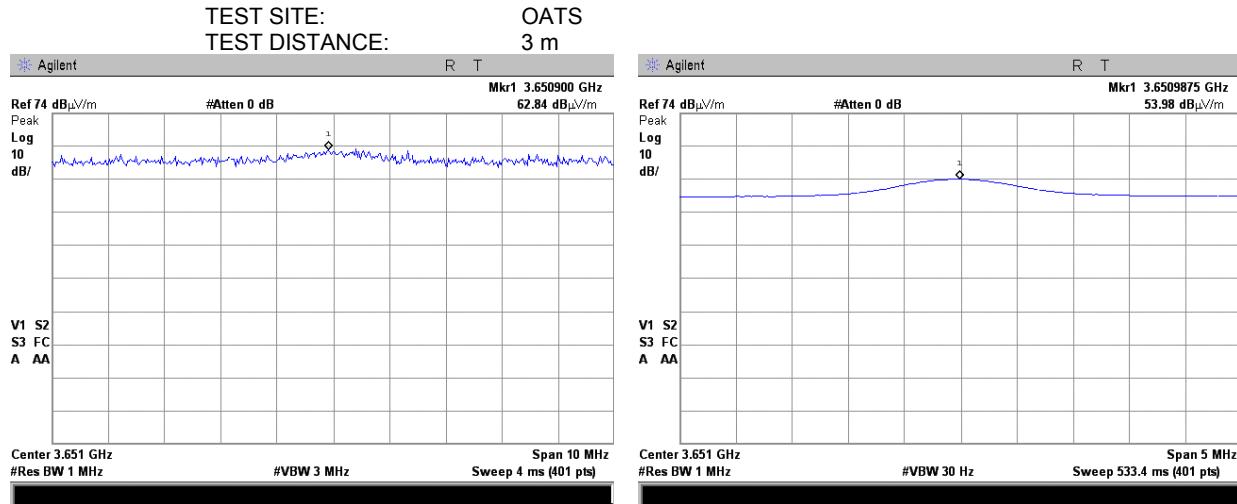


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.29 Radiated emission measurements at the fourth harmonic of mid carrier frequency

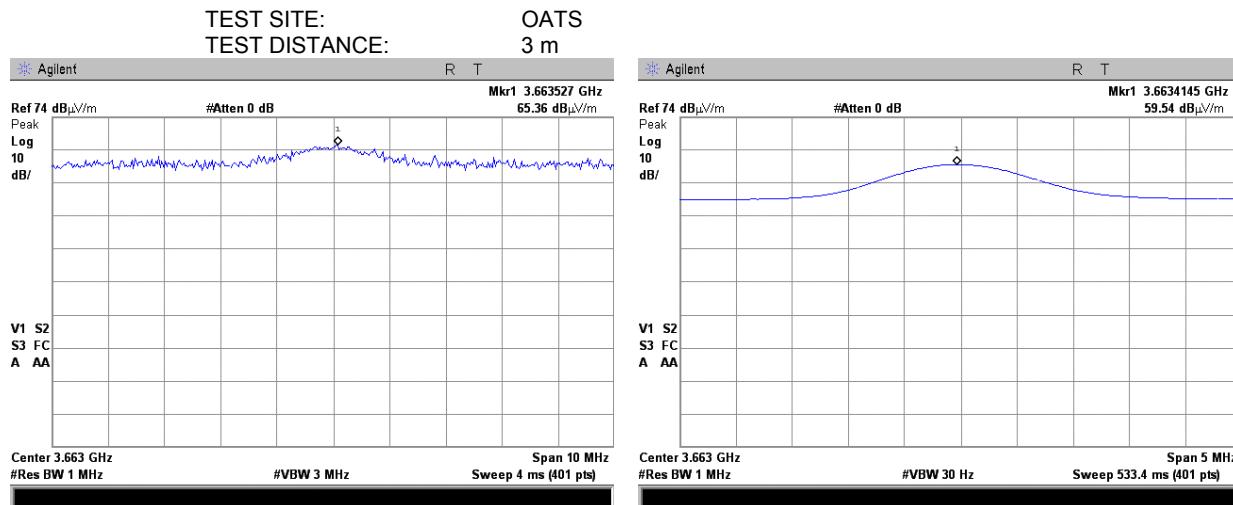


Plot 7.7.30 Radiated emission measurements at the fourth harmonic of high carrier frequency

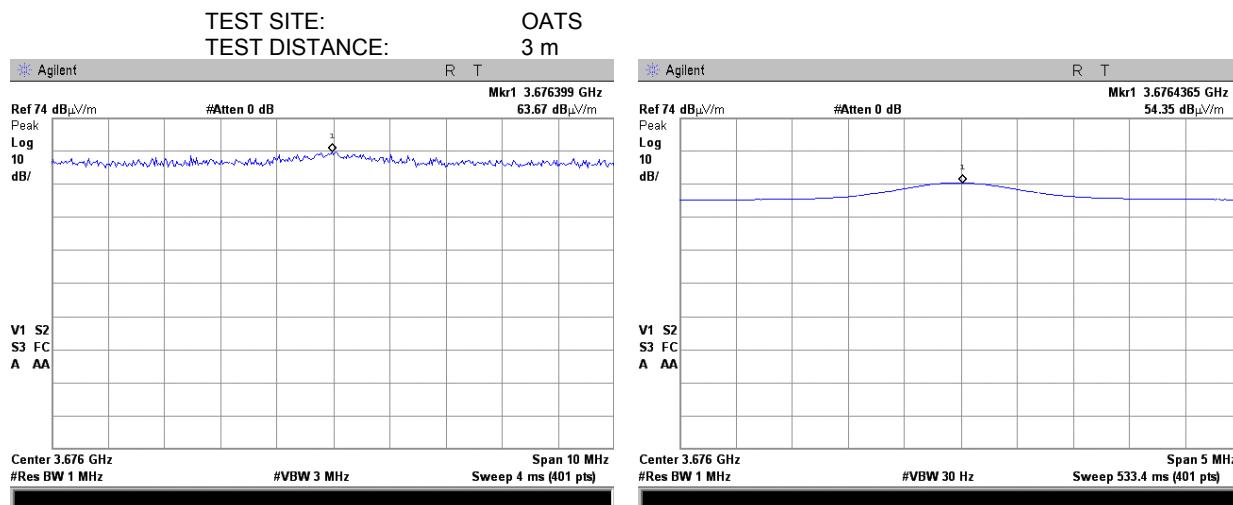


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.31 Radiated emission measurements at the fifth harmonic of low carrier frequency

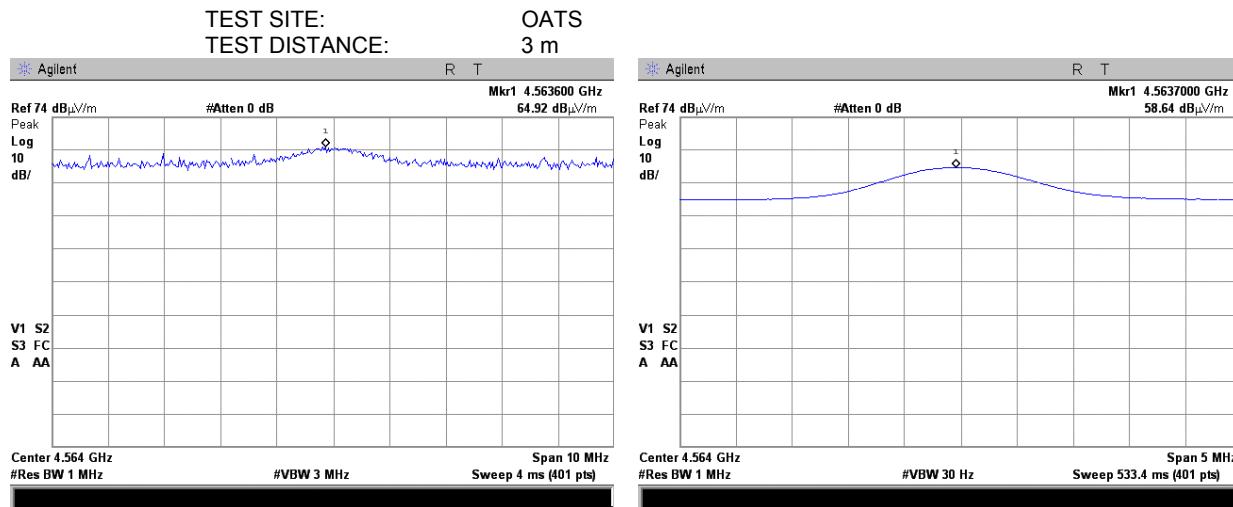


Plot 7.7.32 Radiated emission measurements at the fifth harmonic of mid carrier frequency

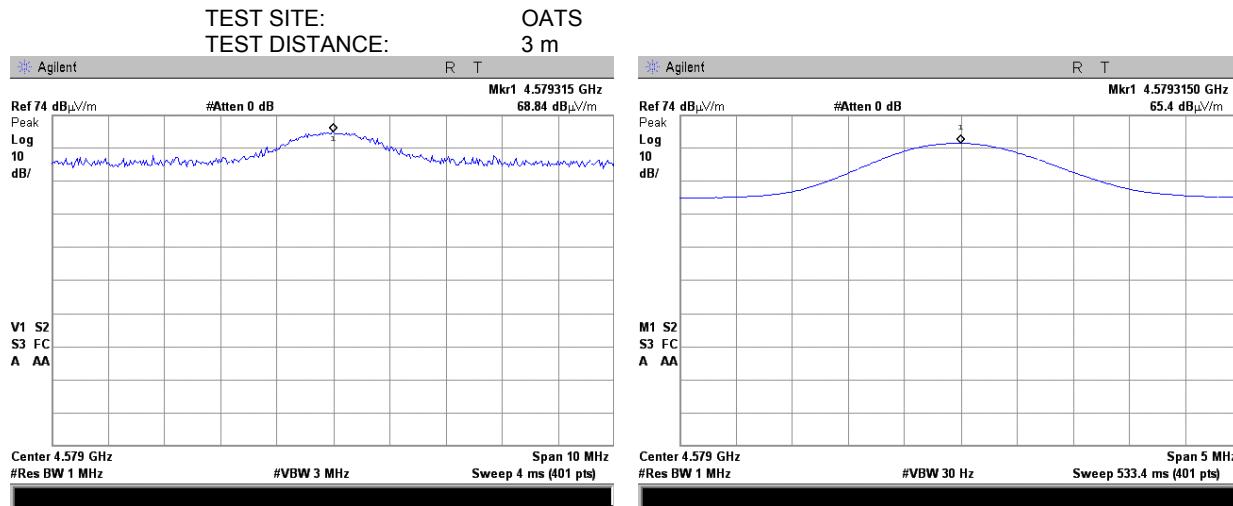


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.33 Radiated emission measurements at the fifth harmonic of high carrier frequency

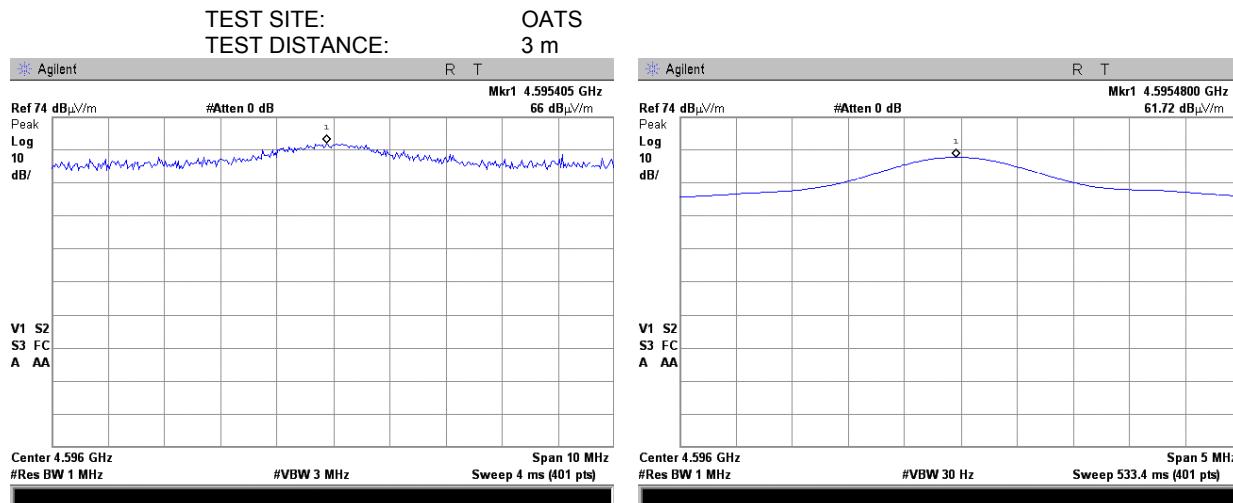


Plot 7.7.34 Radiated emission measurements at the sixth harmonic of low carrier frequency

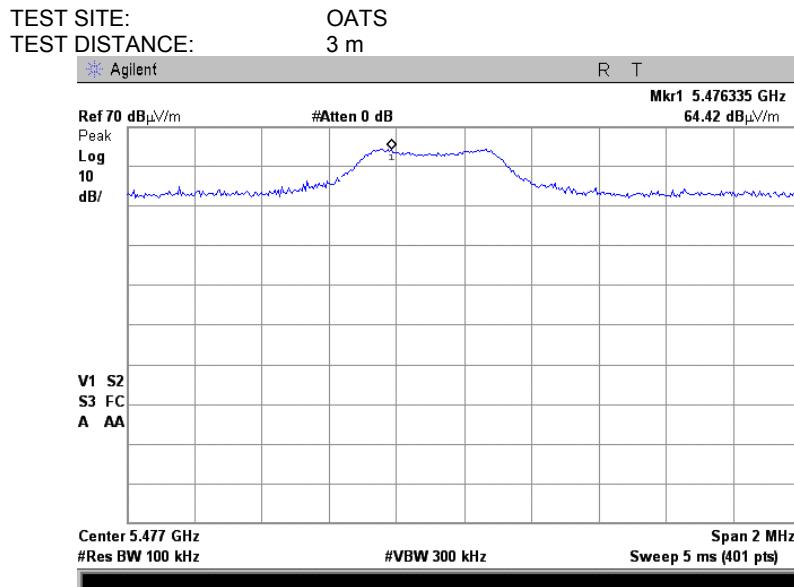


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	5/27/2011		
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.35 Radiated emission measurements at the sixth harmonic of mid carrier frequency

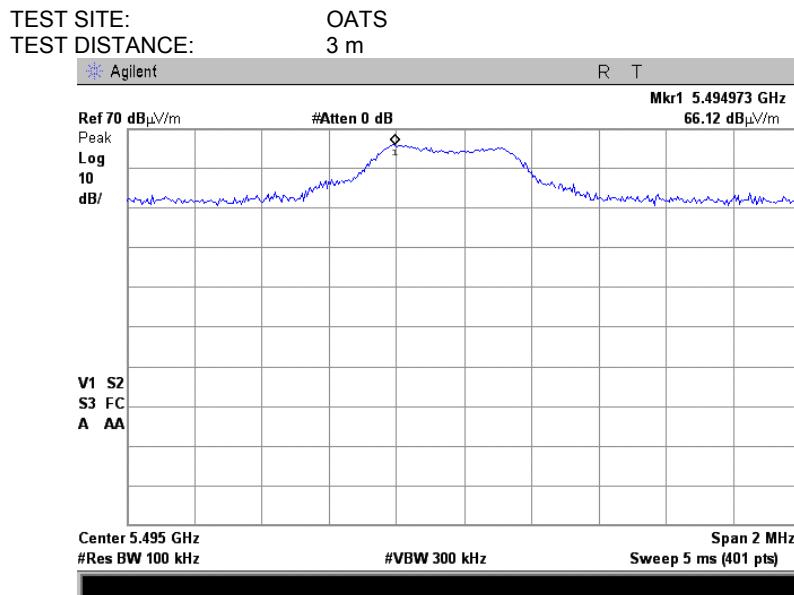


Plot 7.7.36 Radiated emission measurements at the sixth harmonic of high carrier frequency

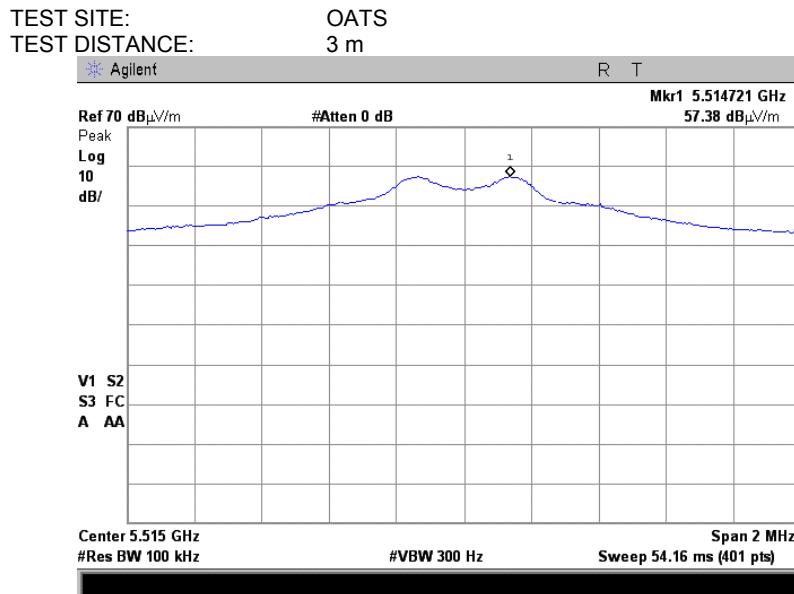


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.37 Radiated emission measurements at the seventh harmonic of low carrier frequency

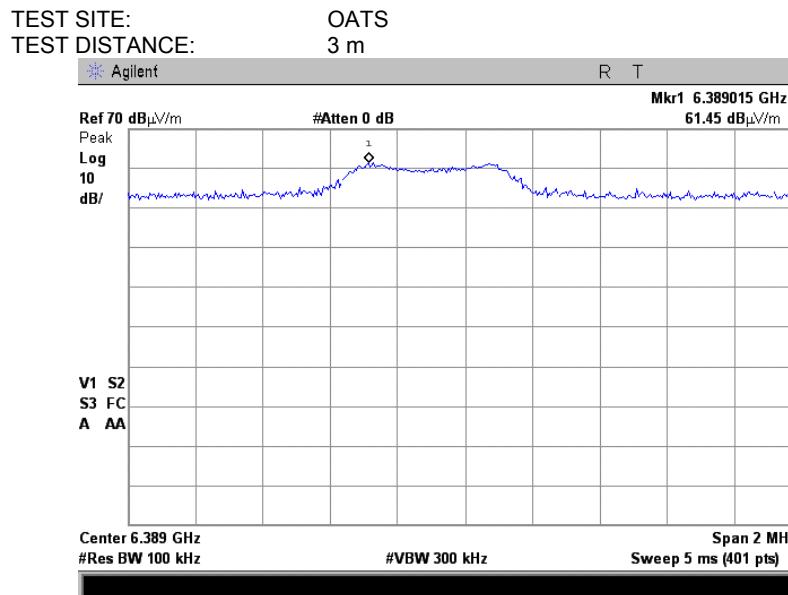


Plot 7.7.38 Radiated emission measurements at the seventh harmonic of mid carrier frequency

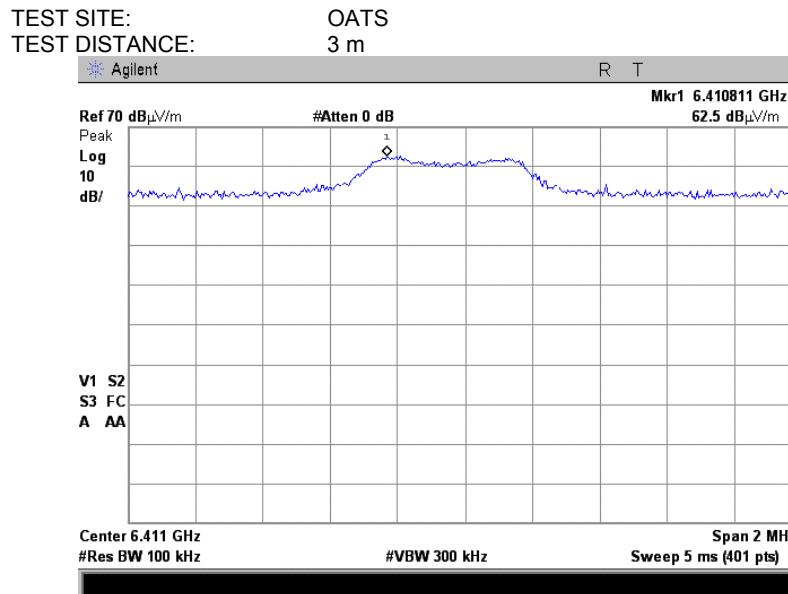


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.39 Radiated emission measurements at the seventh harmonic of high carrier frequency

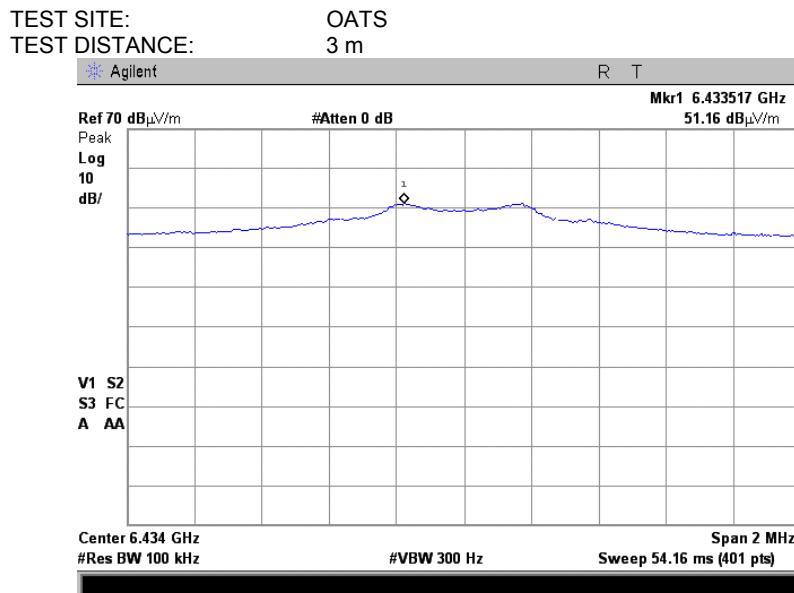


Plot 7.7.40 Radiated emission measurements at the eighth harmonic of low carrier frequency

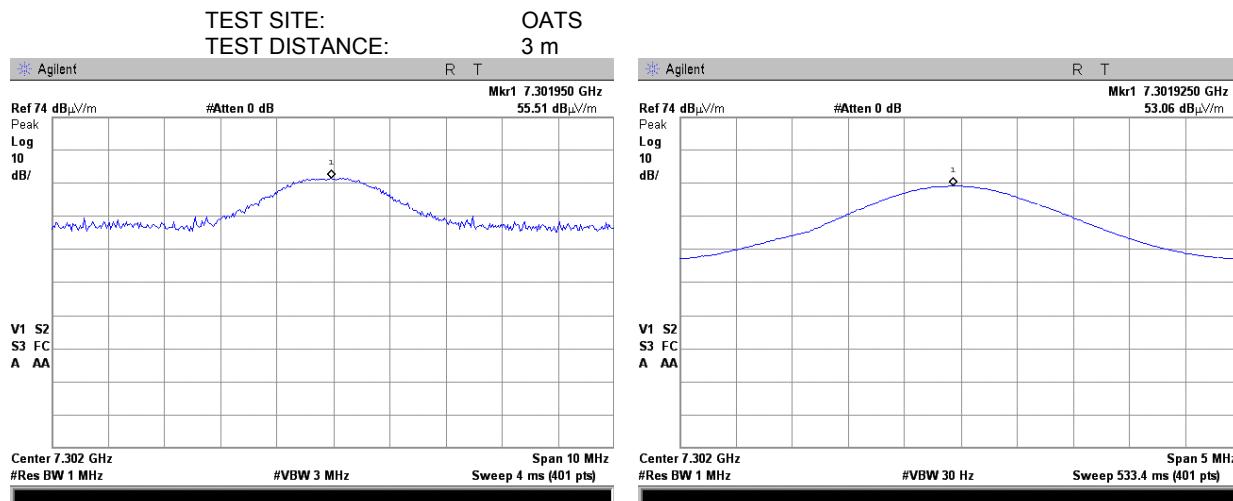


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.41 Radiated emission measurements at the eighth harmonic of mid carrier frequency

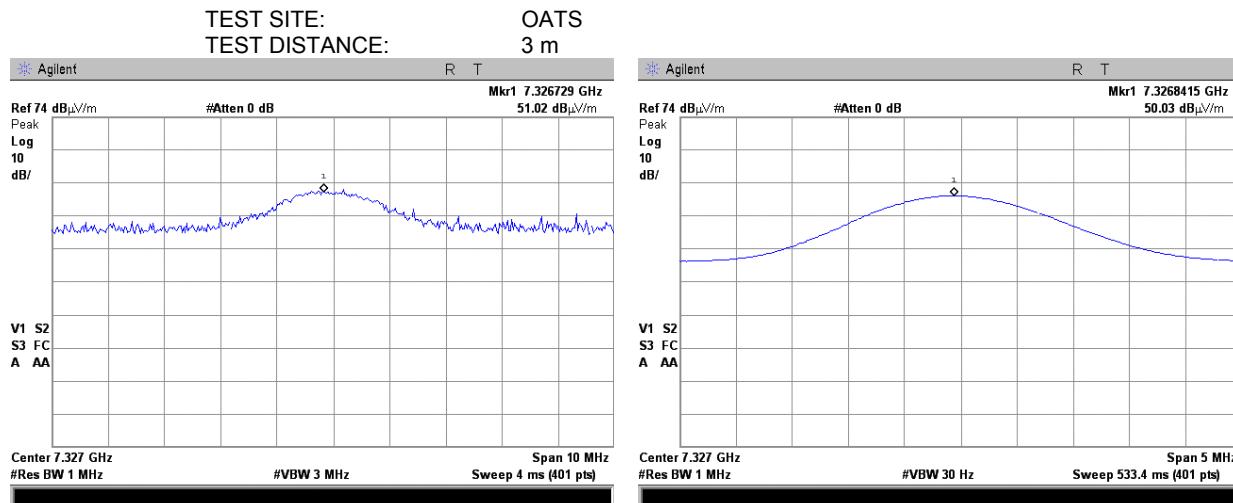


Plot 7.7.42 Radiated emission measurements at the eighth harmonic of high carrier frequency

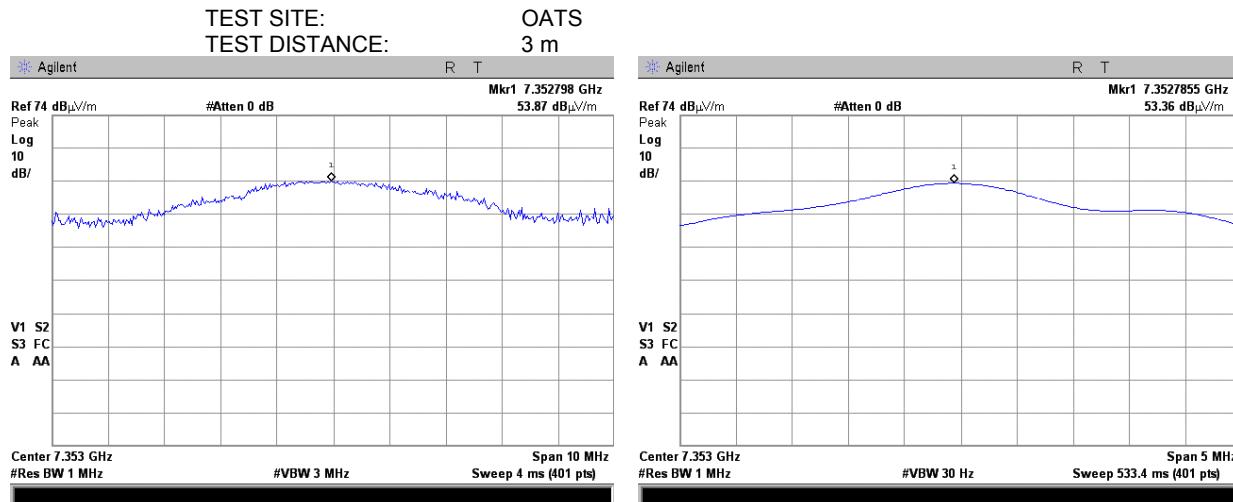


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.43 Radiated emission measurements at the ninth harmonic of low carrier frequency

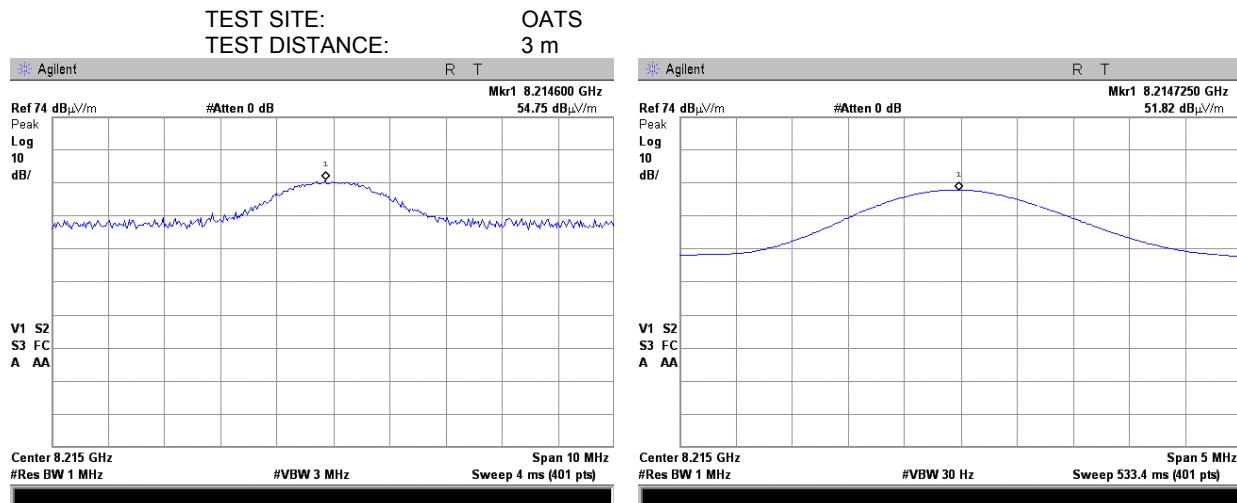


Plot 7.7.44 Radiated emission measurements at the ninth harmonic of mid carrier frequency

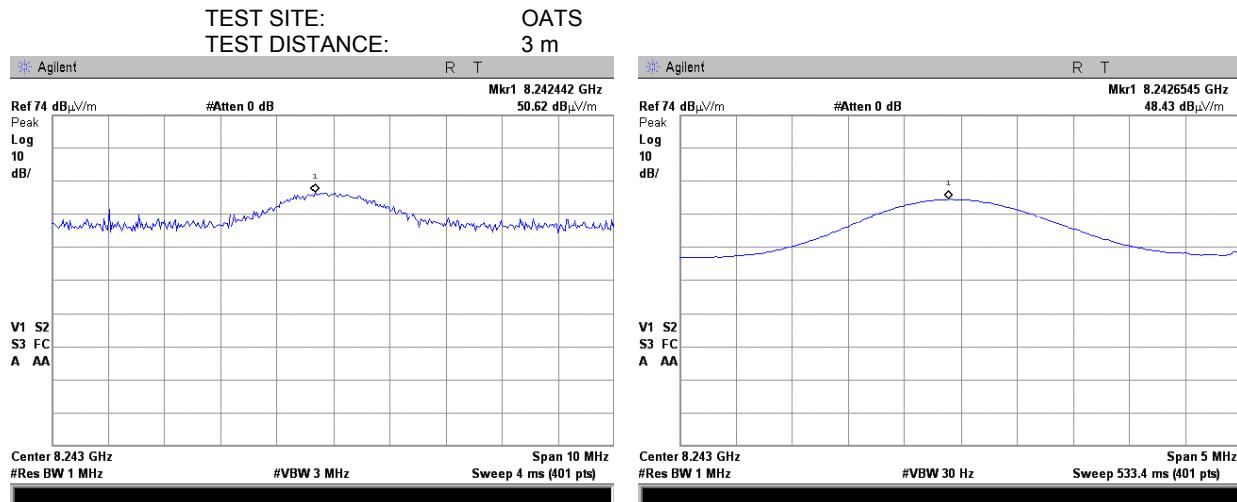


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.45 Radiated emission measurements at the ninth harmonic of high carrier frequency

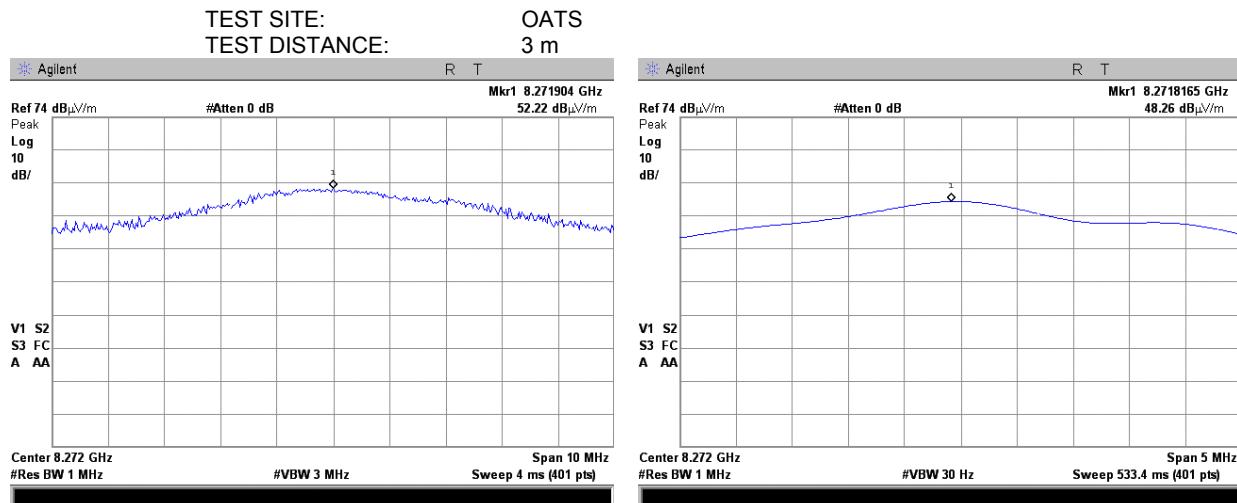


Plot 7.7.46 Radiated emission measurements at the tenth harmonic of low carrier frequency

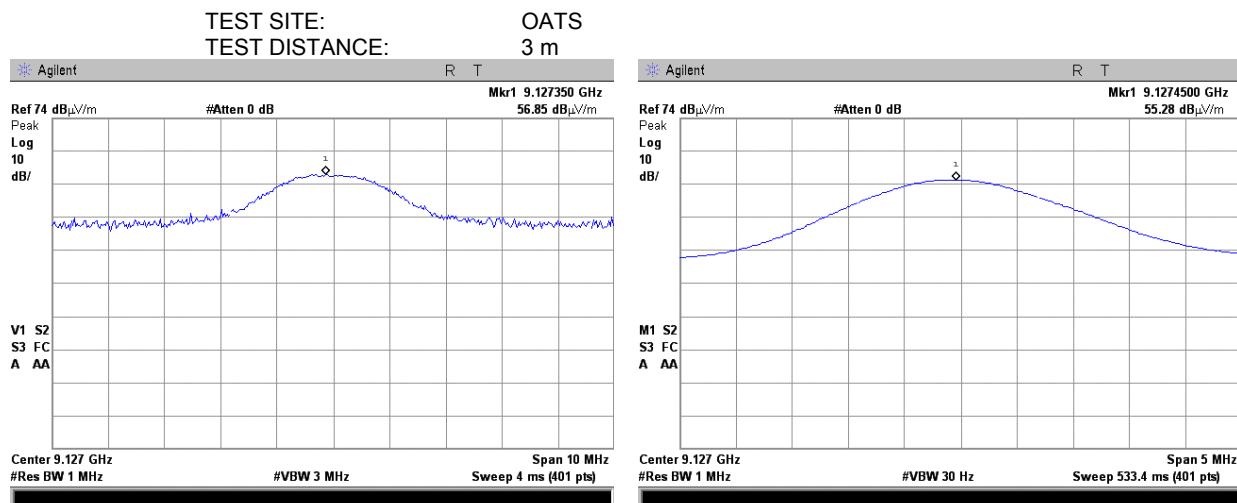


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.47 Radiated emission measurements at the tenth harmonic of mid carrier frequency

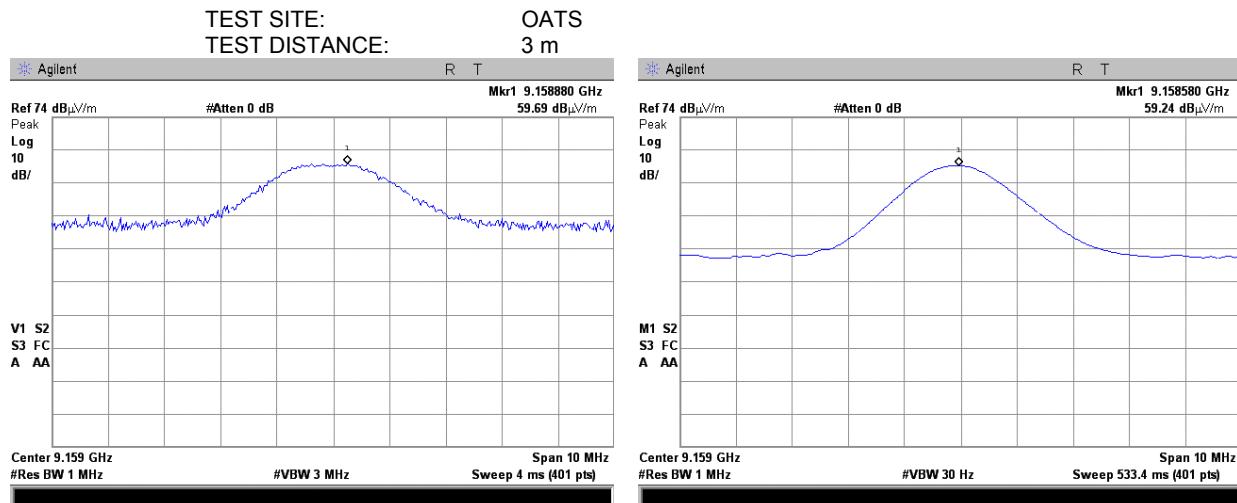


Plot 7.7.48 Radiated emission measurements at the tenth harmonic of high carrier frequency

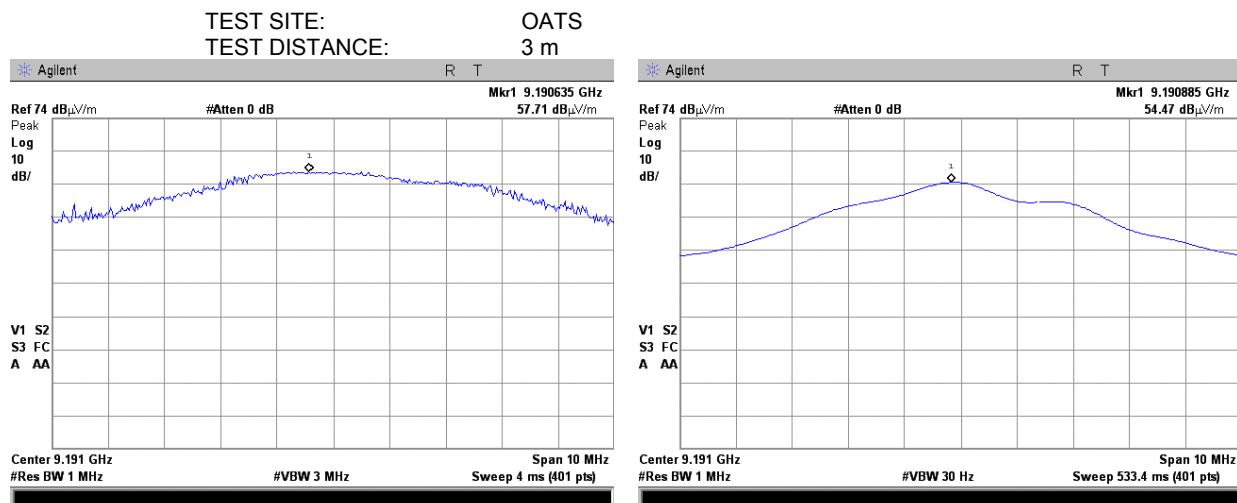


Test specification:	FCC section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	
Date(s):	5/27/2011	PASS	
Temperature: 27 °C	Air Pressure: 1013 hPa	Relative Humidity: 53 %	Power Supply: 6 V battery
Remarks:			

Plot 7.7.49 Transmission pulse duration in normal use

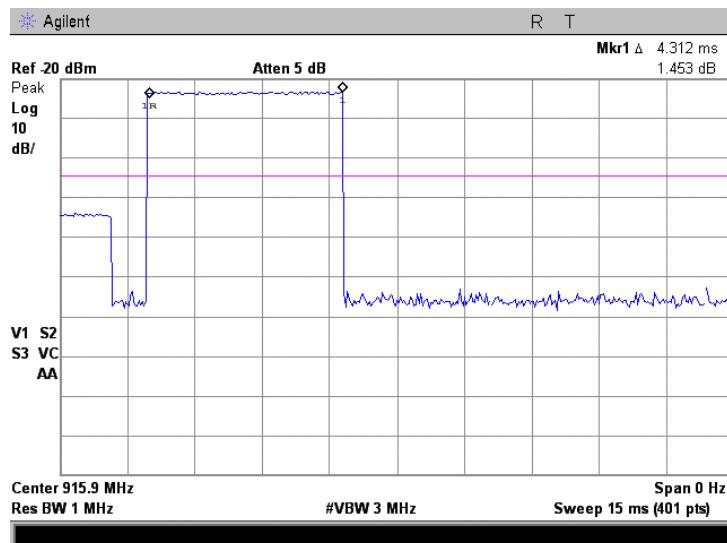

Plot 7.7.50 Transmission pulse period in normal use

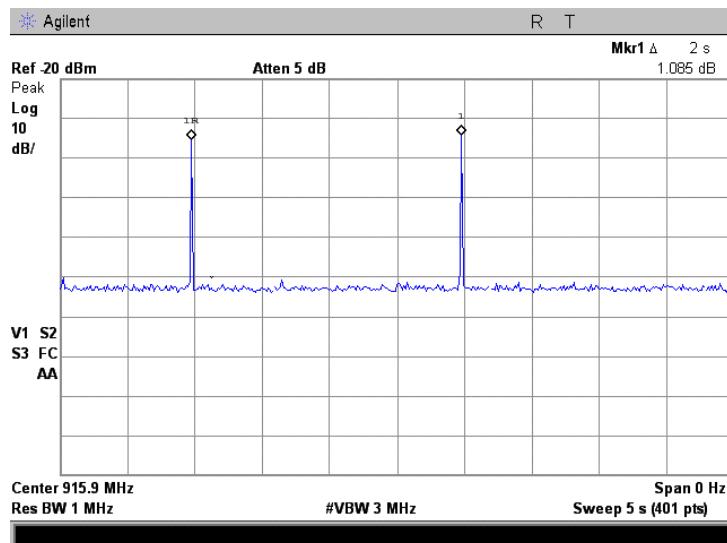

Test specification:	FCC section 15.203, RSS-Gen section 7.1.2, Antenna requirements		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	6/2/2011	Relative Humidity:	48 %
Temperature: 24 °C	Air Pressure: 1013 hPa	Power Supply: 6 V battery	
Remarks:			

7.8 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.8.1 Antenna assembly



Antenna

Test specification:	FCC section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/13/2011		
Temperature: 23 °C	Air Pressure: 1005 hPa	Relative Humidity: 45 %	Power Supply: 6 V battery
Remarks:			

8 Unintentional emissions

8.1 Radiated emission measurements

8.1.1 General

This test was performed to measure radiated emissions from the EUT enclosure. Specification test limits are given in Table 8.1.1, Table 8.1.2, Table 8.1.3.

Table 8.1.1 Radiated emission test limits according to FCC Part 15 Section 15.109

Frequency, MHz	Class B limit, dB(µV/m)		Class A limit, dB(µV/m)	
	10 m distance	3 m distance	10 m distance	3 m distance
30 - 88	29.5*	40.0	39.0	49.5*
88 - 216	33.0*	43.5	43.5	54.0*
216 - 960	35.5*	46.0	46.4	56.9*
Above 960	43.5*	54.0	49.5	60.0*

* The limit for test distance other than specified was calculated using the inverse linear distance extrapolation factor as follows: $\text{Lim}_{S2} = \text{Lim}_{S1} + 20 \log (S_1/S_2)$, where S_1 and S_2 – standard defined and test distance respectively in meters.

Table 8.1.2 Radiated emission limits according to RSS-Gen Section 6.1

Frequency, MHz	Field strength limit at 3 m test distance, dB(µV/m)
30 - 88	40.0
88 - 216	43.5
216 - 960	46.0
960 - 3 rd harmonic**	54.0

** - harmonic of the highest frequency the EUT generates, uses, operates or tunes to.

Table 8.1.3 Radiated emissions limits according to ICES-003 Section 5.5 Class B

Frequency, MHz	Limit, dB(µV/m)	
	10 m distance	3 m distance
30 - 230	30.0	40.0*
230 - 1000	37.0	47.0*

* The limit for 3-m test distance shall be increased by 10 dB.


Test specification:	FCC section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	7/13/2011		
Temperature: 23 °C	Air Pressure: 1005 hPa	Relative Humidity: 45 %	Power Supply: 6 V battery
Remarks:			

8.1.2 Test procedure


- 8.1.2.1 The EUT was set up as shown in Figure 8.1.1 and associated photograph, energized and the performance check was conducted.
- 8.1.2.2 The specified frequency range was investigated with biconilog antenna connected to EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal and the EUT cables position was varied.
- 8.1.2.3 The worst test results (the lowest margins) were recorded in Table 8.1.4 and shown in the associated plots.

Test specification:	FCC section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/13/2011		
Temperature: 23 °C	Air Pressure: 1005 hPa	Relative Humidity: 45 %	Power Supply: 6 V battery
Remarks:			

Figure 8.1.1 Setup for radiated emission measurements in anechoic chamber, table-top equipment

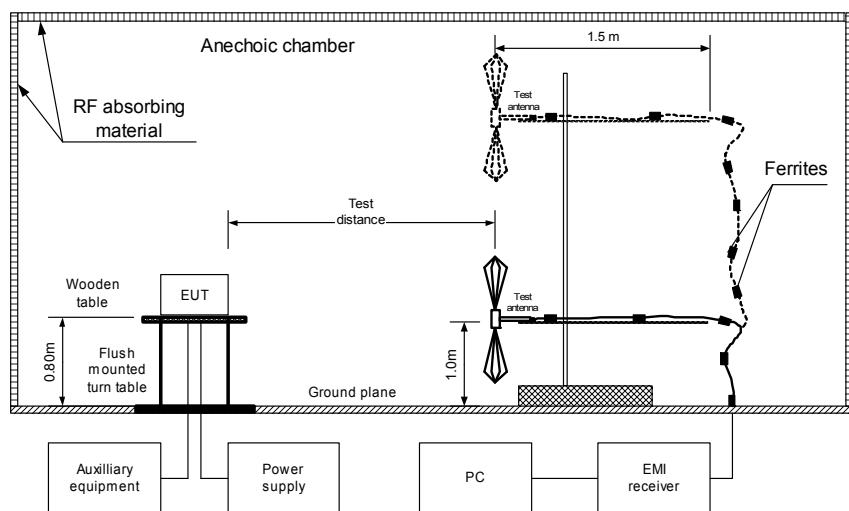

Photograph 8.1.1 Setup for preliminary radiated emission measurements

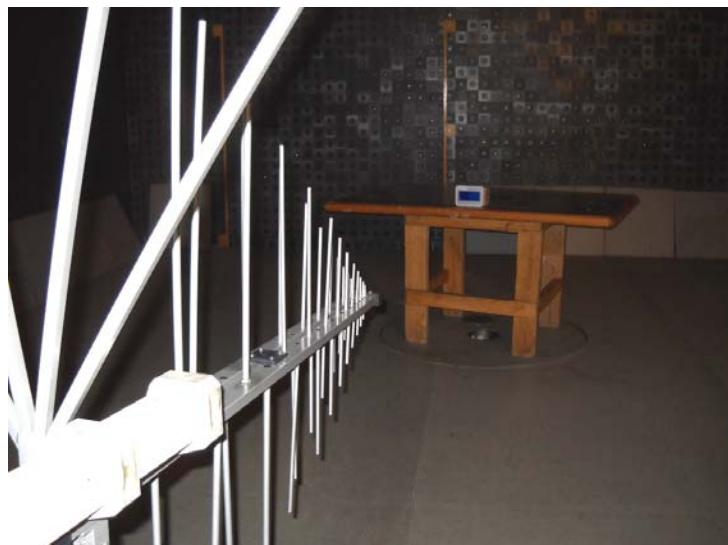

Test specification:	FCC section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/13/2011		
Temperature: 23 °C	Air Pressure: 1005 hPa	Relative Humidity: 45 %	Power Supply: 6 V battery
Remarks:			

Table 8.1.4 Radiated emission test results

EUT SET UP:

TABLE-TOP

LIMIT:

Class B

EUT OPERATING MODE:

Receive

TEST SITE:

SEMI ANECHOIC CHAMBER

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / QUASI-PEAK

FREQUENCY RANGE:

30 MHz – 1000 MHz

RESOLUTION BANDWIDTH:

120 kHz

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emission were found								

TEST SITE:

SEMI ANECHOIC CHAMBER

TEST DISTANCE:

3 m

DETECTORS USED:

PEAK / AVERAGE

FREQUENCY RANGE:

1000 - 6000MHz

RESOLUTION BANDWIDTH:

1000 kHz

Frequency, MHz	Peak			Average			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*	Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
No emissions were found										

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used


HL 0521	HL 0604	HL 2871	HL 3356	HL 3443			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.

Test specification:	FCC section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/13/2011		
Temperature: 23 °C	Air Pressure: 1005 hPa	Relative Humidity: 45 %	Power Supply: 6 V battery
Remarks:			


Plot 8.1.1 Radiated emission measurements in 30 - 1000 MHz range according to FCC part 15 and RSS-Gen

TEST SITE: Semi anechoic chamber
LIMIT: Class B
ANTENNA POLARIZATION Vertical & Horizontal
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive/Stand by

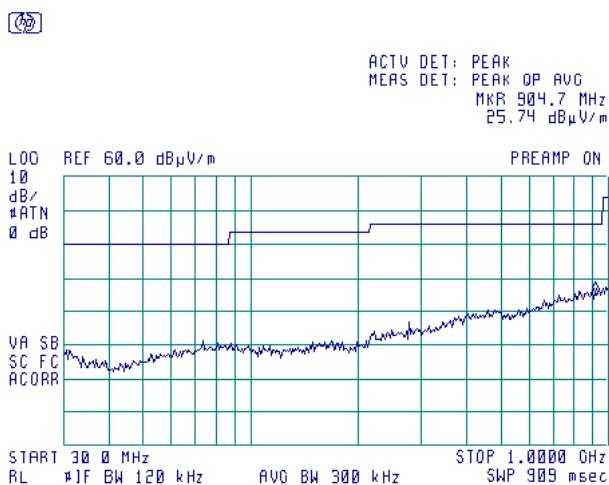

Plot 8.1.2 Radiated emission measurements in 1000 - 6000 MHz range according to FCC part 15 and RSS-Gen


TEST SITE: Semi anechoic chamber
LIMIT: Class B
ANTENNA POLARIZATION Vertical & Horizontal
TEST DISTANCE: 3 m
EUT OPERATING MODE: Receive/Stand by

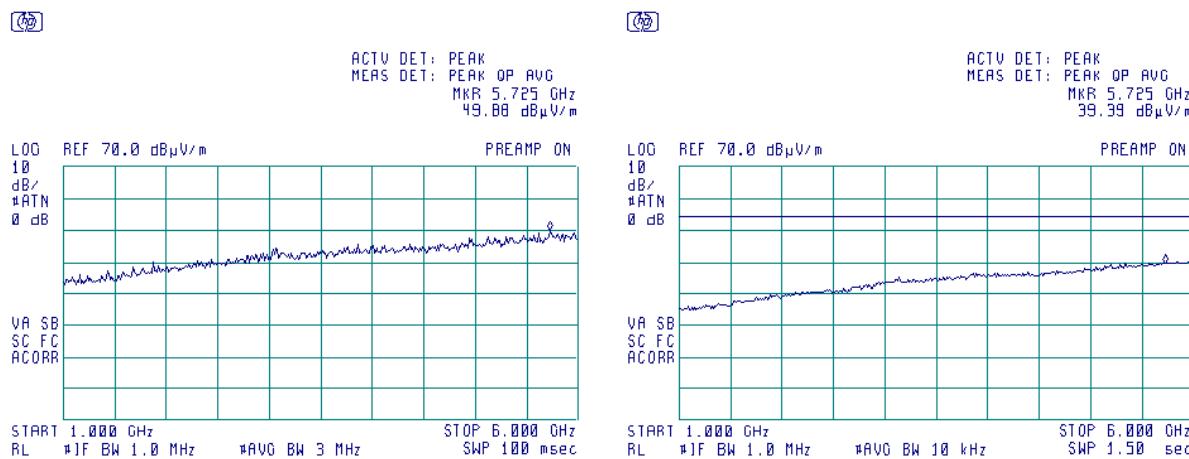

Test specification:	FCC section 15.109, RSS-Gen Section 6.1, ICES-003 Class B, Radiated emission		
Test procedure:	ANSI C63.4, Sections 11.6 and 12.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	7/13/2011		
Temperature: 23 °C	Air Pressure: 1005 hPa	Relative Humidity: 45 %	Power Supply: 6 V battery
Remarks:			


Plot 8.1.3 Radiated emissions measurements in 30 - 1000 MHz range according to ICES-003

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

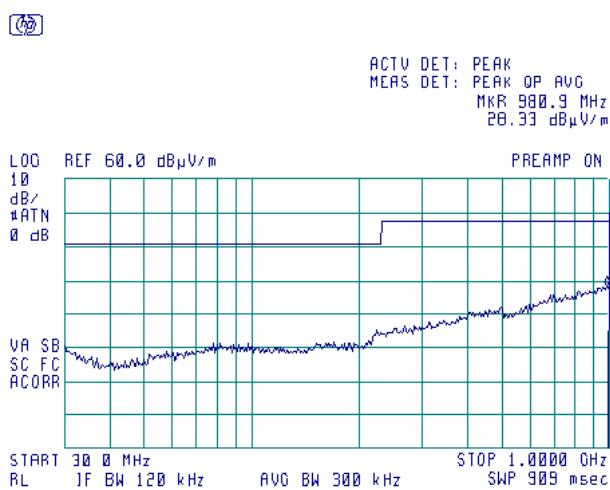

Plot 8.1.4 Radiated emissions measurements in 30 - 1000 MHz range according to ICES-003

TEST SITE: Semi anechoic chamber
LIMIT: Class B
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

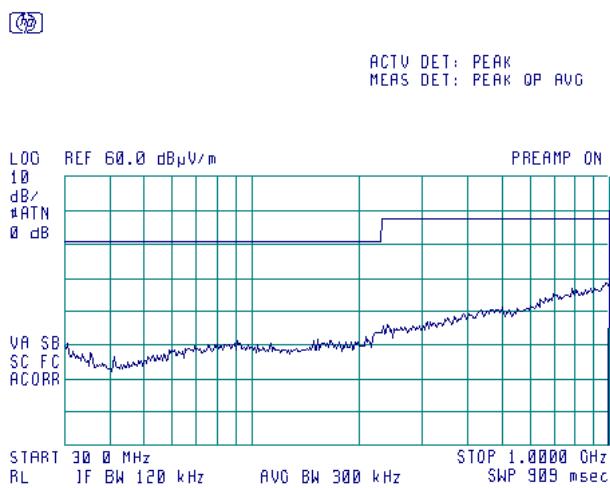

9 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0034	Antenna, Log Periodic, 200 - 1000 MHz	Electro-Metrics	LPA 25/30	1988	04-Jul-11	04-Jul-12
0415	Cable, Coax, RF, RG-214	Hermon Laboratories	CC-3	056	01-Dec-10	01-Dec-11
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-11	03-Jul-12
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	25-Aug-10	25-Aug-11
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	11-Jan-11	11-Jan-12
0812	Cable Coax, RG-214, 11.5 m, N-type connectors	Hermon Laboratories	C214-11	148	01-Dec-10	01-Dec-11
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Aug-10	24-Aug-11
1552	Cable RF, 8 m	Alpha Wire	RG-214	1552	01-Dec-10	01-Dec-11
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	16-Nov-10	16-Nov-11
2432	Antenna, Double-Ridged Waveguide Horn 1-18 GHz	EMC Test Systems	3115	00027177	16-Nov-10	16-Nov-11
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	14-Sep-10	14-Sep-11
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	08-May-11	08-May-12
3119	Cable, 18 GHz N-type, M-F, 3 m	Bird Electronic Corp.	TC-MNFn-3.0	211539004	03-Oct-10	03-Oct-11
3121	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-9155-00	3121	03-Oct-10	03-Oct-11
3356	Low Pass Filter, 50 Ohm, DC to 1800 MHz	Mini-Circuits	VLF-1800+	NA	04-Oct-10	04-Oct-11
3472	Cable, Coax, Microwave, DC-18 GHz, SMA-SMA, 1.0 m	Gore	GORE 65474	1003478	09-May-11	09-May-12
3533	Amplifier, low noise, 6 to 18 GHz	Quinstar Technology	QLJ-06184040 -J0	111590010 01	23-Dec-10	23-Dec-11

10 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.

11 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

12 APPENDIX D Specification references

FCC 47CFR part 15: 2010	Radio Frequency Devices
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment

13 APPENDIX E Test equipment correction factors

**Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

**Antenna factor
Log periodic antenna
Electro-Metrics, model LPA-25/30
Ser.No.1988, HL 0034**

Frequency MHz	Antenna Factor dB(1/m)	Frequency MHz	Antenna Factor dB(1/m)
200	12.6	625	20.4
225	12.2	650	20.9
250	13.4	675	22.0
275	14.3	700	22.2
300	15.2	725	22.7
325	15.7	750	22.5
350	15.9	775	22.7
375	16.4	800	22.8
400	17.0	825	23.2
425	17.4	850	23.5
450	17.9	875	23.9
475	18.6	900	24.0
500	19.1	925	24.0
525	19.3	950	24.2
550	19.6	975	24.7
575	19.8	1000	25.1
600	20.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Biconilog antenna EMC Model 3141
Ser.No.1011, HL 0604

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Antenna factor
Double-ridged guide horn antenna
Model 3115, serial number: 00027177, HL 2432

Frequency, MHz	Antenna factor. dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.8
2500.0	28.9
3000.0	30.7
3500.0	31.8
4000.0	33.0
4500.0	32.8
5000.0	34.2
5500.0	34.9
6000.0	35.2
6500.0	35.4
7000.0	36.3
7500.0	37.3
8000.0	37.5
8500.0	38.0
9000.0	38.3
9500.0	38.3
10000.0	38.7
10500.0	38.7
11000.0	38.9
11500.0	39.5
12000.0	39.5
12500.0	39.4
13000.0	40.5
13500.0	40.8
14000.0	41.5
14500.0	41.3
15000.0	40.2
15500.0	38.7
16000.0	38.5
16500.0	39.8
17000.0	41.9
17500.0	45.8
18000.0	49.1

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).

Cable loss
Cable Coaxial, RG-58/RG-214, s/n 056, HL 0415
+ Cable Coaxial, RG-214, 11.5m, s/n 148, HL 0812

No.	Frequency, MHz	Cable loss, dB	Measured uncertainty, dB
1	20	0.73	± 0.12
2	30	0.91	
3	50	1.2	
4	80	1.56	
5	100	1.76	
6	200	2.59	
7	300	3.26	
8	400	3.93	
9	500	4.42	
10	600	4.92	
11	700	5.36	
12	800	5.88	
13	900	6.41	
14	1000	6.71	
15	1500	8.63	
16	2000	10.39	

Cable loss
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
 HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55

Cable loss
RF cable 8 m, model RG-214, HL 1552

No.	Frequency, MHz	Cable loss, dB	Measurement uncertainty, dB
1	0.010	0.01	
2	0.1	0.01	
3	1	0.03	
4	10	0.12	
5	20	0.23	
6	30	0.30	
7	40	0.32	
8	50	0.34	
9	60	0.39	
10	70	0.43	
11	80	0.48	
12	90	0.50	
13	100	0.55	
14	200	0.78	±0.05
15	300	1.04	
16	400	1.16	
17	500	1.33	
18	600	1.51	
19	700	1.65	
20	800	1.77	
21	900	1.92	
22	1000	2.04	
23	1200	2.26	
24	1400	2.49	
25	1600	2.74	
26	1800	2.94	
27	2000	3.18	
28	2500	3.65	
29	2900	4.08	

Cable loss
Cable 18 GHz, N-type, M-F, 3 m, Bird Electronic Corp., model TC-MNFn-3.0, S/N 211539004
HL 3119

Frequency, MHz	Cable loss, dB								
10	0.06	3600	1.34	7400	2.00	11200	2.48	15100	2.90
30	0.09	3700	1.36	7500	2.01	11300	2.45	15200	2.89
50	0.11	3800	1.37	7600	2.03	11400	2.51	15300	2.91
100	0.23	3900	1.39	7700	2.05	11500	2.45	15400	2.85
200	0.30	4000	1.39	7800	2.07	11600	2.49	15500	2.83
300	0.42	4100	1.42	7900	2.06	11700	2.51	15600	2.89
400	0.39	4200	1.45	8000	2.06	11800	2.50	15700	2.85
500	0.47	4300	1.47	8100	2.09	11900	2.52	15800	2.87
600	0.49	4400	1.49	8200	2.10	12000	2.48	15900	2.91
700	0.63	4500	1.51	8300	2.11	12100	2.53	16000	2.90
800	0.62	4600	1.53	8400	2.15	12200	2.54	16100	2.94
900	0.70	4700	1.55	8500	2.15	12300	2.56	16200	2.91
1000	0.70	4800	1.54	8600	2.17	12400	2.57	16300	2.96
1100	0.77	4900	1.57	8700	2.19	12500	2.57	16400	3.01
1200	0.78	5000	1.60	8800	2.20	12600	2.55	16500	3.01
1300	0.83	5100	1.60	8900	2.21	12700	2.50	16600	2.98
1400	0.86	5200	1.62	9000	2.22	12800	2.57	16700	3.00
1500	0.85	5300	1.65	9100	2.23	12900	2.57	16800	3.01
1600	0.94	5400	1.66	9200	2.25	13000	2.55	16900	3.06
1700	0.90	5500	1.69	9300	2.24	13100	2.62	17000	3.07
1800	0.90	5600	1.70	9400	2.28	13200	2.60	17100	3.09
1900	0.95	5700	1.72	9500	2.28	13300	2.67	17200	3.10
2000	0.97	5800	1.74	9600	2.27	13400	2.66	17300	3.11
2100	1.00	5900	1.75	9700	2.30	13500	2.71	17400	3.16
2200	1.02	6000	1.77	9800	2.30	13600	2.73	17500	3.15
2300	1.05	6100	1.79	9900	2.34	13700	2.73	17600	3.21
2400	1.08	6200	1.82	10000	2.32	13800	2.85	17700	3.21
2500	1.10	6300	1.83	10100	2.31	13900	2.83	17800	3.18
2600	1.13	6400	1.83	10200	2.31	14000	2.83	17900	3.25
2700	1.15	6500	1.87	10300	2.26	14100	2.83	18000	3.14
2800	1.17	6600	1.88	10400	2.32	14200	2.84		
2900	1.21	6700	1.90	10500	2.26	14300	2.90		
3000	1.22	6800	1.93	10600	2.26	14400	2.84		
3100	1.25	6900	1.92	10700	2.31	14600	2.88		
3200	1.27	7000	1.95	10800	2.24	14700	2.85		
3300	1.29	7100	1.96	10900	2.39	14800	2.92		
3400	1.28	7200	1.99	11000	2.41	14900	2.93		
3500	1.31	7300	2.00	11100	2.46	15000	2.83		

Cable loss
Microwave Cable Assembly, 18 GHz, 6.4 m, SMA – SMA, Huber-Suhner, model 198-9155-00
HL 3121

Frequency, MHz	Cable loss, dB								
10	0.08	3600	2.10	7400	3.08	11200	3.85	15100	4.58
30	0.18	3700	2.14	7500	3.11	11300	3.85	15200	4.60
50	0.26	3800	2.18	7600	3.14	11400	3.86	15300	4.63
100	0.34	3900	2.19	7700	3.16	11500	3.86	15400	4.65
200	0.47	4000	2.25	7800	3.18	11600	3.87	15500	4.71
300	0.59	4100	2.25	7900	3.20	11700	3.85	15600	4.70
400	0.66	4200	2.28	8000	3.22	11800	3.96	15700	4.69
500	0.75	4300	2.35	8100	3.26	11900	3.92	15800	4.71
600	0.83	4400	2.35	8200	3.27	12000	3.92	15900	4.74
700	0.90	4500	2.38	8300	3.29	12100	3.94	16000	4.69
800	0.96	4600	2.43	8400	3.30	12200	3.94	16100	4.72
900	1.02	4700	2.43	8500	3.31	12300	3.99	16200	4.71
1000	1.07	4800	2.45	8600	3.33	12400	4.02	16300	4.74
1100	1.12	4900	2.48	8700	3.35	12500	4.10	16400	4.74
1200	1.15	5000	2.55	8800	3.36	12600	4.09	16500	4.75
1300	1.22	5100	2.54	8900	3.38	12700	4.15	16600	4.78
1400	1.28	5200	2.56	9000	3.40	12800	4.15	16700	4.86
1500	1.29	5300	2.58	9100	3.41	12900	4.08	16800	4.84
1600	1.36	5400	2.61	9200	3.45	13000	4.21	16900	4.83
1700	1.40	5500	2.64	9300	3.48	13100	4.19	17000	4.86
1800	1.45	5600	2.69	9400	3.52	13200	4.29	17100	4.83
1900	1.51	5700	2.67	9500	3.54	13300	4.24	17200	4.90
2000	1.50	5800	2.71	9600	3.59	13400	4.26	17300	4.91
2100	1.56	5900	2.73	9700	3.59	13500	4.26	17400	4.94
2200	1.59	6000	2.75	9800	3.62	13600	4.29	17500	4.93
2300	1.63	6100	2.81	9900	3.70	13700	4.35	17600	4.93
2400	1.73	6200	2.80	10000	3.70	13800	4.31	17700	5.00
2500	1.73	6300	2.82	10100	3.72	13900	4.29	17800	5.01
2600	1.78	6400	2.85	10200	3.73	14000	4.32	17900	5.00
2700	1.84	6500	2.87	10300	3.75	14100	4.33	18000	5.00
2800	1.84	6600	2.90	10400	3.76	14200	4.34		
2900	1.91	6700	2.91	10500	3.77	14300	4.36		
3000	1.91	6800	2.94	10600	3.79	14400	4.38		
3100	1.97	6900	2.96	10700	3.80	14600	4.42		
3200	1.98	7000	2.98	10800	3.81	14700	4.42		
3300	2.04	7100	3.01	10900	3.81	14800	4.55		
3400	2.04	7200	3.02	11000	3.83	14900	4.55		
3500	2.10	7300	3.04	11100	3.84	15000	4.55		

Cable loss
Cable coaxial, Microwave, SMA-SMA, 18 GHz, 1.0 m
Gore, HL 3472

Frequency, MHz	Cable loss, dB						
10	0.01	5000	0.47	10200	0.72	15500	0.75
30	0.03	5100	0.47	10300	0.67	15600	0.89
50	0.04	5200	0.47	10400	0.77	15700	0.82
100	0.04	5300	0.47	10500	0.67	15800	0.89
200	0.08	5400	0.49	10600	0.74	15900	0.89
300	0.11	5500	0.48	10700	0.81	16000	0.93
400	0.11	5600	0.49	10800	0.77	16100	0.90
500	0.12	5700	0.49	10900	0.82	16200	0.92
600	0.14	5800	0.51	11000	0.86	16300	0.90
700	0.15	5900	0.50	11100	0.78	16400	0.94
800	0.16	6000	0.51	11200	0.82	16500	0.93
900	0.18	6100	0.53	11300	0.77	16600	0.95
1000	0.17	6200	0.52	11400	0.84	16700	0.98
1100	0.19	6300	0.53	11500	0.74	16800	1.00
1200	0.22	6400	0.54	11600	0.81	16900	0.94
1300	0.21	6500	0.55	11700	0.73	17000	1.00
1400	0.22	6600	0.54	11800	0.75	17100	0.93
1500	0.23	6700	0.57	11900	0.73	17200	1.00
1600	0.24	6800	0.54	12000	0.75	17300	0.93
1700	0.24	6900	0.58	12100	0.66	17400	0.93
1800	0.25	7000	0.58	12200	0.66	17500	0.96
1900	0.26	7100	0.58	12300	0.72	17600	0.94
2000	0.28	7200	0.61	12400	0.64	17700	0.99
2100	0.27	7300	0.59	12500	0.75	17800	0.97
2200	0.29	7400	0.55	12600	0.67	17900	0.90
2300	0.29	7500	0.63	12700	0.75	18000	0.78
2400	0.30	7600	0.60	12800	0.66		
2500	0.30	7700	0.61	12900	0.81		
2600	0.32	7800	0.64	13000	0.75		
2700	0.32	7900	0.60	13100	0.80		
2800	0.33	8000	0.58	13200	0.80		
2900	0.34	8100	0.61	13300	0.81		
3000	0.34	8200	0.62	13400	0.88		
3100	0.35	8300	0.62	13500	0.82		
3200	0.35	8400	0.68	13600	1.00		
3300	0.36	8500	0.63	13700	0.93		
3400	0.37	8600	0.61	13800	0.86		
3500	0.38	8700	0.63	13900	0.84		
3600	0.38	8800	0.62	14000	1.00		
3700	0.40	8900	0.64	14100	0.86		
3800	0.40	9000	0.62	14200	0.98		
3900	0.40	9100	0.64	14300	0.99		
4000	0.40	9200	0.62	14400	0.82		
4100	0.43	9300	0.62	14600	0.89		
4200	0.43	9400	0.62	14700	0.84		
4300	0.43	9500	0.63	14800	0.90		
4400	0.44	9600	0.64	14900	0.89		
4500	0.45	9700	0.60	15000	0.89		
4600	0.45	9800	0.65	15100	0.86		
4700	0.46	9900	0.60	15200	0.87		
4800	0.46	10000	0.67	15300	0.86		
4900	0.46	10100	0.69	15400	0.87		

14 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT