

TEST REPORT

**ACCORDING TO: FCC 47CFR part 15 subpart C § 15.247 (FHSS),
RSS-210 issue 8 Annex 8**

FOR:

**Visonic Ltd.
Advanced two-way keypad
Model: KP-250 PG2
FCC ID:WP3KP250PG2
IC:1467C-KP250PG2**

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Ports and lines	5
6.3	Test configuration.....	5
6.4	Changes made in the EUT	5
6.5	Transmitter characteristics	6
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements.....	7
7.1	20 dB bandwidth	7
7.2	Carrier frequency separation.....	11
7.3	Number of hopping frequencies	13
7.4	Average time of occupancy	17
7.5	Peak output power	21
7.6	Band edge radiated emissions	33
7.7	Field strength of spurious emissions	37
7.8	Antenna requirements	81
7.9	Conducted emissions.....	82
8	APPENDIX A Test equipment and ancillaries used for tests.....	85
9	APPENDIX B Measurement uncertainties.....	86
10	APPENDIX C Test laboratory description	87
11	APPENDIX D Specification references	87
12	APPENDIX E Test equipment correction factors.....	88
13	APPENDIX F Abbreviations and acronyms.....	96

1 Applicant information

Client name: Visonic Ltd.
Address: 24 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3 645 6714
Fax: +972 3645 6788
E-mail: aelshtein@tycoint.com
Contact name: Mr. Arik Elshtain

2 Equipment under test attributes

Product name: Advanced two-way keypad
Product type: Transceiver
Model(s): KP-250 PG2
Catalogue number: 102679
Hardware version: 90-205104
Software release: JS-702451
PCB number: 8-304790
Receipt date 26-Dec-13

3 Manufacturer information

Manufacturer name: Visonic Ltd.
Address: 24 Habarzel street, Tel Aviv 69710, Israel
Telephone: +972 3 645 6714
Fax: +972 3645 6788
E-Mail: aelshtein@tycoint.com
Contact name: Mr. Arik Elshtain

4 Test details

Project ID: 23967
Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel
Test started: 26-Dec-13
Test completed: 07-Jan-14
Test specification(s): FCC 47CFR part 15, subpart C, §15.247 (FHSS);
RSS-210 issue 8 Annex 8

5 Tests summary

Test	Status
FCC Section 15.247(a1), RSS-210 section A8.1(a), The 20 dB bandwidth	Pass
FCC Section 15.247(a1), RSS-210 section A8.1(b), Frequency separation	Pass
FCC Section 15.247(a1), RSS-210 section A8.1(c), Number of hopping frequencies	Pass
FCC Section 15.247(a1), RSS-210 section A8.1(c), Average time of occupancy	Pass
FCC Section 15.247(b), RSS-210 section A8.4(1), Peak output power	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Emissions at band edges	Pass
FCC Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions	Pass
FCC Section 15.203, RSS-Gen section 7.1.2, Antenna requirements	Pass
FCC Section 15.207(a), RSS-Gen section 7.2.4, Conducted emission	Pass
FCC Section 15.247(i), RSS-Gen, section 5.5, RF exposure	Pass, the exhibit to the application of certification is provided

Testing was completed against all relevant requirements of the test standard. The results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. Alex Chaplik, test engineer	January 7, 2014	
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	January 19, 2014	
Approved by:	Mr. M. Nikishin, EMC and radio group manager	June 24, 2014	

6 EUT description

6.1 General information


The EUT, KP-250 PG2 is a 2-way wireless PowerG keypad display device for use with the PowerMaster-33 G2 control panel. It comprises the transceiver operating in 912.750 – 919.106 MHz.

The EUT utilizes integral antennas separate for each radio. The EUT is powered from AC mains via AC/DC adapter and is equipped with an internal backup battery pack.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adaptor	1	Unshielded	2.0

6.3 Test configuration

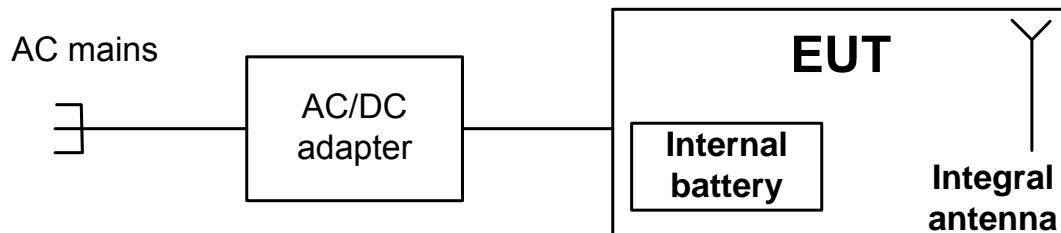

6.4 Changes made in the EUT

No changes were implemented in the EUT during the testing.



6.5 Transmitter characteristics

Type of equipment				
<input checked="" type="checkbox"/>	Stand-alone (Equipment with or without its own control provisions)			
Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)				
Plug-in card (Equipment intended for a variety of host systems)				
Intended use		Condition of use		
	fixed	Always at a distance more than 2 m from all people		
<input checked="" type="checkbox"/>	mobile	Always at a distance more than 20 cm from all people		
	portable	May operate at a distance closer than 20 cm to human body		
Assigned frequency ranges		902 – 928 MHz		
Operating frequencies		912.750 – 919.106 MHz		
Maximum rated output power		At transmitter 50 Ω RF output connector	dBm	
		Peak output power	23.17 dBm	
Is transmitter output power variable?		X	No	
		Yes	continuous variable	
			stepped variable with stepsize	dB
			minimum RF power	dBm
			maximum RF power	dBm
Antenna connection				
unique coupling	standard connector	X	integral	with temporary RF connector
			X	without temporary RF connector
Antenna/s technical characteristics				
Type	Manufacturer	Model number		Gain
Integral	Visonic	Built-in helical antenna		-3 dBi
Transmitter aggregate data rate/s		50 kbps		
Type of modulation		GFSK		
Modulating test signal (baseband)		PRBS		
Maximum transmitter duty cycle in normal use		0.1%		
Transmitter power source				
Battery	Nominal rated voltage		Battery type	Lithium
DC	Nominal rated voltage			
X	AC mains	Nominal rated voltage	120 AC	Frequency
Common power source for transmitter and receiver		X	yes	no
Spread spectrum technique used		X	Frequency hopping (FHSS)	
			Digital transmission system (DTS)	
			Hybrid	
Spread spectrum parameters for transmitters tested per FCC 15.247 only				
FHSS	Total number of hops	50		
	Bandwidth per hop	103 kHz		
	Max. separation of hops	125 kHz		



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	31-Dec-13		
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 8 requirements

7.1 20 dB bandwidth

7.1.1 General

This test was performed to measure the 20 dB bandwidth of the transmitter hopping channel. Specification test limits are given in Table 7.1.1.

Table 7.1.1 The 20 dB bandwidth limits

Assigned frequency, MHz	Maximum bandwidth, kHz	Modulation envelope reference points*, dBc
902.0 – 928.0	250	20
2400.0 – 2483.5	NA	
5725.0 – 5850.0	1000	

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier at maximum data rate.
- 7.1.2.3 The transmitter bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.2 and associated plot.
- 7.1.2.4 The test was repeated for each data rate and each modulation format.

Figure 7.1.1 The 20 dB bandwidth test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	31-Dec-13		
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

Table 7.1.2 The 20 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 902-928 MHz
DETECTOR USED: Peak
SWEEP TIME: Auto
VIDEO BANDWIDTH: \geq RBW
MODULATION ENVELOPE REFERENCE POINTS: 20.0 dBc
MODULATING SIGNAL: PRBS
FREQUENCY HOPPING: Disabled

Carrier frequency, MHz	Type of modulation	Data rate, Mbps	99% OBW	20 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
912.750	GFSK	50 kbps	87.15	102.13	250	-147.87	Pass
915.863			86.60	100.19	250	-149.81	Pass
919.106			85.95	103.35	250	-146.65	Pass

Reference numbers of test equipment used

HL 3818								
---------	--	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Dec-13		
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.1 The 20 dB bandwidth test result at low frequency

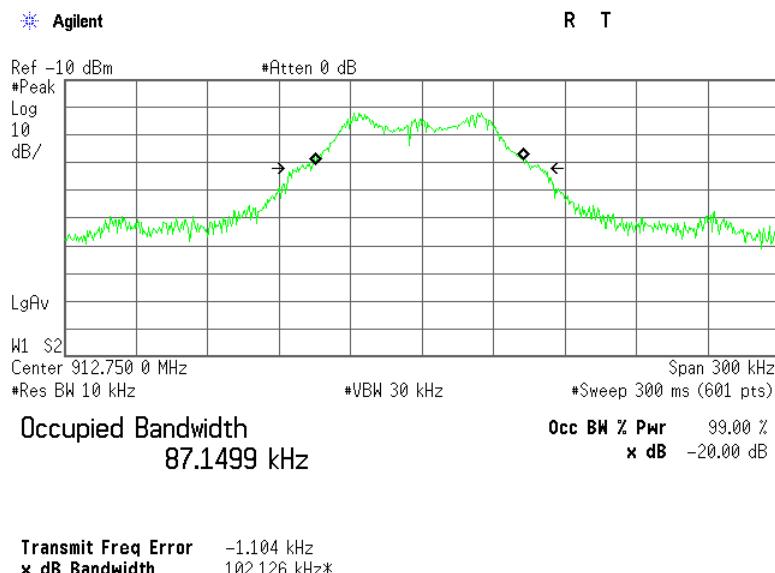

Plot 7.1.2 The 20 dB bandwidth test result at mid frequency

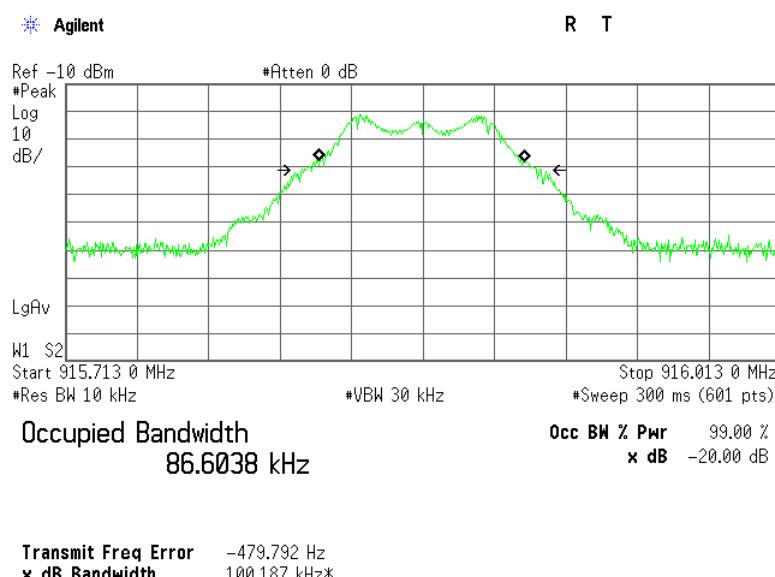




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(a), 20 dB bandwidth		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Dec-13		
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

Plot 7.1.3 The 20 dB bandwidth test result at high frequency

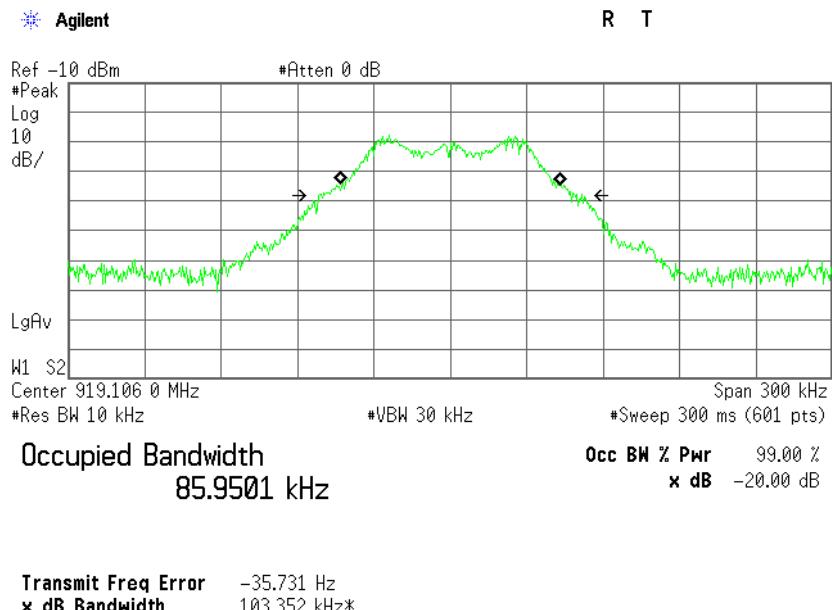



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	05-Jan-14		
Temperature: 21.4 °C	Air Pressure: 1015 hPa	Relative Humidity: 37 %	Power Supply: 120 VAC
Remarks:			

7.2 Carrier frequency separation

7.2.1 General

This test was performed to measure frequency separation between the peaks of adjacent channels. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Carrier frequency separation limits

Assigned frequency range, MHz	Carrier frequency separation
902.0 – 928.0	25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater
2400.0 – 2483.5	
5725.0 – 5850.0	

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.2.2.2 The spectrum analyzer span was set to capture the carrier frequency and both of adjacent channels, the lower and the higher. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.2.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.2.2.4 The frequency separation between the peaks of adjacent channels was measured as provided in Table 7.2.2 and associated plots.

Figure 7.2.1 Carrier frequency separation test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(b), Frequency separation		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	05-Jan-14		
Temperature: 21.4 °C	Air Pressure: 1015 hPa	Relative Humidity: 37 %	Power Supply: 120 VAC
Remarks:			

Table 7.2.2 Carrier frequency separation test results

ASSIGNED FREQUENCY: 902-928 MHz
 MODULATION: GFSK
 BIT RATE: 50 kbps
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW
 FREQUENCY HOPPING: Enabled
 20 dB BANDWIDTH: 103.35 kHz


Carrier frequency separation, kHz	Limit, kHz	Margin*	Verdict
125	103.35	21.65	Pass

* - Margin = Carrier frequency separation – specification limit.

Reference numbers of test equipment used

HL 1424						
---------	--	--	--	--	--	--

Full description is given in Appendix A.

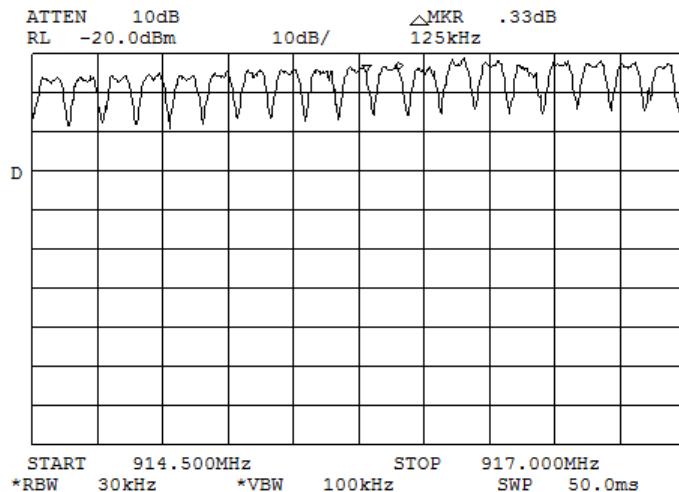Plot 7.2.1 Carrier frequency separation



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Dec-13		
Temperature: 21.4 °C	Air Pressure: 1015 hPa	Relative Humidity: 37 %	Power Supply: 120 VAC
Remarks:			

7.3 Number of hopping frequencies

7.3.1 General

This test was performed to calculate the number of hopping frequencies used by the EUT. Specification test limits are given in Table 7.3.1.


Table 7.3.1 Minimum number of hopping frequencies

Assigned frequency range, MHz	Number of hopping frequencies
902.0 – 928.0	50 (if the 20 dB bandwidth is less than 250 kHz) 25 (if the 20 dB bandwidth is 250 kHz or greater)
2400.0 – 2483.5	15
5725.0 – 5850.0	75

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.3.2.2 Initially the spectrum analyzer span was set equal to frequency band of operation and the resolution bandwidth was set wider than 1 % of the frequency span. If the separate hopping channels were not clearly resolved the frequency band of operation was broken to sections and the resolution bandwidth was set wider than 1 % of the frequency span of each section.
- 7.3.2.3 The spectrum analyzer was set in max hold mode and allowed trace to stabilize.
- 7.3.2.4 The number of frequency hopping channels was calculated as provided in Table 7.3.2 and associated plots.

Figure 7.3.1 Hopping frequencies test setup

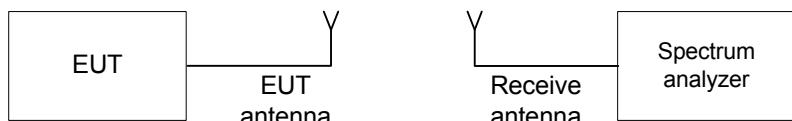



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Dec-13		
Temperature: 21.4 °C	Air Pressure: 1015 hPa	Relative Humidity: 37 %	Power Supply: 120 VAC
Remarks:			

Table 7.3.2 Hopping frequencies test results

ASSIGNED FREQUENCY: 902-928 MHz
MODULATION: GFSK
BIT RATE: 50kbps
DETECTOR USED: Peak
RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
VIDEO BANDWIDTH: \geq RBW
FREQUENCY HOPPING: Enabled

Number of hopping frequencies	Minimum number of hopping frequencies	Margin*	Verdict
50	50	0	Pass

* - Margin = Number of hopping frequencies – Minimum number of hopping frequencies.

Reference numbers of test equipment used

HL 1424							
---------	--	--	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Dec-13		
Temperature: 21.4 °C	Air Pressure: 1015 hPa	Relative Humidity: 37 %	Power Supply: 120 VAC
Remarks:			

Plot 7.3.1 Number of hopping frequencies in the frequency range 912 – 914.5 MHz (fourteen)

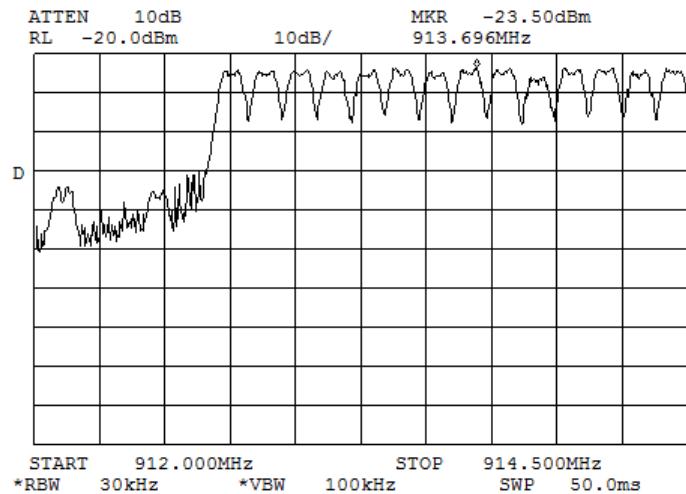

Plot 7.3.2 Number of hopping frequencies in the frequency range 914.5 – 917 MHz (nineteen)

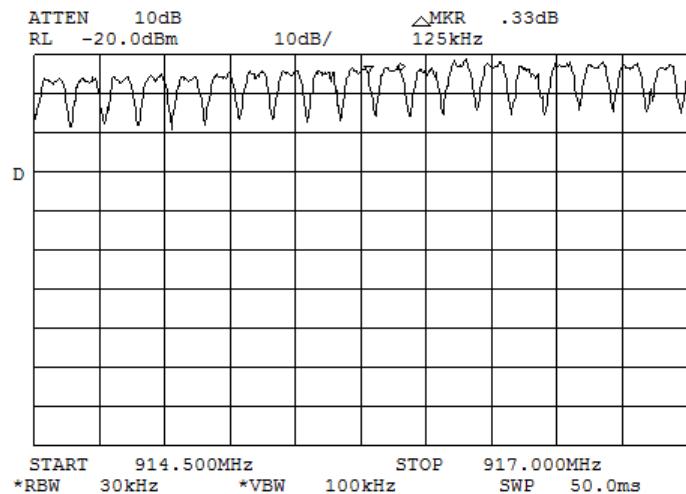




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Number of hopping frequencies		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Dec-13		
Temperature: 21.4 °C	Air Pressure: 1015 hPa	Relative Humidity: 37 %	Power Supply: 120 VAC
Remarks:			

Plot 7.3.3 Number of hopping frequencies in the frequency range 917 –919.5 MHz (seventeen)

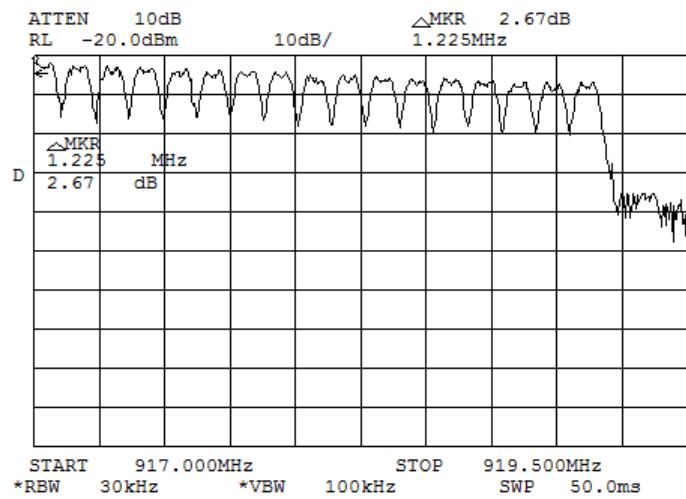



HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	24-Nov-13		
Temperature: 21 °C	Air Pressure: 1026 hPa	Relative Humidity: 31 %	Power Supply: 120 VAC
Remarks:			

7.4 Average time of occupancy

7.4.1 General

This test was performed to calculate the average time of occupancy (dwell time) on any frequency channel of the EUT. Specification test limits are given in Table 7.4.1.


Table 7.4.1 Average time of occupancy limits

Assigned frequency range, MHz	Maximum average time of occupancy, s	Investigated period, s	Number of hopping frequencies
902.0 – 928.0	0.4	20.0	≥ 50
902.0 – 928.0	0.4	10.0	< 50
2400.0 – 2483.5	0.4	0.4 × N	N (≥ 15)
5725.0 – 5850.0	0.4	30.0	≥ 75

7.4.2 Test procedure

- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized with frequency hopping function enabled and its proper operation was checked.
- 7.4.2.2 The spectrum analyzer span was set to zero centered on a hopping channel.
- 7.4.2.3 The single transmission duration and period were measured with oscilloscope.
- 7.4.2.4 The average time of occupancy was calculated as the single transmission time multiplied by the investigated period and divided by the single transmission period.
- 7.4.2.5 The test was repeated at each data rate and modulation type as provided in Table 7.4.2 and associated plots.

Figure 7.4.1 Average time of occupancy test setup





HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	24-Nov-13		
Temperature: 21 °C	Air Pressure: 1026 hPa	Relative Humidity: 31 %	Power Supply: 120 VAC
Remarks:			

Table 7.4.2 Average time of occupancy test results

ASSIGNED FREQUENCY: 902 - 928 MHz
 MODULATION: GFSK
 MODULATING SIGNAL: PRBS
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1 MHz
 VIDEO BANDWIDTH: 3 MHz
 NUMBER OF HOPPING FREQUENCIES: 50
 INVESTIGATED PERIOD: 20s
 FREQUENCY HOPPING: Enabled

Carrier frequency, MHz	Single pulse duration, s	Number of pulses during 20 s	Average time of occupancy*, s	Bit rate, Mbps	Limit, s	Margin, s**	Verdict
917.8	0.004662	7	0.0326	50	0.4	-0.367	Pass

* - Average time of occupancy = (Single transmission duration × Investigated period).

** - Margin = Average time of occupancy – specification limit.

Reference numbers of test equipment used

HL 3818	HL 4135	HL 4274					
---------	---------	---------	--	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	24-Nov-13		
Temperature: 21 °C	Air Pressure: 1026 hPa	Relative Humidity: 31 %	Power Supply: 120 VAC
Remarks:			

Plot 7.4.1 Single pulse duration

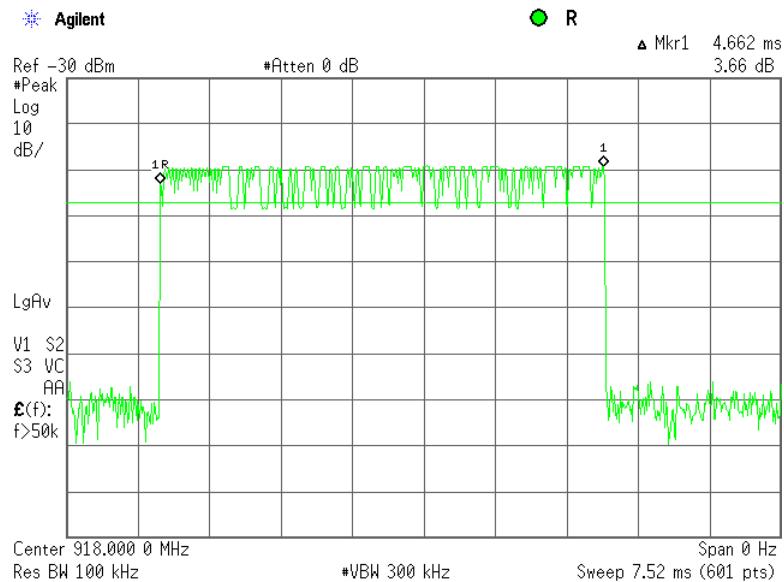

Plot 7.4.2 Single transmission period

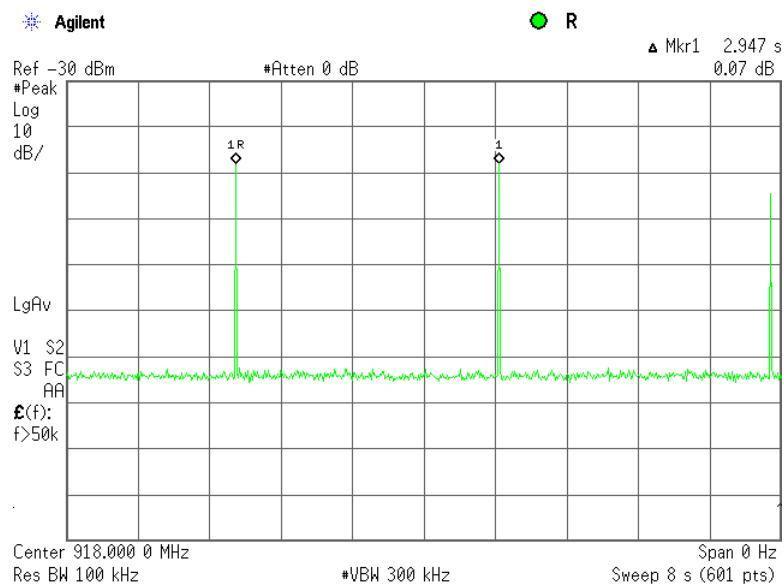




HERMON LABORATORIES

Test specification:	Section 15.247(a)1, RSS-210 section A8.1(c), Average time of occupancy		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	24-Nov-13		
Temperature: 21 °C	Air Pressure: 1026 hPa	Relative Humidity: 31 %	Power Supply: 120 VAC
Remarks:			

Plot 7.4.3 Transmission train, pulse period

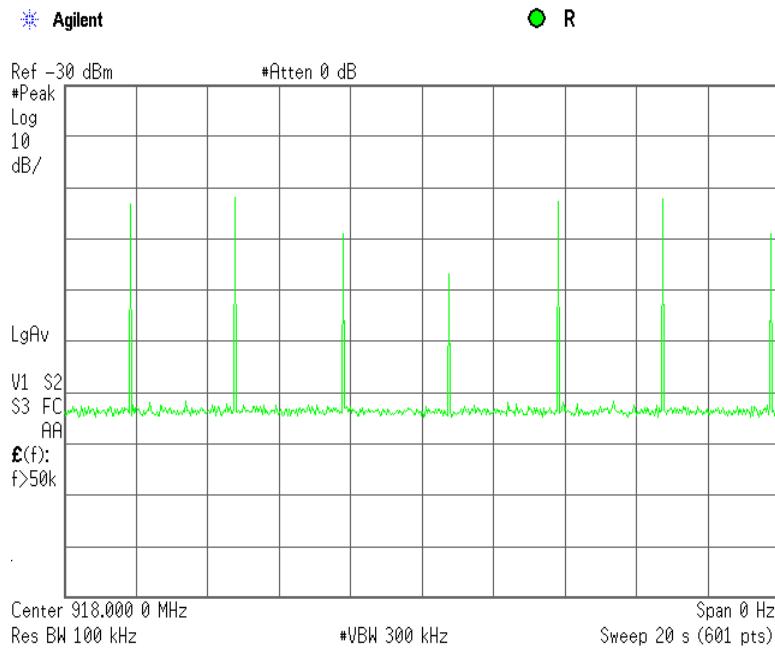



HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

7.5 Peak output power

7.5.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak output power limits

Assigned frequency range, MHz	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)*	Maximum antenna gain, dBi
	W	dBm		
902.0 – 928.0	0.25 (<50 hopping channels)	24.0(<50 hopping channels)	125.2 (<50 hopping channels)	6.0*
	1.0 (≥50 hopping channels)	30.0 (≥50 hopping channels)	131.2 (≥50 hopping channels)	
	0.125 (<75 hopping channels)	21.0(<75 hopping channels)	122.2 (<75 hopping channels)	
2400.0 – 2483.5	1.0 (≥75 hopping channels)	30.0 (≥75 hopping channels)	131.2 (≥75 hopping channels)	
5725.0 – 5850.0	1.0	30.0	131.2	

*- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

**- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

- by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;
- without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band;
- by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

7.5.2 Test procedure

- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The frequency span of spectrum analyzer was set approximately 5 times wider than 20 dB bandwidth of the EUT and the resolution bandwidth was set wider than 20 dB bandwidth of the EUT. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.5.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.5.2 and associated plots.
- 7.5.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


- 7.5.2.6 The worst test results (the lowest margins) were recorded in Table 7.5.2.



HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Figure 7.5.1 Setup for carrier field strength measurements

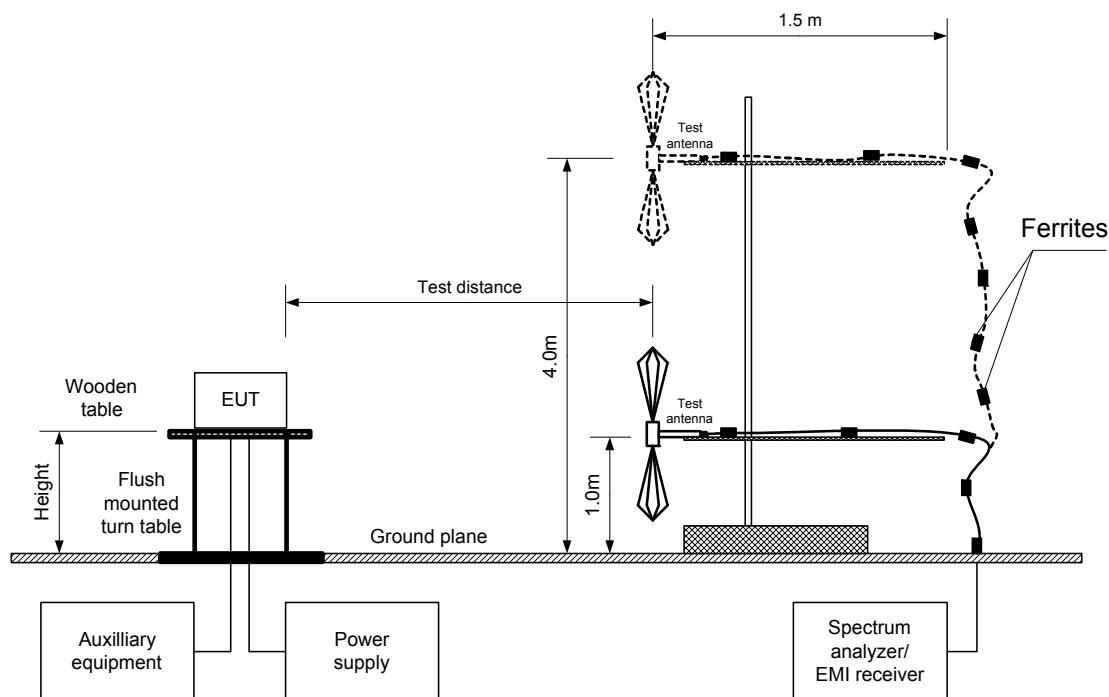



HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 7.5.2 Peak output power test results

ASSIGNED FREQUENCY:	902-928 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	0.8 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Biconilog (30 MHz – 1000 MHz)
MODULATION:	GFSK
BIT RATE:	50kbps
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
EUT 20 dB BANDWIDTH:	103.35 kHz
RESOLUTION BANDWIDTH:	120 kHz
VIDEO BANDWIDTH:	300 kHz
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
912.735	109.57	Vertical	1.1	180	-3.0	17.37	30.0	-12.63	Pass
915.843	115.37	Vertical	1.1	180	-3.0	23.17	30.0	-6.83	Pass
919.089	110.65	Vertical	1.1	180	-3.0	18.45	30.0	-11.55	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom input power voltage.

Reference numbers of test equipment used

HL 0521	HL 0604	HL 2871	HL 4353				
---------	---------	---------	---------	--	--	--	--


Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.1 Field strength of carrier at low frequency and U_{nom} , vertical antenna polarization

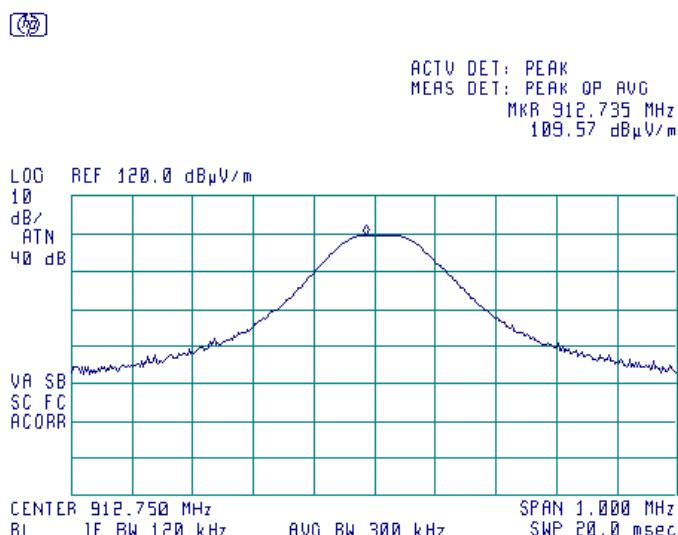

Plot 7.5.2 Field strength of carrier at low frequency and Unom, horizontal antenna polarization

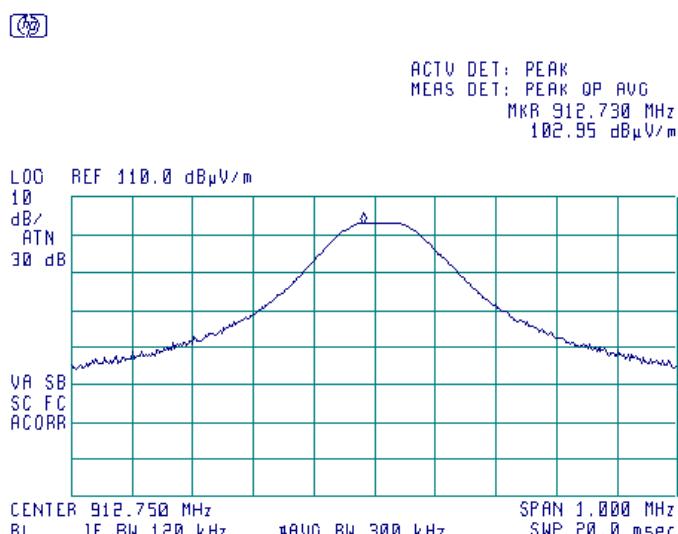





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.3 Field strength of carrier at mid frequency and U_{nom} , vertical antenna polarization

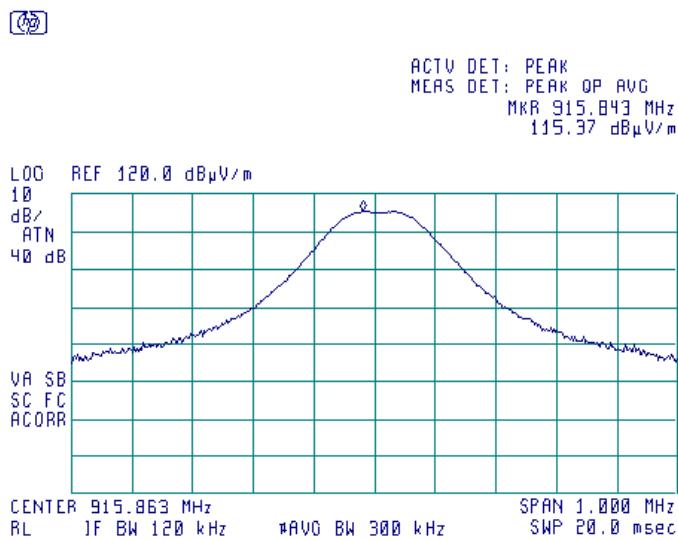

Plot 7.5.4 Field strength of carrier at mid frequency and Unom, horizontal antenna polarization

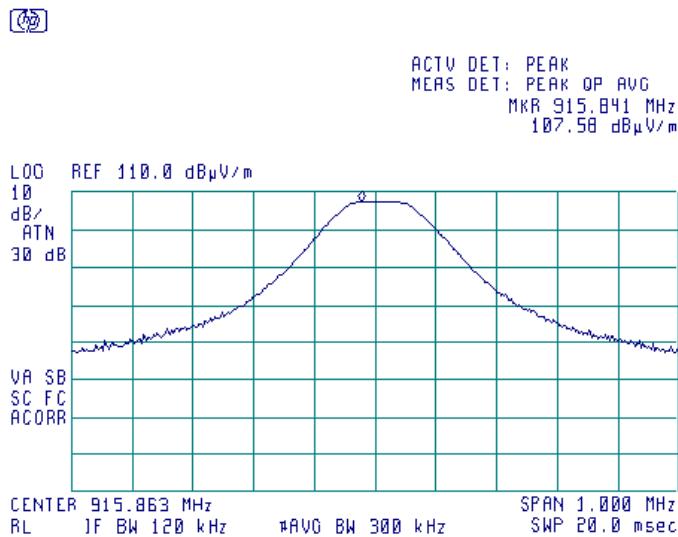





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.5 Field strength of carrier at high frequency and Unom, vertical antenna polarization

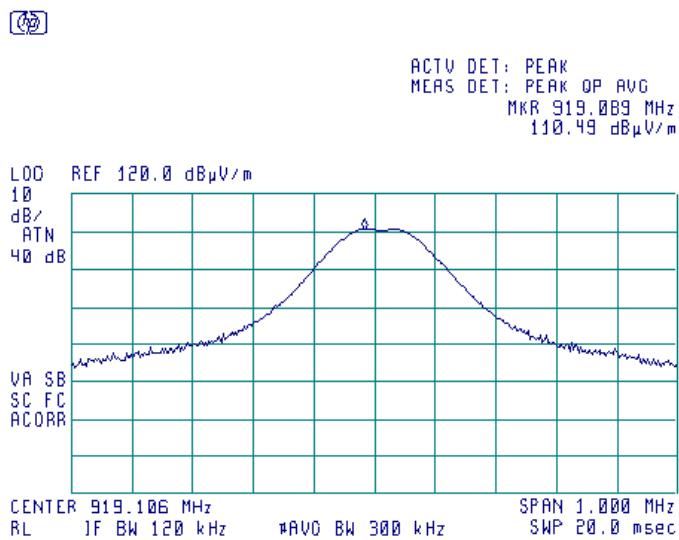

Plot 7.5.6 Field strength of carrier at high frequency and Unom, horizontal antenna polarization

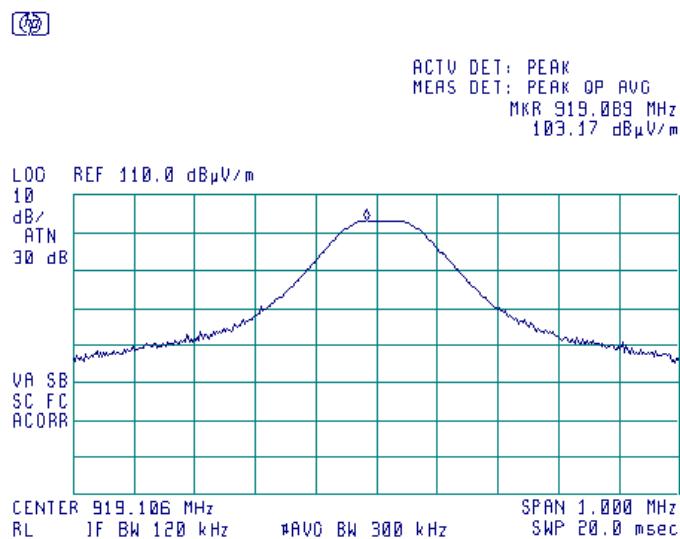





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.7 Peak output power at low frequency and 115%Unom, vertical antenna polarization

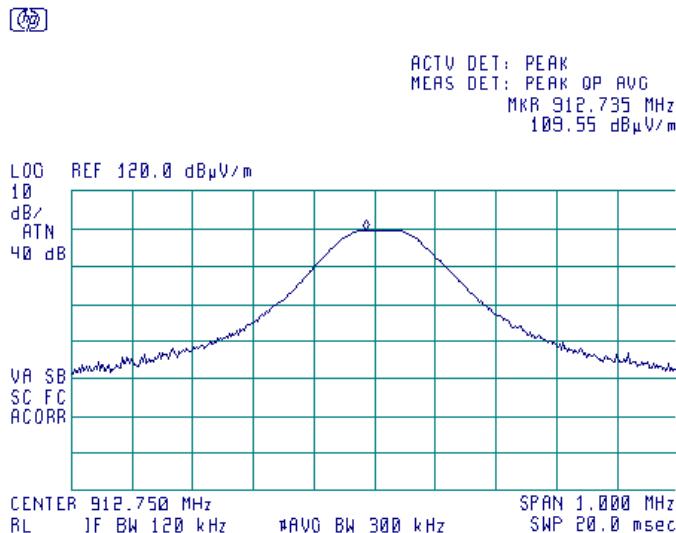

Plot 7.5.8 Peak output power at low frequency and 115%Unom, horizontal antenna polarization

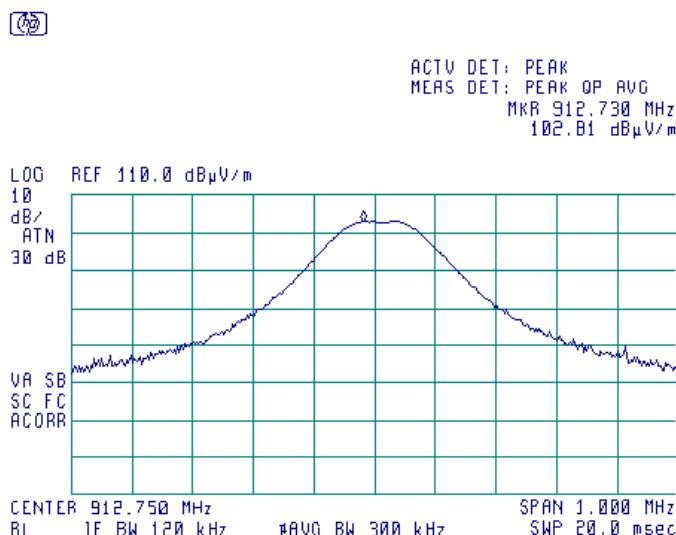





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.9 Peak output power at mid frequency and 115%Unom, vertical antenna polarization

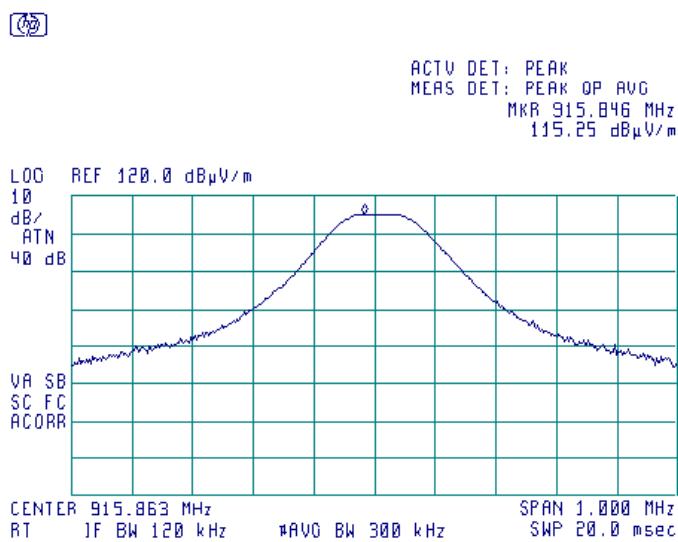

Plot 7.5.10 Peak output power at mid frequency and 115%Unom, horizontal antenna polarization

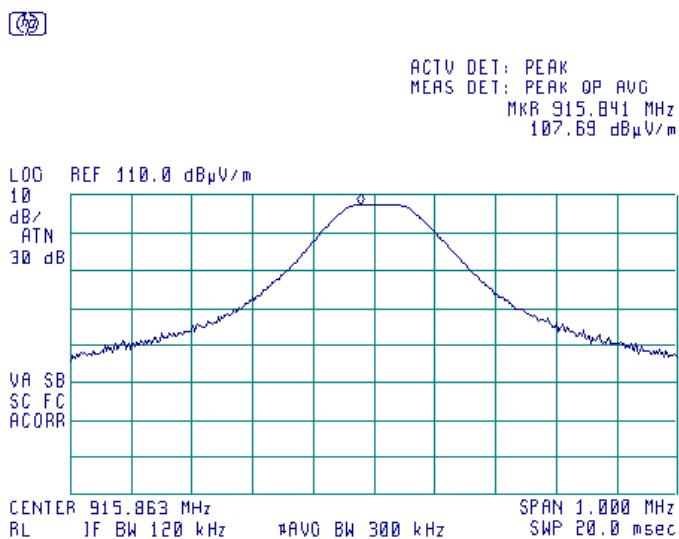





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.11 Peak output power at high frequency and 115%Unom, vertical antenna polarization

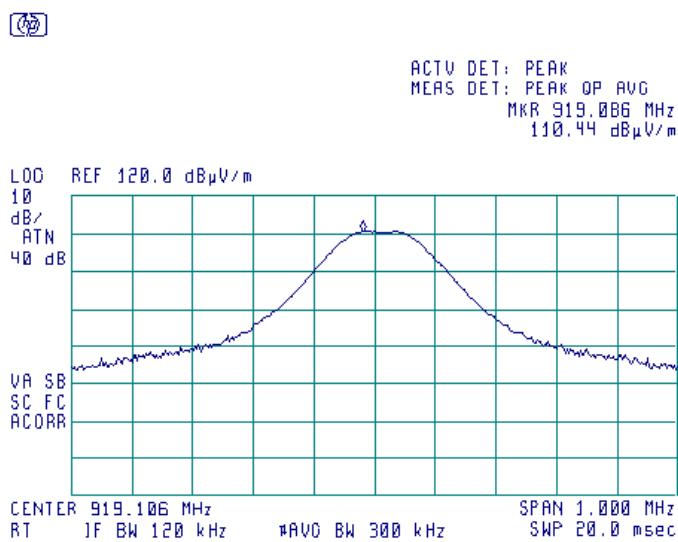

Plot 7.5.12 Peak output power at high frequency and 115%Unom, horizontal antenna polarization

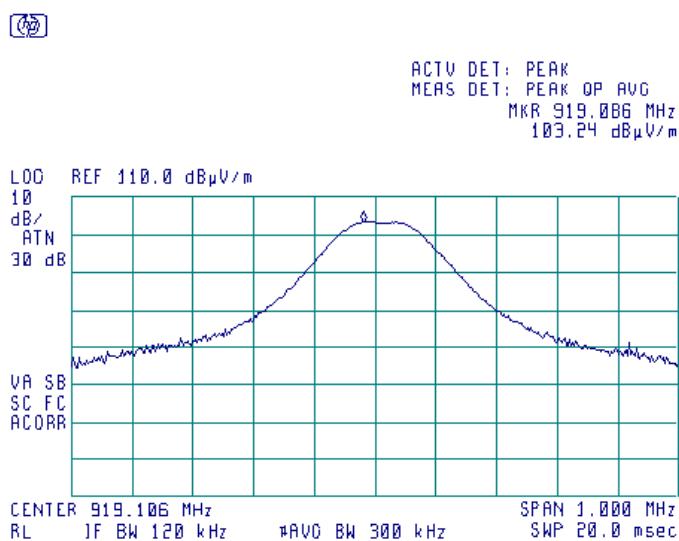





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.13 Peak output power at low frequency and 85%Unom, vertical antenna polarization

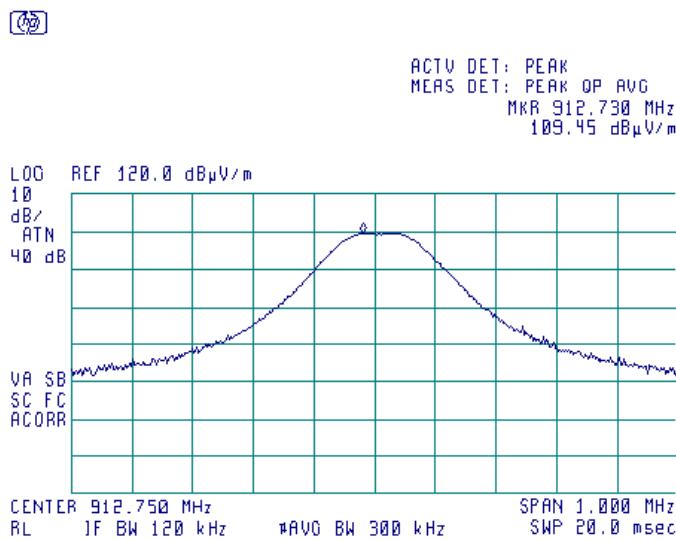

Plot 7.5.14 Peak output power at low frequency and 85%Unom, horizontal antenna polarization

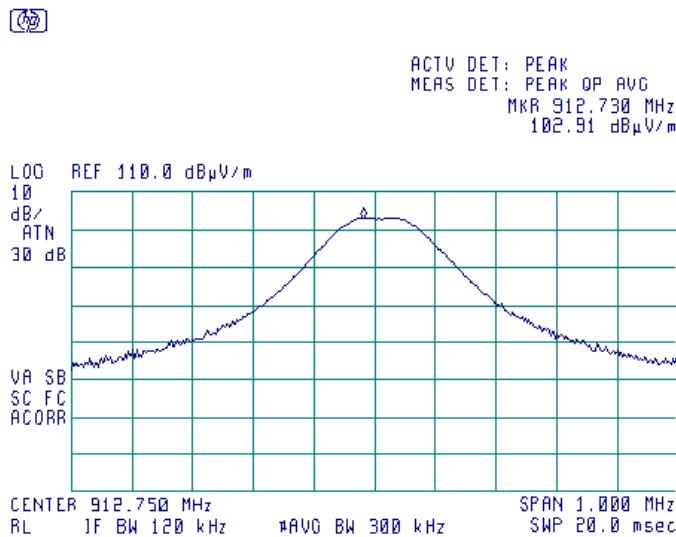





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.15 Peak output power at mid frequency and 85%Unom, vertical antenna polarization

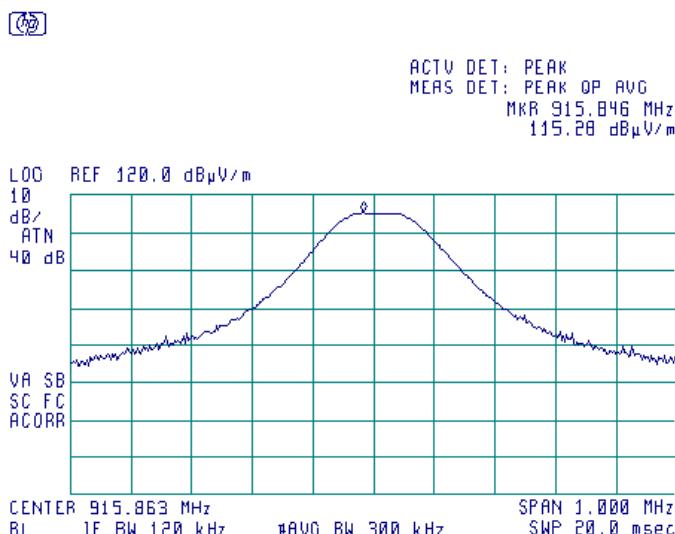

Plot 7.5.16 Peak output power at mid frequency and 85%Unom, horizontal antenna polarization

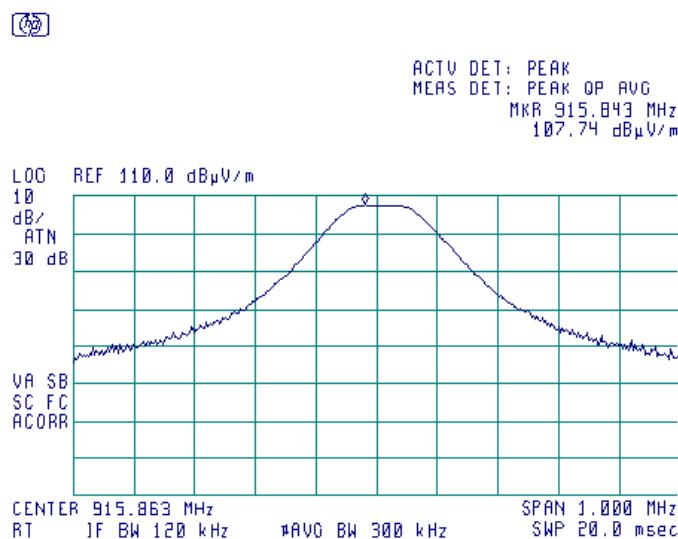





HERMON LABORATORIES

Test specification:	Section 15.247(b), RSS-210 section A8.4(1), Peak output power		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13		
Temperature: 20.7 °C	Air Pressure: 1024 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.5.17 Peak output power at high frequency and 85%Unom, vertical antenna polarization

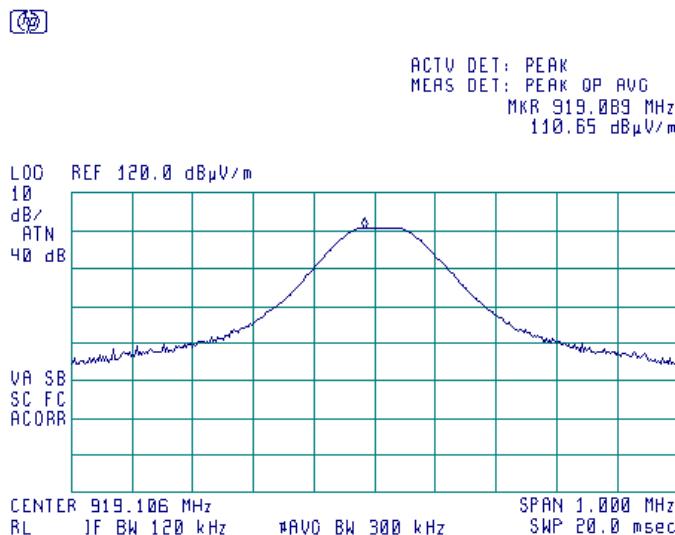

Plot 7.5.18 Peak output power at high frequency and 85%Unom, horizontal antenna polarization

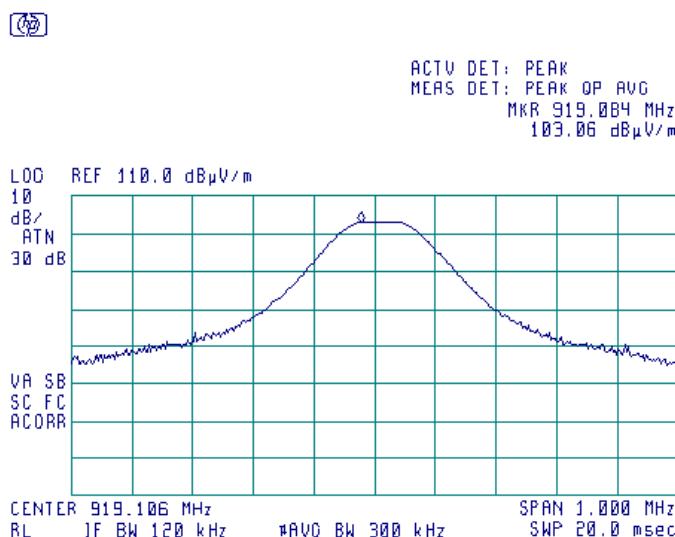



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Dec-13		
Temperature: 21.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

7.6 Band edge radiated emissions

7.6.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.6.1.

Table 7.6.1 Band edge emission limits

Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
		Peak	Average
902.0 – 928.0			
2400.0 – 2483.5	20.0	74.0	54.0
5725.0 – 5850.0			

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.6.2 Test procedure

- 7.6.2.1 The EUT was set up as shown in Figure 7.6.1, energized normally modulated at the maximum data rate with its hopping function disabled and its proper operation was checked.
- 7.6.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.6.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.6.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.6.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.6.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.6.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.6.2.7 The above procedure was repeated with the frequency hopping function enabled.

Figure 7.6.1 Band edge emission test setup





HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Dec-13		
Temperature: 21.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

Table 7.6.2 Band edge emission test results

ASSIGNED FREQUENCY RANGE: 902 – 928 MHz
 DETECTOR USED: Peak
 MODULATION: GFSK
 BIT RATE: 50 kbps
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 RESOLUTION BANDWIDTH: $\geq 1\%$ of the span
 VIDEO BANDWIDTH: \geq RBW

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
Frequency hopping disabled						
902	-73.00	-24.50	48.50	20.0	28.50	Pass
928	-72.17	-23.67	48.50		28.50	
Frequency hopping enabled						
902	-72.67	-24.50	48.17	20.0	28.17	Pass
928	-72.33	-22.17	50.16		30.16	

*- Margin = Attenuation below carrier – specification limit.

Reference numbers of test equipment used

HL 1424						
---------	--	--	--	--	--	--



Full description is given in Appendix A.





HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict: PASS	
Date(s):	29-Dec-13		
Temperature: 21.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

Plot 7.6.1 The highest band edge emission at low carrier frequency with hopping function disabled

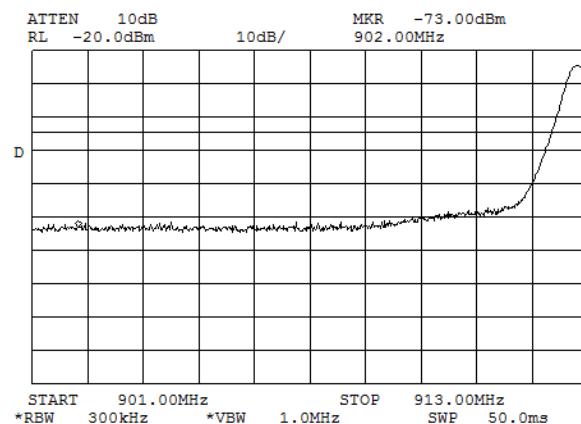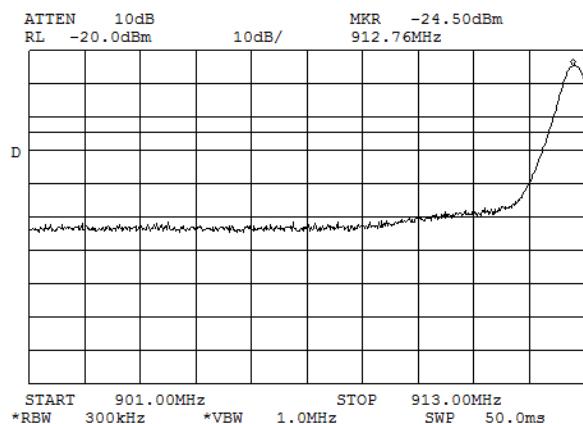

Plot 7.6.2 The highest band edge emission at high carrier frequency with hopping function disabled

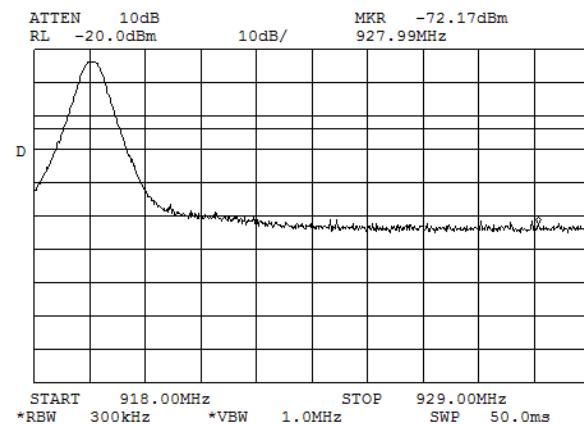
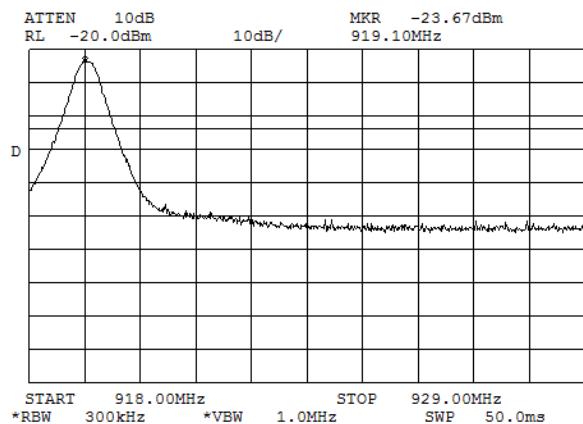






HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Emissions at band edges		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	29-Dec-13		
Temperature: 21.5 °C	Air Pressure: 1015 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC
Remarks:			

Plot 7.6.3 The highest band edge emission at low carrier frequency with hopping function enabled

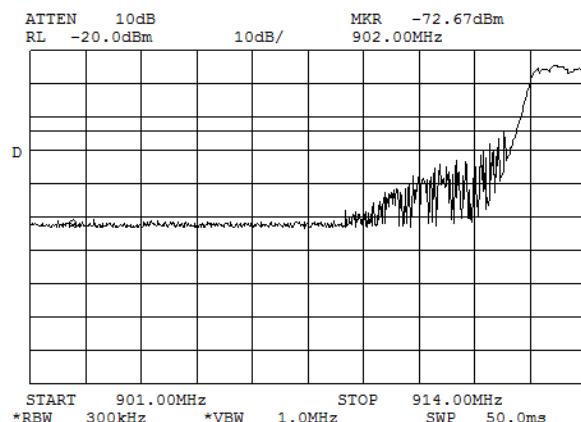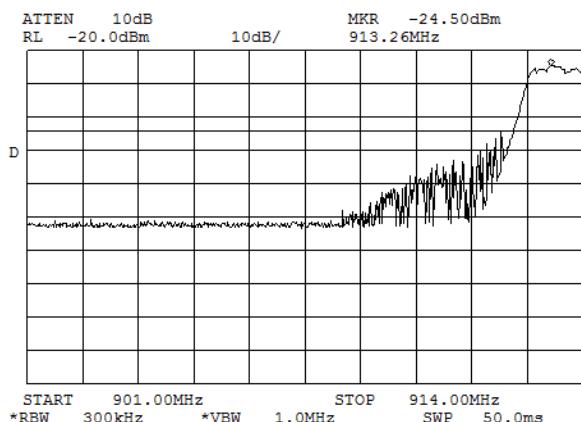

Plot 7.6.4 The highest band edge emission at high carrier frequency with hopping function enabled

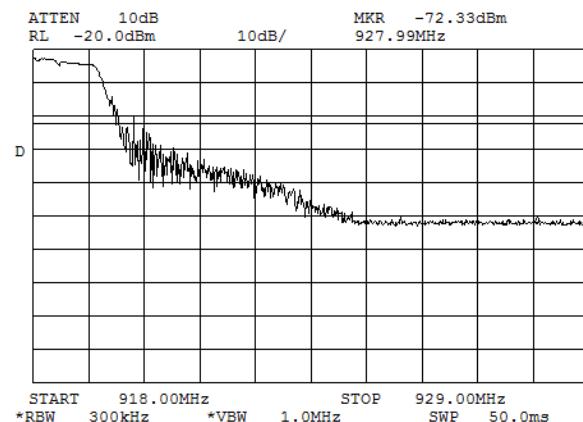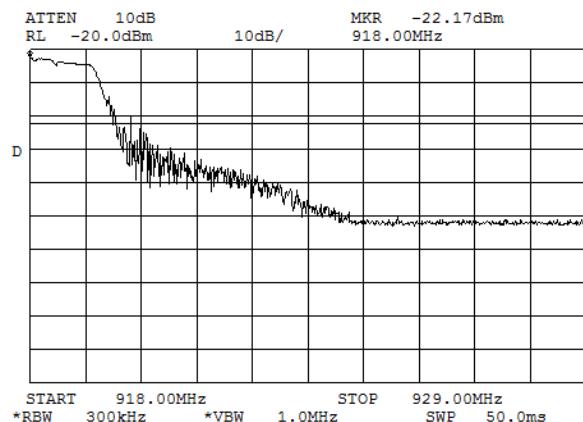



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

7.7 Field strength of spurious emissions

7.7.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.7.1.

Table 7.7.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)***			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88	NA	40.0	NA	
88 – 216		43.5		
216 – 960		46.0		
960 – 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$Lim_{S2} = Lim_{S1} + 40 \log (S_1/S_2),$$

where S₁ and S₂ – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.7.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

- 7.7.2.1 The EUT was set up as shown in Figure 7.7.1, energized and the performance check was conducted.
- 7.7.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.
- 7.7.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.7.3 Test procedure for spurious emission field strength measurements above 30 MHz

- 7.7.3.1 The EUT was set up as shown in Figure 7.7.2, energized and the performance check was conducted.
- 7.7.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- 7.7.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Figure 7.7.1 Setup for spurious emission field strength measurements below 30 MHz


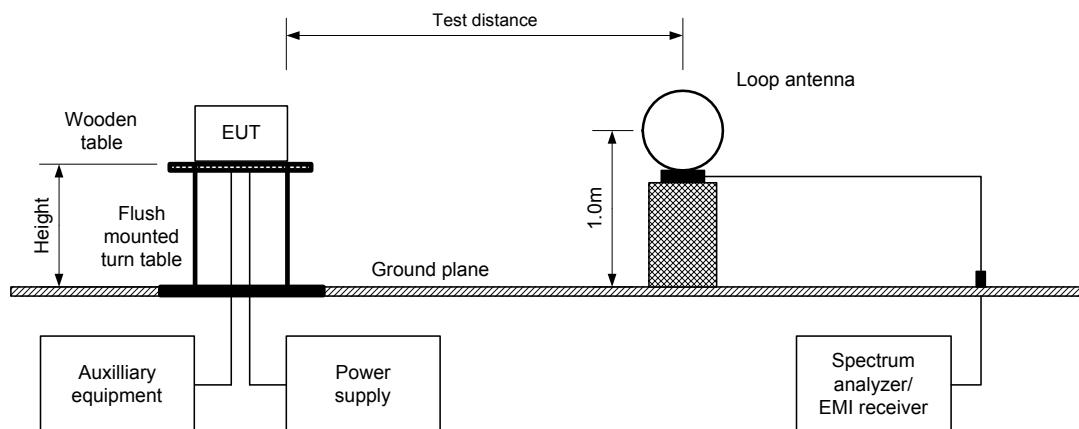


Figure 7.7.2 Setup for spurious emission field strength measurements above 30 MHz



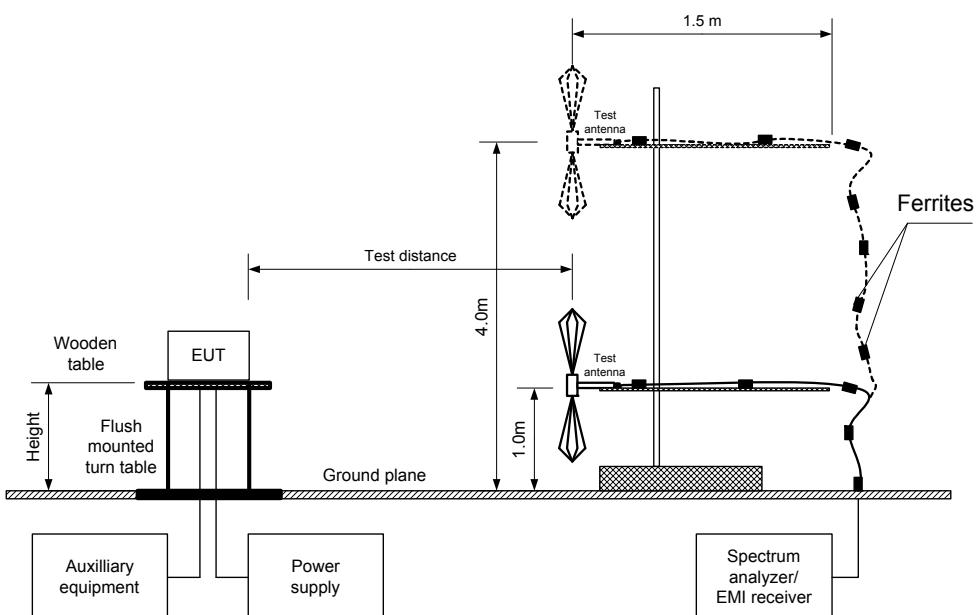

HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 7.7.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 -9300 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	50 kps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency									
32.425	27.88	Vertical	1.1	220	109.44	-81.56	20.0	-61.56	Pass
35.900	28.01	Vertical	1.1	345		-81.43		-61.43	
42.499	30.87	Vertical	1.1	80		-78.57		-58.57	
61.508	26.68	Vertical	1.1	110		-82.76		-62.76	
147.105	29.15	Vertical	1.1	80		-80.29		-60.29	
5476.6450	63.73	Horizontal	1.4	160		-45.71		-25.71	
6389.0700	56.80	Horizontal	1.4	155		-52.64		-32.64	
Mid carrier frequency									
32.425	27.88	Vertical	1.1	220	115.24	-87.36	20.0	-67.36	Pass
35.900	28.01	Vertical	1.1	345		-87.23		-67.23	
42.499	30.87	Vertical	1.1	80		-84.37		-64.37	
61.508	26.68	Vertical	1.1	110		-88.56		-68.56	
147.105	29.15	Vertical	1.1	80		-86.09		-66.09	
5495.0105	66.44	Horizontal	1.3	165		-48.80		-28.80	
6410.8335	59.27	Horizontal	1.3	140		-55.97		-35.97	
High carrier frequency									
32.425	27.88	Vertical	1.1	220	110.39	-82.51	20.0	-62.51	Pass
35.900	28.01	Vertical	1.1	345		-82.38		-62.38	
42.499	30.87	Vertical	1.1	80		-79.52		-59.52	
61.508	26.68	Vertical	1.1	110		-83.71		-63.71	
147.105	29.15	Vertical	1.1	80		-81.24		-61.24	
5514.4735	63.43	Horizontal	1.4	140		-46.96		-26.96	
6433.5570	56.79	Horizontal	1.3	130		-53.60		-33.60	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.



HERMON LABORATORIES

Report ID: VISRAD_FCC_IC.23967.docx

Date of Issue: 24-Jun-14

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 7.7.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY: 902-928 MHz
 INVESTIGATED FREQUENCY RANGE: 1000 - 9300 MHz
 TEST DISTANCE: 3 m
 MODULATION: GFSK
 BIT RATE: 50 kbps
 DUTY CYCLE: 100 %
 TRANSMITTER OUTPUT POWER SETTINGS: Maximum
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 1000 kHz
 TEST ANTENNA TYPE: Double ridged guide
 FREQUENCY HOPPING: Disabled

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=30 Hz)			Verdict
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)	
Low carrier frequency										
2738.2375	Vertical	1.2	90	58.22	74.00	-15.78	56.96	30.33	54.00	-23.67
3651.0125	Vertical	1.4	180	56.24	74.00	-17.76	53.82	27.19	54.00	-26.81
4563.7250	Horizontal	1.5	200	66.13	74.00	-7.87	64.50	37.87	54.00	-16.13
7301.9750	Vertical	1.4	170	55.86	74.00	-18.14	46.02	19.39	54.00	-34.61
8214.7375	Horizontal	1.2	175	60.22	74.00	-13.78	54.06	27.43	54.00	-26.57
9127.5500	Horizontal	1.2	175	58.58	74.00	-15.42	50.80	24.17	54.00	-29.83
Mid carrier frequency										
2747.5765	Horizontal	1.4	160	60.73	74.00	-13.27	59.85	33.22	54.00	-20.78
3663.4395	Vertical	1.2	175	60.54	74.00	-13.46	59.18	32.55	54.00	-21.45
4579.3400	Horizontal	1.5	200	69.55	74.00	-4.45	69.20	42.57	54.00	-11.43
7326.8540	Vertical	1.3	210	56.74	74.00	-17.26	48.36	21.73	54.00	-32.27
8242.7295	Horizontal	1.2	150	58.49	74.00	-15.51	51.05	24.42	54.00	-29.58
9158.6050	Horizontal	1.2	170	59.54	74.00	-14.46	53.52	26.89	54.00	-27.11
High carrier frequency										
2757.3180	Vertical	1.3	110	57.82	74.00	-16.18	56.80	30.17	54.00	-23.83
3676.4365	Horizontal	1.6	220	54.87	74.00	-19.13	52.43	25.8	54.00	-28.2
4595.5175	Horizontal	1.8	190	65.11	74.00	-8.89	64.23	37.6	54.00	-16.4
7352.8355	Vertical	1.3	220	54.89	74.00	-19.11	46.76	20.13	54.00	-33.87
8271.9540	Horizontal	1.2	140	58.39	74.00	-15.61	52.86	26.23	54.00	-27.77
9191.0975	Vertical	1.1	180	55.99	74.00	-18.01	48.03	21.4	54.00	-32.6

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,

where Calculated field strength = Measured field strength + average factor.

Table 7.7.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Number of pulses in 100ms period	Duration, ms	Period, ms		
4.662	1	NA	NA	NA	-26.63

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100 \text{ ms}} \times \text{Number of bursts within 100 ms} \right)$$



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict: PASS	
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Table 7.7.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	902-928 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	50 kbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)
FREQUENCY HOPPING:	Disabled

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency								
131.648	28.6	22.7	43.5	-20.8	Vertical	1.0	160	Pass
Mid carrier frequency								
131.648	28.6	22.7	43.5	-20.8	Vertical	1.0	160	Pass
High carrier frequency								
131.648	28.6	22.7	43.5	-20.8	Vertical	1.0	160	Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions				
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4				
Test mode:	Compliance				Verdict: PASS
Date(s):	25-Dec-13 - 07-Jan-14				
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %		Power Supply: 120 VAC	
Remarks:					

Table 7.7.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.7.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 0521	HL 0604	HL 1984	HL 2780	HL 2871	HL 4160	HL 4353
---------	---------	---------	---------	---------	---------	---------	---------

Full description is given in Appendix A.



HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.1 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 912.780 MHz
109.44 dB μ V/m

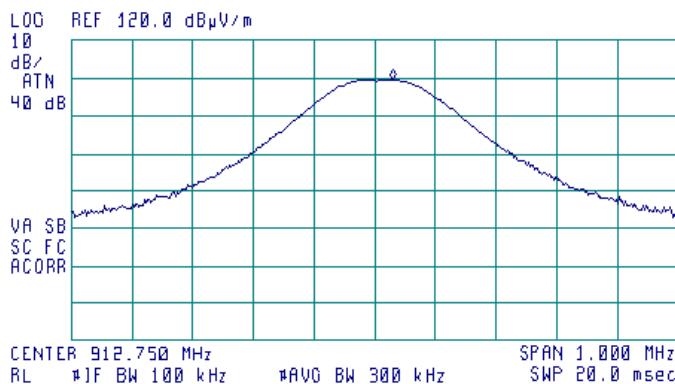


Plot 7.7.2 Radiated emission measurements at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 912.725 MHz
102.78 dB μ V/m

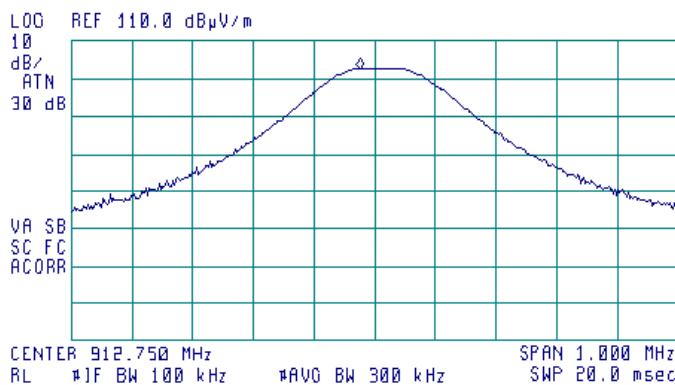



HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.3 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 915.843 MHz
 115.24 dB μ V/m

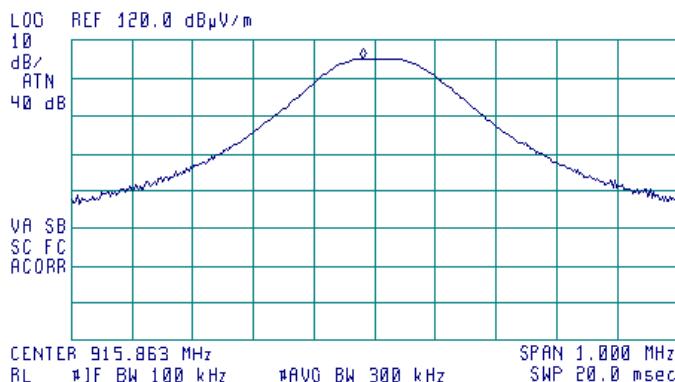**Plot 7.7.4 Radiated emission measurements at the mid carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 915.846 MHz
 107.52 dB μ V/m

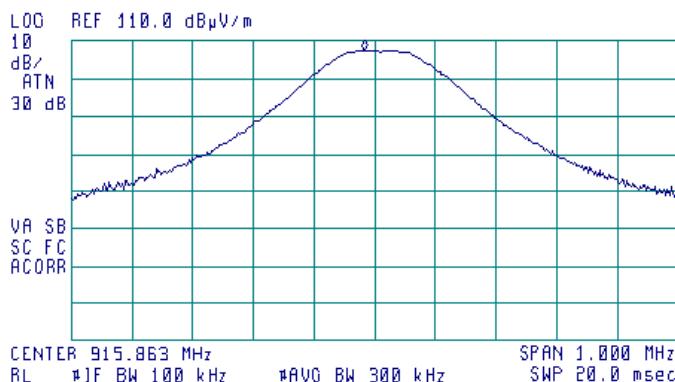



HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.5 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 919.091 MHz
 110.39 dB μ V/m

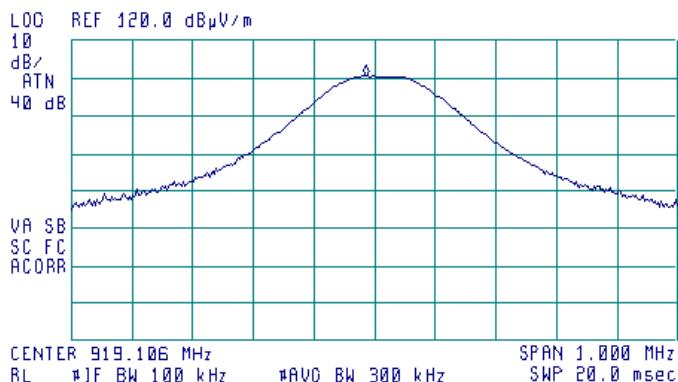**Plot 7.7.6 Radiated emission measurements at the high carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 919.089 MHz
 103.05 dB μ V/m

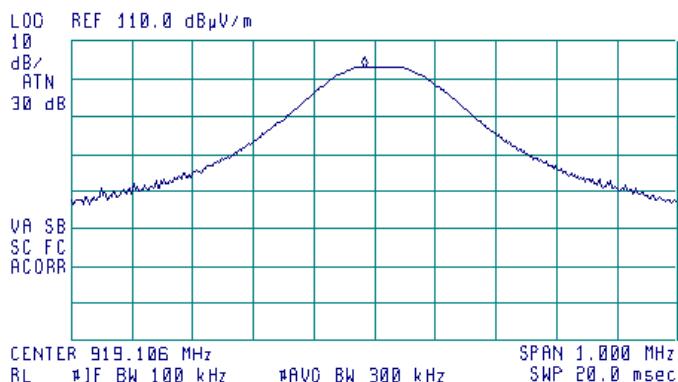



HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.7 Radiated emission measurements from 9 to 150 kHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 9.2 kHz
67.83 dB μ V/m

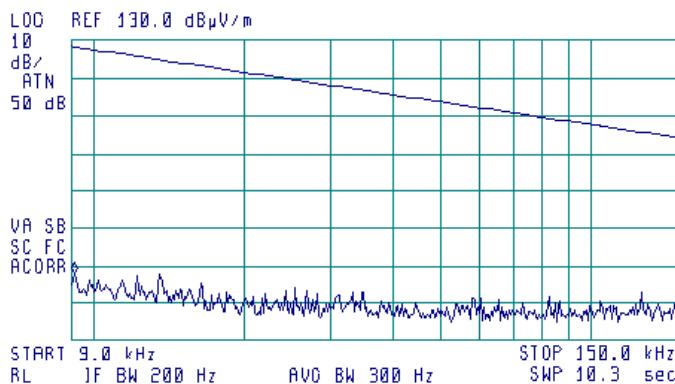


Plot 7.7.8 Radiated emission measurements from 9 to 150 kHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
MEAS DET: PEAK OP AVG
MKR 11.7 kHz
67.87 dB μ V/m

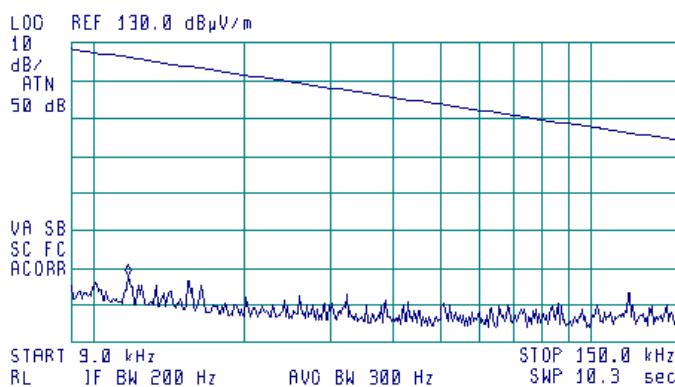



HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.9 Radiated emission measurements from 9 to 150 kHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical




ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 9.2 kHz
 68.04 dB μ V/m

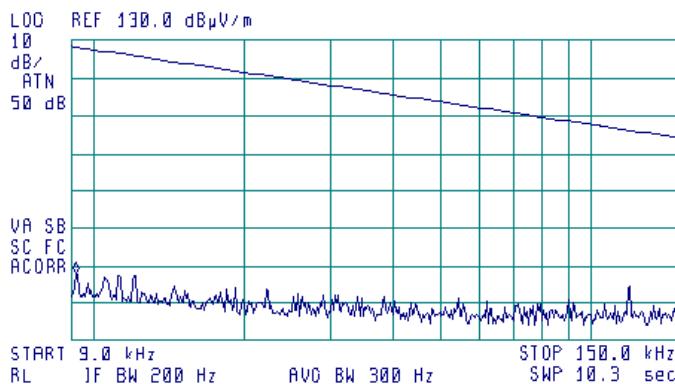**Plot 7.7.10 Radiated emission measurements from 0.15 to 30 MHz at the low carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 170 kHz
 56.93 dB μ V/m

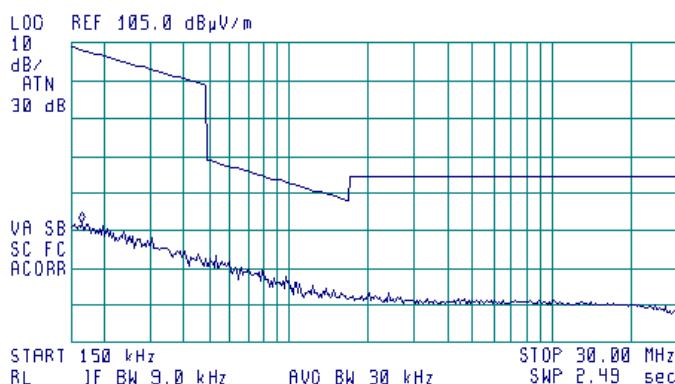




HERMON LABORATORIES


Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.11 Radiated emission measurements from 0.15 to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

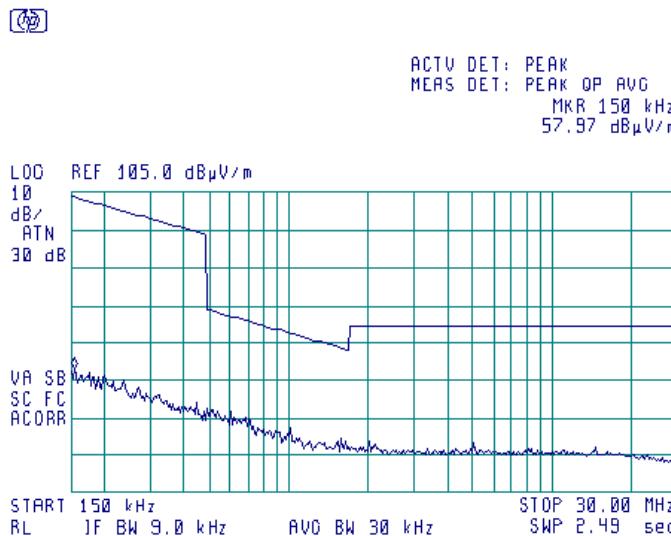**Plot 7.7.12 Radiated emission measurements from 0.15 to 30 MHz at the high carrier frequency**

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical

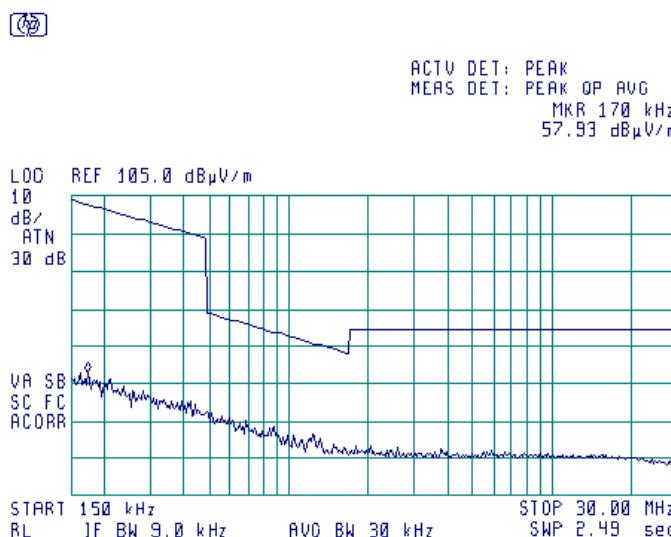



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			



Plot 7.7.13 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal



ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 984.7 MHz
 108.53 dB μ V/m

ACTV DET: PEAK
 MEAS DET: PEAK OP AVG
 MKR 984.7 MHz
 102.65 dB μ V/m

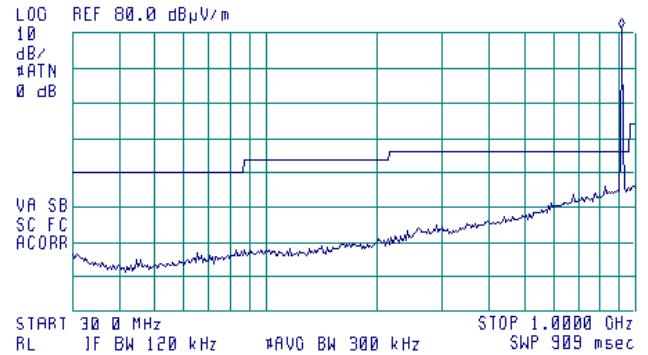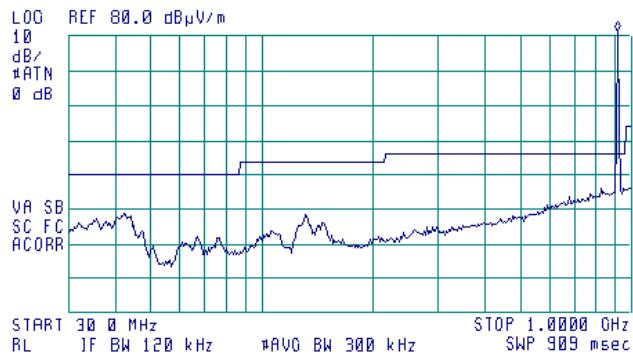

Note: The low carrier is shown




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.14 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal

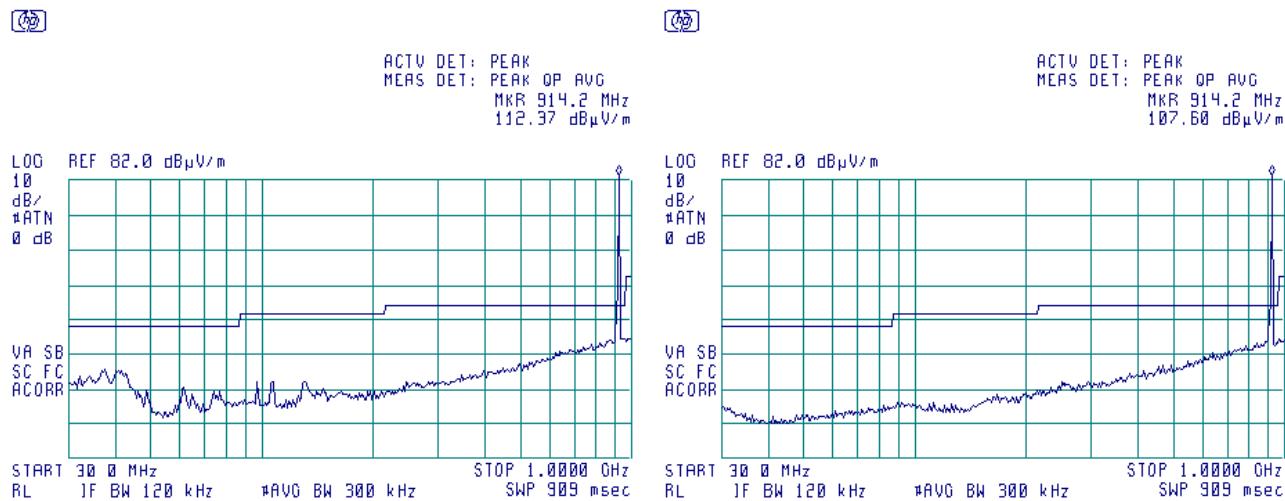

Note: The mid carrier is shown

Plot 7.7.15 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION: Vertical and Horizontal


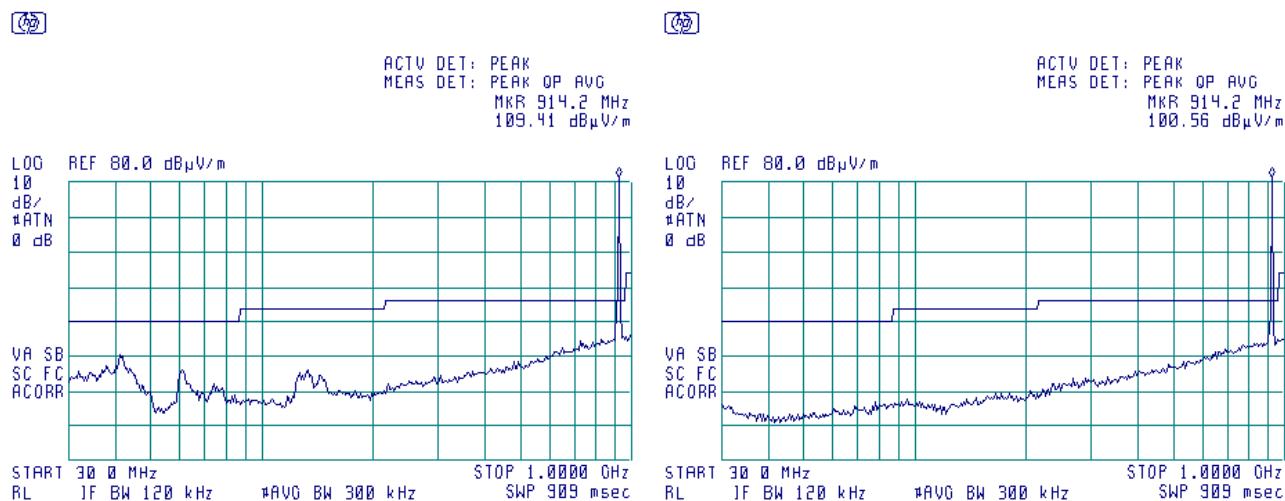


Note: The high carrier is shown



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

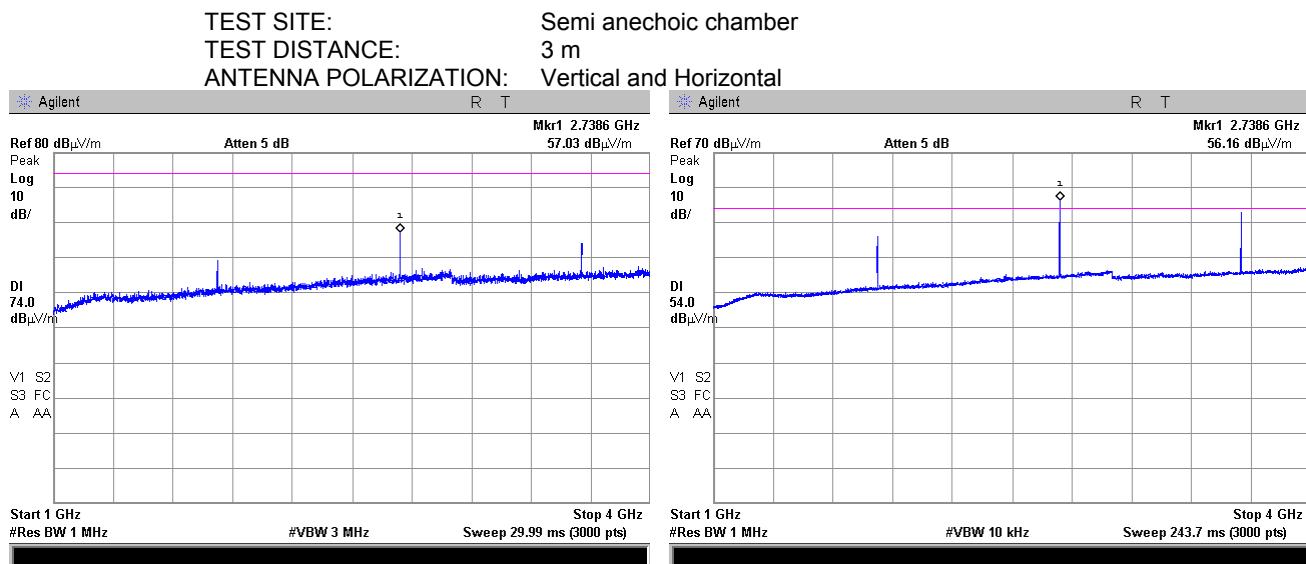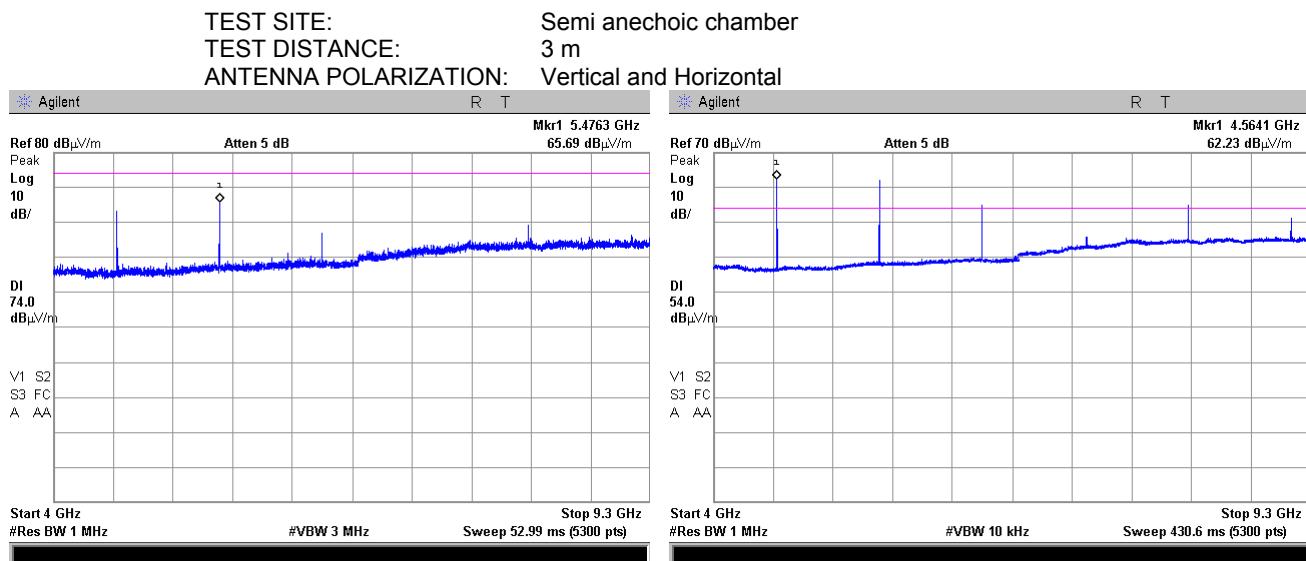Plot 7.7.16 Radiated emission measurements from 1000 to 4000 MHz at the low carrier frequency**Plot 7.7.17 Radiated emission measurements from 4000 to 9300 MHz at the low carrier frequency**



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

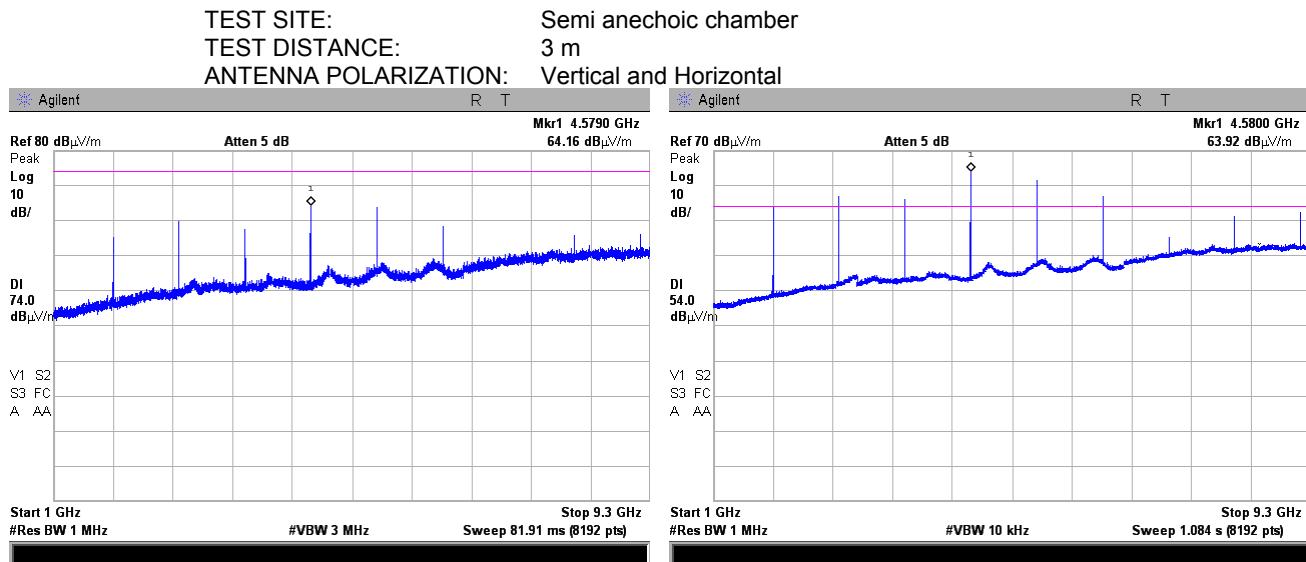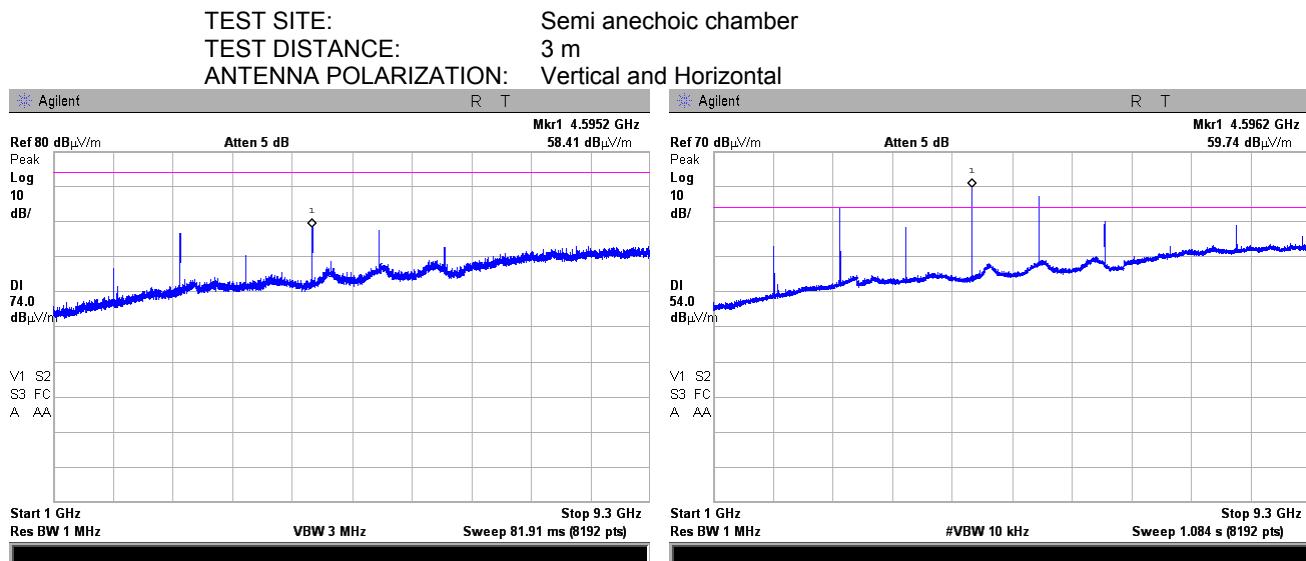Plot 7.7.18 Radiated emission measurements from 1000 to 9300 MHz at the mid carrier frequency**Plot 7.7.19 Radiated emission measurements from 1000 to 9300 MHz at the high carrier frequency**




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.20 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

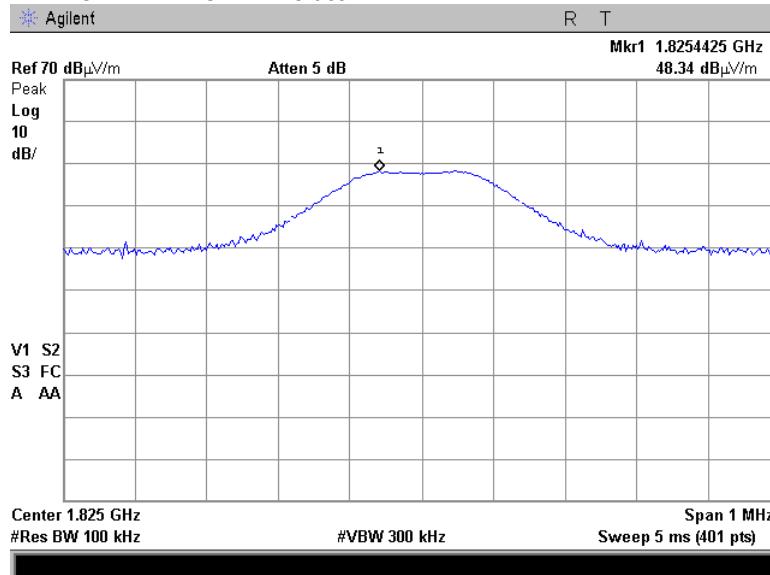

Plot 7.7.21 Radiated emission measurements at the second harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

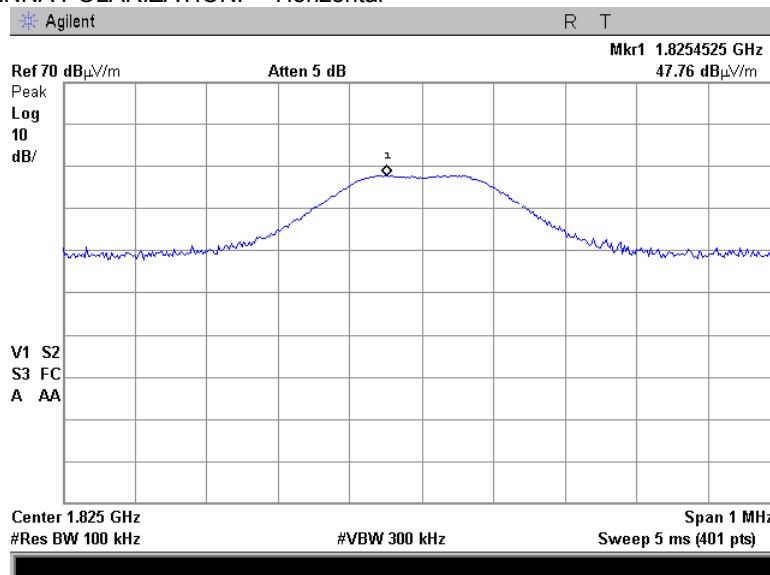




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.22 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

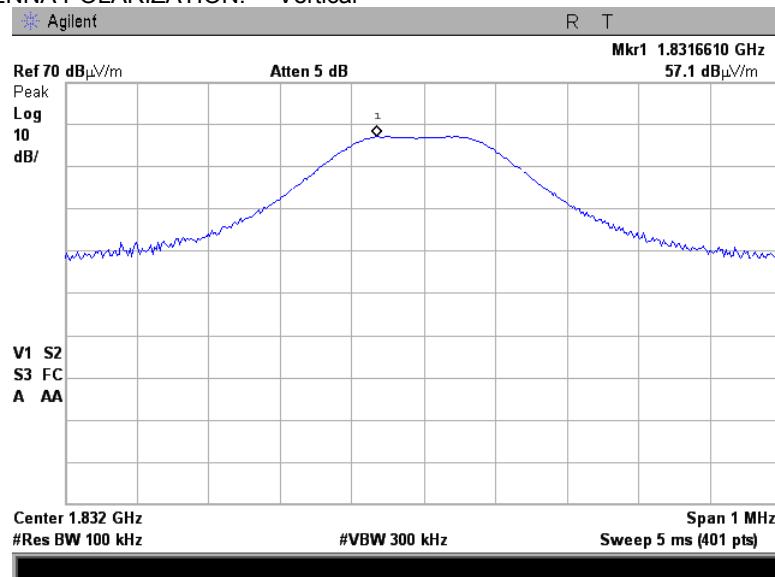

Plot 7.7.23 Radiated emission measurements at the second harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

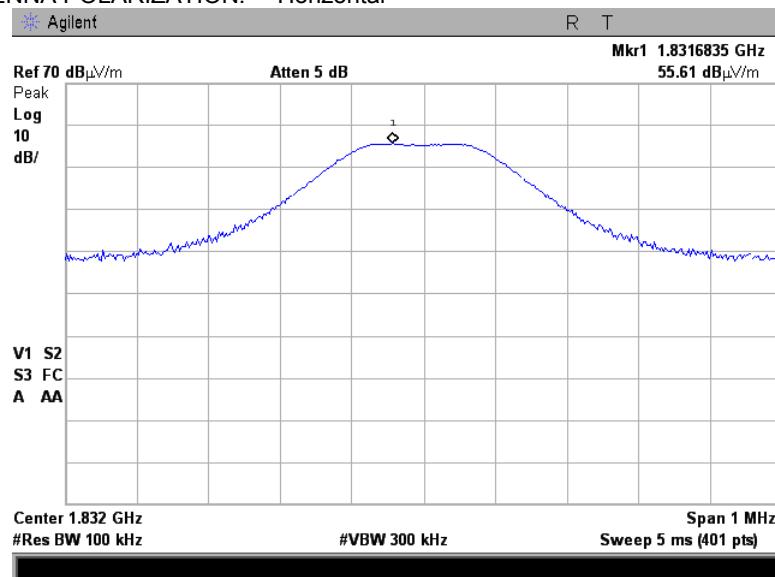




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.24 Radiated emission measurements at the second harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

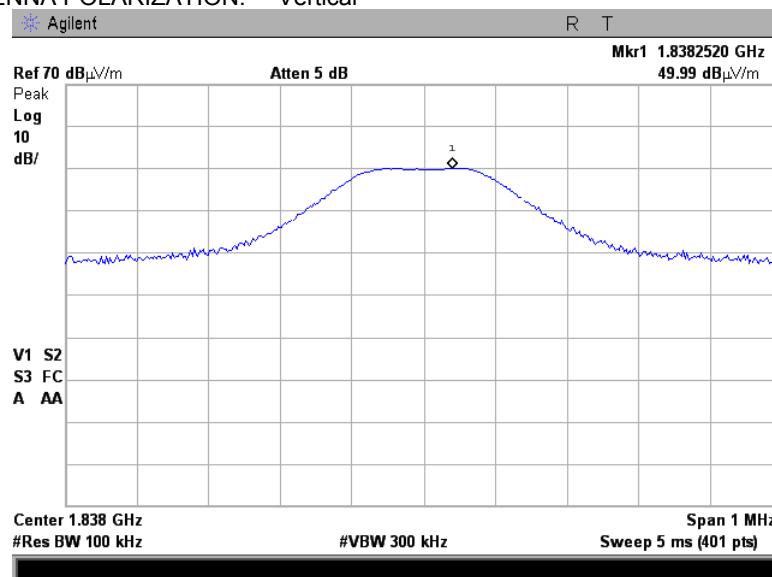

Plot 7.7.25 Radiated emission measurements at the second harmonic of high carrier frequency



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

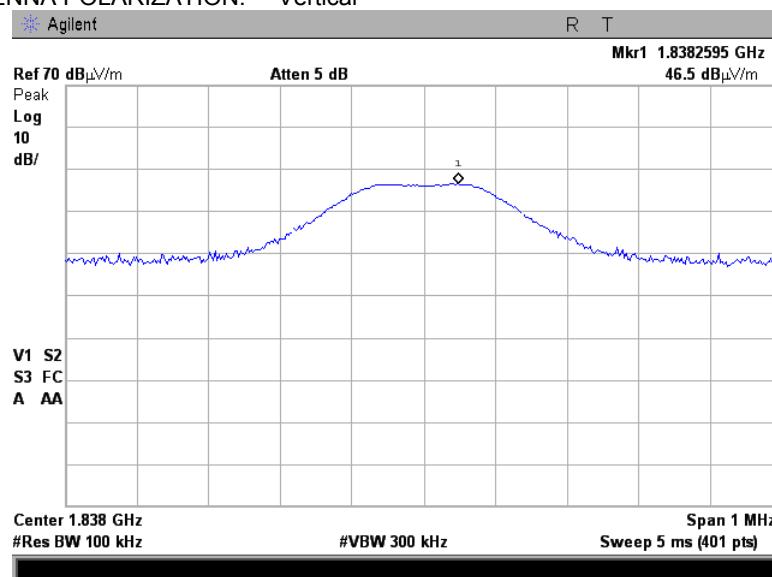



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

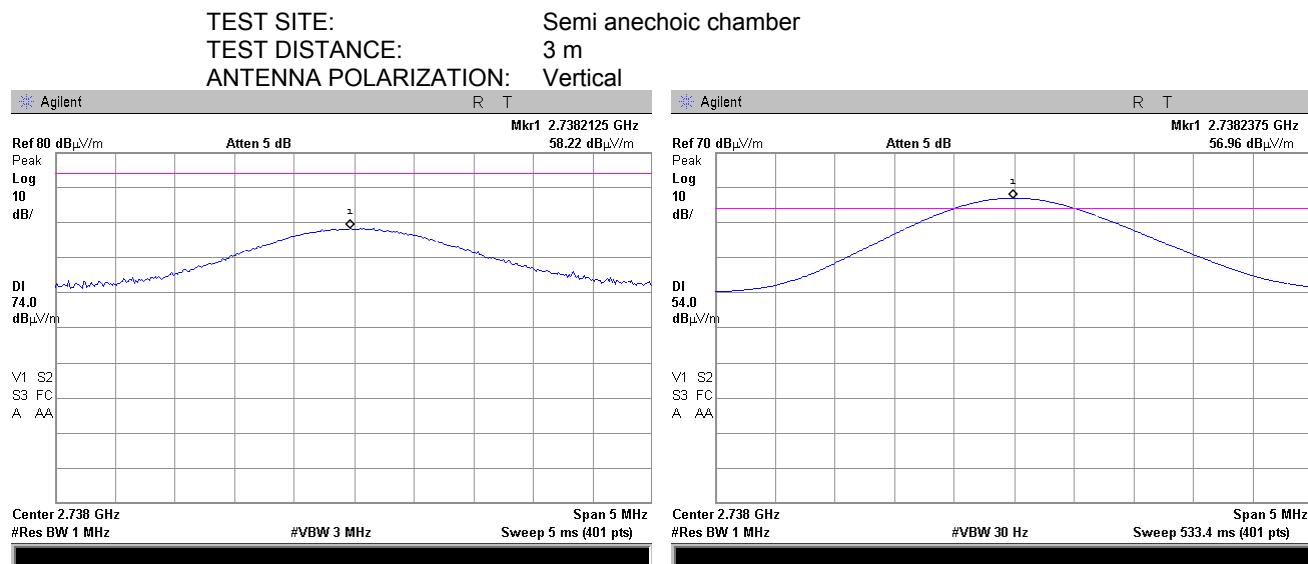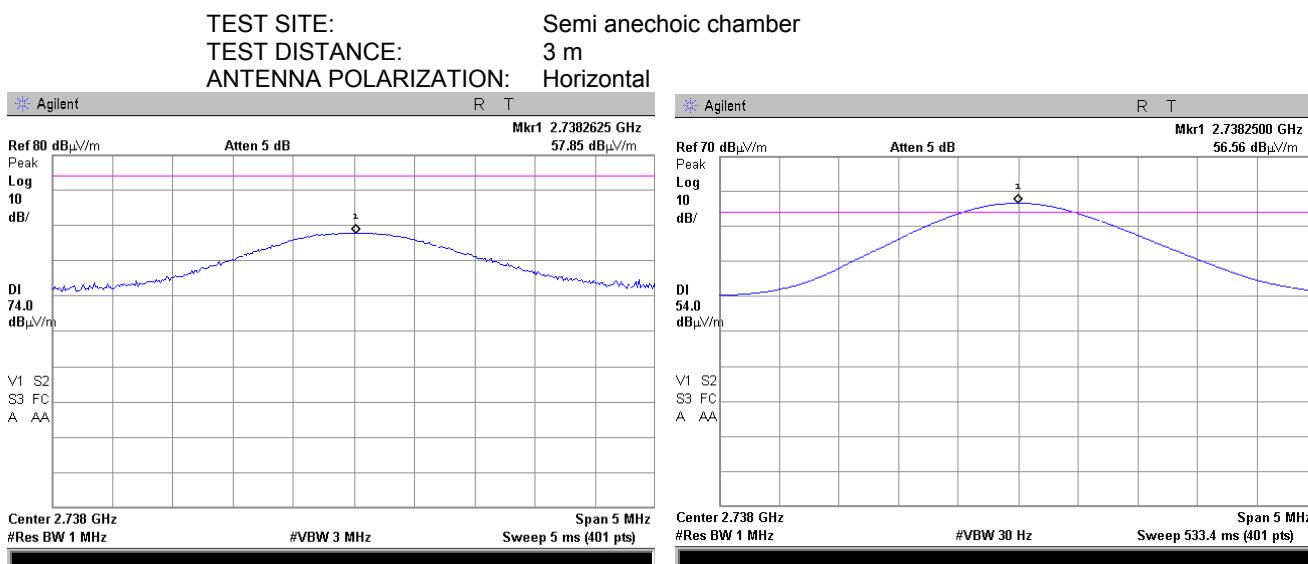Plot 7.7.26 Radiated emission measurements at the third harmonic of low carrier frequency**Plot 7.7.27 Radiated emission measurements at the third harmonic of low carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

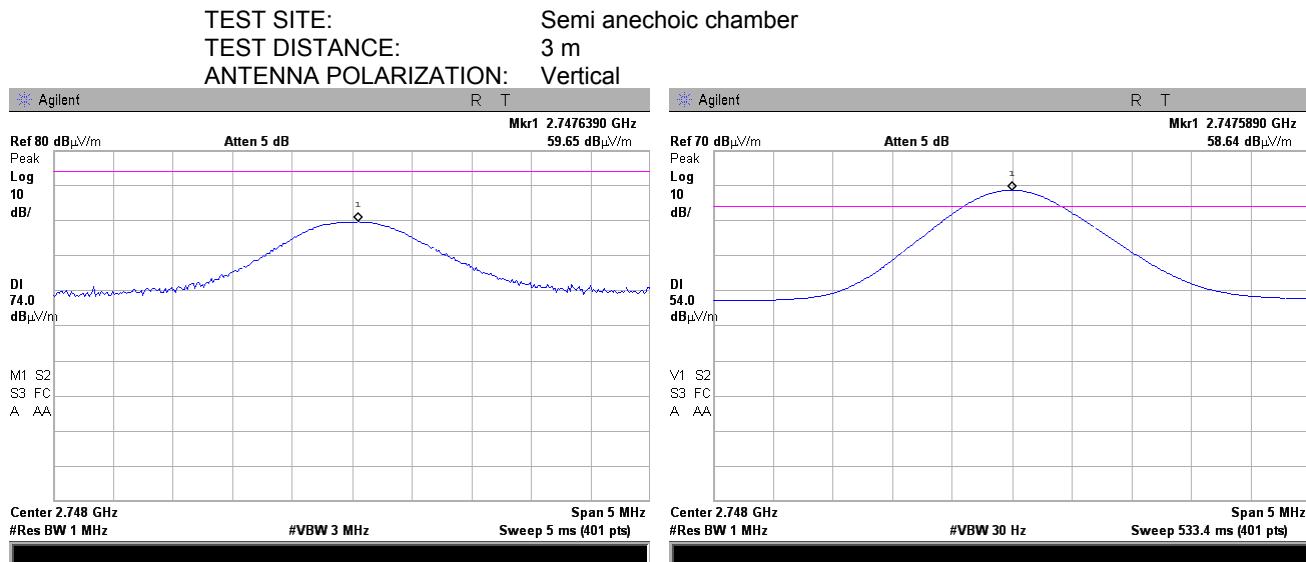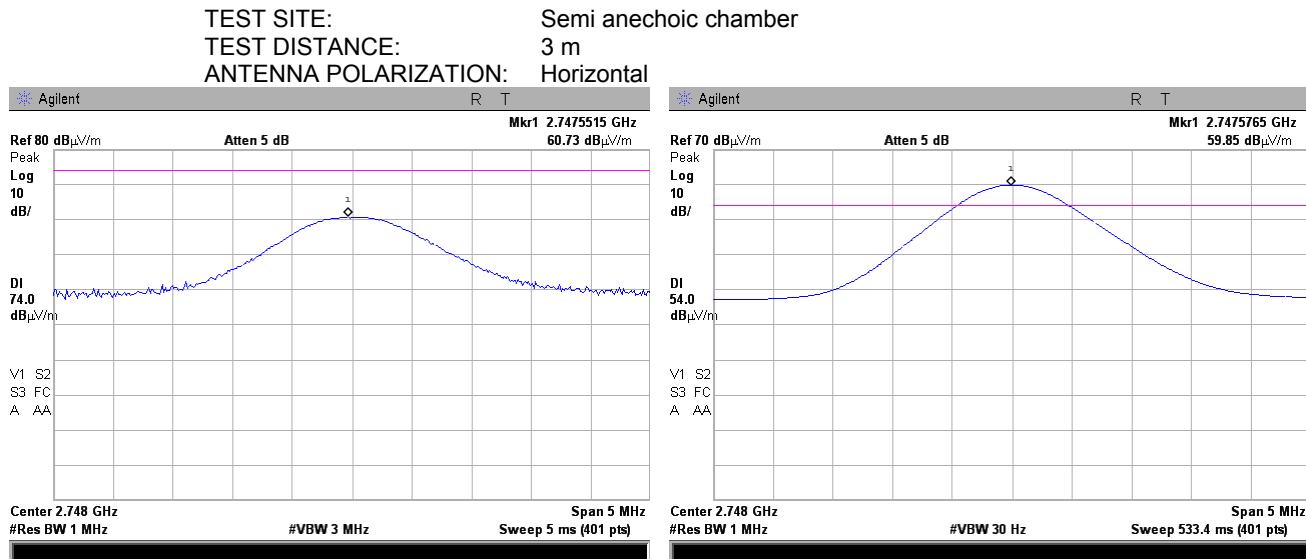Plot 7.7.28 Radiated emission measurements at the third harmonic of mid carrier frequency**Plot 7.7.29 Radiated emission measurements at the third harmonic of mid carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

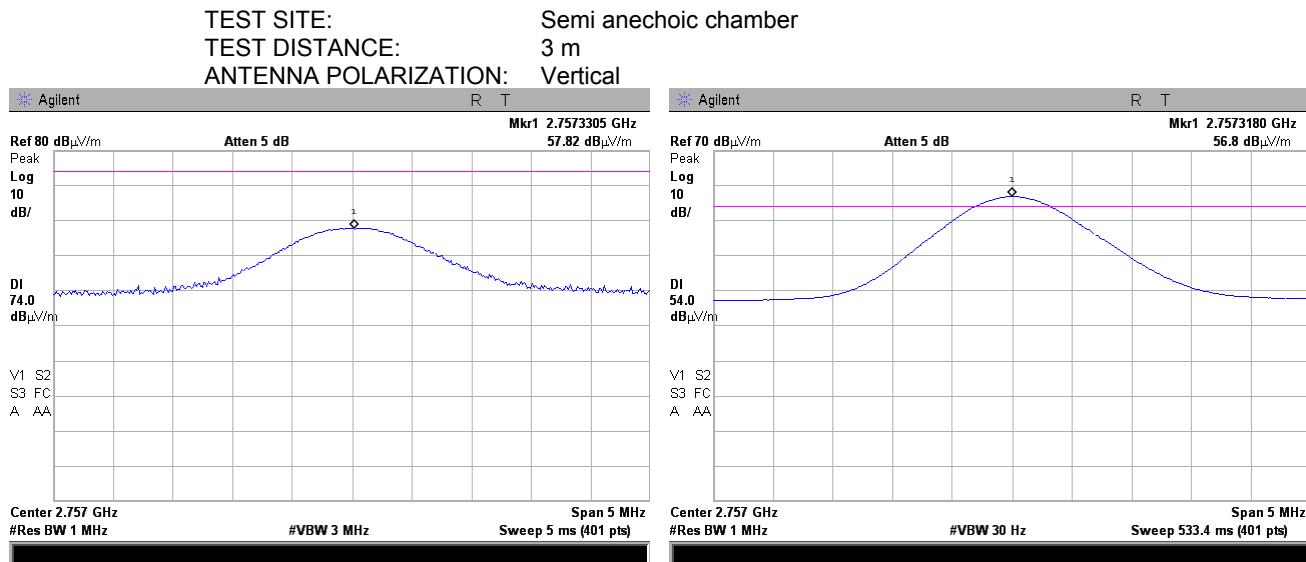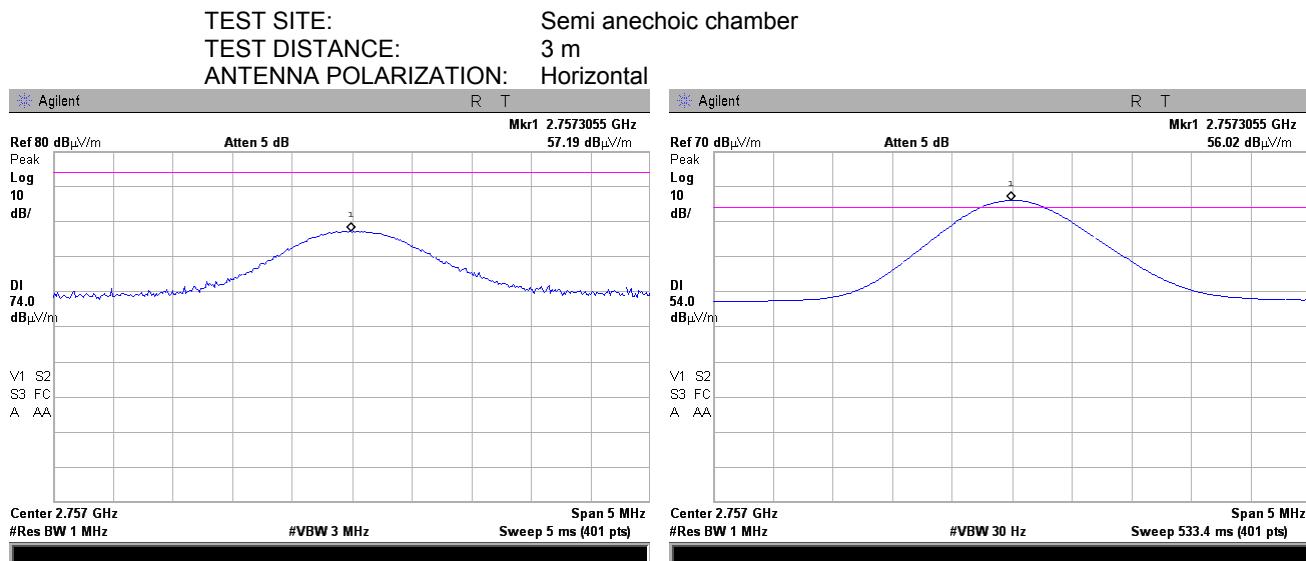Plot 7.7.30 Radiated emission measurements at the third harmonic of high carrier frequency**Plot 7.7.31 Radiated emission measurements at the third harmonic of high carrier frequency**



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

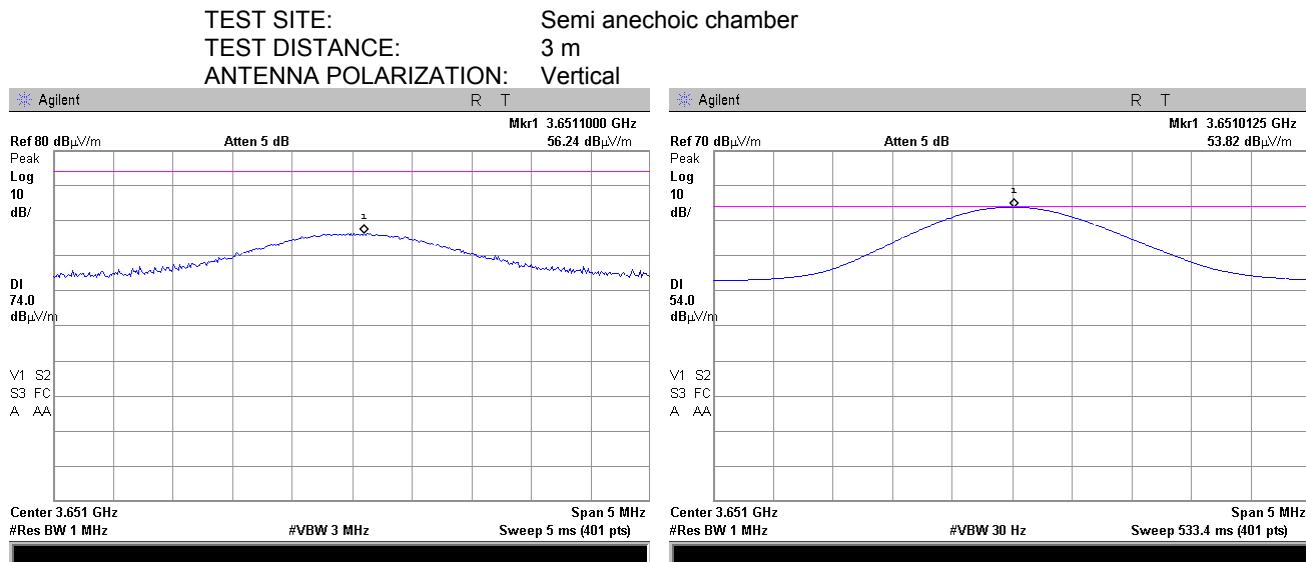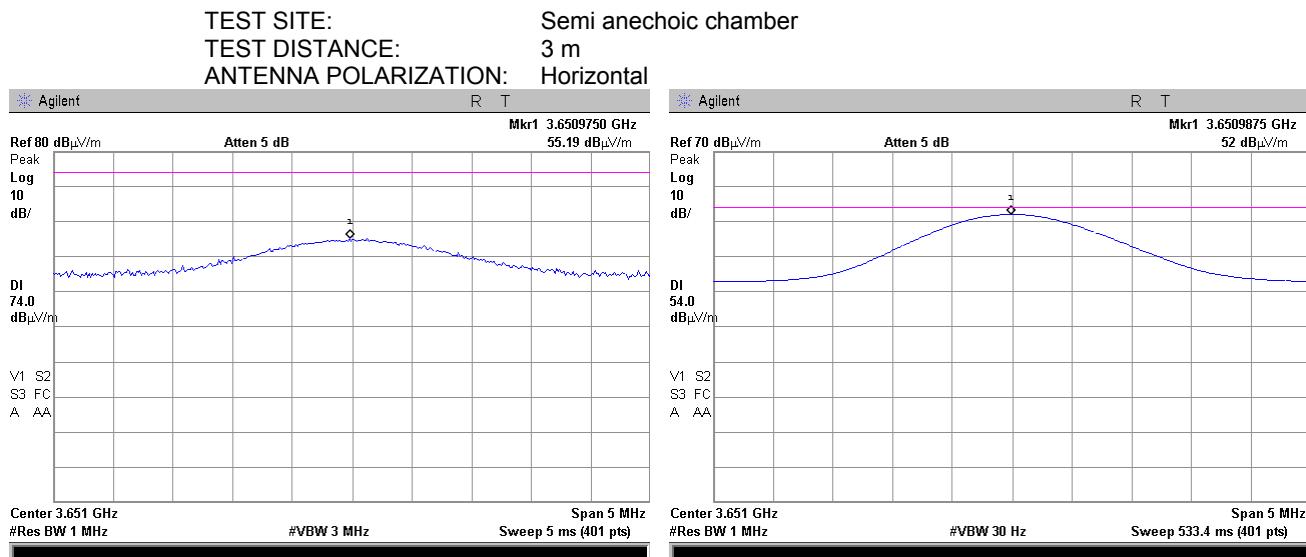Plot 7.7.32 Radiated emission measurements at the fourth harmonic of low carrier frequency**Plot 7.7.33 Radiated emission measurements at the fourth harmonic of low carrier frequency**





HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			



Plot 7.7.34 Radiated emission measurements at the fourth harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

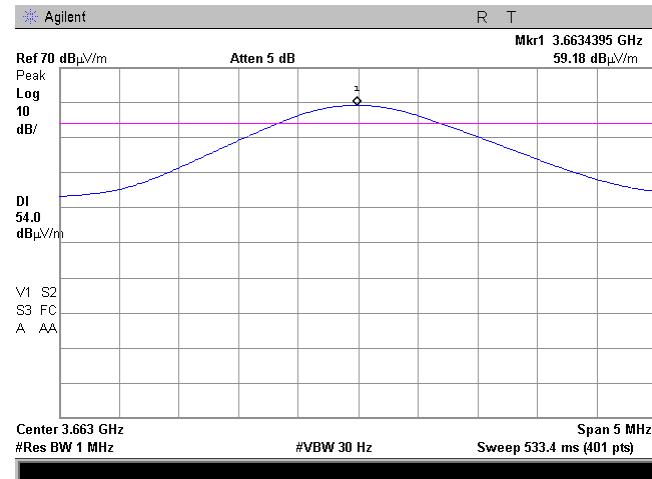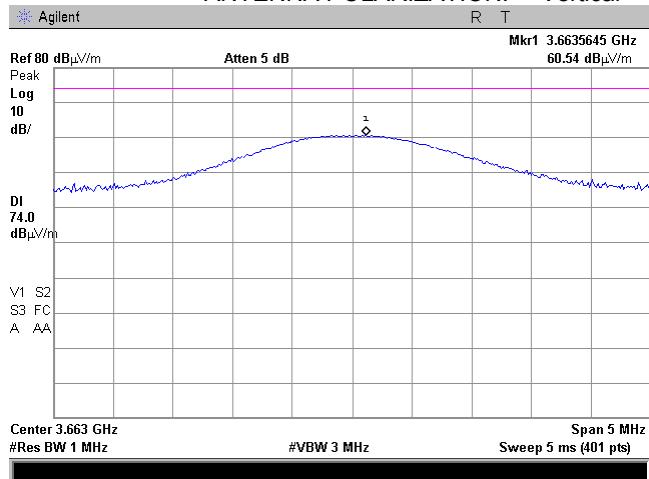

Plot 7.7.35 Radiated emission measurements at the fourth harmonic of mid carrier frequency



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

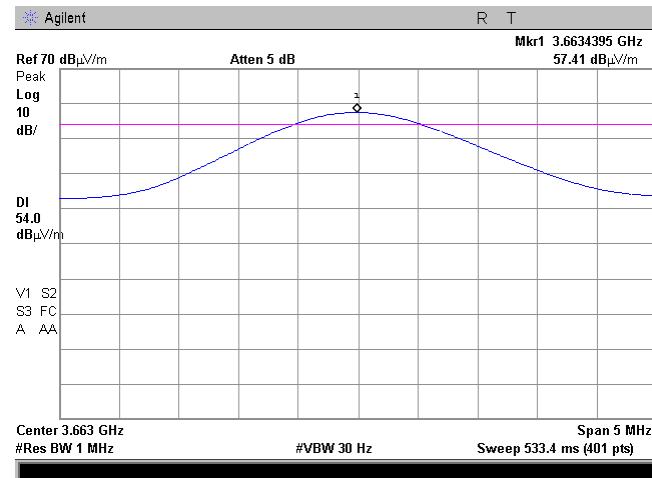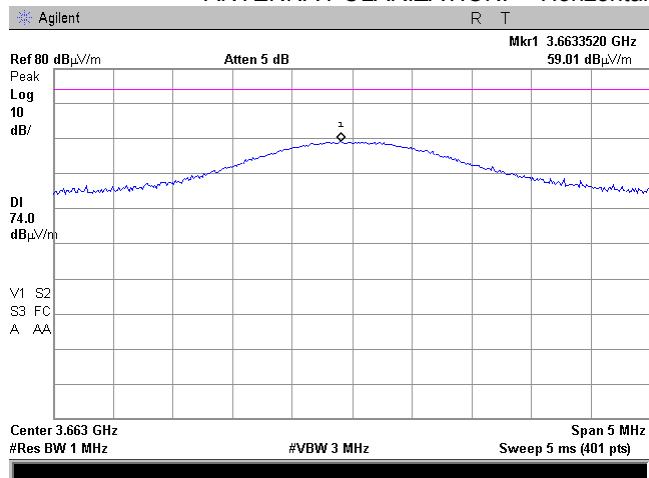



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

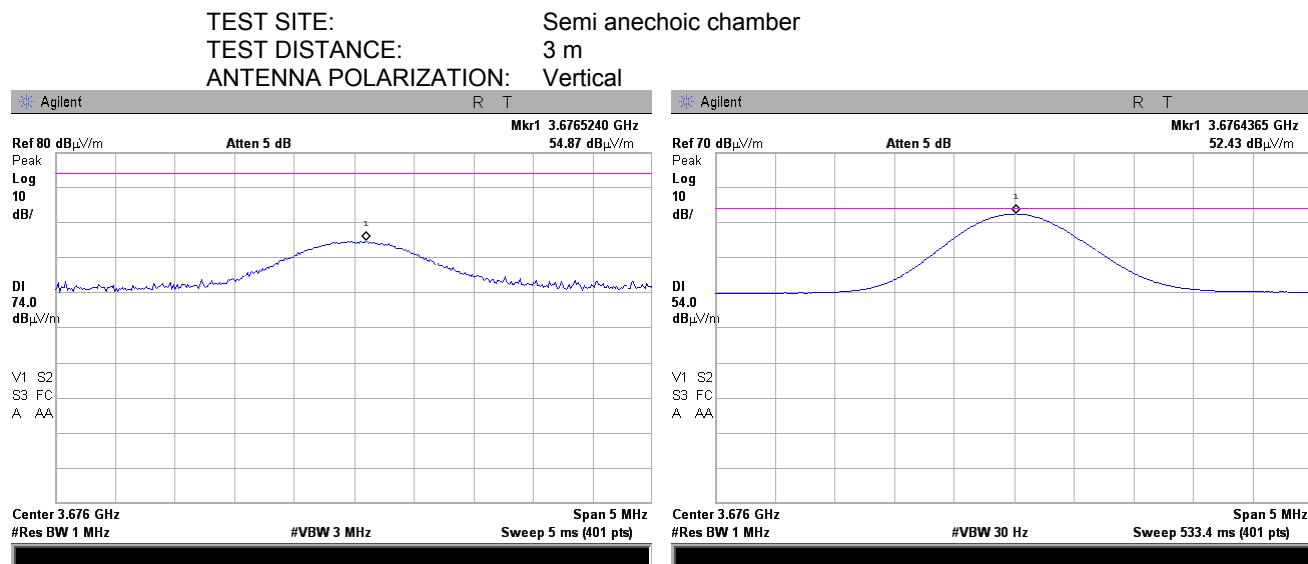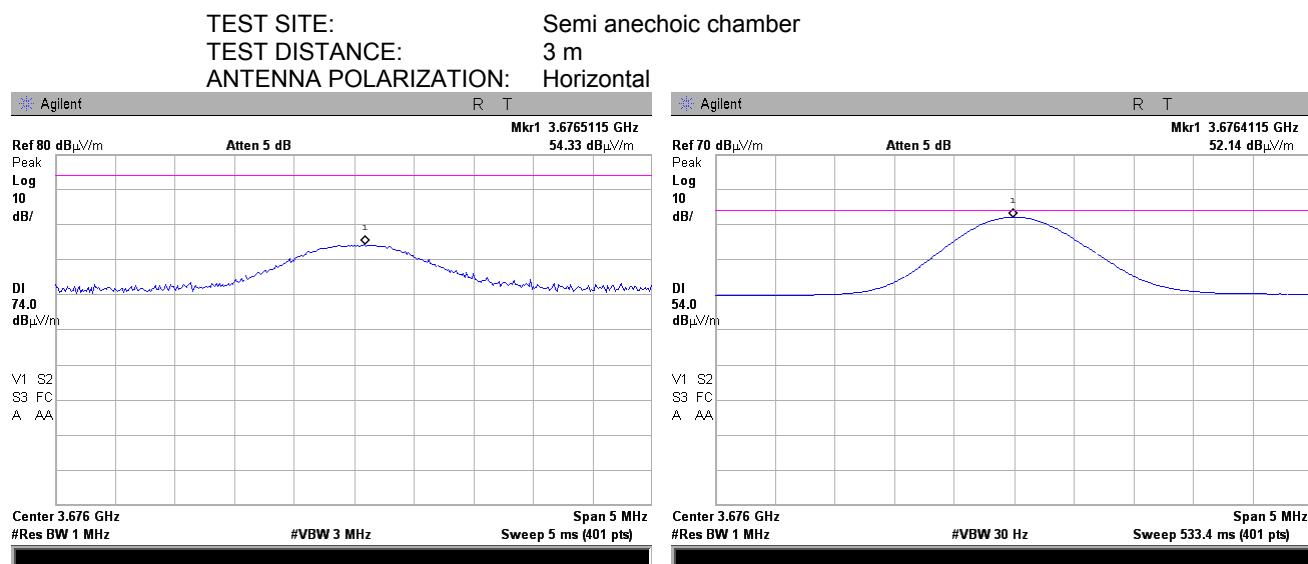Plot 7.7.36 Radiated emission measurements at the fourth harmonic of high carrier frequency**Plot 7.7.37 Radiated emission measurements at the fourth harmonic of high carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

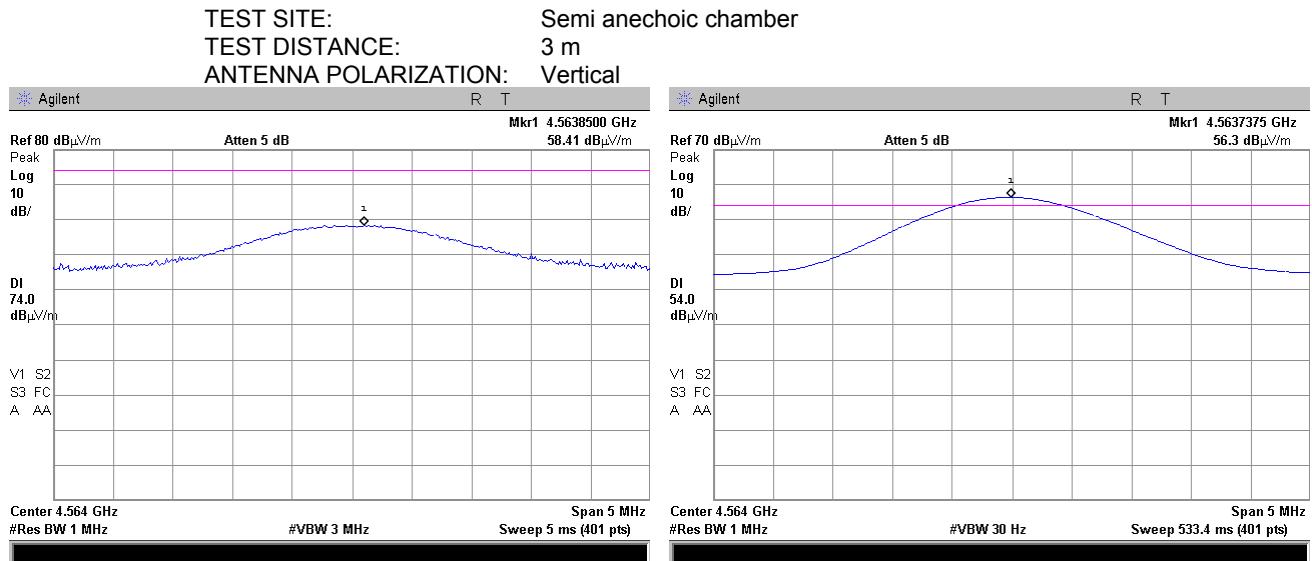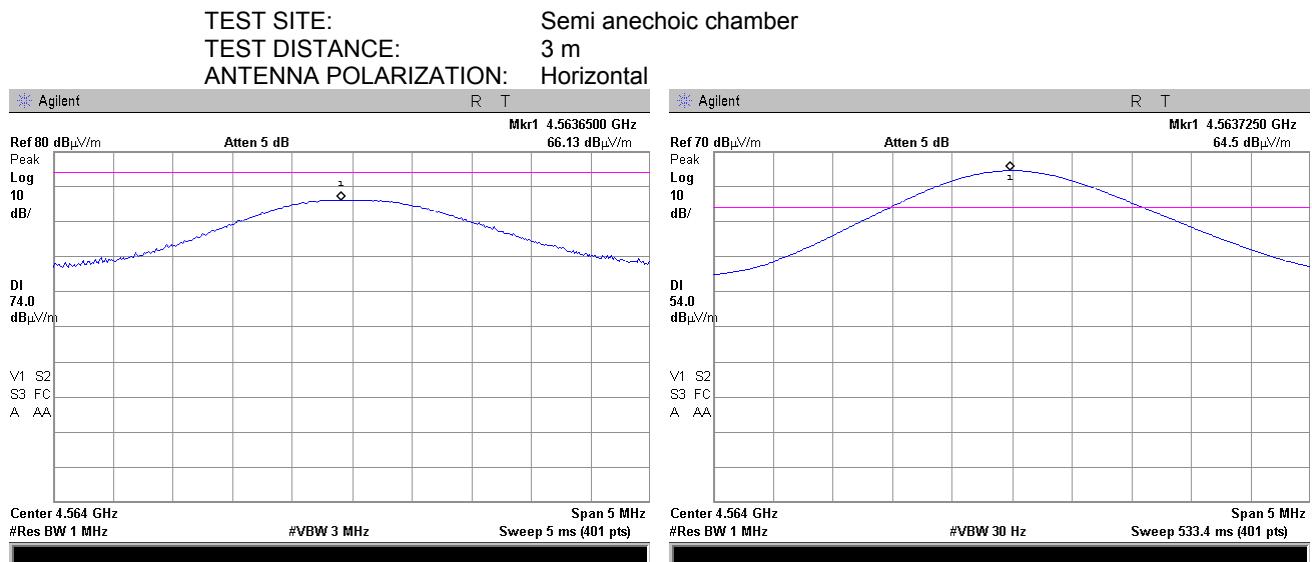Plot 7.7.38 Radiated emission measurements at the fifth harmonic of low carrier frequency**Plot 7.7.39 Radiated emission measurements at the fifth harmonic of low carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

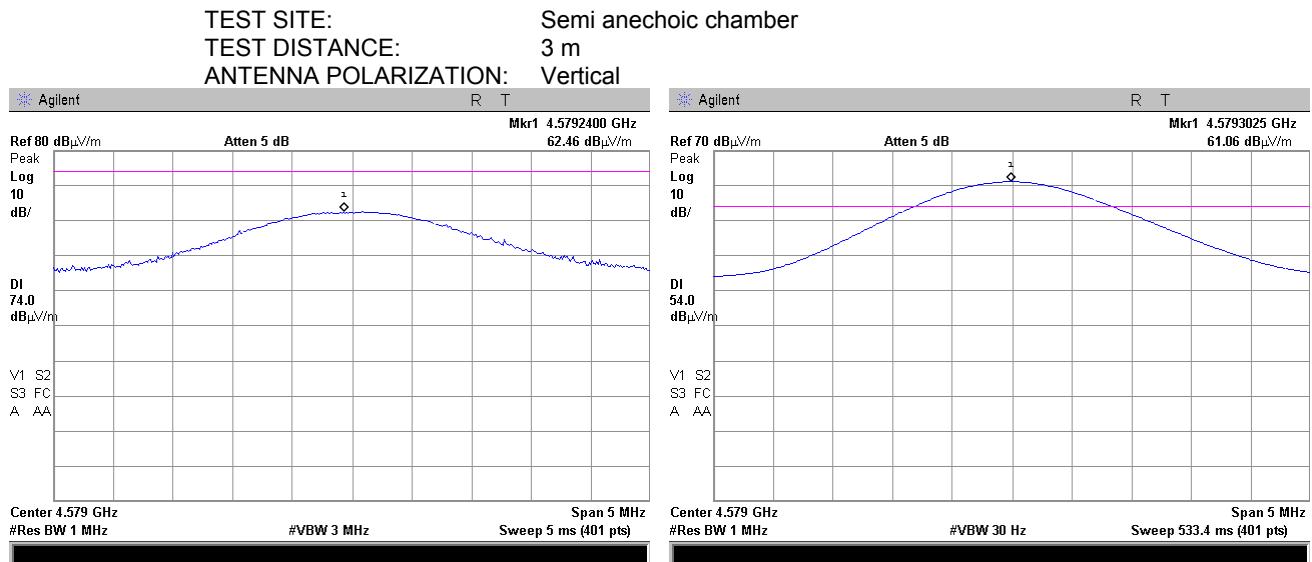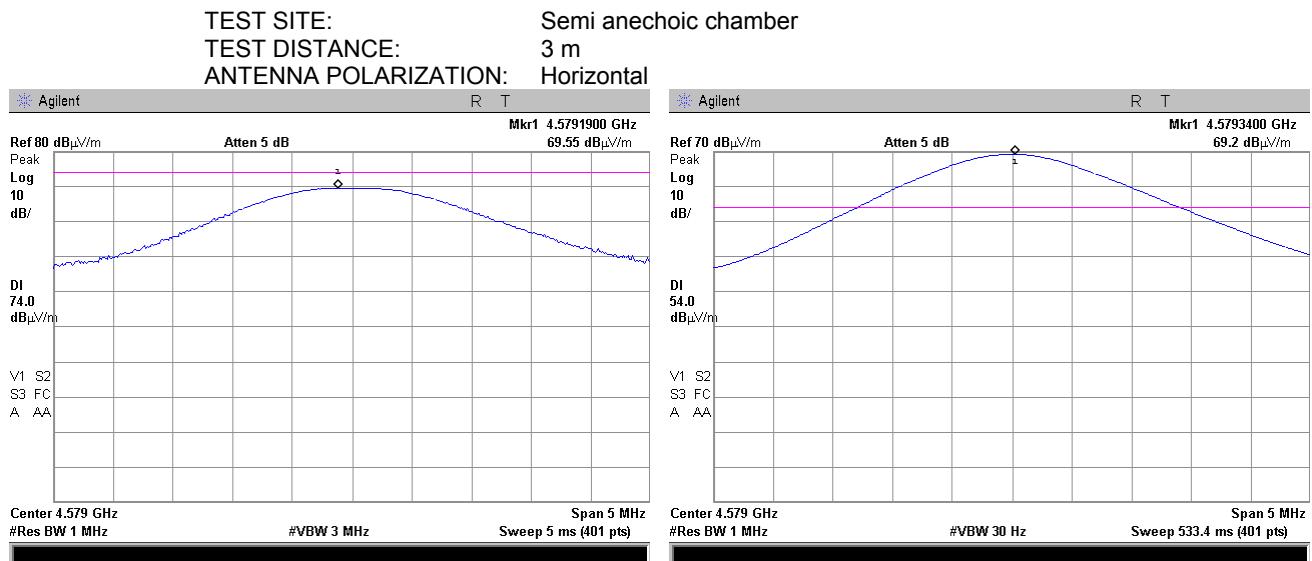Plot 7.7.40 Radiated emission measurements at the fifth harmonic of mid carrier frequency**Plot 7.7.41 Radiated emission measurements at the fifth harmonic of mid carrier frequency**



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

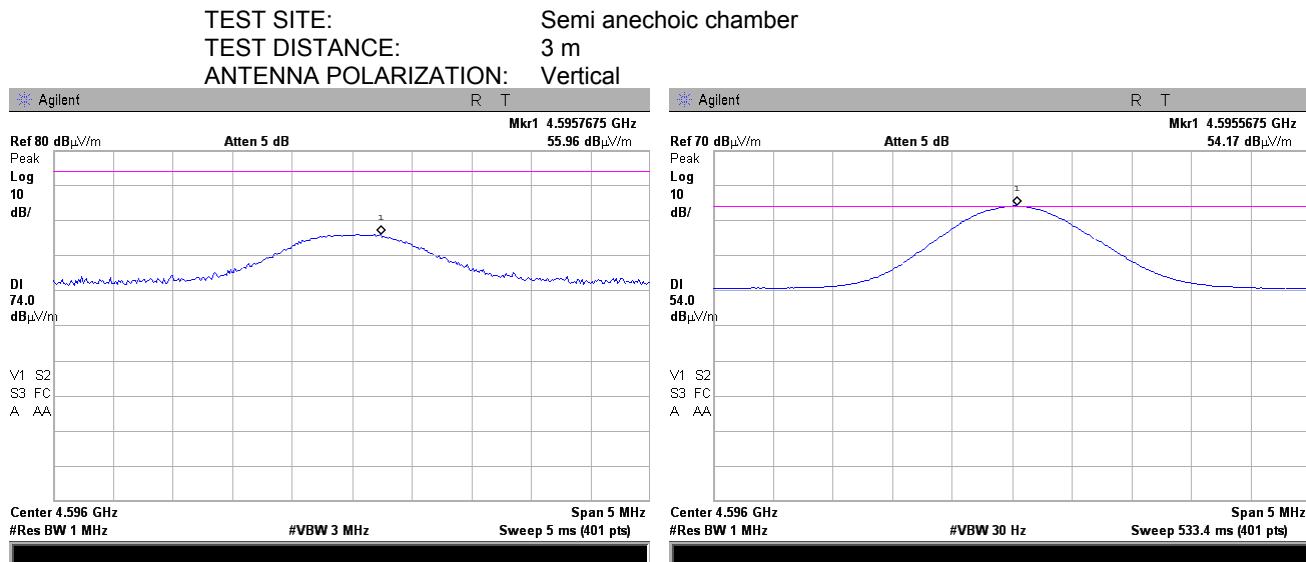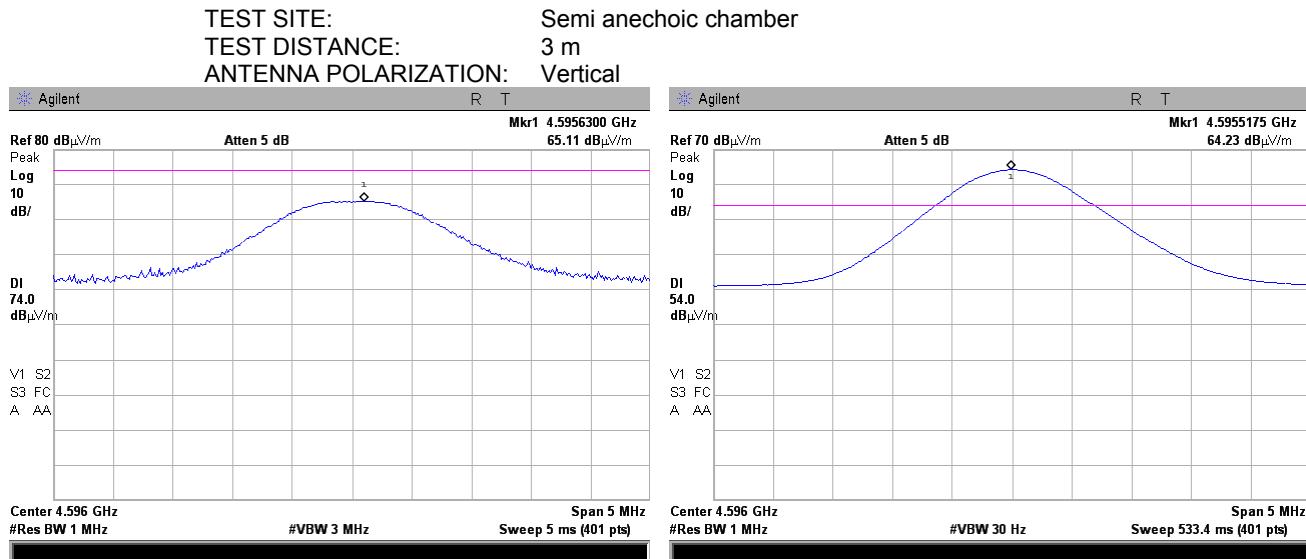Plot 7.7.42 Radiated emission measurements at the fifth harmonic of high carrier frequency**Plot 7.7.43 Radiated emission measurements at the fifth harmonic of high carrier frequency**




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.44 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

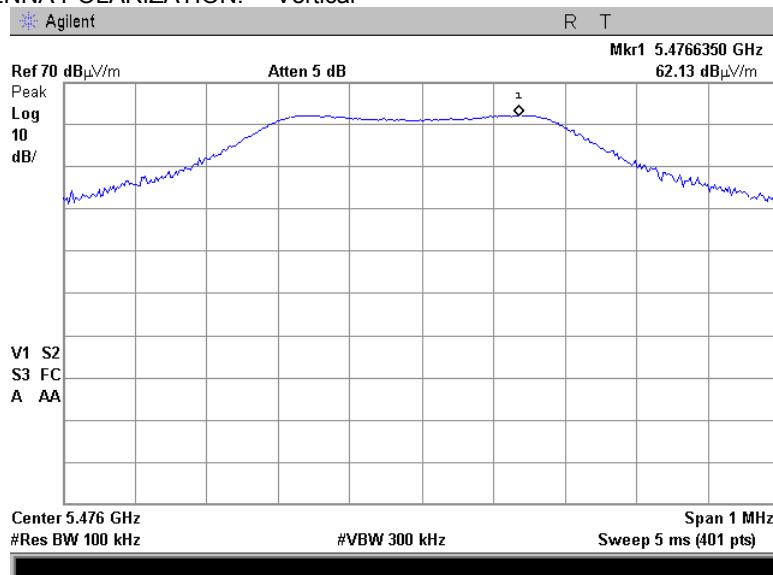

Plot 7.7.45 Radiated emission measurements at the sixth harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

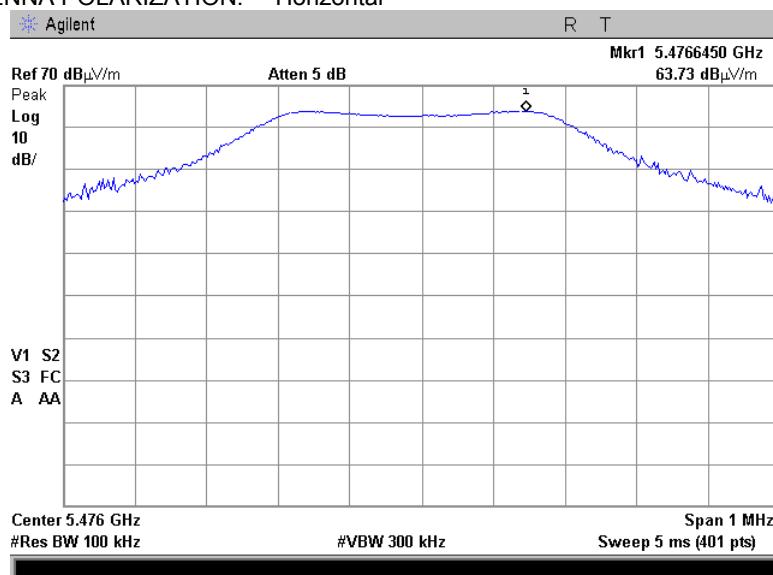




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.46 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

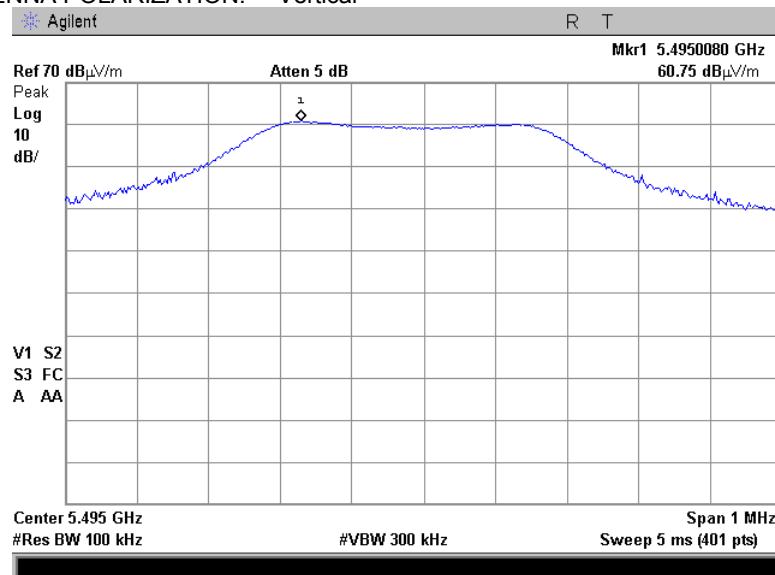

Plot 7.7.47 Radiated emission measurements at the sixth harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

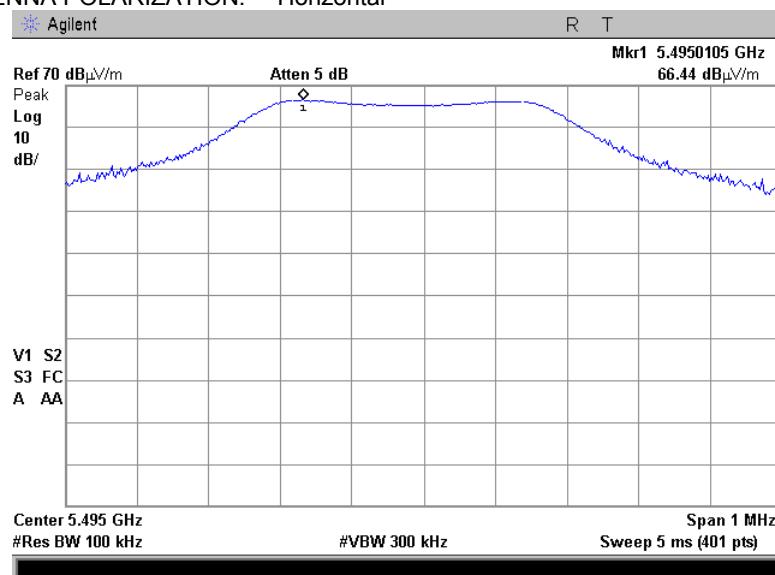




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.48 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

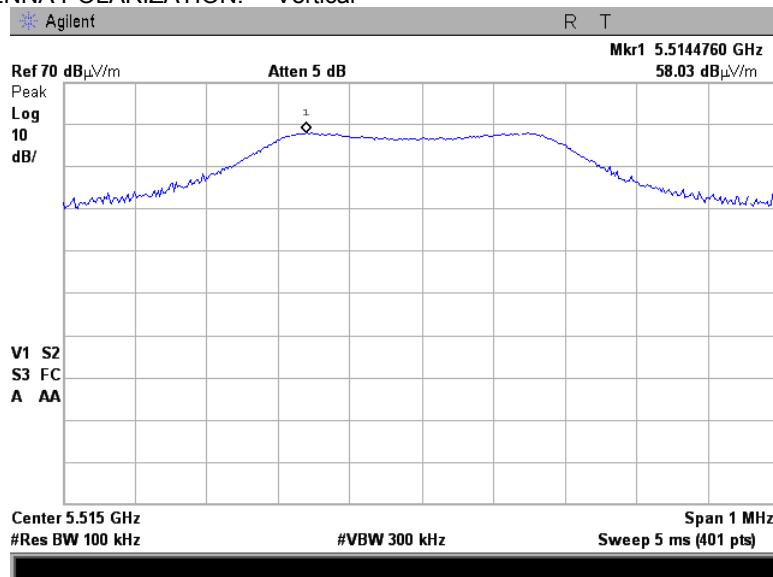

Plot 7.7.49 Radiated emission measurements at the sixth harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

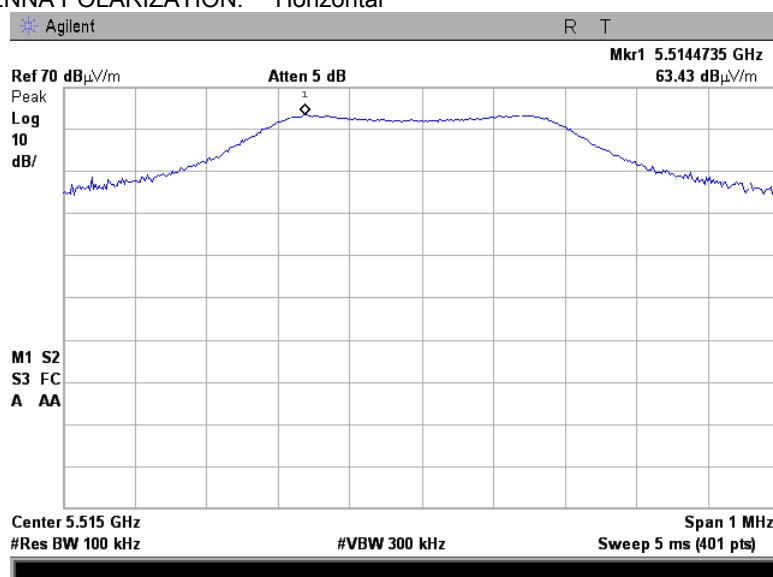




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.50 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

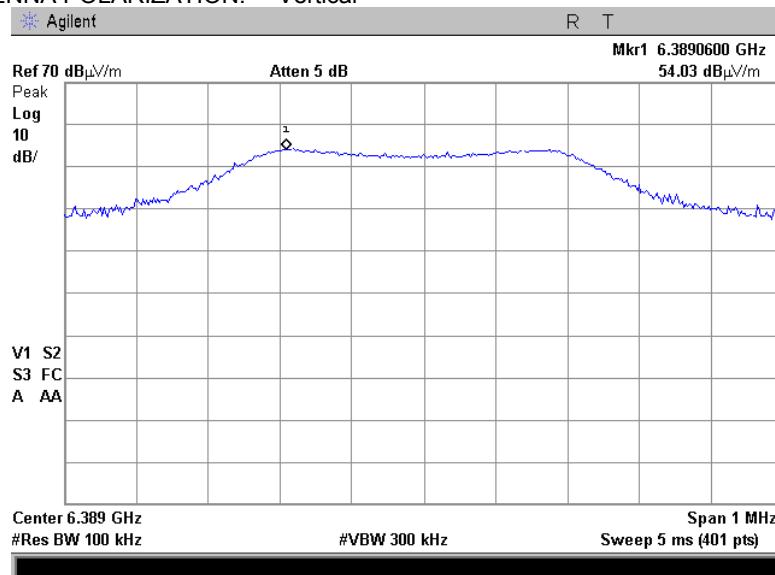

Plot 7.7.51 Radiated emission measurements at the seventh harmonic of low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

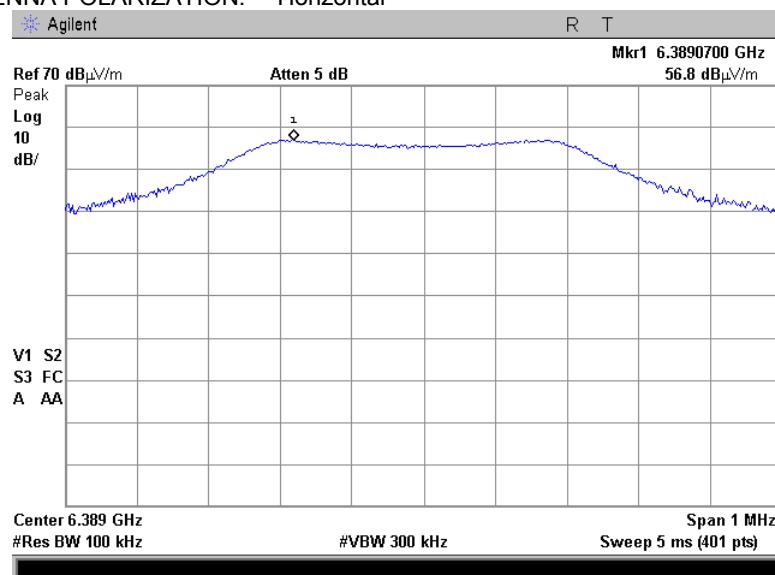




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.52 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

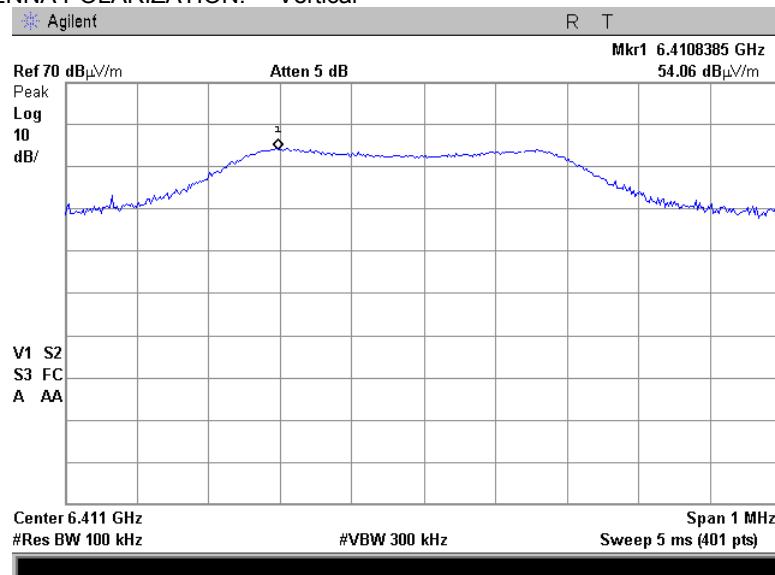

Plot 7.7.53 Radiated emission measurements at the seventh harmonic of mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

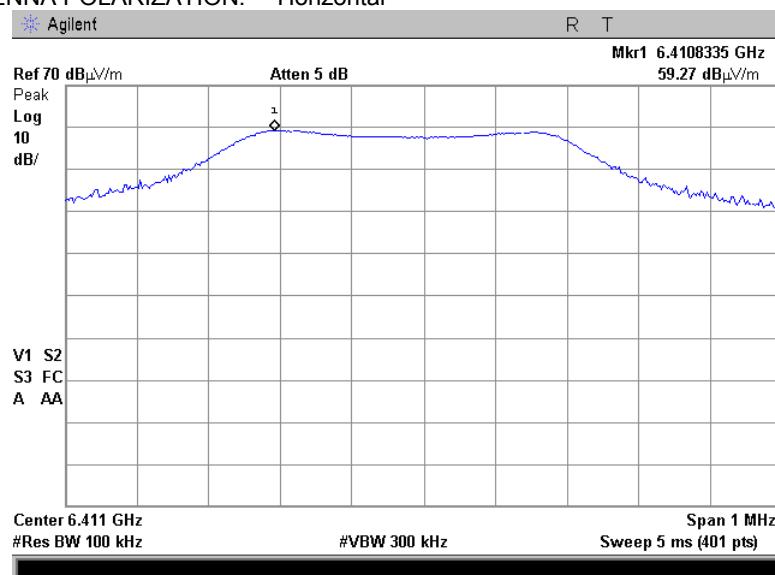




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			


Plot 7.7.54 Radiated emission measurements at the seventh harmonic of high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

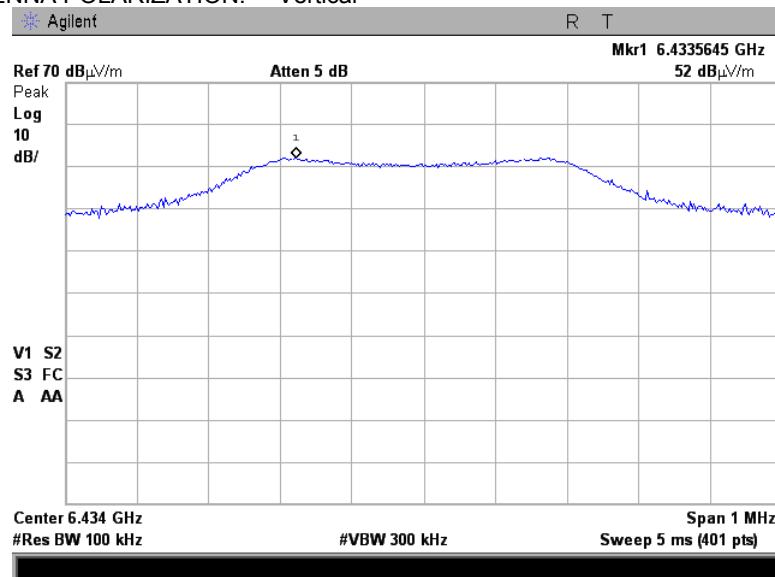

Plot 7.7.55 Radiated emission measurements at the seventh harmonic of high carrier frequency



TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Horizontal

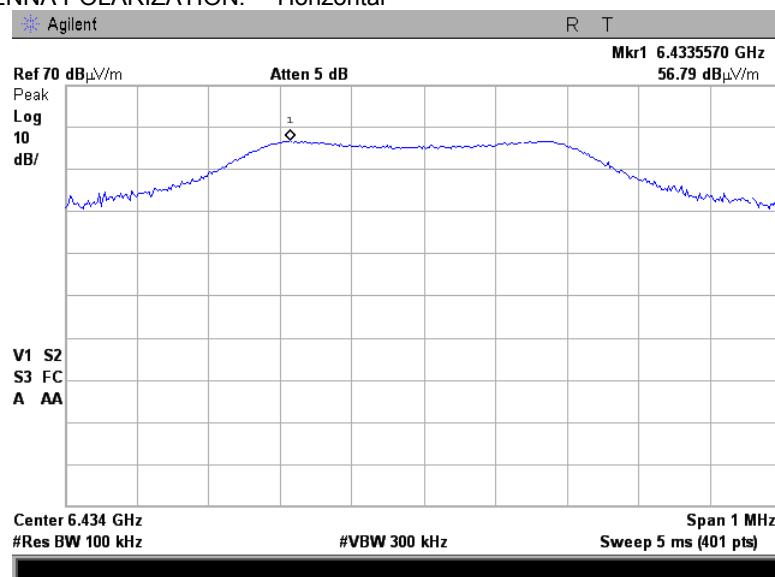



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

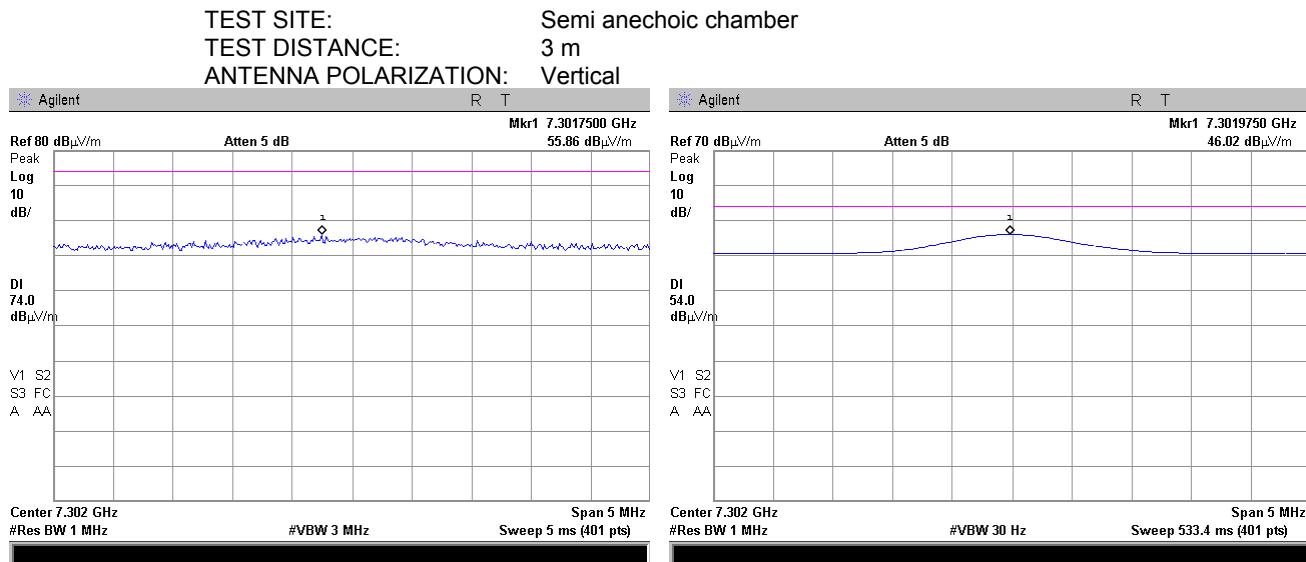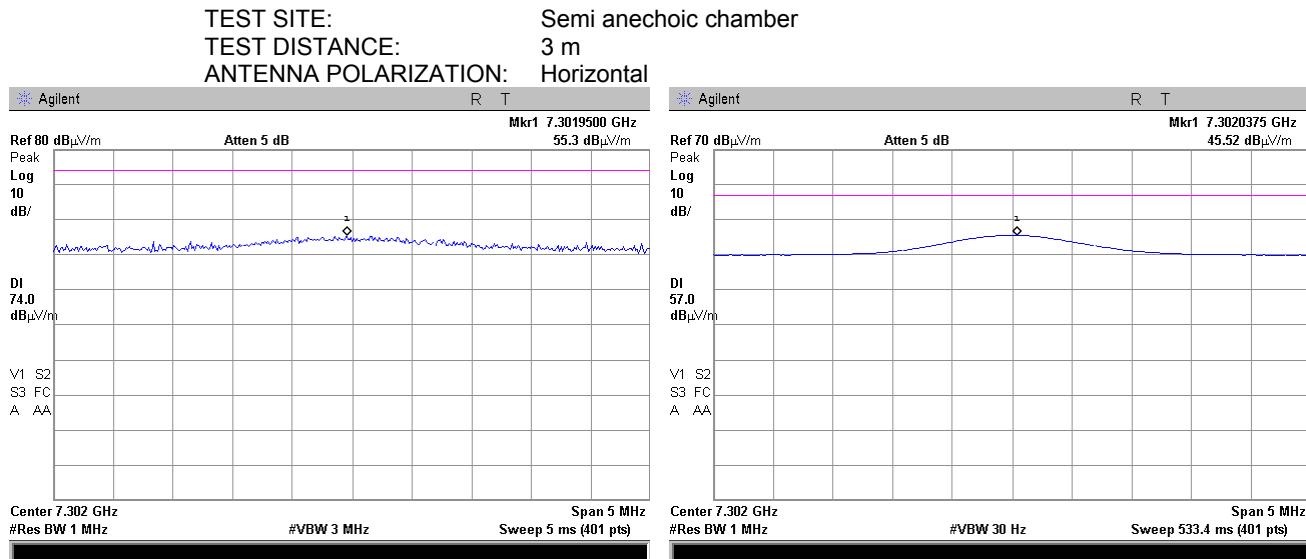Plot 7.7.56 Radiated emission measurements at the eighth harmonic of low carrier frequency**Plot 7.7.57 Radiated emission measurements at the eighth harmonic of low carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

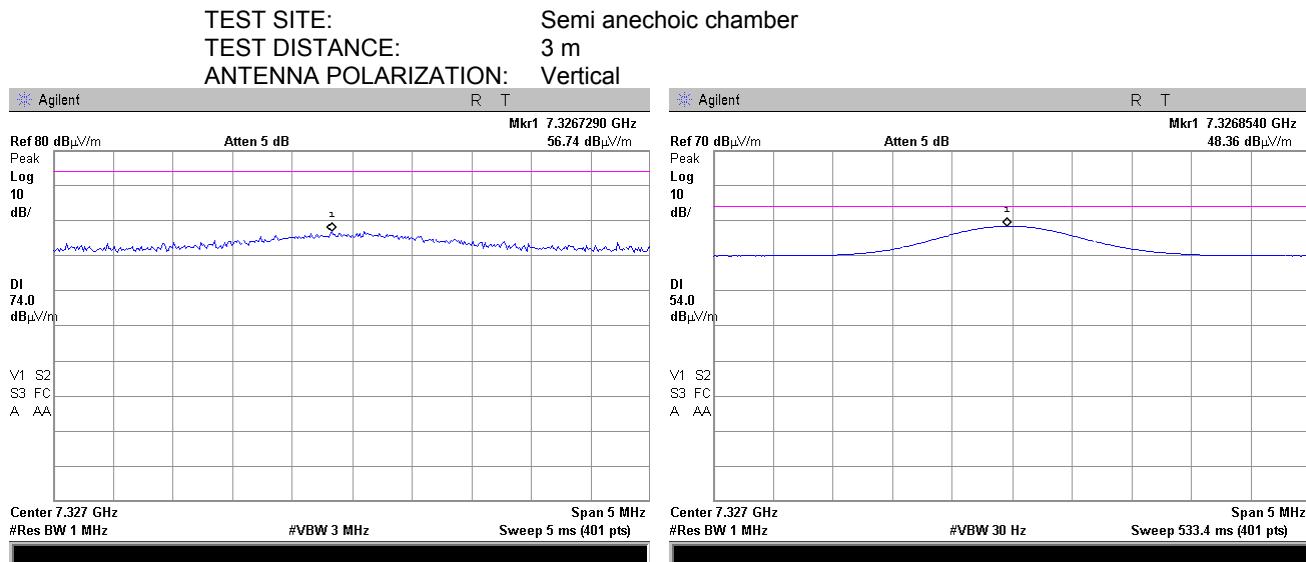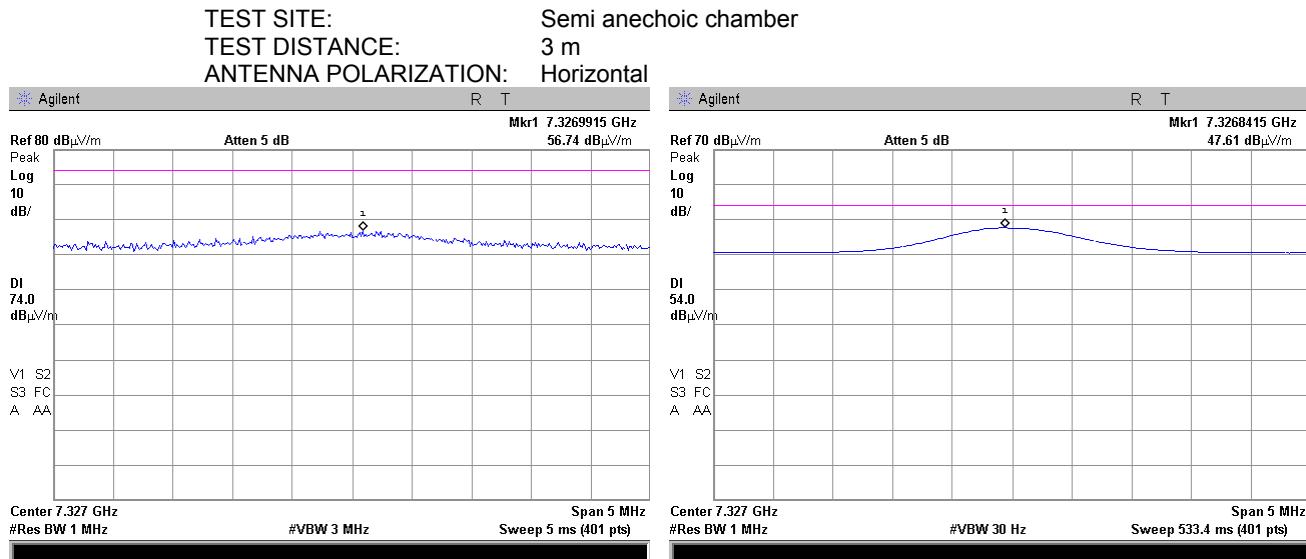Plot 7.7.58 Radiated emission measurements at the eighth harmonic of mid carrier frequency**Plot 7.7.59 Radiated emission measurements at the eighth harmonic of mid carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

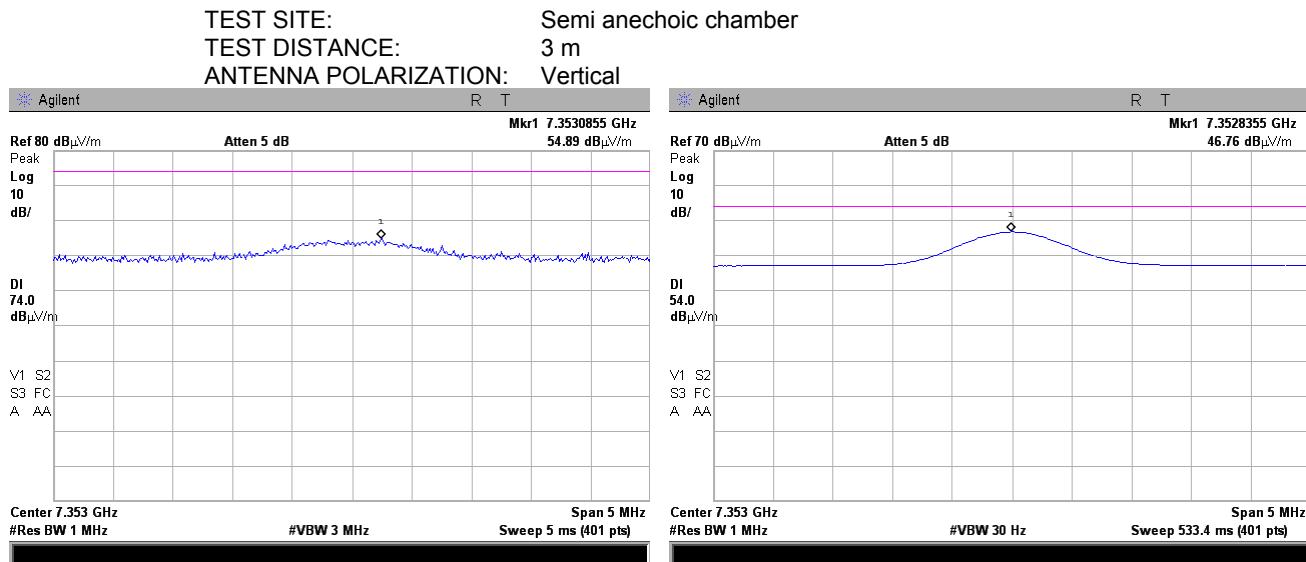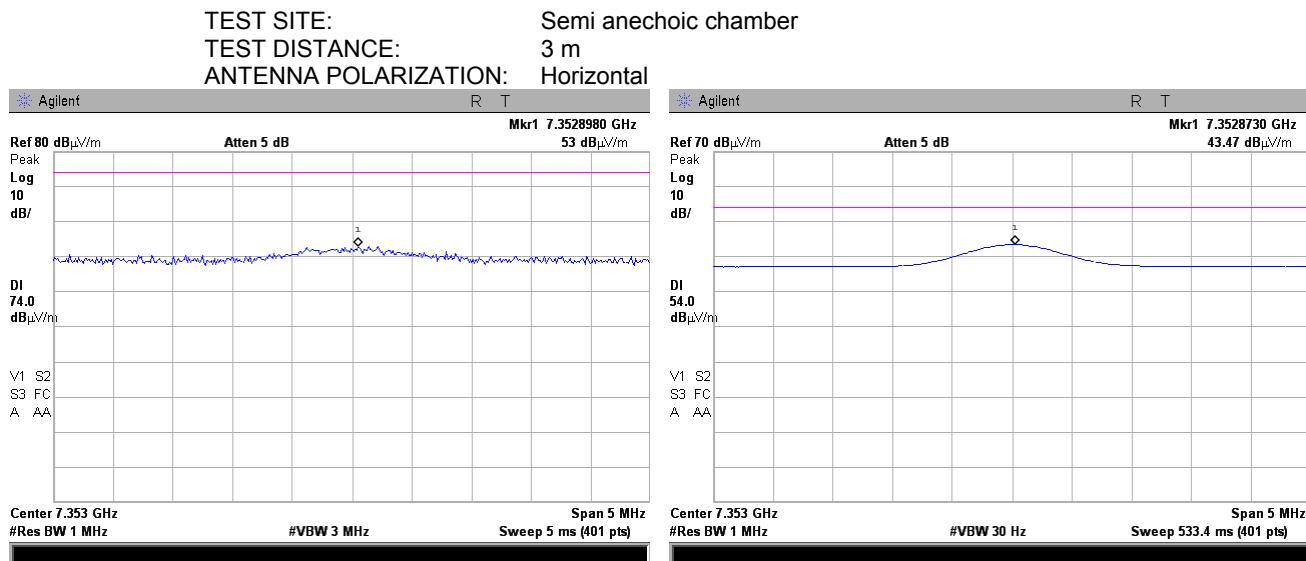Plot 7.7.60 Radiated emission measurements at the eighth harmonic of high carrier frequency**Plot 7.7.61 Radiated emission measurements at the eighth harmonic of high carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

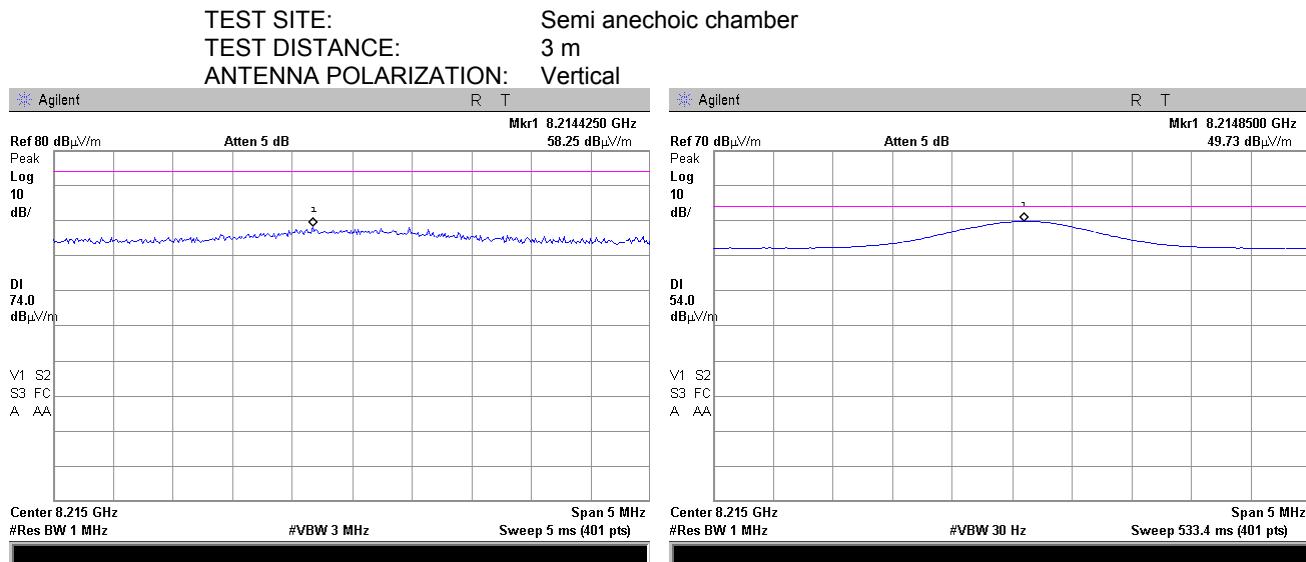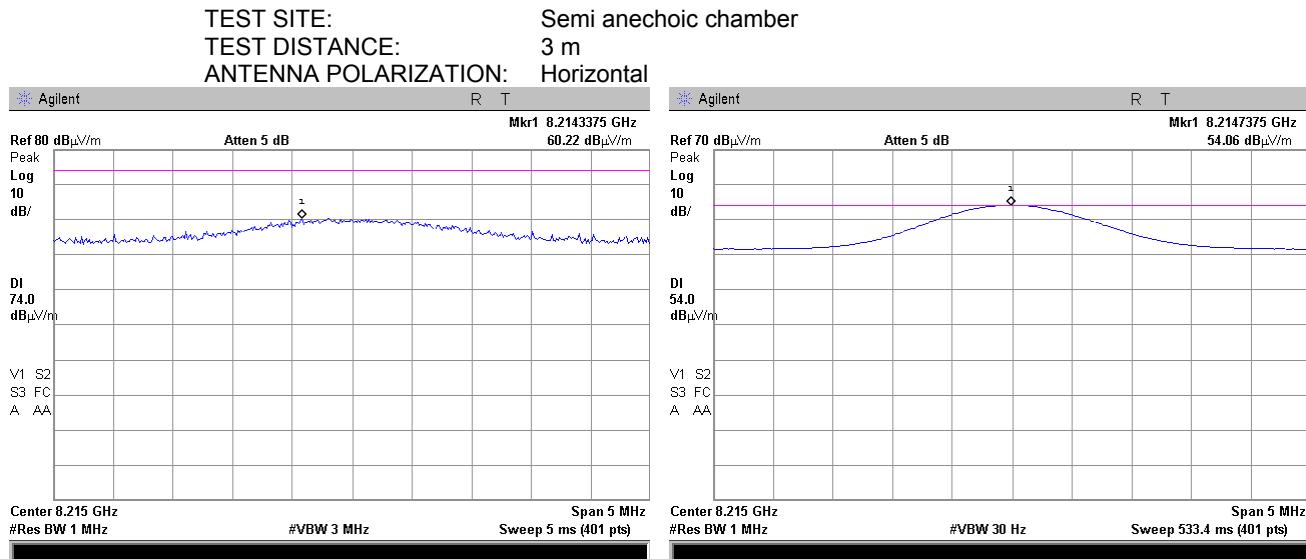Plot 7.7.62 Radiated emission measurements at the ninth harmonic of low carrier frequency**Plot 7.7.63 Radiated emission measurements at the ninth harmonic of low carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

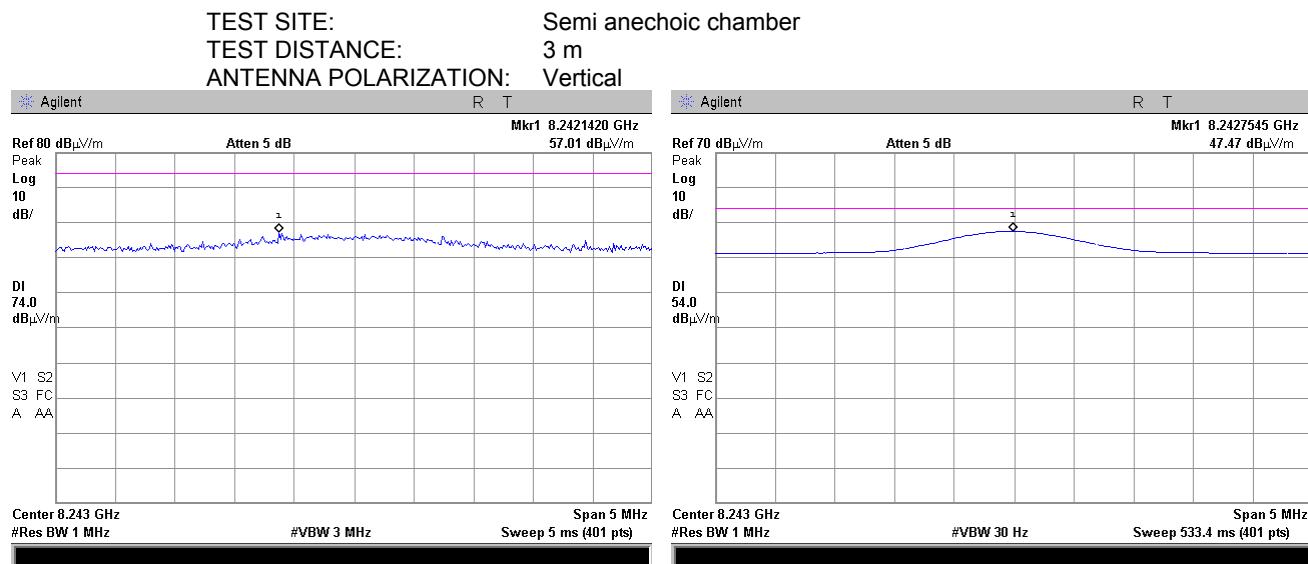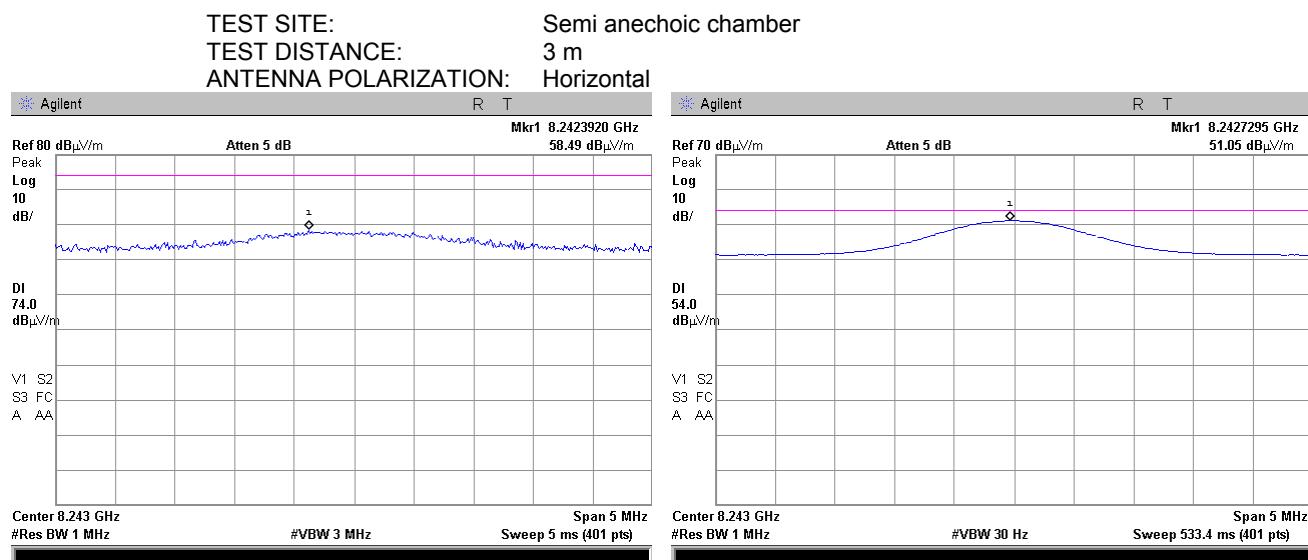Plot 7.7.64 Radiated emission measurements at the ninth harmonic of mid carrier frequency**Plot 7.7.65 Radiated emission measurements at the ninth harmonic of mid carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

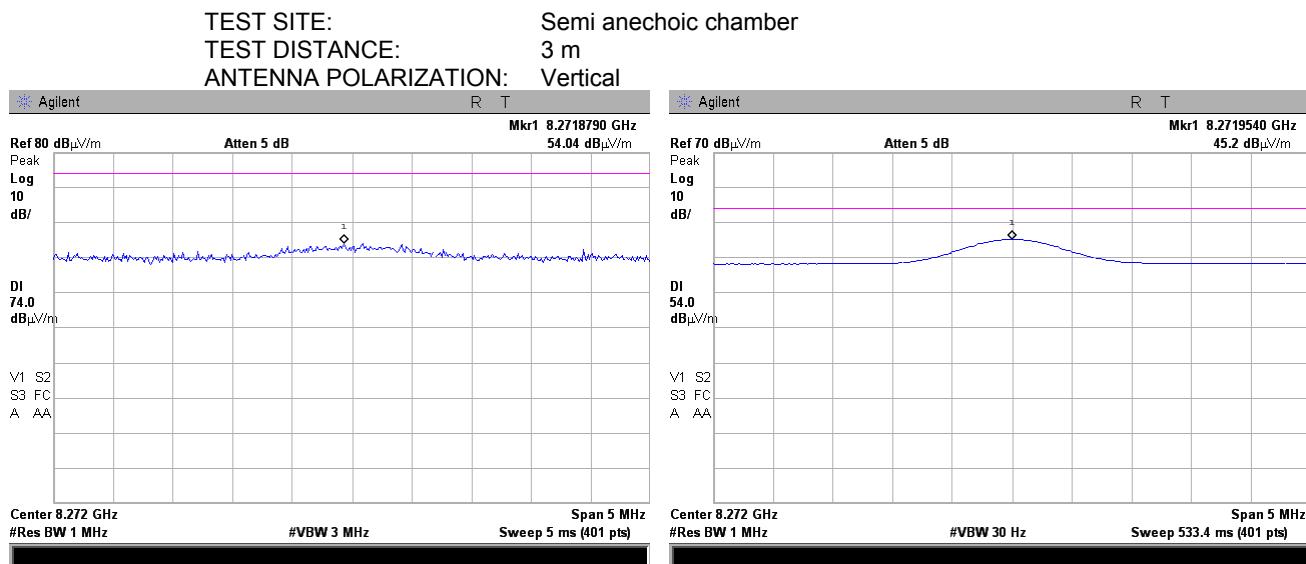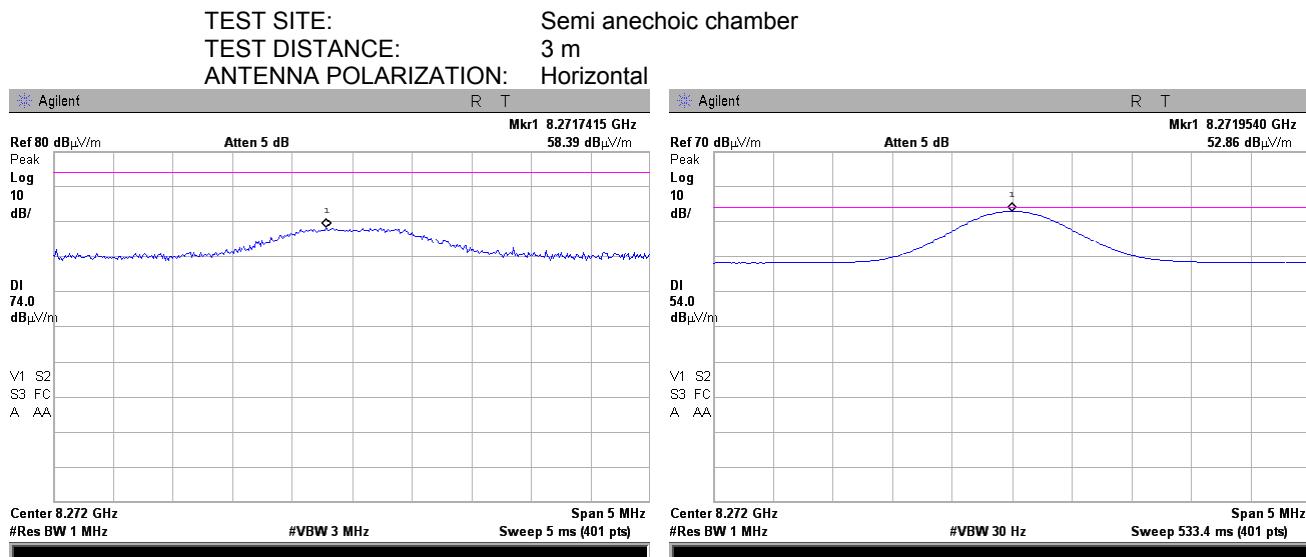Plot 7.7.66 Radiated emission measurements at the ninth harmonic of high carrier frequency**Plot 7.7.67 Radiated emission measurements at the ninth harmonic of high carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

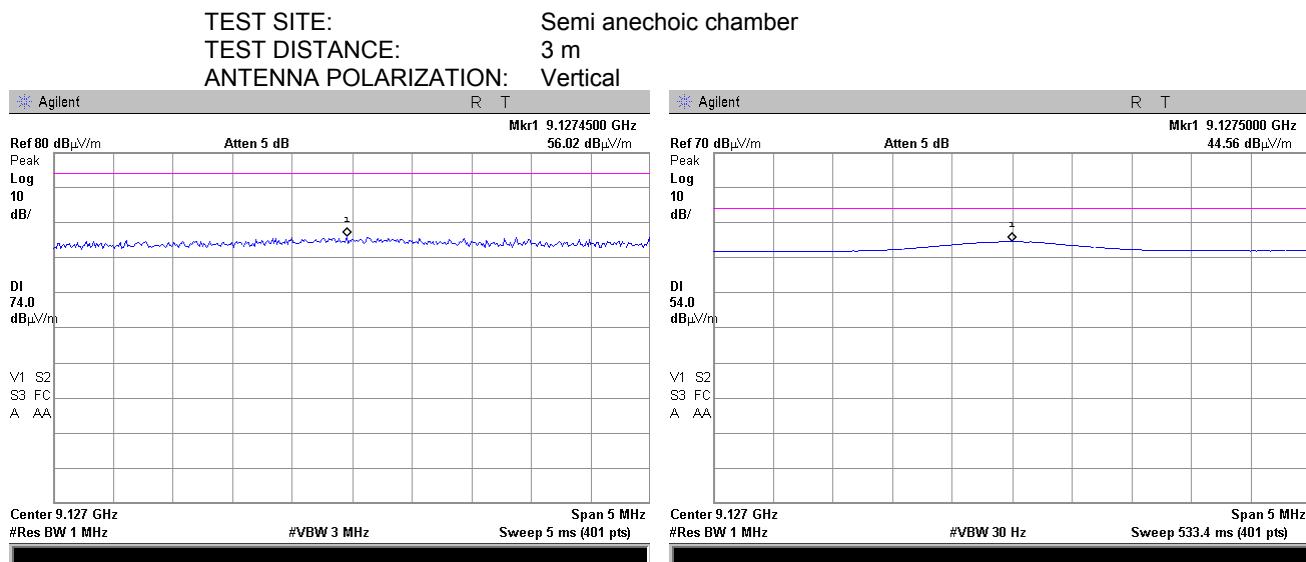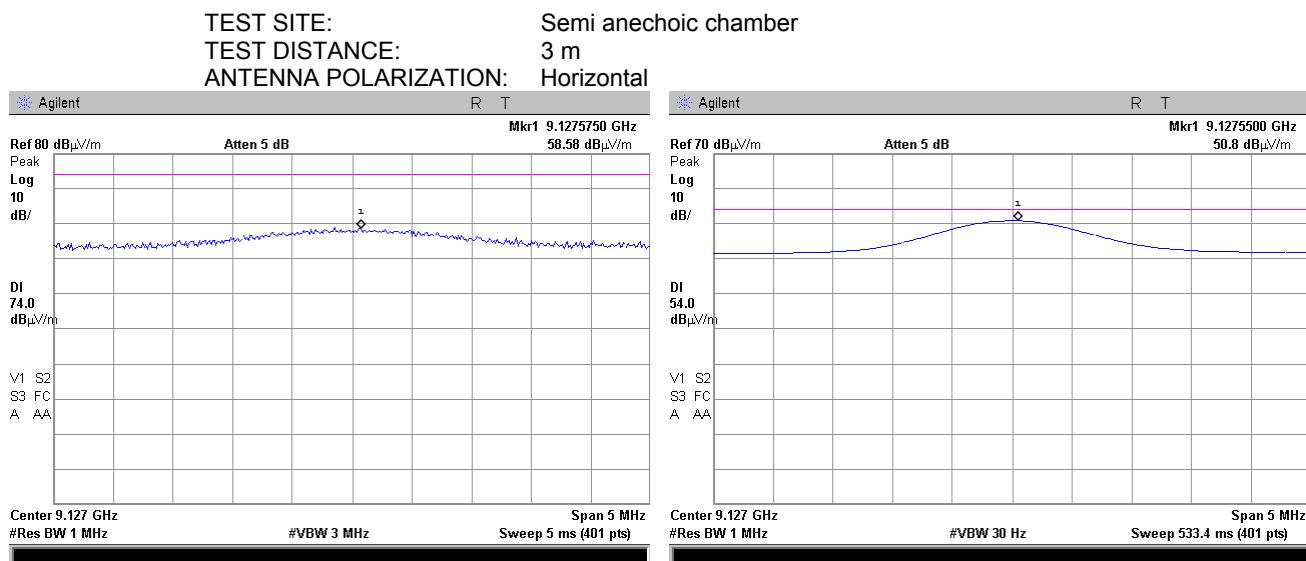Plot 7.7.68 Radiated emission measurements at the tenth harmonic of low carrier frequency**Plot 7.7.69 Radiated emission measurements at the tenth harmonic of low carrier frequency**



HERMON LABORATORIES



Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

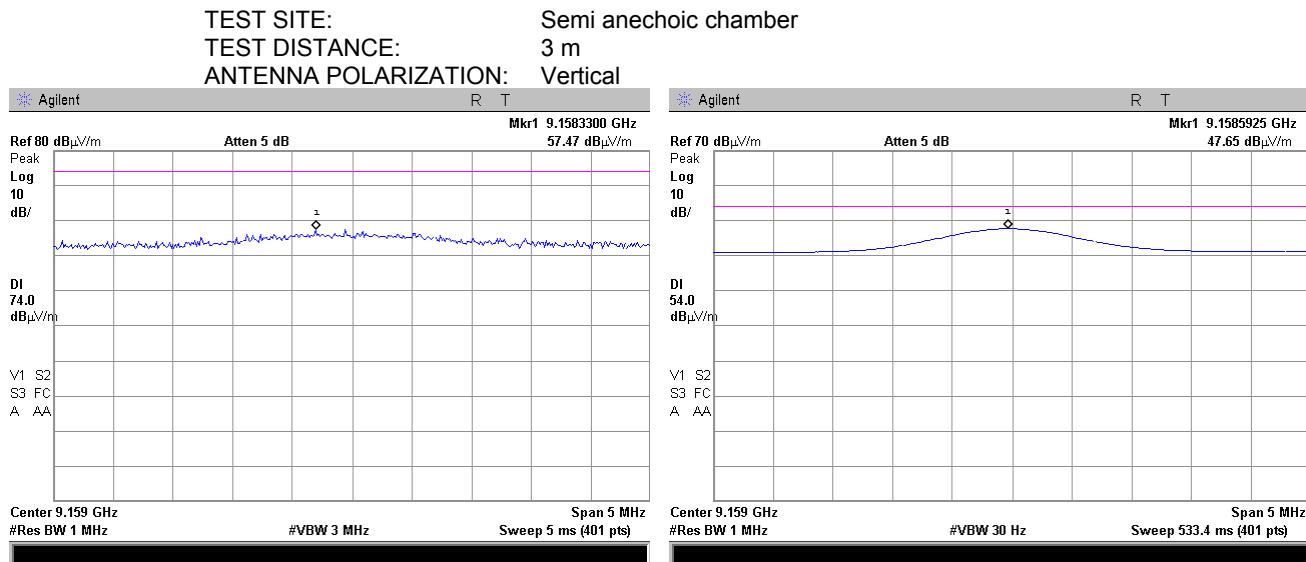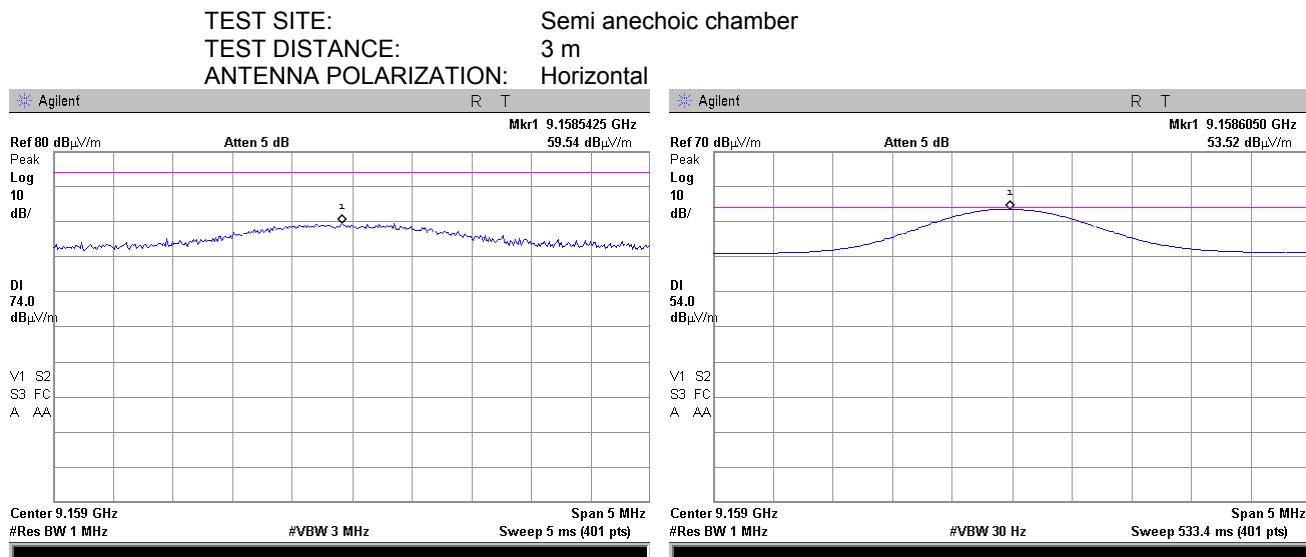Plot 7.7.70 Radiated emission measurements at the tenth harmonic of mid carrier frequency**Plot 7.7.71 Radiated emission measurements at the tenth harmonic of mid carrier frequency**



HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

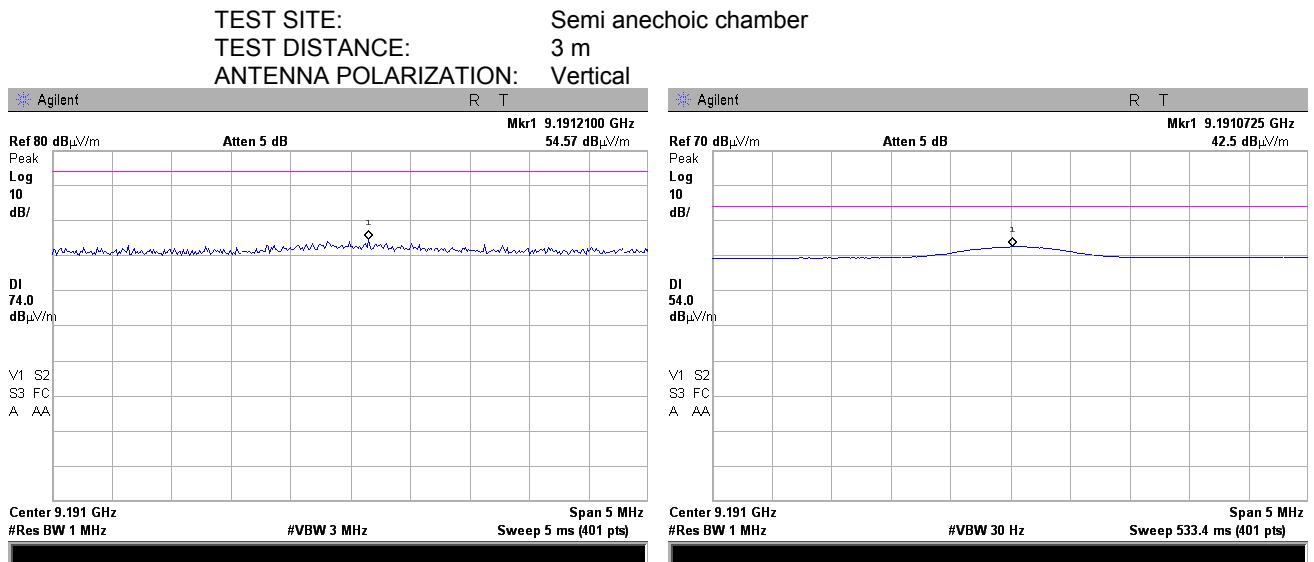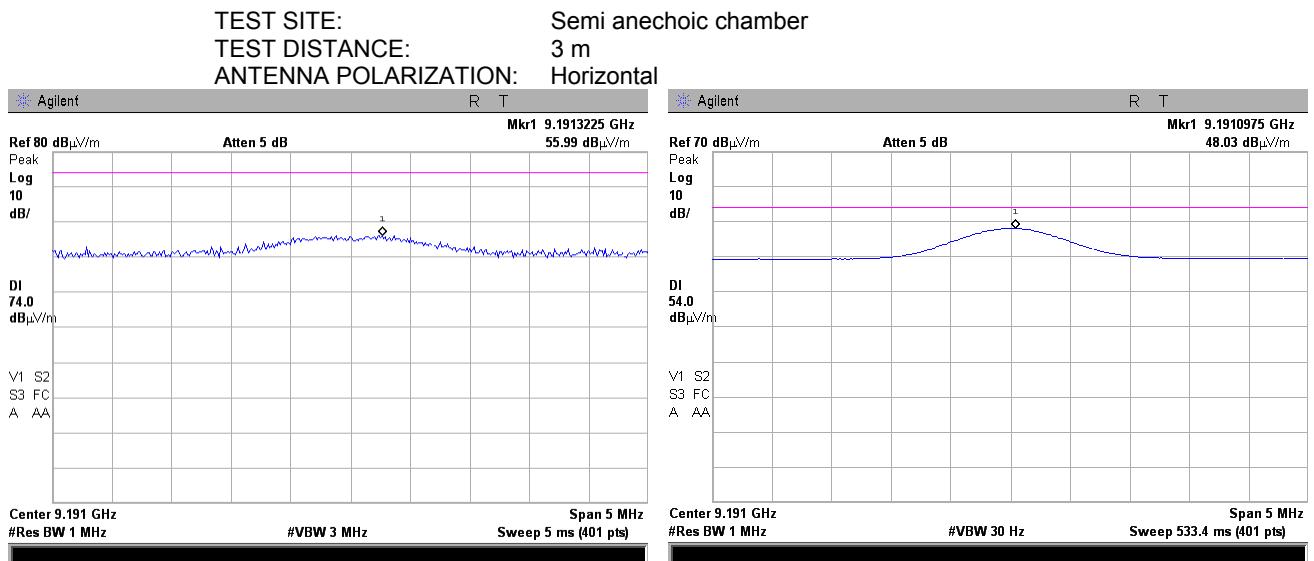
Plot 7.7.72 Radiated emission measurements at the tenth harmonic of high carrier frequency**Plot 7.7.73 Radiated emission measurements at the tenth harmonic of high carrier frequency**




HERMON LABORATORIES

Test specification:	Section 15.247(d), RSS-210 section A8.5, Radiated spurious emissions		
Test procedure:	Public notice DA 00-705/ 47 CFR, Section 15.247(c) / ANSI C63.4, Section 13.1.4		
Test mode:	Compliance	Verdict:	PASS
Date(s):	25-Dec-13 - 07-Jan-14		
Temperature: 20.7 °C	Air Pressure: 1034 hPa	Relative Humidity: 38 %	Power Supply: 120 VAC
Remarks:			

Plot 7.7.74 Transmission pulse duration

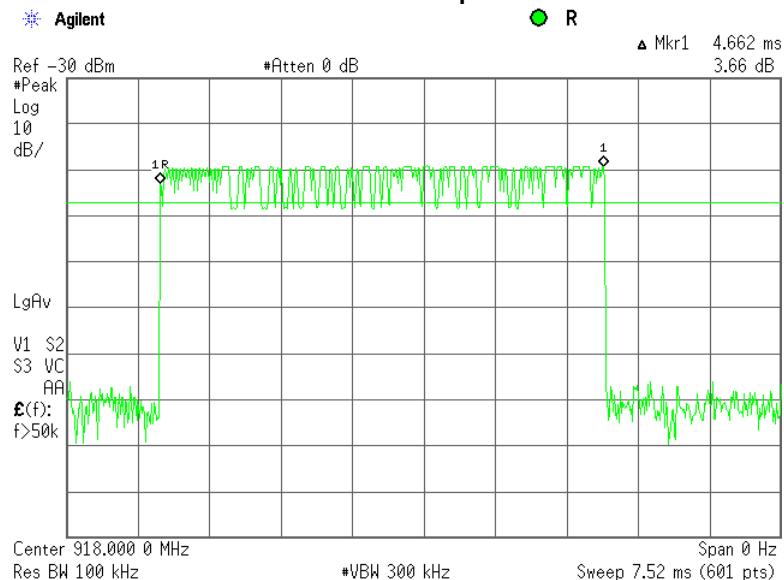

Plot 7.7.75 Transmission pulse period

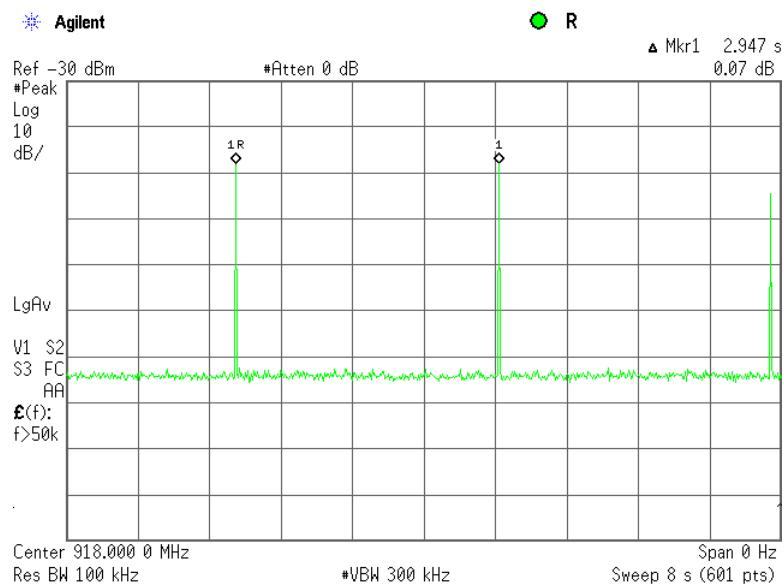



HERMON LABORATORIES

Test specification:	Section 15.203, RSS-Gen section 7.1.2, Antenna requirements		
Test procedure:	Public notice DA 00-705		
Test mode:	Compliance	Verdict:	PASS
Date(s):	05-Jan-14		
Temperature: 22.1 °C	Air Pressure: 1018 hPa	Relative Humidity: 36 %	Power Supply: 120 VAC
Remarks:			

7.8 Antenna requirements


The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.8.1.

Table 7.8.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	

Photograph 7.8.1 Antenna assembly

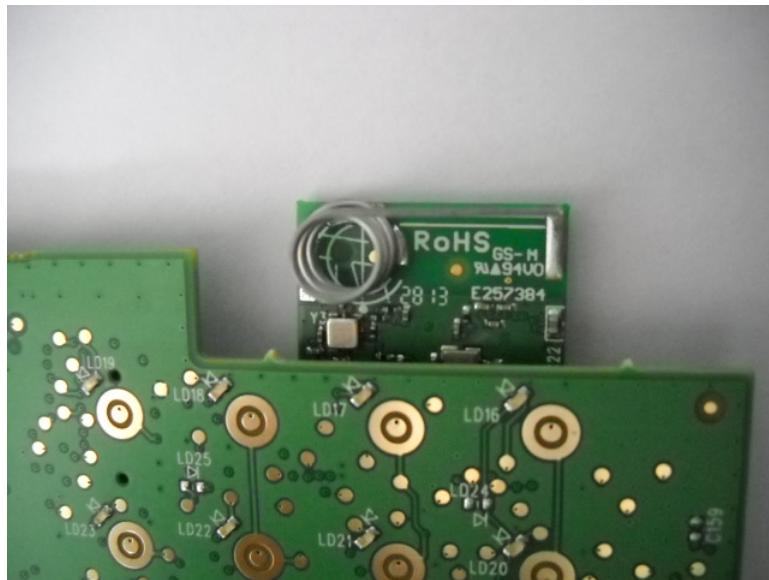



HERMON LABORATORIES

Test specification:	Section 15.207(a), RSS-Gen Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Dec-13		
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

7.9 Conducted emissions

7.9.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.9.1.

Table 7.9.1 Limits for conducted emissions


Frequency, MHz	Class B limit, dB(µV)	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5.0	56	46
5.0 - 30	60	50

* The limit decreases linearly with the logarithm of frequency.

7.9.2 Test procedure

- 7.9.2.1 The EUT was set up as shown in Figure 7.9.1 and associated photographs, energized and the performance check was conducted.
- 7.9.2.2 The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.9.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- 7.9.2.3 The position of the device cables was varied to determine maximum emission level.
- 7.9.2.4 The worst test results (the lowest margins) were recorded in Table 7.9.2 and shown in the associated plots.

Figure 7.9.1 Setup for conducted emission measurements, table-top equipment

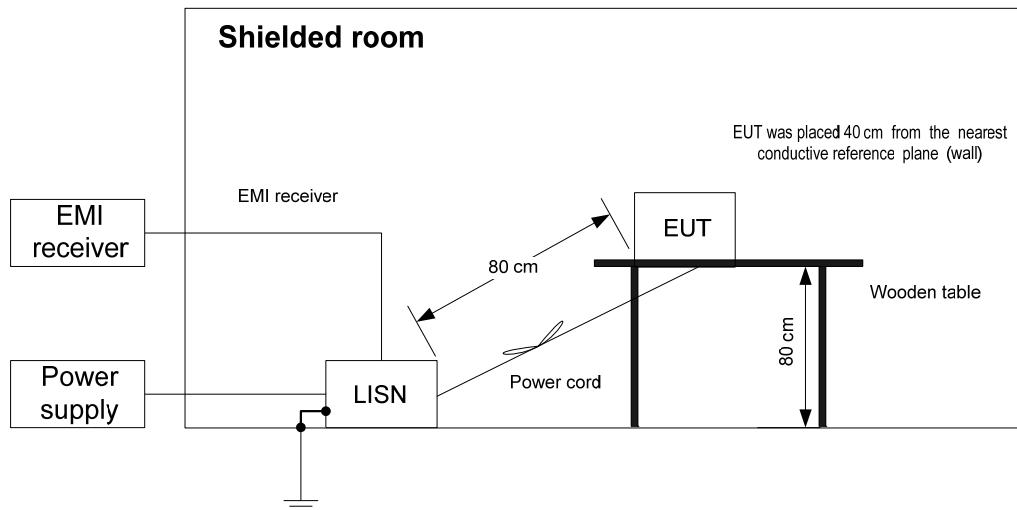



HERMON LABORATORIES

Test specification:	Section 15.207(a), RSS-Gen Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	
Date(s):	31-Dec-13	PASS	
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			

Table 7.9.2 Conducted emission test results

LINE: AC mains
 EUT OPERATING MODE: Transmit
 EUT SET UP: TABLE-TOP
 TEST SITE: SHIELDED ROOM
 DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE
 FREQUENCY RANGE: 150 kHz - 30 MHz
 RESOLUTION BANDWIDTH: 9 kHz

Frequency, MHz	Peak emission, dB(µV)	Quasi-peak			Average			Line ID	Verdict
		Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*	Measured emission, dB(µV)	Limit, dB(µV)	Margin, dB*		
161.5	43.30	39.20	65.39	-26.19	19.50	43.49	-23.99	L1	Pass
167.0	42.00	38.90	65.11	-26.21	19.70	55.11	-35.41		
185.7	40.00	36.10	64.23	-28.13	17.60	54.23	-36.63		
225.4	36.70	31.40	62.62	-31.22	17.70	52.62	-34.92		
284.9	35.30	31.20	60.67	-29.47	26.20	50.67	-24.47		
676.1	33.20	30.70	56.00	-25.30	23.50	46.00	-22.50		
161.2	42.70	38.90	60.58	-21.68	20.20	50.58	-30.38	L2	Pass
170.0	42.40	38.80	64.96	-26.16	20.20	54.96	-34.76		
186.1	39.70	35.90	64.21	-28.31	18.40	54.21	-35.81		
207.0	38.30	33.20	63.32	-30.12	18.60	53.32	-34.72		
239.4	37.00	31.40	62.12	-30.72	20.50	52.12	-31.62		
288.0	38.20	34.20	60.58	-26.38	29.70	50.58	-20.88		

*- Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 0787	HL 1425	HL 1513	HL 2909	HL 3612		
---------	---------	---------	---------	---------	---------	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Test specification:	Section 15.207(a), RSS-Gen Section 7.2.4, Conducted emission		
Test procedure:	ANSI C63.4, Section 13.1.3		
Test mode:	Compliance	Verdict:	PASS
Date(s):	31-Dec-13		
Temperature: 20 °C	Air Pressure: 1016 hPa	Relative Humidity: 40 %	Power Supply: 120 VAC
Remarks:			


Plot 7.9.1 Conducted emission measurements

LINE: L1
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

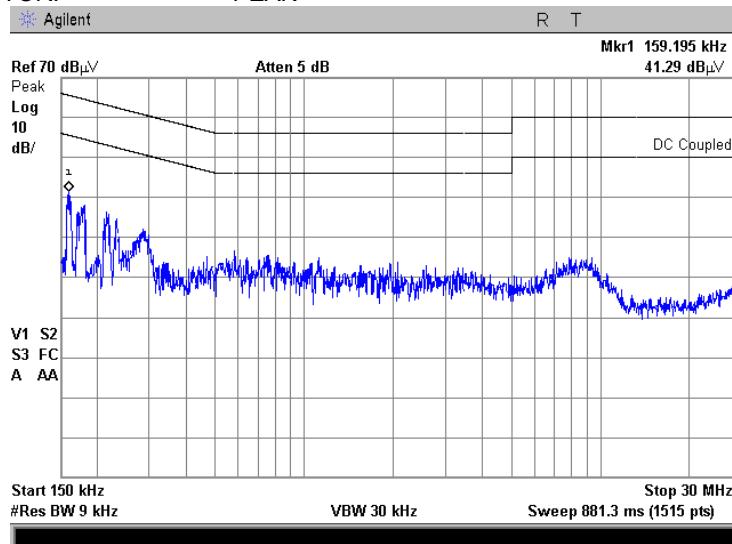

Plot 7.9.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit
LIMIT: QUASI-PEAK, AVERAGE
DETECTOR: PEAK

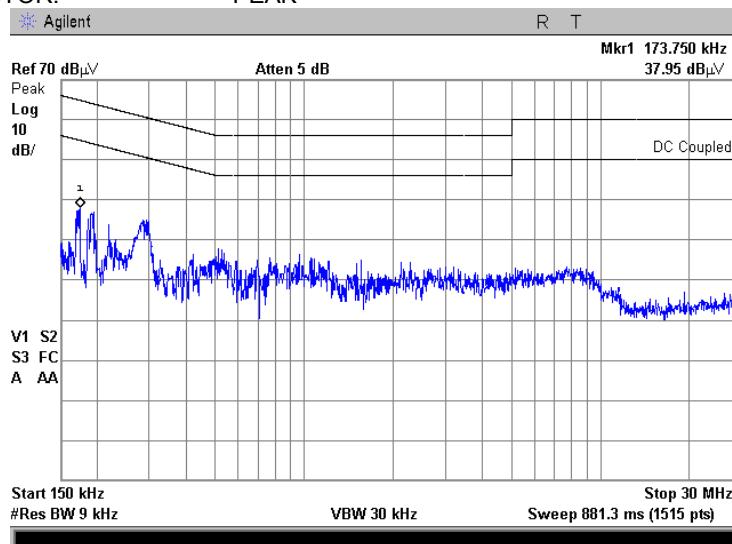



HERMON LABORATORIES

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	03-Jul-12	03-Jul-14
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH + 5 Ohm, STD CISPR 16-1	Hermon Laboratories	LISN 16 - 1	066	23-Oct-13	23-Oct-14
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	28-Oct-13	28-Oct-14
0604	Antenna BiconiLog Log-Periodic/T Bow-TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	04-Jun-13	04-Jun-14
0787	Transient Limiter 9 kHz-200 MHz	Hewlett Packard	11947A	3107A018 77	13-Oct-13	13-Oct-14
1424	Spectrum Analyzer, 30 Hz- 40 GHz	Agilent Technologies	8564EC	3946A002 19	10-Oct-13	10-Oct-14
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	25-Oct-13	25-Dec-14
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	05-Nov-13	05-Nov-14
1984	Antenna, Double-Ridged Waveguide Horn, 1-18 GHz, 300 W	EMC Test Systems	3115	9911-5964	03-Jan-14	03-Jan-15
2780	EMC analyzer, 100 Hz to 26.5 GHz	Agilent Technologies	E7405A	MY451024 62	10-Jul-13	10-Jul-14
2871	Microwave Cable Assembly, 18 GHz, 6.4 m, SMA - SMA	Huber-Suhner	198-8155-00	2871	04-Dec-13	04-Dec-14
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	23-Dec-13	23-Dec-14
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	05-Dec-13	05-Dec-14
3818	PSA Series Spectrum Analyzer, 3 Hz- 44 GHz	Agilent Technologies	E4446A	MY482502 88	24-Apr-13	24-Apr-14
4135	Shield Box	TESCOM CO., LTD	TC-5916A	5916A000 136	09-Apr-13	09-Apr-14
4160	Preamplifier, 0.1 to 18 GHz, Gain 25 dB, N-type(f) in, N-type(m) out.	Agilent Technologies	87405C	MY470105 94	11-Aug-13	11-Aug-14
4274	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT-SMNM+	70047	27-Nov-13	27-Nov-14
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29-N1N1-244	12025101 003	06-Mar-13	06-Mar-14



HERMON LABORATORIES

9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions (file numbers IC 2186A-1 for OATS, IC 2186A-2 for anechoic chamber, IC 2186A-3 for full-anechoic chamber for RE measurements above 1 GHz), certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, G-27 for full-anechoic chamber for RE measurements above 1 GHz, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is US1003.

Address: P.O. Box 23, Binyamina 30500, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2012	Radio Frequency Devices
Public notice DA 00- 705: 2000	Filing and measurement guidelines for frequency hopping spread spectrum systems.
ANSI C63.2: 1996	American National Standard for Instrumentation-Electromagnetic Noise and Field Strength, 10 kHz to 40 GHz-Specifications
ANSI C63.4: 2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
RSS-210 Issue 8: 2010	Low Power Licence- Exempt Radiocommunication Devices
RSS-Gen Issue 3: 2010	General Requirements and Information for the Certification of Radiocommunication Equipment



HERMON LABORATORIES

12 APPENDIX E Test equipment correction factors

Correction factor
Line impedance stabilization network
Model LISN 16 - 1
Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.



HERMON LABORATORIES

**Antenna factor
Active loop antenna
Model 6502, S/N 2857, HL 0446**

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

**Antenna factor
Biconilog antenna EMCO Model 3141
Ser.No.1011, HL 0604**

Frequency, MHz	Antenna Factor, dB(1/m)	Frequency, MHz	Antenna Factor, dB(1/m)
26	7.8	940	24.0
28	7.8	960	24.1
30	7.8	980	24.5
40	7.2	1000	24.9
60	7.1	1020	25.0
70	8.5	1040	25.2
80	9.4	1060	25.4
90	9.8	1080	25.6
100	9.7	1100	25.7
110	9.3	1120	26.0
120	8.8	1140	26.4
130	8.7	1160	27.0
140	9.2	1180	27.0
150	9.8	1200	26.7
160	10.2	1220	26.5
170	10.4	1240	26.5
180	10.4	1260	26.5
190	10.3	1280	26.6
200	10.6	1300	27.0
220	11.6	1320	27.8
240	12.4	1340	28.3
260	12.8	1360	28.2
280	13.7	1380	27.9
300	14.7	1400	27.9
320	15.2	1420	27.9
340	15.4	1440	27.8
360	16.1	1460	27.8
380	16.4	1480	28.0
400	16.6	1500	28.5
420	16.7	1520	28.9
440	17.0	1540	29.6
460	17.7	1560	29.8
480	18.1	1580	29.6
500	18.5	1600	29.5
520	19.1	1620	29.3
540	19.5	1640	29.2
560	19.8	1660	29.4
580	20.6	1680	29.6
600	21.3	1700	29.8
620	21.5	1720	30.3
640	21.2	1740	30.8
660	21.4	1760	31.1
680	21.9	1780	31.0
700	22.2	1800	30.9
720	22.2	1820	30.7
740	22.1	1840	30.6
760	22.3	1860	30.6
780	22.6	1880	30.6
800	22.7	1900	30.6
820	22.9	1920	30.7
840	23.1	1940	30.9
860	23.4	1960	31.2
880	23.8	1980	31.6
900	24.1	2000	32.0
920	24.1		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Antenna factor
Double-ridged wave guide horn antenna
Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).



HERMON LABORATORIES

Cable loss
**Cable coaxial, Huber-Suhner, 18 GHz, 6.4 m, SMA - SMA, model 198-8155-00,
HL 2871**

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.12	5750	2.34	12000	3.55
30	0.14	6000	2.39	12250	3.61
100	0.27	6250	2.46	12500	3.67
250	0.45	6500	2.52	12750	3.74
500	0.63	6750	2.58	13000	3.79
750	0.76	7000	2.64	13250	3.82
1000	0.89	7250	2.68	13500	3.83
1250	1.01	7500	2.73	13750	3.83
1500	1.12	7750	2.78	14000	3.88
1750	1.23	8000	2.83	14250	3.93
2000	1.32	8250	2.88	14500	3.96
2250	1.41	8500	2.94	14750	4.01
2500	1.49	8750	2.97	15000	4.00
2750	1.58	9000	3.02	15250	4.01
3000	1.66	9250	3.07	15500	4.00
3250	1.73	9500	3.13	15750	4.13
3500	1.80	9750	3.18	16000	4.22
3750	1.87	10000	3.21	16250	4.29
4000	1.93	10250	3.26	16500	4.29
4250	2.01	10500	3.30	16750	4.32
4500	2.06	10750	3.36	17000	4.37
4750	2.12	11000	3.39	17250	4.45
5000	2.17	11250	3.44	17500	4.49
5250	2.24	11500	3.48	17750	4.53
5500	2.29	11750	3.52	18000	4.55



HERMON LABORATORIES

Cable loss
Cable coaxial, RG-214/U, N type-N type, 17 m
Teldor, HL 3612

Frequency, MHz	Cable loss, dB
0.1	0.05
0.5	0.07
1	0.10
3	0.22
5	0.29
10	0.39
30	0.68
50	0.90
100	1.27
150	1.58
200	1.80
250	2.12
300	2.36
350	2.60
400	2.82
450	2.99
500	3.23
550	3.40
600	3.56
650	3.71
700	3.90
750	4.04
800	4.23
850	4.39
900	4.55
950	4.65
1000	4.79



HERMON LABORATORIES

Cable loss
Test cable, Mini-Circuits, S/N 70047, 18 GHz, 1.8 m, SMA/M - N/M
CBL-6FT-SMNM+, HL 4274

Frequency, MHz	Cable loss, dB						
10	0.07	4800	1.69	9800	2.62	14800	3.42
30	0.11	4900	1.70	9900	2.63	14900	3.39
50	0.14	5000	1.72	10000	2.64	15000	3.38
100	0.21	5100	1.75	10100	2.64	15100	3.40
200	0.26	5200	1.76	10200	2.66	15200	3.41
300	0.30	5300	1.77	10300	2.67	15300	3.40
400	0.37	5400	1.79	10400	2.68	15400	3.39
500	0.44	5500	1.82	10500	2.68	15500	3.41
600	0.49	5600	1.85	10600	2.70	15600	3.44
700	0.54	5700	1.86	10700	2.71	15700	3.46
800	0.58	5800	1.87	10800	2.73	15800	3.45
900	0.63	5900	1.91	10900	2.74	15900	3.47
1000	0.67	6000	1.94	11000	2.76	16000	3.51
1100	0.71	6100	1.97	11100	2.77	16100	3.56
1200	0.75	6200	1.98	11200	2.78	16200	3.55
1300	0.78	6300	1.99	11300	2.79	16300	3.54
1400	0.81	6400	2.02	11400	2.80	16400	3.57
1500	0.85	6500	2.05	11500	2.82	16500	3.62
1600	0.88	6600	2.06	11600	2.83	16600	3.61
1700	0.91	6700	2.06	11700	2.84	16700	3.60
1800	0.94	6800	2.08	11800	2.85	16800	3.62
1900	0.97	6900	2.10	11900	2.87	16900	3.68
2000	1.00	7000	2.12	12000	2.88	17000	3.70
2100	1.03	7100	2.12	12100	2.89	17100	3.68
2200	1.06	7200	2.13	12200	2.90	17200	3.70
2300	1.08	7300	2.16	12300	2.92	17300	3.80
2400	1.11	7400	2.19	12400	2.94	17400	3.84
2500	1.14	7500	2.22	12500	2.95	17500	3.83
2600	1.16	7600	2.23	12600	2.96	17600	3.83
2700	1.19	7700	2.26	12700	2.98	17700	3.86
2800	1.21	7800	2.30	12800	3.00	17800	3.86
2900	1.27	7900	2.33	12900	3.02	17900	3.80
3000	1.29	8000	2.35	13000	3.03	18000	3.79
3100	1.32	8100	2.37	13100	3.06		
3200	1.35	8200	2.41	13200	3.08		
3300	1.37	8300	2.44	13300	3.09		
3400	1.38	8400	2.47	13400	3.10		
3500	1.41	8500	2.48	13500	3.13		
3600	1.43	8600	2.51	13600	3.17		
3700	1.46	8700	2.53	13700	3.17		
3800	1.47	8800	2.55	13800	3.18		
3900	1.49	8900	2.56	13900	3.22		
4000	1.52	9000	2.57	14000	3.26		
4100	1.55	9100	2.58	14100	3.28		
4200	1.56	9200	2.59	14200	3.30		
4300	1.58	9300	2.59	14300	3.35		
4400	1.60	9400	2.60	14400	3.39		
4500	1.63	9500	2.60	14500	3.39		
4600	1.65	9600	2.61	14600	3.39		
4700	1.67	9700	2.61	14700	3.41		



HERMON LABORATORIES

Cable loss
Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M,
NC29-N1N1-244S/N 12025101 003,
HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		



HERMON LABORATORIES

13 APPENDIX F Abbreviations and acronyms

A	ampere
AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EIRP	equivalent isotropically radiated power
ERP	effective radiated power
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
NB	narrow band
OATS	open area test site
Ω	Ohm
PM	pulse modulation
PS	power supply
ppm	part per million (10^{-6})
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt
WB	wideband

END OF DOCUMENT