

# Test report

# 295231-1TRFWL

Date of issue: December 14, 2015

Applicant:

Visonic Ltd.

Product:

Wireless Door/Window Contact

Model:

MCT-350 SMA and XHS2-TY

FCC ID: IC Registration number:

WP3MCT350SMA5 1467C-MCT350SMA

### Specifications:

FCC 47 CFR Part 15 Subpart C, §15.247

Operation in the 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz

RSS-247, Issue 1, May 2015, Section 5

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices



### Test location

| Company name | Nemko Canada Inc.                                    |
|--------------|--|
| Address      | 303 River Road                                       |
| City         | Ottawa   |
| Province     | Ontario  |
| Postal code  | K1V 1H2  |
| Country      | Canada   |
| Telephone    | +1 613 737 9680                                      |
| Facsimile    | +1 613 737 9691                                      |
| Toll free    | +1 800 563 6336                                      |
| Website      | www.nemko.com  |
| Site number  | FCC: 176392; IC: 2040A-4 (3 m semi anechoic chamber) |

| Tested by          | Kevin Rose, Wireless/EMC Specialist             |
|--------------------|---|
| Reviewed by        | Andrey Adelberg, Senior Wireless/EMC Specialist |
| Review date        | December 14, 2015                               |
| Reviewer signature |   |

### Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

### Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.



# Table of contents

| Table of  | contents   | 3  |
|-----------|--|----|
| Section 1 | I. Report summary  | 4  |
| 1.1       | Applicant and manufacturer   | 4  |
| 1.2       | Test specifications  | 4  |
| 1.3       | Test methods   | 4  |
| 1.4       | Statement of compliance  | 4  |
| 1.5       | Exclusions   | 4  |
| 1.6       | Test report revision history   | 4  |
| Section 2 | 2. Summary of test results   | 5  |
| 2.1       | FCC Part 15 Subpart C, general requirements test results   | 5  |
| 2.2       | FCC Part 15 Subpart C, intentional radiators test results  | 5  |
| 2.3       | IC RSS-GEN, Issue 4, test results  | 5  |
| 2.4       | IC RSS-247, Issue 1, test results  | 6  |
| Section 3 | 3. Equipment under test (EUT) details  | 7  |
| 3.1       | Sample information   | 7  |
| 3.2       | EUT information  | 7  |
| 3.3       | Technical information  | 7  |
| 3.4       | Product description and theory of operation  | 8  |
| 3.5       | EUT exercise details   | 8  |
| 3.6       | EUT setup diagram  | 8  |
| Section 4 | 4. Engineering considerations  | 9  |
| 4.1       | Modifications incorporated in the EUT  | 9  |
| 4.2       | Technical judgment   | 9  |
| 4.3       | Deviations from laboratory tests procedures  | 9  |
| Section 5 | 5. Test conditions   | 10 |
| 5.1       | Atmospheric conditions   | 10 |
| 5.2       | Power supply range   | 10 |
| Section 6 | 6. Measurement uncertainty   | 11 |
| 6.1       | Uncertainty of measurement   | 11 |
| Section 7 | 7. Test equipment  | 12 |
| 7.1       | Test equipment list  | 12 |
| Section 8 | B. Testing data  | 13 |
| 8.1       | FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques | 13 |
| 8.2       | FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements                       | 15 |
| 8.3       | FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions   | 17 |
| 8.4       | FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices                    |    |
| Section 9 | 9. Block diagrams of test set-ups  | 23 |
| 9.1       | Radiated emissions set-up for frequencies below 1 GHz.   | 23 |
| 9.2       | Radiated emissions set-up for frequencies above 1 GHz  | 24 |



# Section 1. Report summary

# 1.1 Applicant and manufacturer

| Company name    | Visonic Ltd.       |
|-----------------|--------------------|
| Address         | Habarzel Street 24 |
| City            | Tel Aviv           |
| Province/State  |                    |
| Postal/Zip code | 61920              |
| Country         | Israel             |

# 1.2 Test specifications

| FCC 47 CFR Part 15, Subpart C, Clause 15.247 | Operation in the 902–928 MHz, 2400–2483.5 MHz  |
|--|--|
| RSS-247, Issue 1, May 2015, Section 5        | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |

# 1.3 Test methods

| 558074 D01 DTS Meas Guidance v03r03 | Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under |
|-------------------------------------|---|
| (June 9, 2015)                      | §15.247   |
| ANSI C63.10 v2013                   | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices        |

# 1.4 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

# 1.5 Exclusions

None

# 1.6 Test report revision history

| Revision # | Details of changes made to test report |
|------------|--|
| TRF        | Original report issued                 |



# Section 2. Summary of test results

# 2.1 FCC Part 15 Subpart C, general requirements test results

| Part       | Test description          | Verdict                     |
|------------|---------------------------|-----------------------------|
| §15.207(a) | Conducted limits          | Not applicable              |
| §15.31(e)  | Variation of power source | Not applicable <sup>1</sup> |
| §15.203    | Antenna requirement       | Pass <sup>2</sup>           |

Notes: <sup>1</sup> Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with a fully charged battery

## 2.2 FCC Part 15 Subpart C, intentional radiators test results

| Part               | Test description   | Verdict        |
|--------------------|--|----------------|
| §15.247(a)(1)(i)   | Frequency hopping systems operating in the 902–928 MHz band  | Not applicable |
| §15.247(a)(1)(ii)  | Frequency hopping systems operating in the 5725–5850 MHz band  | Not applicable |
| §15.247(a)(1)(iii) | Frequency hopping systems operating in the 2400–2483.5 MHz band  | Not applicable |
| §15.247(a)(2)      | Minimum 6 dB bandwidth for systems using digital modulation techniques   | Pass           |
| §15.247(b)(1)      | Maximum peak output power of frequency hopping systems operating in the 2400–2483.5 MHz band and 5725–5850 MHz band        | Not applicable |
| §15.247(b)(2)      | Maximum peak output power of Frequency hopping systems operating in the 902–928 MHz band                                   | Not applicable |
| §15.247(b)(3)      | Maximum peak output power of systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands | Pass           |
| §15.247(c)(1)      | Fixed point-to-point operation with directional antenna gains greater than 6 dBi   | Not applicable |
| §15.247(c)(2)      | Transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams                                    | Not applicable |
| §15.247(d)         | Spurious emissions   | Pass           |
| §15.247(e)         | Power spectral density for digitally modulated devices   | Pass           |
| §15.247(f)         | Time of occupancy for hybrid systems   | Not applicable |

# 2.3 IC RSS-GEN, Issue 4, test results

| Part  | Test description   | Verdict        |
|-------|--|----------------|
| 7.1.2 | Receiver radiated emission limits  | Not applicable |
| 7.1.3 | Receiver conducted emission limits                                       | Not applicable |
| 8.8   | Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus | Not applicable |

Notes: <sup>1</sup>According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

The EUT is Battery powered.

<sup>&</sup>lt;sup>2</sup> The Antennas are located within the enclosure of EUT and not user accessible.



# 2.4 IC RSS-247, Issue 1, test results

| Part    | Test description   | Verdict        |
|---------|--|----------------|
| 5.1     | Frequency Hopping Systems (FHSs)   |                |
| 5.1 (1) | Bandwidth of a frequency hopping channel   | Not applicable |
| 5.1 (2) | Minimum channel spacing for frequency hopping systems                                  | Not applicable |
| 5.1 (3) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable |
| 5.1 (4) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not applicable |
| 5.1 (5) | Frequency hopping systems operating in the 5725–5850 MHz band                          | Not applicable |
| 5.2     | Digital Transmission Systems (DTSs)  |                |
| 5.2 (1) | Minimum 6 dB bandwidth   | Pass           |
| 5.2 (2) | Maximum power spectral density   | Pass           |
| 5.3     | Hybrid Systems   |                |
| 5.3 (1) | Digital modulation turned off  | Not applicable |
| 5.3 (2) | Frequency hopping turned off   | Not applicable |
| 5.4     | Transmitter output power and e.i.r.p. requirements                                     |                |
| 5.4 (1) | Frequency hopping systems operating in the 902–928 MHz band                            | Not applicable |
| 5.4 (2) | Frequency hopping systems operating in the 2400–2483.5 MHz band                        | Not applicable |
| 5.4 (3) | Frequency hopping systems operating in the 5725–5850 MHz                               | Not applicable |
| 5.4 (4) | Systems employing digital modulation techniques  | Pass           |
| 5.4 (5) | Point-to-point systems in 2400–2483.5 MHz and 5725–5850 MHz band                       | Not applicable |
| 5.4 (6) | Transmitters which operate in the 2400–2483.5 MHz band with multiple directional beams | Not applicable |
| 5.5     | Out-of-band emissions  | Pass           |

Notes: None



# Section 3. Equipment under test (EUT) details

# 3.1 Sample information

| Receipt date           | October 21, 2015 |
|------------------------|------------------|
| Nemko sample ID number | 133-001906       |

# 3.2 EUT information

| Product name  | Wireless Door/Window Contact |
|---------------|------------------------------|
| Model         | MCT-350 SMA and XHS2-TY      |
| Model variant | -                            |
| Serial number | -                            |

# 3.3 Technical information

| Applicant IC company number             | 1467C   |
|---|---|
| IC UPN number                           | 1467C-MCT350SMA5  |
| All used IC test site(s) Reg. number    | 2040A-4   |
| RSS number and Issue number             | RSS-247 Issue 1, May 2015   |
| Frequency band                          | 2400–2483.5 MHz   |
| Frequency Min (MHz)                     | 2405  |
| Frequency Max (MHz)                     | 2480  |
| RF power Min (W), Conducted             | N/A   |
| RF power Max (W), Conducted             | 0.0067  |
| Field strength, Units @ distance        | N/A   |
| Measured BW (kHz) (6 dB)                | 1740  |
| Calculated BW (kHz), as per TRC-43      | N/A   |
| Type of modulation                      | GFSK  |
| Emission classification (F1D, G1D, D1D) | W7D   |
| Transmitter spurious, Units @ distance  | 53.16 dBμV/m peak @ 2.4835 GHz @ 3 m  |
| Power requirements                      | CR2450 3Vdc Battery   |
| Antenna information                     | Internal PWB antenna Gain 1 dBi   |
|   | The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator. |



# 3.4 Product description and theory of operation

Door/Window sensors are designed to secure the perimeter of the residential premise, and provide the ability to add various automation services. The Door/Window sensor, which consists of a magnet that attaches to a door or window, will communicate door events to the home security system. When the magnet is moved away from the sensor, a signal will be sent to the control panel that communicates the changed state to the security system. Signals can also be used to activate a chime or convenience lighting based on system settings.

# 3.5 EUT exercise details

The EUT was modified to Transmit Low, Middle, and High Channels

# 3.6 EUT setup diagram

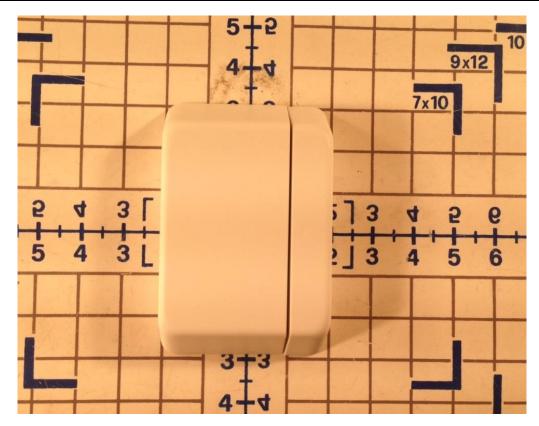


Figure 3.6-1: Setup diagram



# **Section 4.** Engineering considerations

# 4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

# 4.2 Technical judgment

None

# 4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.



# **Section 5.** Test conditions

# 5.1 Atmospheric conditions

| Temperature       | 15–30 °C      |
|-------------------|---------------|
| Relative humidity | 20–75 %       |
| Air pressure      | 860–1060 mbar |

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

# 5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages ±5 %, for which the equipment was designed.



# Section 6. Measurement uncertainty

# 6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of K = 2 with 95% certainty.

| Test name                         | Measurement uncertainty, dB |  |
|-----------------------------------|-----------------------------|--|
| All antenna port measurements     | 0.55                        |  |
| Conducted spurious emissions      | 1.13                        |  |
| Radiated spurious emissions       | 3.78                        |  |
| AC power line conducted emissions | 3.55                        |  |



# **Section 7.** Test equipment

# 7.1 Test equipment list

Table 7.1-1: Equipment list

| Equipment                  | Manufacturer    | Model no.    | Asset no. | Cal cycle | Next cal.    |
|----------------------------|-----------------|--------------|-----------|-----------|--------------|
| 3 m EMI test chamber       | TDK             | SAC-3        | FA002047  | 1 year    | Feb. 25/16   |
| Flush mount turntable      | Sunol           | FM2022       | FA002082  | _         | NCR          |
| Controller                 | Sunol           | SC104V       | FA002060  | _         | NCR          |
| Antenna mast               | Sunol           | TLT2         | FA002061  | _         | NCR          |
| Pre-amplifier (1–18 GHz)   | JCA             | JCA118-503   | FA002091  | 1 year    | May 05/16    |
| Pre-amplifier (18–26 GHz)  | Narda           | BBS-1826N612 | FA001550  | _         | VOU          |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESU 26       | FA002043  | 1 year    | Jan. 07/16   |
| Receiver/spectrum analyzer | Rohde & Schwarz | ESU 40       | FA002071  | 1 year    | April. 06/16 |
| Horn antenna (1–18 GHz)    | EMCO            | 3115         | FA000825  | 1 year    | Apr. 01/16   |
| Horn antenna (18–40 GHz)   | EMCO            | 3116         | FA001847  | 1 year    | Jan. 09/16   |
| Horn antenna (18–40 GHz)   | EMCO            | 3116         | FA001847  | 1 year    | Jan. 09/16   |

Note: NCR - no calibration required, VOU - verify on use

Section 8 Testing data

Test name FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital

modulation techniques

**Specification** FCC Part 15 Subpart C and RSS-247, Issue 1



# Section 8. Testing data

# 8.1 FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital modulation techniques

### 8.1.1 Definitions and limits

### FCC and IC:

- Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:
  - (2) Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.1.2 Test summary

| Test date     | October 22, 2015 | Temperature       | 22 °C     |
|---------------|------------------|-------------------|-----------|
| Test engineer | Kevin Rose       | Air pressure      | 1003 mbar |
| Test location | Ottawa           | Relative humidity | 34 %      |

### 8.1.3 Observations, settings and special notes

## Spectrum analyser settings:

| Resolution bandwidth | 1–5 % of DTS BW (no wider than 100 kHz) |
|----------------------|---|
| Video bandwidth      | ≥3 × RBW                                |
| Frequency span       | 1.5 × DTS                               |
| Detector mode        | Peak                                    |
| Trace mode           | Max Hold                                |

### 8.1.4 Test data

## Table 8.1-1: 6 dB bandwidth results

| Frequency, MHz | 6 dB bandwidth, MHz | Minimum limit, MHz | Margin, MHz |
|----------------|---------------------|--------------------|-------------|
| 2405           | 1.60                | 0.5                | 1.10        |
| 2445           | 1.72                | 0.5                | 1.22        |
| 2475           | 1.74                | 0.5                | 1.24        |
| 2480           | 1.57                | 0.5                | 1.13        |

Section 8

Testing data


Test name
Specification

FCC 15.247(a)(2) and RSS-247 5.2(1) Minimum 6 dB bandwidth for systems using digital

modulation techniques

FCC Part 15 Subpart C and RSS-247, Issue 1



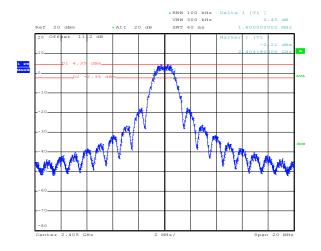

Date: 21.0CT.2015 17:21:21

Figure 8.1-1: 6 dB bandwidth, sample plot

FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

FCC Part 15 Subpart C and RSS-247, Issue 1



# 8.2 FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements

### 8.2.1 Definitions and limits

### FCC:

- (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
  - (3) For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 W (30 dBm). As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
  - (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
    - (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Fixed, point-to-point operation, as used in paragraphs (b)(3)(i) and (b)(3)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

- (c) Operation with directional antenna gains greater than 6 dBi.
  - (2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400–2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
    - (i) Different information must be transmitted to each receiver.
    - (ii) If the transmitter employs an antenna system that emits multiple directional beams but does not do emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:
      - (A) The directional gain shall be calculated as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

# IC:

For DTSs employing digital modulation techniques operating in the bands 902–928 MHz and 2400–2483.5 MHz, the maximum peak conducted output power shall not exceed 1W. Except as provided in Section 5.4(5), the e.i.r.p. shall not exceed 4 W.

Fixed point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding an e.i.r.p. of 4 W.

### 8.2.2 Test summary

| Test date     | October 22, 2015 | Temperature       | 22 °C     |
|---------------|------------------|-------------------|-----------|
| Test engineer | Kevin Rose       | Air pressure      | 1003 mbar |
| Test location | Ottawa           | Relative humidity | 34 %      |

Section 8 Testing data

Test name FCC 15.247(b) and RSS-247 5.4 (4) Transmitter output power and e.i.r.p. requirements Specification





#### 8.2.3 Observations, settings and special notes

558074 D01 DTS Meas Guidance v03r03 (June 9, 2015) Section 9.1 Maximum peak conducted output power

#### 8.2.4 Test data

**Table 8.2-1:** Output power measurements results

| Frequency, | Conducted out | out power, dBm | Mossis dB  | Antenna gain, | EIRP, | EIRP limit, | CIDD magnetin dD |
|------------|---------------|----------------|------------|---------------|-------|-------------|------------------|
| MHz        | Measured      | Limit          | Margin, dB | dBi           | dBm   | dBm         | EIRP margin, dB  |
| 2405       | 8.15          | 30             | 21.85      | 1             | 9.15  | 36          | 26.85            |
| 2445       | 8.25          | 30             | 21.75      | 1             | 9.25  | 36          | 26.75            |
| 2475       | 8.19          | 30             | 21.81      | 1             | 9.19  | 36          | 26.81            |
| 2480       | 8.18          | 30             | 21.82      | 1             | 9.18  | 36          | 26.82            |



# 8.3 FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions

### 8.3.1 Definitions and limits

### FCC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### IC:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Table 8.3-1: FCC §15.209 and RSS-Gen – Radiated emission limits

| Frequency,  | Frequency, Field strength of emissions |                                 | Measurement distance, m |
|-------------|--|---------------------------------|-------------------------|
| MHz         | μV/m                                   | dBμV/m                          |                         |
| 0.009-0.490 | 2400/F                                 | $67.6 - 20 \times \log_{10}(F)$ | 300                     |
| 0.490-1.705 | 24000/F                                | $87.6 - 20 \times \log_{10}(F)$ | 30                      |
| 1.705-30.0  | 30                                     | 29.5                            | 30                      |
| 30–88       | 100                                    | 40.0                            | 3                       |
| 88–216      | 150                                    | 43.5                            | 3                       |
| 216–960     | 200                                    | 46.0                            | 3                       |
| above 960   | 500                                    | 54.0                            | 3                       |

Notes: In the emission table above, the tighter limit applies at the band edges.

For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.3-2: IC restricted frequency bands

| MHz             | MHz                 | MHz           | GHz         |
|-----------------|---------------------|---------------|-------------|
| 0.090-0.110     | 12.51975-12.52025   | 399.9–410     | 5.35-5.46   |
| 2.1735–2.1905   | 12.57675-12.57725   | 608-614       | 7.25–7.75   |
| 3.020-3.026     | 13.36-13.41         | 960–1427      | 8.025-8.5   |
| 4.125-4.128     | 16.42-16.423        | 1435-1626.5   | 9.0-9.2     |
| 4.17725-4.17775 | 16.69475-16.69525   | 1645.5-1646.5 | 9.3–9.5     |
| 4.20725-4.20775 | 16.80425-16.80475   | 1660-1710     | 10.6-12.7   |
| 5.677-5.683     | 25.5–25.67          | 1718.8-1722.2 | 13.25–13.4  |
| 6.215-6.218     | 37.5-38.25          | 2200-2300     | 14.47-14.5  |
| 6.26775-6.26825 | 73–74.6             | 2310–2390     | 15.35–16.2  |
| 6.31175-6.31225 | 74.8–75.2           | 2655-2900     | 17.7-21.4   |
| 8.291-8.294     | 108-138             | 3260–3267     | 22.01–23.12 |
| 8.362-8.366     | 156.52475-156.52525 | 3332–3339     | 23.6-24.0   |
| 8.37625-8.38675 | 156.7–156.9         | 3345.8–3358   | 31.2-31.8   |
| 8.41425-8.41475 | 240–285             | 3500-4400     | 36.43-36.5  |
| 12.29–12.293    | 322–335.4           | 4500–5150     | Above 38.6  |

Note: Certain frequency bands listed in Table 8.3-2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard

FCC Part 15 Subpart C and RSS-247, Issue 1



**Table 8.3-3:** FCC restricted frequency bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9–410     | 4.5–5.15    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25–7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5–38.25          | 1435–1626.5   | 9.0–9.2     |
| 4.20725-4.20775   | 73–74.6             | 1645.5-1646.5 | 9.3–9.5     |
| 6.215-6.218       | 74.8–75.2           | 1660–1710     | 10.6–12.7   |
| 6.26775-6.26825   | 108-121.94          | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 123–138             | 2200–2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9–150.05        | 2310–2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5–2500   | 17.7–21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690–2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260–3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240–285             | 3345.8–3358   | 36.43–36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | Above 38.6  |
| 13.36–13.41       |                     |               |             |

# 8.3.2 Test summary

| Test date     | October 22, 2015 | Temperature       | 22 °C     |
|---------------|------------------|-------------------|-----------|
| Test engineer | Kevin Rose       | Air pressure      | 1003 mbar |
| Test location | Ottawa           | Relative humidity | 34 %      |

## 8.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic.

EUT was set to transmit with 100 % duty cycle.

Spectrum analyser settings for radiated measurements within restricted bands below 1 GHz:

| Resolution bandwidth: | 100 kHz  |
|-----------------------|----------|
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Spectrum analyser settings for peak radiated measurements within restricted bands above 1 GHz:

| Resolution bandwidth: | 1 MHz    |
|-----------------------|----------|
| Video bandwidth:      | 3 MHz    |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

Section 8 Testing data

Test name FCC 15.247(d) and RSS-247 5.5 Spurious (out-of-band) emissions

**Specification** FCC Part 15 Subpart C and RSS-247, Issue 1



Spectrum analyser settings for conducted spurious emissions measurements:

| Resolution bandwidth: | 100 kHz  |
|-----------------------|----------|
| Video bandwidth:      | 300 kHz  |
| Detector mode:        | Peak     |
| Trace mode:           | Max Hold |

### 8.3.4 Test data

Table 8.3-4: Radiated field strength measurement results

| Channel Frequency, | Peak Field strength, dBμV/m |          | Margin, | Duty Cycle Correction, | Average Field strength,<br>dΒμV/m |            | Margin, |       |
|--------------------|-----------------------------|----------|---------|------------------------|-----------------------------------|------------|---------|-------|
|                    | MHz                         | Measured | Limit   | dB                     | QB "                              | Calculated | Limit   | dB    |
| Low                | 2390                        | 61.71    | 74      | 12.29                  | 13.34                             | 48.37      | 54      | 5.63  |
| Low                | 2334.2                      | 54.04    | 74      | 19.96                  | 13.34                             | 40.70      | 54      | 13.3  |
| Mid                | 2377.3                      | 60.36    | 74      | 13.64                  | 13.34                             | 47.02      | 54      | 6.98  |
| High               | 2544.2                      | 52.04    | 74      | 21.96                  | 13.34                             | 38.70      | 54      | 15.3  |
| Low                | 4810                        | 56.50    | 74      | 17.50                  | 13.34                             | 43.16      | 54      | 10.84 |
| Mid                | 7215                        | 57.41    | 74      | 16.59                  | 13.34                             | 44.07      | 54      | 9.93  |
| High - 5 MHz       | 2483.5                      | 59.13    | 74      | 14.87                  | 13.34                             | 45.79      | 54      | 8.21  |
| High               | 2483.5                      | 66.50    | 74      | 7.50                   | 13.34                             | 53.16      | 54      | 1.84  |

Notes: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable.

Duty cycle / average factor =  $20 \times \log_{10} \left( \frac{Tx_{100ms}}{100ms} \right)$ 

# Customer provided Information:

Check-in message (1.958 ms x 11 pulses Tx time in 100 ms). Calculation: AF= $20 \times \log (Tx(ms)/100 ms) = 20 \times \log (10.2 / 100) = -13.34 dB$ 



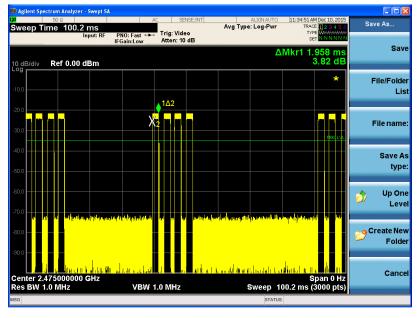


Figure 8.3-1: Duty cycle plot





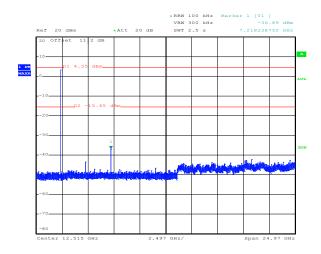


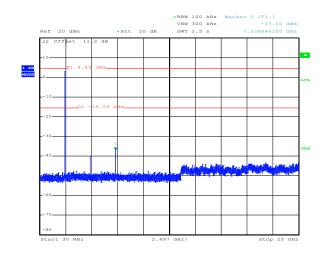

Date: 21.OCT.2015 17:20:11 Date: 21.OCT.2015 17:26:15

Figure 8.3-2: Conducted spurious emissions for Low channel

Figure 8.3-3: Conducted spurious emissions for Mid channel

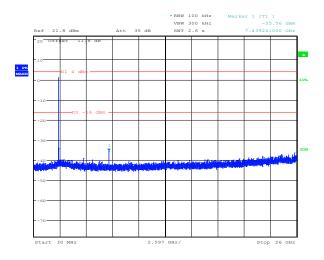

Date: 24.NOV.2015 16:29:24

Figure 8.3-4: Conducted spurious emissions for High channel

Testing data

Test name Specification FCC Clause 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices  $\frac{15.247}{6}$ 

FCC Part 15 Subpart C and RSS-247, Issue 1



# 8.4 FCC 15.247(e) and RSS-247 5.2(2) Power spectral density for digitally modulated devices

### 8.4.1 Definitions and limits

### FCC:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### IC:

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### 8.4.2 Test summary

| Test date     | October 22, 2015 | Temperature       | 22 °C     |
|---------------|------------------|-------------------|-----------|
| Test engineer | Kevin Rose       | Air pressure      | 1003 mbar |
| Test location | Ottawa           | Relative humidity | 34 %      |

### 8.4.3 Observations, settings and special notes

558074 D01 DTS Meas Guidance v03r03 (June 9, 2015) Section 10.2 Method PKPSD (peak PSD) Spectrum analyser settings:


| Resolution bandwidth: | 3 kHz                |
|-----------------------|----------------------|
| Video bandwidth:      | 100 kHz              |
| Frequency span:       | 1.5 × DTS channel BW |
| Detector mode:        | Peak                 |
| Trace mode:           | Maxhold              |



# 8.4.4 Test data

Table 8.4-1: PSD measurements results

| Frequency, MHz | PSD, dBm | PSD limit, dBm/3 kHz | Margin, dB |
|----------------|----------|----------------------|------------|
| 2405           | -8.49    | 8                    | 16.49      |
| 2445           | -8.07    | 8                    | 16.07      |
| 2475           | -7.31    | 8                    | 15.31      |
| 2480           | -8.37    | 8                    | 16.37      |

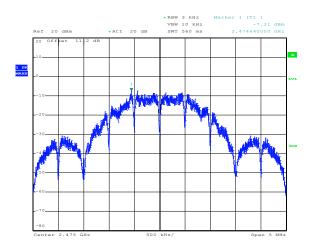


Date: 21.0CT.2015 17:31:46

Figure 8.4-1: PSD sample plot



# Section 9. Block diagrams of test set-ups

# 9.1 Radiated emissions set-up for frequencies below 1 GHz

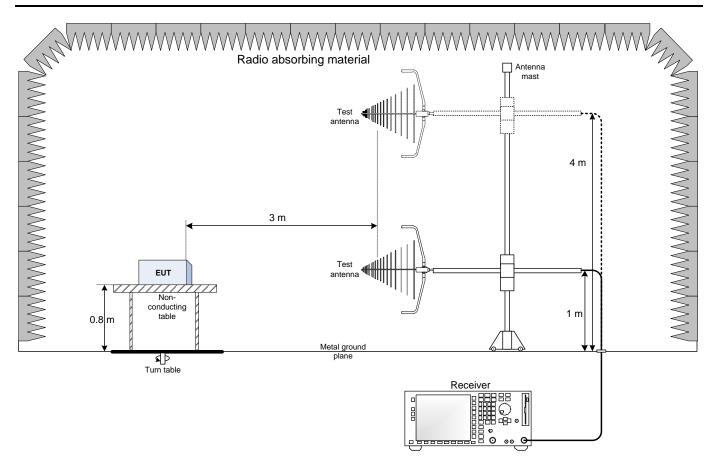



# 9.2 Radiated emissions set-up for frequencies above 1 GHz

