



Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel

Tel. +972-4-6288001 Fax. +972-4-6288277

E-mail: mail@hermonlabs.com

TEST REPORT

ACCORDING TO: FCC 47 CFR PART 15 subpart C, section 15.249; RSS-210 issue 8 Annex 2

FOR:

Visonic Ltd.

Control Panel (Z-wave module)

Model:PM-360

FCC ID:WP3PMASTER360

IC:1467C-PMASTER360

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested. This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.

Report ID: VISRAD_FCC.26893_15.249.docx

Date of Issue: 11-Feb-16



Table of contents

1	Applicant information	(
2	Equipment under test attributes	
3	Manufacturer information	
4	Test details	
5	Tests summary	
6	EUT description	
6.1	General information	
6.2	Ports and lines	
6.3	Test configuration	
6.4	Changes made in the EUT	
6.5	EUT test positions	6
6.6	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 2 requirements	8
7.1	Field strength of emissions	8
7.2	Band edge emission	17
7.3	Conducted emissions	2′
7.4	Antenna requirements	24
7.5	Occupied bandwidth test	25
8	APPENDIX A Test equipment and ancillaries used for tests	29
9	APPENDIX B Measurement uncertainties	30
10	APPENDIX C Test laboratory description	3´
11	APPENDIX D Specification references	3 ²
12	APPENDIX E Test equipment correction factors	32
13	APPENDIX F Abbreviations and acronyms	40



1 Applicant information

Client name: Visonic Ltd.

Address: 24 Habarzel street, Tel Aviv 69710, Israel

 Telephone:
 +972 3645 6832

 Fax:
 +972 3645 6788

 E-mail:
 Visonic Ltd.

Contact name: 24 Habarzel street, Tel Aviv 69710, Israel

2 Equipment under test attributes

Product name: Z-wave module of Control Panel

Product type: Transceiver
Model(s): PM-360
Serial number: 1215140369
Hardware version: 90-207342
Software release: JS-702974
Receipt date 04-May-15

3 Manufacturer information

Manufacturer name: Visonic Ltd.

Address: 24 Habarzel street, Tel Aviv 69710, Israel

 Telephone:
 +972 3645 6832

 Fax:
 +972 3645 6788

 E-Mail:
 Visonic Ltd.

Contact name: 24 Habarzel street, Tel Aviv 69710, Israel

4 Test details

Project ID: 26893

Location: Hermon Laboratories Ltd. Harakevet Industrial Zone, Binyamina 30500, Israel

Test started:04-May-15Test completed:25-Aug-15

Test specification(s): FCC 47 CFR Part 15, subpart C, §15.249; RSS-210 issue 8 Annex 2



5 Tests summary

Test	Status
Transmitter characteristics	
Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions	Pass
Section 15.249(d)/RSS-210, section A2.9, Band edge emissions	Pass
Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission	Pass
Section 15.203/ RSS-Gen, Section 8.3, Antenna requirement	Pass
Section 15.215(c) / RSS-Gen, Section 6.6, Occupied bandwidth	Pass

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. S. Samokha, test engineer Mrs. E. Pitt, test engineer	August 25, 2015	Can
Reviewed by:	Mrs. M. Cherniavsky, certification engineer	October 18, 2015	Chu
Approved by:	Mr. M. Nikishin, EMC and Radio group manager	February 11, 2016	ff



6 EUT description

6.1 General information

The EUT, Control panel PM-360 is a wireless control panel powered via external AC/DC adaptor. The panel comprises four Visonic RF boards with below radio modules:

- 1. PG-2 module- communication within the alarm system in 902- 928 MHz band
- 2. WiFi module- modular approved FCC ID:Z64-WL18SBMOD with Visonic antenna, connected to RF PCB
- a. 802.11b
- b. 802.11g
- c. 802.11n
- 3. Z-wave module with Visonic antenna connected to RF board
- 4. Cellular module UE910NAR modular approved with FCC ID:RI7UE910NA, IC: 5131A-UE910NA used for 3G/2G modes with Visonic antenna connected to RF board.


All radios could operate simalteneously.

The present test report involves the test results for certification of 902 – 928 MHz Z-wave module as a part of a composite application for certification.

6.2 Ports and lines

Port type	Port description	Connected from	Connected to	Qty.	Cable type	Cable length, m
Power	AC power	AC mains	AC/DC adaptor	1	Unshielded	2.0

6.3 Test configuration




6.4 Changes made in the EUT

No changes were implemented in the EUT during the testing.




6.5 EUT test positions



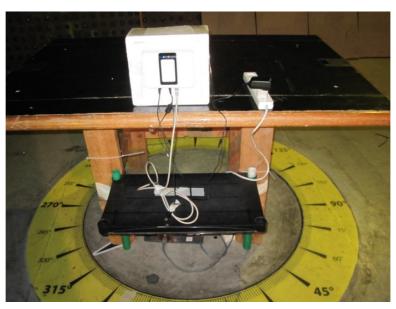

Photograph 6.5.2 EUT in horizontal position

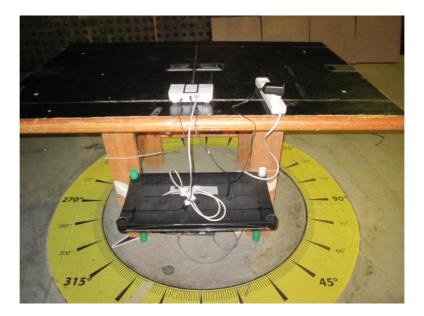



6.6 Transmitter characteristics

	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,					
Type of equipment						
V Stand-alone (Equipment with o						
Combined equipment (Equipme				grated within and	other type of equipment)	
Plug-in card (Equipment intend	ed for a var	iety of host	systems)			
Assigned frequency range	902	– 928 MHz				
Operating frequency range	908.	4 MHz, 916	1 MHz			
Maximum field strength of carrier	Peal	k 92.1 dΒμ\	//m at 3 m d	istance		
	٧	No				
				continuous varia	ble	
Is transmitter output power variable?		Yes		stepped variable	with stepsize	dB
		165	minimum	RF power		dBm
			maximum	RF power		dBm
Antenna connection						
unique coupling	etandard	connector	v	Integral	with temporary	RF connector
unique coupiing	Stariuaru	idald connector		• integral	V without temporary RF connector	
Antenna/s technical characteristics						
Type Ma	nufacturer	cturer		Model number Gain		
	onic		Built-in l	Built-in helical antenna 0 dBi		
Transmitter aggregate data rate/s		40	kbps at 908	.4 MHz; 100 kbps	s at 916 1 MHz	
Type of modulation		2F\$	SK			
Modulating test signal (baseband)		PR	BS			
Transmitter power source						
Battery Nominal rate	d voltage			Battery type		
DC Nominal rate	d voltage					
) VAC		Hz	



Test specification:	Section 15.249(a)(d)/RSS	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions					
Test procedure:	ANSI C63.4, Section 13.1.4						
Test mode:	Compliance	Verdict:	PASS				
Date(s):	11-Jun-15	verdict.	FAGG				
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC				
Remarks:							

7 Transmitter tests according to 47CFR part 15 subpart C and RSS-210 Annex 2 requirements

7.1 Field strength of emissions

7.1.1 General

This test was performed to measure field strength of fundamental and spurious emissions from the EUT. Specification test limits are given in Table 7.1.1, Table 7.1.2 and Table 7.1.3.

Table 7.1.1 Radiated fundamental emission limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)			
Fundamental frequency, MHZ	Peak	Average	Quasi-Peak	
902 – 928	NA	NA	94	

Table 7.1.2 Harmonics limits

Fundamental frequency, MHz	Field strength at 3 m, dB(μV/m)		
	Peak	Average	
902 – 928	74.0	54.0	

Table 7.1.3 Radiated spurious emissions limits (other than harmonics)

Frequency, MHz	Field strength at 3 m, dB(μV/m)*					
Frequency, Winz	Peak	Quasi Peak	Average	Attenuation below carrier		
0.009 - 0.090	148.5 – 128.5	NA	128.5 – 108.5**			
0.090 - 0.110	NA	108.5 – 106.8**	NA			
0.110 - 0.490	126.8 – 113.8	NA	106.8 - 93.8**			
0.490 - 1.705		73.8 – 63.0**				
1.705 - 30.0*		69.5		50 dBc (whichever is the less		
30 – 88	NA	40.0	NA	stringent)		
88 – 216	INA	43.5	INA			
216 – 960		46.0				
960 - 1000		54.0				
Above 1000	74.0	NA	54.0			

^{*-} The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows: $\lim_{S^2} = \lim_{S^1} + 40 \log (S_1/S_2)$,

where S_1 and S_2 – standard defined and test distance respectively in meters.

<u>Note:</u> The above field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency but not exceeding 40 GHz for intentional radiators operated below 10 GHz and up to the fifth harmonic of the highest fundamental frequency but not exceeding 100 GHz for intentional radiators operated above 10 GHz.


^{**-} The limit decreases linearly with the logarithm of frequency.



Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions					
Test procedure:	ANSI C63.4, Section 13.1.4	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance	Verdict:	PASS			
Date(s):	11-Jun-15	verdict.	FASS			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC			
Remarks:						

- 7.1.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band
- **7.1.2.1** The EUT was set up as shown in Figure 7.1.1, energized and the performance check was conducted.
- **7.1.2.2** The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360⁰ and the measuring antenna was rotated around its vertical axis.
- **7.1.2.3** The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots.
- 7.1.3 Test procedure for spurious emission field strength measurements above 30 MHz
- 7.1.3.1 The EUT was set up as shown in Figure 7.1.2, energized and the performance check was conducted.
- **7.1.3.2** The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.
- **7.1.3.3** The worst test results (the lowest margins) were recorded in the associated tables and shown in the associated plots


Figure 7.1.1 Setup for spurious emission field strength measurements below 30 MHz $\,$

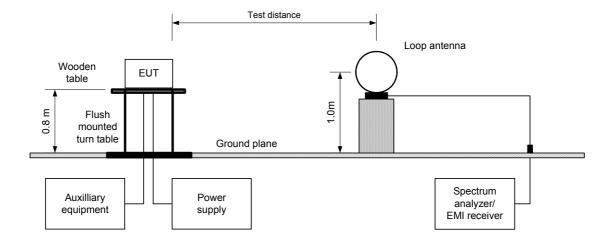



Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions					
Test procedure:	ANSI C63.4, Section 13.1.4	ANSI C63.4, Section 13.1.4				
Test mode:	Compliance	Verdict:	PASS			
Date(s):	11-Jun-15	verdict:	PASS			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC			
Remarks:		-	-			

Figure 7.1.2 Setup for spurious emission field strength measurements above 30 MHz

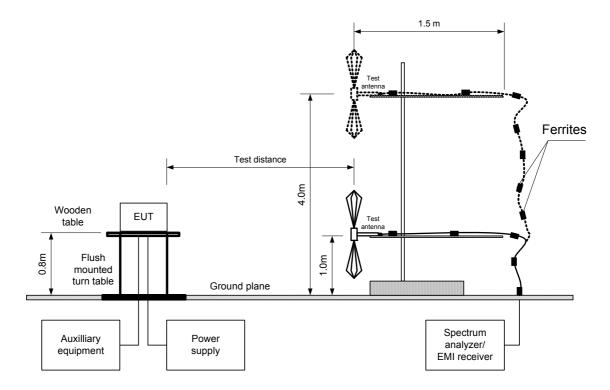



Test specification:

Test procedure:

ANSI C63.4, Section 13.1.4

Test mode:

Date(s):

Temperature: 23 °C

Remarks:

Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions

Verdict:

PASS

Power Supply: 120 VAC

Table 7.1.4 Field strength of fundamental emission and spurious emissions

TEST DISTANCE: 3 m

EUT POSITION: Vertical and Horizontal

MODULATION: 2FSK MODULATING SIGNAL: PRBS

INVESTIGATED FREQUENCY RANGE: 0.009 – 10000 MHz

DETECTOR USED: Peak

RESOLUTION BANDWIDTH:

1.0 kHz (9 kHz – 150 kHz)

9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz) 1.0 MHz (above 1000 MHz)

VIDEO BANDWIDTH:

TEST ANTENNA TYPE:

Active loop (9 kHz − 30 MHz)

Biconilog (30 MHz − 1000 MHz)

Double ridged guide (above 1000 MHz)

Fundamental emission

		Ante	enna		Peak	Qu	asi-peak		
Fre	equency, MHz	Pol.	Height, m	Azimuth, degrees*	emission, dB(μV/m)	Measured emission, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Verdict
	908.4	Hor	1.4	142	92.0	91.7	94.0	-2.3	Pass
	916.1	Hor	1.5	34	92.5	92.1	94.0	-1.9	Pass

Spurious emissions

	Ant	enna	A =imath	Peak	field streng	jth	Avr	Averag	ge field strer	ngth	
F, MHz	Pol.	Height, m	Azimuth, degrees*	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	factor, dB	Measured, dB(μV/m)	Limit, dB(μV/m)	Margin, dB**	Verdict
Spurious emissions											
1888.95	Hor	2.0	10	48.01	74	-25.99	NA	44.88	54	-9.12	Pass

^{*-} EUT front panel refers to 0 degrees position of turntable.

Reference numbers of test equipment used

Γ	HL 0446	HL 0604	HL 1984	HI 1353	HI 4575	HL 4922	
L	TL 0440	11L 000 4	11L 1304	TL 4333	TL 43/3	11L 4322	

Full description is given in Appendix A.

^{**-} Margin, dB =Measured (calculated) value, dB(μ V/m)-Limit, dB(μ V/m).

^{***} The EUT vertical position considered as the worst case.



Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions						
Test procedure:	ANSI C63.4, Section 13.1.4						
Test mode:	Compliance	Verdict:	PASS				
Date(s):	11-Jun-15	verdict.	FASS				
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC				
Remarks:							


Plot 7.1.1 Radiated emission measurements at low fundamental frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

EUT PLANE: Vertical and Horizontal ANTENNA POLARIZATION: Vertical and horizontal






Plot 7.1.2 Radiated emission measurements at the high fundamental frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

EUT PLANE: Vertical and Horizontal ANTENNA POLARIZATION: Vertical and Horizontal



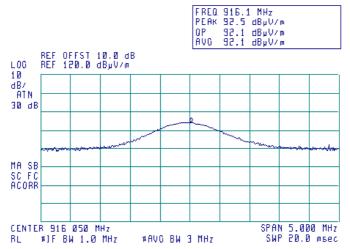



Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions						
Test procedure:	ANSI C63.4, Section 13.1.4						
Test mode:	Compliance	Verdict:	PASS				
Date(s):	11-Jun-15	verdict.	FASS				
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC				
Remarks:							


Plot 7.1.3 Radiated emission measurements from 9 to 150 kHz at the low and high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical/ Horizontal)



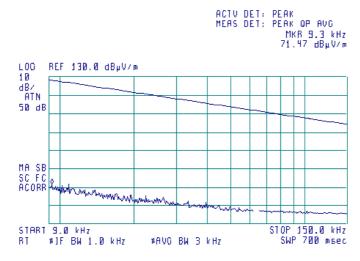


Plot 7.1.4 Radiated emission measurements from 0.15 to 30 MHz at the low and high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

EUT POSITION: Typical (Vertical/ Horizontal)



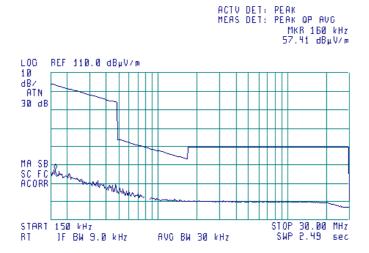



Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions						
Test procedure:	ANSI C63.4, Section 13.1.4						
Test mode:	Compliance	Verdict:	PASS				
Date(s):	11-Jun-15	verdict.	FASS				
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC				
Remarks:							


Plot 7.1.5 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal



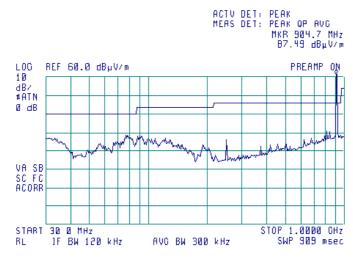


Plot 7.1.6 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal



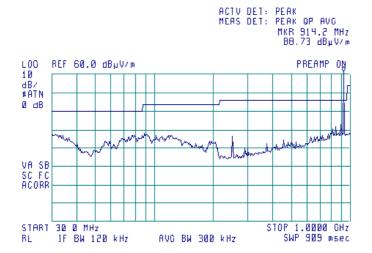



Test specification:

Test procedure:

ANSI C63.4, Section 13.1.4

Test mode:

Date(s):

Temperature: 23 °C

Remarks:

Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions

Verdict:


PASS

Power Supply: 120 VAC

Plot 7.1.7 Radiated emission measurements from 1000 to 6500 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber TEST DISTANCE: 3 m


ANTENNA POLARIZATION: Vertical and Horizontal

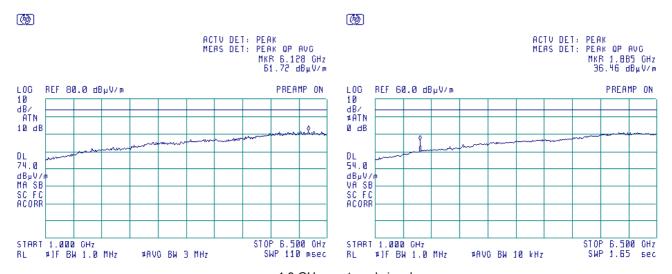

1.8 GHz – external signal

Plot 7.1.8 Radiated emission measurements from 6500 to 10000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

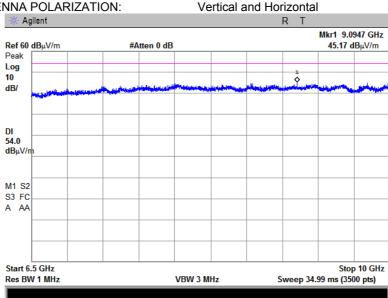




Test specification:	Section 15.249(a)(d)/RSS-210, section A2.9, Field strength of emissions						
Test procedure:	ANSI C63.4, Section 13.1.4						
Test mode:	Compliance	Verdict:	PASS				
Date(s):	11-Jun-15	verdict.	FASS				
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 52 %	Power Supply: 120 VAC				
Remarks:							

Plot 7.1.9 Radiated emission measurements from 1000 to 6500 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

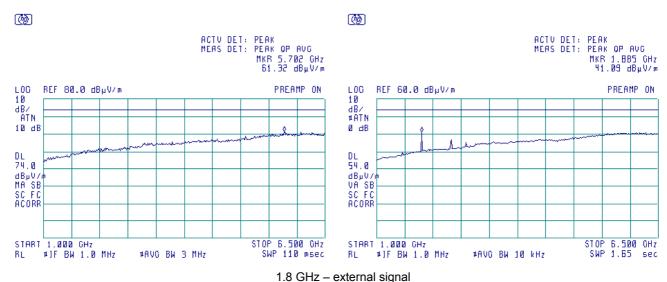


Plot 7.1.10 Radiated emission measurements from 6500 to 10000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal

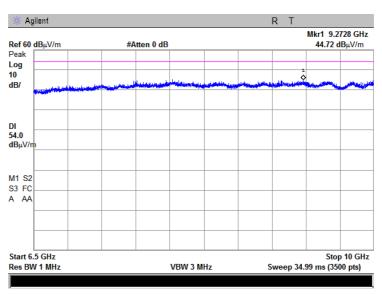





Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions					
Test procedure:	ANSI C63.4, Section 13.1.4					
Test mode:	Compliance	Verdict:	PASS			
Date(s):	11-Jun-15	verdict.	FASS			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC			
Remarks:						

7.2 Band edge emission

7.2.1 General

This test was performed to verify the EUT band edge emission including all associated side bands was attenuated at least 50 dB below the unmodulated carrier level or below the general spurious emission limit. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Band edge emission limits

Frequency band,	Field strength lim	it at 3 m, dBμV/m	Attenuation below carrier,	
MHz	Peak	QP	dBc	
902.000 - 928.000	NA	46.0	50	


7.2.2 Test procedure

- **7.2.2.1** The EUT was set up as shown in Figure 7.2.1, energized and the performance check was conducted.
- **7.2.2.2** The spectrum analyzer frequency span was set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- **7.2.2.3** The frequency of modulation envelope points beyond which power level drops below the band edge emission limit was measured.
- **7.2.2.4** The test results were recorded in Table 7.2.2 and shown in the associated plots.



Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions					
Test procedure:	ANSI C63.4, Section 13.1.4					
Test mode:	Compliance	Verdict:	PASS			
Date(s):	11-Jun-15	verdict:	PASS			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC			
Remarks:		-	-			

Figure 7.2.1 Band edge emission measurement set up

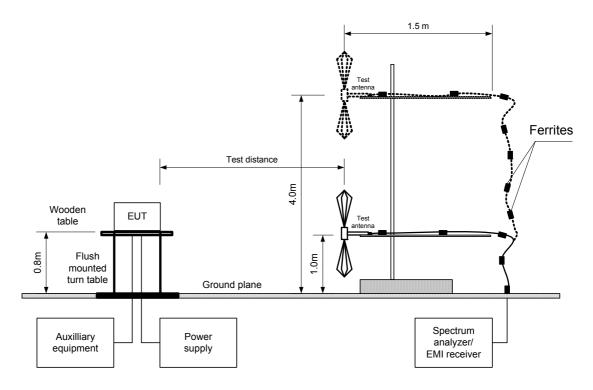



Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions					
Test procedure:	ANSI C63.4, Section 13.1.4					
Test mode:	Compliance	Verdict:	PASS			
Date(s):	11-Jun-15	verdict.	FASS			
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC			
Remarks:						

Table 7.2.2 Band edge emission test results

OPERATING FREQUENCY RANGE: 902-928 MHz
DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 120 kHz
VIDEO BANDWIDTH: 300 kHz
MODULATION: 2FSK

Modulation envelope		Measured peak emission,	Measured QP emission,	QP limit,	Margin,	Verdict	
Edge	Frequency, MHz	dBμV/m	dBμV/m	dBμV/m	dB *	veruici	
Low	902	30.59	NA	46.0	-15.41	Pass	
High	928	30.91	NA	46.0	-15.09	Pass	

^{* -} Margin, dB = Measured value- Limit

Reference numbers of test equipment used

		• •			
HL 0521	HL 0604	HL 4353	HL 4722		

Full description is given in Appendix A.



Test specification:	Section 15.249(d)/RSS-210, section A2.9, Band edge emissions			
Test procedure:	ANSI C63.4, Section 13.1.4			
Test mode:	Compliance	Verdict:	PASS	
Date(s):	11-Jun-15	verdict:	PASS	
Temperature: 23 °C	Air Pressure: 1011 hPa	Relative Humidity: 55 %	Power Supply: 120 VAC	
Remarks:		-	-	


Plot 7.2.1 Low band edge emission test result

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal



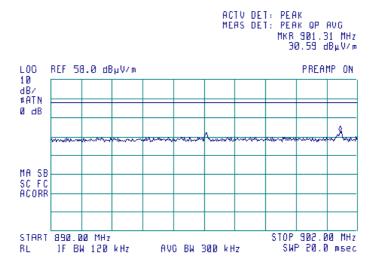


Plot 7.2.2 High band edge emission test result

TEST SITE: Semi anechoic chamber

TEST DISTANCE: 3 m

ANTENNA POLARIZATION: Vertical and Horizontal



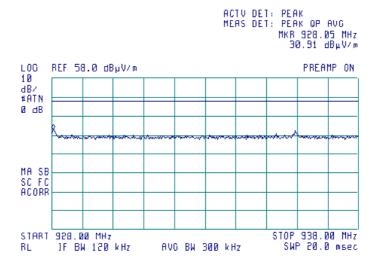



Test specification:	Section 15.207(a)/RSS-Ge	Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission			
Test procedure:	ANSI C63.4, Section 13.1.3				
Test mode:	Compliance	Verdict:	PASS		
Date(s):	27-Apr-15	verdict:	PASS		
Temperature: 22.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC		
Remarks:					

7.3 Conducted emissions

7.3.1 General

This test was performed to measure common mode conducted emissions at the power port. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Limits for conducted emissions

Frequency,	Class B limit, dB(μV)			
MHz	QP	AVRG		
0.15 - 0.5	66 - 56*	56 - 46*		
0.5 - 5.0	56	46		
5.0 - 30	60	50		


^{*} The limit decreases linearly with the logarithm of frequency.

7.3.2 Test procedure

- 7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.
- **7.3.2.2** The measurements were performed at power terminals with the LISN, connected to a spectrum analyzer in the frequency range referred to in Table 7.3.2. Unused coaxial connector of the LISN was terminated with 50 Ohm. Quasi-peak and average detectors were used throughout the testing.
- **7.3.2.3** The position of the device cables was varied to determine maximum emission level.
- 7.3.2.4 The worst test results (the lowest margins) were recorded in Table 7.3.2 and shown in the associated plots.

Figure 7.3.1 Setup for conducted emission measurements, table-top equipment

Shielded room

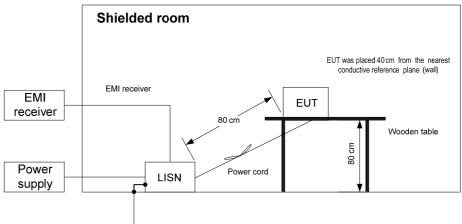



Test specification:	Section 15.207(a)/RSS-G	Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission			
Test procedure:	ANSI C63.4, Section 13.1.3				
Test mode:	Compliance	Verdict:	PASS		
Date(s):	27-Apr-15	verdict:	PASS		
Temperature: 22.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC		
Remarks:					

Table 7.3.2 Conducted emission test results

LINE: AC mains **EUT OPERATING MODE:** Transmit TABLE-TOP EUT SET UP: TEST SITE: SHIELDED ROOM

DETECTORS USED: PEAK / QUASI-PEAK / AVERAGE

FREQUENCY RANGE: 150 kHz - 30 MHz 9 kHz

RESOLUTION BANDWIDTH:

	Dook	Qı	Quasi-peak			Average			
Frequency, MHz	Peak emission, dB(μV)	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Measured emission, dB(μV)	Limit, dB(μV)	Margin, dB*	Line ID	Verdict
0.150	53.02	51.09	66.00	-14.91	38.45	56.00	-17.55		
0.160	50.67	43.35	65.48	-22.13	28.74	55.48	-26.74		
0.189	47.92	42.50	64.05	-21.55	26.00	54.05	-28.05	L1	Pass
0.409	37.40	32.88	57.68	-24.80	23.67	47.68	-24.01		
7.805	29.73	25.47	60.00	-34.53	17.33	50.00	-32.67		
0.150	52.73	50.78	65.96	-15.18	35.23	55.96	-20.73		
0.163	52.86	43.57	65.35	-21.78	22.17	55.35	-33.18		
0.194	48.54	45.03	63.88	-18.85	26.95	53.88	-26.93	L2	Pass
0.280	39.65	37.42	60.85	-23.43	18.12	50.85	-32.73	LZ	rass
0.510	28.69	25.27	56.00	-30.73	13.29	46.00	-32.71		
0.597	27.47	21.83	56.00	-34.17	10.33	46.00	-35.67		

^{*-} Margin = Measured emission - specification limit.

Reference numbers of test equipment used

HL 0447	HL 1425	HL 1513	HL 3612	HL 3774	HL 4527	

Full description is given in Appendix A.



Test specification:	Section 15.207(a)/RSS-Ge	Section 15.207(a)/RSS-Gen, section 8.8, Conducted emission			
Test procedure:	ANSI C63.4, Section 13.1.3				
Test mode:	Compliance	Verdict:	PASS		
Date(s):	27-Apr-15	verdict.	FASS		
Temperature: 22.0 °C	Air Pressure: 1011 hPa	Relative Humidity: 39 %	Power Supply: 120 VAC		
Remarks:					


Plot 7.3.1 Conducted emission measurements

LINE: L1 EUT OPERATING MODE: Transmit

LIMIT: QUASI-PEAK, AVERAGE

DETECTOR: PEAK

(B)

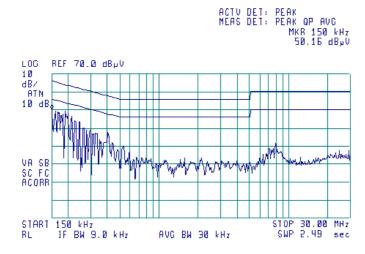


Plot 7.3.2 Conducted emission measurements

LINE: L2
EUT OPERATING MODE: Transmit

LIMIT: QUASI-PEAK, AVERAGE

DETECTOR: PEAK

(B)

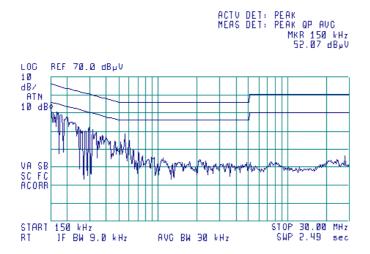



Test specification:	Section 15.203 / RSS-Gen, Section 7.1.4, Antenna requirement				
Test procedure:	Visual inspection / supplier de	Visual inspection / supplier declaration			
Test mode:	Compliance	Verdict: PASS			
Date(s):	25-Aug-15				
Temperature: 24 °C	Air Pressure: 1010 hPa	Relative Humidity: 56 %	Power Supply: 120 VAC		
Remarks:					

7.4 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.4.1.

Table 7.4.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	
The transmitter employs a unique antenna connector	NA	Comply
The transmitter requires professional installation	NA	

Photograph 7.4.1 Antenna assembly





Test specification:	Section 15.215(c) / RSS-G	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth			
Test procedure:	ANSI C63.4, Section 13.1.7				
Test mode:	Compliance	Verdict:	PASS		
Date(s):	29-Jun-15	verdict.	FASS		
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC		
Remarks:					

7.5 Occupied bandwidth test

7.5.1 General

This test was performed to verify that the 20 dB bandwidth of the emissions was contained within the standard specified frequency band according to FCC §15.215 requirements. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Occupied bandwidth limits according to FCC §15.215

Assigned frequency, MHz	Modulation envelope reference points*, dBc
902 - 928	20.0

^{*-} Modulation envelope reference points provided in terms of attenuation below modulated carrier.

Table 7.5.2 Occupied bandwidth limits according to RSS-Gen

Assigned frequency, MHz	Modulation envelope reference points*, %
902 - 928	99.0

7.5.2 Test procedure

- **7.5.2.1** The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- **7.5.2.2** The spectrum analyzer sweep time and bandwidth were set to capture all major modulation sidebands of emission and sweep time was set sufficiently slow to ensure peak measurements. Spectrum analyzer was set in peak hold mode and time sufficient for trace stabilization was allowed.
- **7.5.2.3** The peak of emission was measured. The transmitter occupied bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.5.3 and associated plot
- **7.5.2.4** Modulation bandwidth was calculated by adding of the negative frequency drift to the lower measured frequency and the positive frequency drift to the higher measured frequency. The obtained modulation bandwidth was verified to be within the allowed frequency range.

Figure 7.5.1 Occupied bandwidth test setup





Test specification:	Section 15.215(c) / RSS-G	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth			
Test procedure:	ANSI C63.4, Section 13.1.7				
Test mode:	Compliance	Verdict: PASS			
Date(s):	29-Jun-15	Verdict: PASS			
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC		
Remarks:		-	-		

Table 7.5.3 Occupied bandwidth test results

ASSIGNED FREQUENCY BAND 902 – 928 MHz
DETECTOR USED: Peak hold
RESOLUTION BANDWIDTH: 10 kHz
VIDEO BANDWIDTH: 30 kHz
MODULATING SIGNAL: Enable

MODULATION ENVELOPE REFERENCE POINTS: 20 dBc

Band edge	OBW, kHz	Cross point frequency, MHz	Modulation band edge, MHz	Assigned band edge, MHz	Verdict
Low	104.05	908.339	908.339	902.0	Pass
High	112.50	916.050	916.050	928.0	Pass

MODULATION ENVELOPE REFERENCE POINTS: 99%

Band edge	OBW, kHz	Cross point frequency, MHz	Modulation band edge, MHz	Assigned band edge, MHz	Verdict
Low	85.0614	NA	NA	NA	Pass
High	85.3719	NA	NA	NA	Pass

Reference numbers of test equipment used


_						
	HL 2909	HL 4273				

Full description is given in Appendix A.




Test specification:	Section 15.215(c) / RSS-G	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth			
Test procedure:	ANSI C63.4, Section 13.1.7				
Test mode:	Compliance	Verdict: PASS			
Date(s):	29-Jun-15	Verdict: PASS			
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC		
Remarks:		-	-		

Plot 7.5.1 Occupied bandwidth test result, low frequency

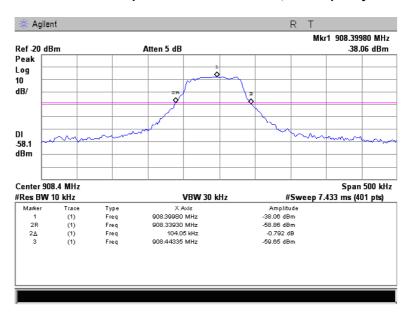


Plot 7.5.2 Occupied bandwidth test result, low frequency (99% power)

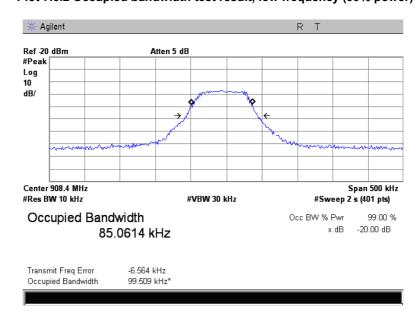




Test specification:	Section 15.215(c) / RSS-G	Section 15.215(c) / RSS-Gen, section 6.6, Occupied bandwidth			
Test procedure:	ANSI C63.4, Section 13.1.7				
Test mode:	Compliance	Verdict: PASS			
Date(s):	29-Jun-15	verdict.	FASS		
Temperature: 23.5 °C	Air Pressure: 1010 hPa	Relative Humidity: 46 %	Power Supply: 120 VAC		
Remarks:					

Plot 7.5.3 Occupied bandwidth test result, high frequency

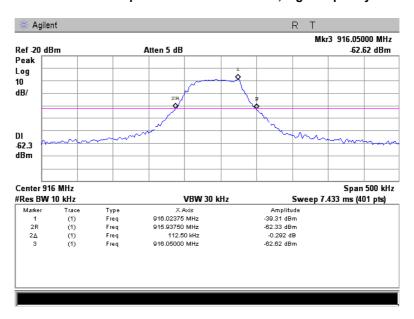

Plot 7.5.4 Occupied bandwidth test result, high frequency (99% power)

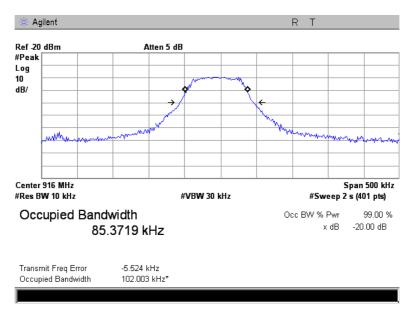



8 APPENDIX A Test equipment and ancillaries used for tests

HL	Description	Manufacturer	Model	Ser. No.	Last Cal./	Due Cal./
No	Bescription	Wandacture	Wiodei	Jei. 140.	Check	Check
0446	Antenna, Loop, Active, 10 kHz - 30 MHz	EMCO	6502	2857	13-Jan-15	13-Jan-16
0447	LISN, 16/2, 300V RMS, 50 Ohm/50 uH +	Hermon	LISN 16 -	066	13-Oct-15	13-Oct-16
	5 Ohm, STD CISPR 16-1	Laboratories	1			
0521	EMI Receiver (Spectrum Analyzer) with RF filter section 9 kHz-6.5 GHz	Hewlett Packard	8546A	3617A 00319, 3448A002 53	22-Oct-14	22-Oct-15
0604	Antenna BiconiLog Log-Periodic/T Bow- TIE, 26 - 2000 MHz	EMCO	3141	9611-1011	15-May-15	15-May-16
1425	EMI Receiver, 9 kHz - 2.9 GHz, System: HL1426, HL1427	Agilent Technologies	8542E	3710A002 22, 3705A002 04	24-Dec-14	24-Dec-15
1513	Cable RF, 8 m, BNC/BNC	Belden	M17/167 MIL-C-17	1513	08-Sep-15	08-Sep-16
1984	Antenna, Double-Ridged Waveguide Horn, 1 to 18 GHz, 300 W	EMC Test Systems	3115	9911-5964	17-Apr-15	17-Apr-16
2909	Spectrum analyzer, ESA-E, 100 Hz to 26.5 GHz	Agilent Technologies	E4407B	MY414447 62	22-Feb-15	22-Feb-16
3612	Cable RF, 17.5 m, N type-N type	Teldor	RG-214/U	NA	07-Dec-14	07-Dec-15
3774	Attenuator, N-type, 10 dB, DC to 18 GHz, 5 W	Mini-Circuits	BW- N10W5+	NA	30-Dec-14	30-Dec-15
4273	Test Cable , DC-18 GHz, 1.8 m, SMA/M - N/M	Mini-Circuits	CBL-6FT- SMNM+	70045	28-May-15	28-May-16
4353	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29- N1N1-244	12025101 003	15-Mar-15	15-Mar-16
4527	DC block , 50 Ohm, 10 MHz to 6 GHz	Mini-Circuits	BLK-6-N+	NA	13-Jan-15	13-Jan-17
4575	EXA Signal Analyzer, 9 kHz - 26.5 GHz	Agilent Technologies	N9010A	MY480301 10	05-Feb-15	05-Feb-16
4722	Low Loss Armored Test Cable, DC - 18 GHz, 6.2 m, N type-M/N type-M	MegaPhase	NC29- N1N1-244	51228701 001	31-Aug-15	31-Aug-16
4922	Low Pass Filter, 50 Ohm, DC to 630 MHz, SMA/M-SMA/F	Mini-Circuits	VLF-630+	NA	01-Oct-15	01-Oct-17





9 APPENDIX B Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB
	150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 10 m measuring distance	
Horizontal polarization	Biconilog antenna: ± 5.0 dB
	Biconical antenna: ± 5.0 dB
	Log periodic antenna: ± 5.1 dB
Montinal malarisation	Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 5.5 dB
	Biconical antenna: ± 5.5 dB
	Log periodic antenna: ± 5.6 dB
	Double ridged horn antenna: ± 5.8 dB
Radiated emissions at 3 m measuring distance	
Horizontal polarization	Biconilog antenna: ± 5.3 dB
	Biconical antenna: ± 5.0 dB
	Log periodic antenna: ± 5.3 dB
Vertical polarization	Double ridged horn antenna: ± 5.3 dB
Vertical polarization	Biconilog antenna: ± 6.0 dB
	Biconical antenna: ± 5.7 dB
	Log periodic antenna: ± 6.0 dB
2	Double ridged horn antenna: ± 6.0 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB
	2.9 GHz to 6.46 GHz: ± 3.5 dB
	6.46 GHz to 13.2 GHz: ± 4.3 dB
	13.2 GHz to 22.0 GHz: ± 5.0 dB
	22.0 GHz to 26.8 GHz: ± 5.5 dB
D. C. Carlos (T. ON (OFF) and	26.8 GHz to 40.0 GHz: ± 4.8 dB
Duty cycle, timing (Tx ON / OFF) and average	1400/
factor measurements	± 1.0 %
Occupied bandwidth	± 8.0 %

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.





10 APPENDIX C Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, safety, environmental and telecommunication testing facility.

Hermon Laboratories is listed by the Federal Communications Commission (USA) for all parts of Code of Federal Regulations 47 (CFR 47), Registration Numbers 90624 for OATS and 90623 for the anechoic chamber; by Industry Canada for electromagnetic emissions, file number IC 2186A-1 for OATS, certified by VCCI, Japan (the registration numbers are R-808 for OATS, R-1082 for anechoic chamber, C-845 for conducted emissions site, T-1606 for conducted emissions at telecommunication ports), has a status of a Telefication - Listed Testing Laboratory, Certificate No. L138/00. The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing and environmental simulation (for exact scope please refer to Certificate No. 839.01). The FCC Designation Number is IL1001.

Address: P.O. Box 23, Binyamina 30500, Israel.

Telephone: +972 4628 8001 Fax: +972 4628 8277 e-mail: mail@hermonlabs.com website: www.hermonlabs.com

Person for contact: Mr. Alex Usoskin, CEO.

11 APPENDIX D Specification references

FCC 47CFR part 15: 2014 Radio Frequency Devices

ANSI C63.2: 1996 American National Standard for Instrumentation-Electromagnetic Noise and Field

Strength, 10 kHz to 40 GHz-Specifications

ANSI C63.4: 2009 American National Standard for Methods of Measurement of Radio-Noise Emissions

from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

RSS-210 Issue 8: 2010 Low Power Licence- Exempt Radiocommunication Devices

RSS-Gen Issue 4: 2014 General Requirements and Information for the Certification of Radiocommunication

Equipment





12 APPENDIX E Test equipment correction factors

Correction factor Line impedance stabilization network Model LISN 16 - 1 Hermon Laboratories, HL 0447

Frequency, kHz	Correction factor, dB
10	4.9
15	2.86
20	1.83
25	1.25
30	0.91
35	0.69
40	0.53
50	0.35
60	0.25
70	0.18
80	0.14
90	0.11
100	0.09
125	0.06
150	0.04

The correction factor in dB is to be added to meter readings of an interference analyzer or a spectrum analyzer.





Antenna factor Active loop antenna Model 6502, S/N 2857, HL 0446

Frequency, MHz	Magnetic antenna factor, dB	Electric antenna factor, dB
0.009	-32.8	18.7
0.010	-33.8	17.7
0.020	-38.3	13.2
0.050	-41.1	10.4
0.075	-41.3	10.2
0.100	-41.6	9.9
0.150	-41.7	9.8
0.250	-41.6	9.9
0.500	-41.8	9.8
0.750	-41.9	9.7
1.000	-41.4	10.1
2.000	-41.5	10.0
3.000	-41.4	10.2
4.000	-41.4	10.1
5.000	-41.5	10.1
10.000	-41.9	9.6
15.000	-41.9	9.6
20.000	-42.2	9.3
25.000	-42.8	8.7
30.000	-44.0	7.5

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).





Antenna factor Biconilog antenna EMCO Model 3141 Ser.No.1011, HL 0604

Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)	Frequency, MHz	Antenna factor, dB(1/m)
26	7.8	580	20.6	1320	27.8
28	7.8	600	21.3	1340	28.3
30	7.8	620	21.5	1360	28.2
40	7.2	640	21.2	1380	27.9
60	7.1	660	21.4	1400	27.9
70	8.5	680	21.9	1420	27.9
80	9.4	700	22.2	1440	27.8
90	9.8	720	22.2	1460	27.8
100	9.7	740	22.1	1480	28.0
110	9.3	760	22.3	1500	28.5
120	8.8	780	22.6	1520	28.9
130	8.7	800	22.7	1540	29.6
140	9.2	820	22.9	1560	29.8
150	9.8	840	23.1	1580	29.6
160	10.2	860	23.4	1600	29.5
170	10.4	880	23.8	1620	29.3
180	10.4	900	24.1	1640	29.2
190	10.3	920	24.1	1660	29.4
200	10.6	940	24.0	1680	29.6
220	11.6	960	24.1	1700	29.8
240	12.4	980	24.5	1720	30.3
260	12.8	1000	24.9	1740	30.8
280	13.7	1020	25.0	1760	31.1
300	14.7	1040	25.2	1780	31.0
320	15.2	1060	25.4	1800	30.9
340	15.4	1080	25.6	1820	30.7
360	16.1	1100	25.7	1840	30.6
380	16.4	1120	26.0	1860	30.6
400	16.6	1140	26.4	1880	30.6
420	16.7	1160	27.0	1900	30.6
440	17.0	1180	27.0	1920	30.7
460	17.7	1200	26.7	1940	30.9
480	18.1	1220	26.5	1960	31.2
500	18.5	1240	26.5	1980	31.6
520	19.1	1260	26.5	2000	32.0
540	19.5	1280	26.6		
560	19.8	1300	27.0		

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field strength in dB(μ V/m).





Antenna factor Double-ridged wave guide horn antenna Model 3115, S/N 9911-5964, HL1984

Frequency, MHz	Antenna factor, dB(1/m)
1000.0	24.7
1500.0	25.7
2000.0	27.6
2500.0	28.9
3000.0	31.2
3500.0	32.0
4000.0	32.5
4500.0	32.7
5000.0	33.6
5500.0	35.1
6000.0	35.4
6500.0	34.9
7000.0	36.1
7500.0	37.8
8000.0	38.0
8500.0	38.1
9000.0	39.1
9500.0	38.3
10000.0	38.6
10500.0	38.2
11000.0	38.7
11500.0	39.5
12000.0	40.0
12500.0	40.4
13000.0	40.5
13500.0	41.1
14000.0	41.6
14500.0	41.7
15000.0	38.7
15500.0	38.2
16000.0	38.8
16500.0	40.5
17000.0	42.5
17500.0	45.9
18000.0	49.4

Antenna factor in dB(1/m) is to be added to receiver meter reading in dB(μ V) to convert it into field intensity in dB(μ V/m).





Cable loss Cable coaxial, RG-214/U, N type-N type, 17 m Teldor, HL 3612

Frequency, MHz	Cable loss, dB	
0.1	0.05	
0.5	0.07	
1	0.10	
3	0.22	
5	0.29	
10	0.39	
30	0.68	
50	0.90	
100	1.27	
150	1.58	
200	1.80	
250	2.12	
300	2.36	
350	2.60	
400	2.82	
450	2.99	
500	3.23	
550	3.40	
600	3.56	
650	3.71	
700	3.90	
750	4.04	
800	4.23	
850	4.39	
900	4.55	
950	4.65	
1000	4.79	





Cable loss Test cable, Mini-Circuits, S/N 70045, 18 GHz, 1.8 m, SMA/M - N/M CBL-6FT-SMNM+, HL 4273


CBL-6F I - SMNM+, HL 42/3							
Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
10	0.09	4800	1.76	9800	2.70	14800	3.59
30	0.11	4900	1.78	9900	2.71	14900	3.59
50	0.14	5000	1.81	10000	2.73	15000	3.60
100	0.20	5100	1.82	10100	2.75	15100	3.63
200	0.30	5200	1.86	10200	2.76	15200	3.67
300	0.38	5300	1.89	10300	2.79	15300	3.70
400	0.45	5400	1.92	10400	2.81	15400	3.68
500	0.50	5500	1.96	10500	2.82	15500	3.70
600	0.55	5600	2.00	10600	2.83	15600	3.71
700	0.60	5700	2.03	10700	2.87	15700	3.77
800	0.65	5800	2.04	10800	2.87	15800	3.75
900	0.69	5900	2.07	10900	2.88	15900	3.77
1000	0.73	6000	2.10	11000	2.89	16000	3.79
1100	0.77	6100	2.10	11100	2.91	16100	3.85
1200	0.80	6200	2.11	11200	2.92	16200	3.82
1300	0.84	6300	2.11	11300	2.94	16300	3.83
1400	0.88	6400	2.14	11400	2.95	16400	3.88
1500	0.92	6500	2.15	11500	2.98	16500	3.89
1600	0.95	6600	2.15	11600	3.00	16600	3.92
1700	0.98	6700	2.16	11700	3.02	16700	3.88
1800	1.01	6800	2.19	11800	3.04	16800	3.95
1900	1.04	6900	2.22	11900	3.08	16900	3.91
2000	1.07	7000	2.24	12000	3.09	17000	3.97
2100	1.09	7100	2.26	12100	3.12	17100	3.92
2200	1.13	7200	2.29	12200	3.13	17200	3.94
2300	1.15	7300	2.32	12300	3.16	17300	3.94
2400	1.18	7400	2.36	12400	3.17	17400	3.98
2500	1.21	7500	2.39	12500	3.19	17500	3.93
2600	1.24	7600	2.41	12600	3.20	17600	3.95
2700	1.27	7700	2.43	12700	3.21	17700	3.96
2800	1.30	7800	2.46	12800	3.21	17800	3.97
2900	1.34	7900	2.49	12900	3.22	17900	3.96
3000	1.36	8000	2.52	13000	3.22	18000	3.97
3100	1.38	8100	2.52	13100	3.24		
3200	1.41	8200	2.54	13200	3.24		
3300	1.45	8300	2.59	13300	3.27		
3400	1.46	8400	2.61	13400	3.28		
3500	1.49	8500	2.60	13500	3.31		
3600	1.51	8600	2.63	13600	3.31		
3700	1.55	8700	2.65	13700	3.35		
3800	1.34	8800	2.65	13800	3.37		
3900	1.36	8900	2.65	13900	3.40		
4000	1.38	9000	2.66	14000	3.43		
4100	1.41	9100	2.66	14100	3.45		
4200	1.45	9200	2.67	14200	3.46		
4300	1.46	9300	2.67	14300	3.46		
4400	1.49	9400	2.67	14400	3.49		
4500	1.51	9500	2.68	14500	3.50		
4600	1.55	9600	2.69	14600	3.50		
4700	1.34	9700	2.69	14700	3.52		





Cable loss Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M, NC29-N1N1-244S/N 12025101 003, HL 4353

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.20	9000	2.71
100	0.27	9500	2.81
300	0.47	10000	2.90
500	0.61	10500	2.97
1000	0.87	11000	3.06
1500	1.07	11500	3.13
2000	1.24	12000	3.20
2500	1.39	12500	3.26
3000	1.53	13000	3.34
3500	1.65	13500	3.39
4000	1.77	14000	3.47
4500	1.89	14500	3.54
5000	1.99	15000	3.62
5500	2.07	15500	3.69
6000	2.20	16000	3.76
6500	2.30	16500	3.83
7000	2.39	17000	3.86
7500	2.51	17500	3.94
8000	2.58	18000	4.02
8500	2.65		





Cable loss Low Loss Armored Test Cable, MegaPhase, 18 GHz, 6.2 m, N type-M/N type-M, NC29-N1N1-244, S/N 51228701001 HL 4722

Frequency, MHz	Cable loss, dB	Frequency, MHz	Cable loss, dB
50	0.22	9000	2.93
100	0.30	9500	3.06
300	0.52	10000	3.16
500	0.66	10500	3.20
1000	0.93	11000	3.34
1500	1.15	11500	3.39
2000	1.33	12000	3.48
2500	1.49	12500	3.55
3000	1.64	13000	3.66
3500	1.77	13500	3.75
4000	1.90	14000	3.76
4500	2.03	14500	3.87
5000	2.17	15000	3.98
5500	2.30	15500	4.01
6000	2.39	16000	4.14
6500	2.51	16500	4.15
7000	2.59	17000	4.32
7500	2.67	17500	4.36
8000	2.76	18000	4.38
8500	2.84		



13 APPENDIX F Abbreviations and acronyms

A ampere

AC alternating current
A/m ampere per meter
AM amplitude modulation
AVRG average (detector)

cm centimeter dB decibel

 $\begin{array}{ll} \text{dBm} & \text{decibel referred to one milliwatt} \\ \text{dB}(\mu V) & \text{decibel referred to one microvolt} \end{array}$

 $dB(\mu V/m)$ decibel referred to one microvolt per meter

 $dB(\mu A)$ decibel referred to one microampere

DC direct current

EIRP equivalent isotropically radiated power

ERP effective radiated power EUT equipment under test

F frequency GHz gigahertz GND ground H height

HL Hermon laboratories

Hz hertz k kilo kHz kilohertz LO local oscillator meter m MHz megahertz min minute millimeter mm ms millisecond μS microsecond not applicable NA narrow band NB **OATS** open area test site

 $\Omega \qquad \qquad \mathsf{Ohm}$

PM pulse modulation PS power supply

ppm part per million (10⁻⁶)

QP quasi-peak
RE radiated emission
RF radio frequency
rms root mean square

Rx receive s second T temperature Tx transmit V volt WB wideband

END OF DOCUMENT