

Prüfbericht-Nr.: Test report no.:	CN21W4GQ 001	Auftrags-Nr.: Order no.:	168328821	Seite 1 von 17 Page 1 of 17
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2021-07-28	
Auftraggeber: Client:	ZEN Factory Group (Asia) Limited A5-B, 12/F, Block A, Hong Kong Industrial Centre, 489-491 Castle Peak Road, Kowloon, Hong Kong			
Prüfgegenstand: Test item:	Chat Pad Controller Keyboard for Xbox (Keyboard)			
Bezeichnung / Typ-Nr.: Identification / Type no.:	NS-XB1CHATPAD, NS-XB1CHATPAD-C (Trademark: INSIGNIA)			
Auftrags-Inhalt: Order content:	FCC and IC approval			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.249 RSS-210 Issue 10 December 2019 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-Gen Issue 5 March 2019 CFR47 FCC Part 15: Subpart B Section 15.109 ICES-003 Issue 7 October 2020			
Wareneingangsdatum: Date of sample receipt:	2021-07-29	Please refer to photo documents		
Prüfmuster-Nr.: Test sample no.:	A003099328			
Prüfzeitraum: Testing period:	2021-08-16 - 2021-09-02			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date:	2021-09-09		Ausstellungsdatum: Issue date:	2021-09-09
	Signed by: Alex Lan		Signed by: Winnie Hou	
Stellung / Position	Senior Project Engineer		Stellung / Position	Department Manager
Sonstiges / Other: FCC ID: WP85I02001VZEN IC: 8632A-5I0201V HVIN: 5I02001ZEN				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged:		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.: CN21W4GQ 001
Test Report No.

Seite 2 von 17
Page 2 of 17

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 FUNDAMENTAL & HARMONICS RADIATED EMISSION

RESULT: Pass

5.1.3 20dB BANDWIDTH

RESULT: Pass

5.1.4 99% BANDWIDTH

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSION & BAND EDGE

RESULT: Pass

5.1.6 RADIATED EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES.....	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	5
2.3	TRACEABILITY.....	6
2.4	CALIBRATION.....	6
2.5	MEASUREMENT UNCERTAINTY	6
2.6	LOCATION OF ORIGINAL DATA	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3	GENERAL PRODUCT INFORMATION.....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	8
3.5	SUBMITTED DOCUMENTS.....	8
4	TEST SET-UP AND OPERATION MODES	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	9
4.5	TEST SETUP DIAGRAM	10
5	TEST RESULTS.....	11
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	11
5.1.1	<i>Antenna Requirement.....</i>	<i>11</i>
5.1.2	<i>Fundamental & Harmonics Radiated Emission</i>	<i>12</i>
5.1.3	<i>20dB Bandwidth</i>	<i>13</i>
5.1.4	<i>99% Bandwidth</i>	<i>14</i>
5.1.5	<i>Radiated Spurious Emission & Band Edge</i>	<i>15</i>
5.1.6	<i>Radiated Emission</i>	<i>16</i>
6	PHOTOGRAPHS OF THE TEST SET-UP.....	17
7	LIST OF TABLES	17

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Accreditation Designation No.: CN1260

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

TÜV Rheinland (Shenzhen) Co., Ltd.

Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2022-08-10
Signal Analyzer	R&S	FSV 40	101439	2022-08-09
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2022-08-09
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2022-08-09
Amplifier	R&S	SCU-18F	180070	2022-08-09
Amplifier	R&S	SCU40A	100475	2022-08-09
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-22

Radiated Emission				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Horn Antenna	R&S	HF907	102706	2022-08-07
Preamplifier	FIT	SCU-18F	180077	2022-08-16
Active magnetic loop antenna	SCHWARZBECK	FMZB1519B	00080	2022-08-20
Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	2022-12-08

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd.. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The product is a Keyboard for Xbox, which supports 2.4GHz wireless technology.

According to the declaration of the applicant, the electrical circuit design, PCB layout and construction Design are identical for all models, only the model No. is different.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Chat Pad Controller Keyboard for Xbox (Keyboard)
Type Designation	NS-XB1CHATPAD, NS-XB1CHATPAD-C
Trademark	INSIGNIA
FCC ID	WP85I02001VZEN
IC	8632A-5I0201V
HVIN	5I02001ZEN
Operating Voltage	DC 3.3V via external battery
Testing Voltage	DC 3.3V
Technical Specification of 2.4GHz	
Frequency Range	2402 - 2479 MHz
Type of Modulation	GFSK
Channel Number	16 channels
Antenna Type	PCB Layout antenna
Antenna Gain	0 dBi

Table 3: RF Channel and Frequency of 2.4GHz

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2402	5	2423	9	2446	13	2468
2	2408	6	2428	10	2451	14	2474
3	2419	7	2433	11	2456	15	2478
4	2421	8	2437	12	2460	16	2479

Test frequencies are lowest channel: 2402 MHz, middle channel: 2437 MHz and highest channel: 2479 MHz

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 2.4GHz transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. On, Wireless connecting mode
- C. On, Normal operation mode
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Rating Label

- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model NS-XB1CHATPAD in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Dongle	ZEN Factory Group (Asia) Limited	NS-XB1CHATPAD	N/A	DC 5.0V by USB port

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

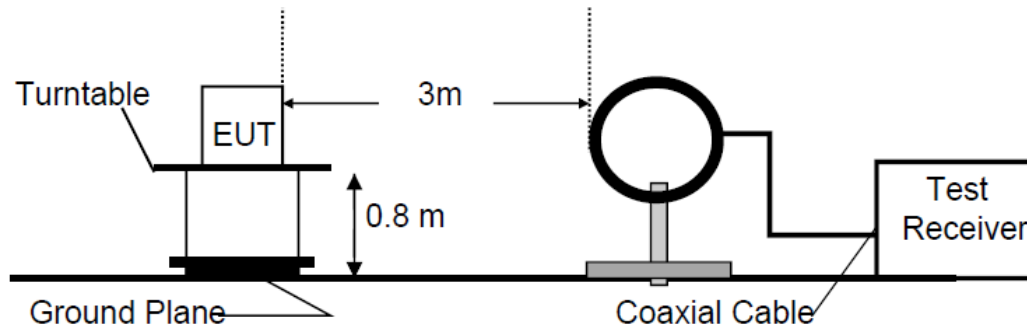


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


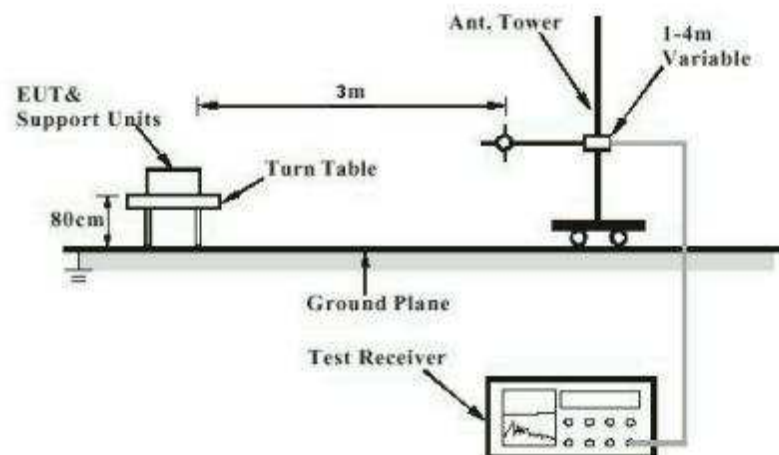


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

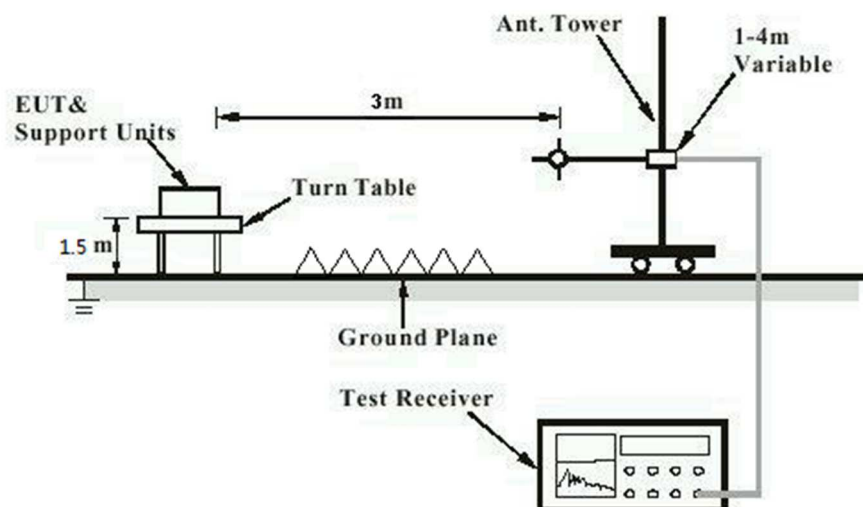

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 0 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN21W4GQ 001
Test Report No.Seite 12 von 17
Page 12 of 17

5.1.2 Fundamental & Harmonics Radiated Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.249(a) RSS-210 Issue 10 B.10
Basic standard	: ANSI C63.10: 2013 RSS-210 Issue 10 B.10(a) & Table A2
Limits	: Refer to FCC Part 15.249(a) & 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2021-08-16 ~ 2021-08-30
Input voltage	: DC 3.3V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 22 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.3 20dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.215
RSS-Gen clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-09-02
Input voltage : DC 3.3V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 22 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 5: Test Result of 20dB Bandwidth

Test Channel (MHz)	Test Channel Frequency (MHz)	20dB Bandwidth (MHz)	Verdict
Low Channel	2402	1.085	PASS
Middle Channel	2437	1.094	
High Channel	2479	1.098	

5.1.4 99% Bandwidth**RESULT:****Pass****Test Specification**

Test standard : RSS-Gen clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-09-02
Input voltage : DC 3.3V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 22 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 6: Test Result of 99% Bandwidth

Test Channel (MHz)	Test Channel Frequency (MHz)	99% Bandwidth (MHz)	Verdict
Low Channel	2402	1.059	PASS
Middle Channel	2437	1.068	
High Channel	2479	1.081	

5.1.5 Radiated Spurious Emission & Band Edge

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.249(a) RSS-210 Issue 10 B.10
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to FCC Part 15.249(a) & 15.209(a) RSS-210 Issue 10 B.10(a) & Table A2
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2021-08-16 ~ 2021-08-30
Input voltage	: DC 3.3V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.6 Radiated Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.109(a) ICES-003 Issue 6
Basic standard	: ANSI C63.4: 2014
Frequency range	: 30 - 6000MHz
Classification	: Class B
Limits	: FCC Part 15.109(a) ICES-003 Issue 6 Table 5 & Table 7
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2021-08-16 ~ 2021-08-30
Input voltage	: DC 3.3V
Operation mode	: C
Ambient temperature	: 22 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.



7 List of Tables


Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	7
Table 3: RF Channel and Frequency of 2.4GHz	7
Table 4: Auxiliary Equipment Used during Test	9
Table 5: Test Result of 20dB Bandwidth.....	13
Table 6: Test Result of 99% Bandwidth	14

Appendix B: Test Results

APPENDIX B: TEST RESULTS	1
APPENDIX B.1: TEST RESULTS OF 20DB BANDWIDTH	2
APPENDIX B.2: TEST RESULTS OF 99% BANDWIDTH	4
APPENDIX B.3: FUNDAMENTAL & HARMONICS RADIATED EMISSION	6
30MHz - 1GHz	6
1GHz - 6.2GHz	10
6.2GHz - 18GHz	16
APPENDIX B.4: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	22
APPENDIX B.5: TEST RESULTS OF RADIATED EMISSIONS	26


Appendix B.1: Test Results of 20dB Bandwidth

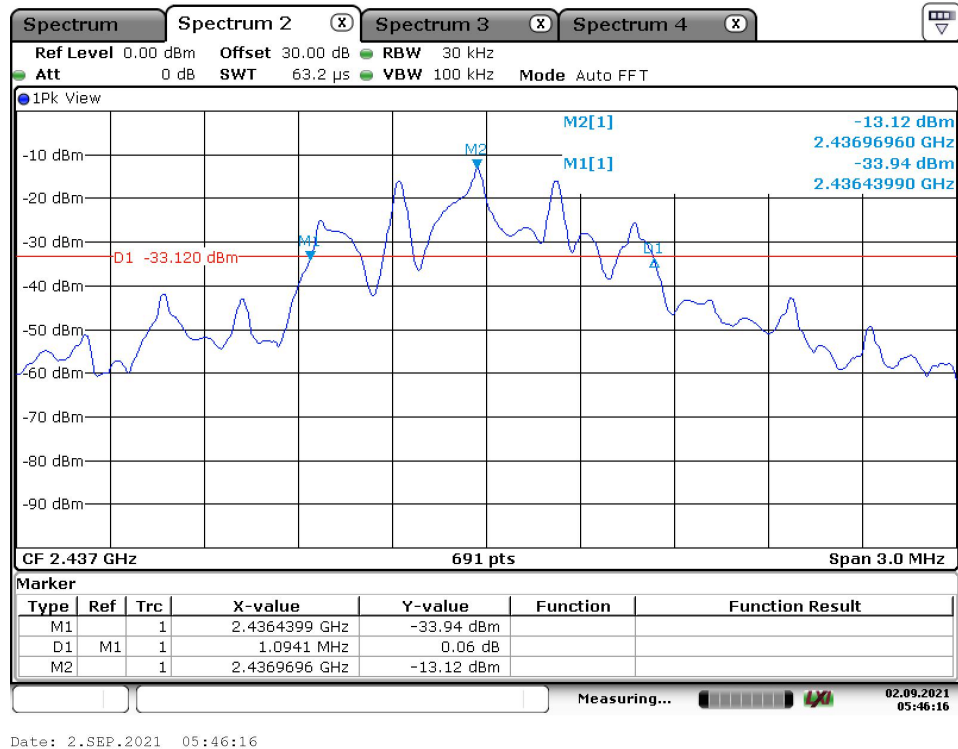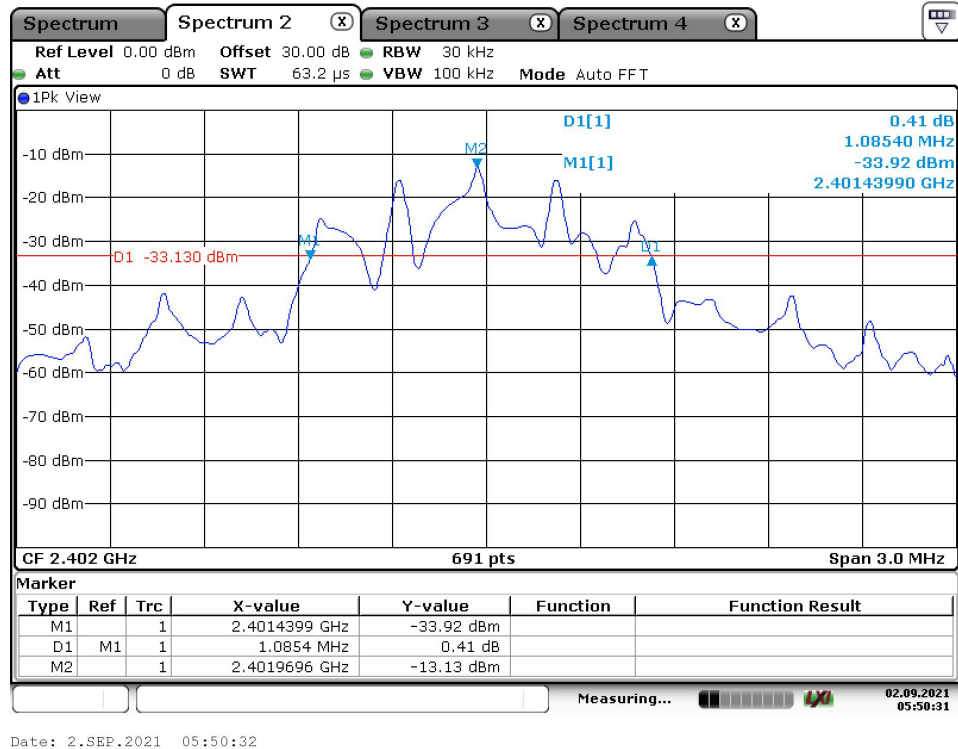

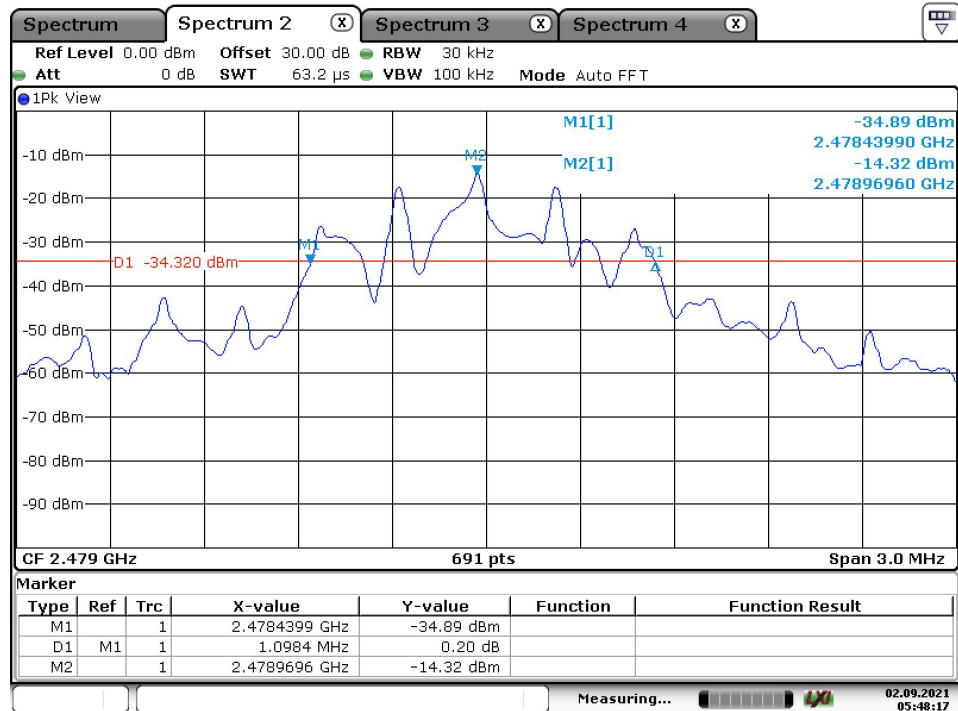


Date: 2.SEP.2021 05:48:18


Appendix B.2: Test Results of 99% Bandwidth

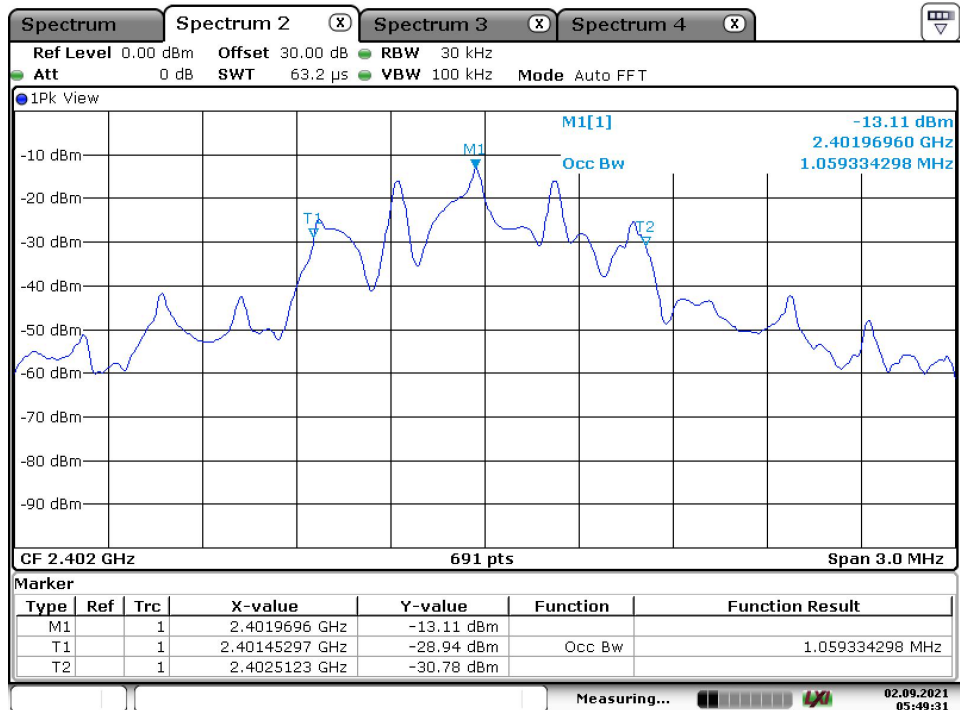

Date: 2.SEP.2021 05:49:32

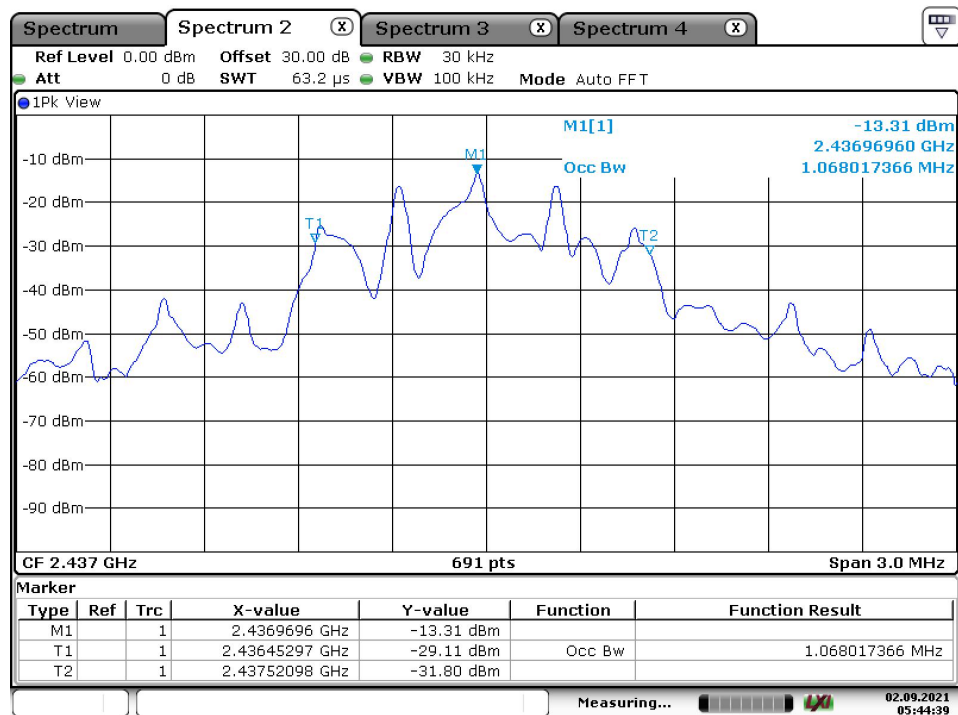

Date: 2.SEP.2021 05:44:40

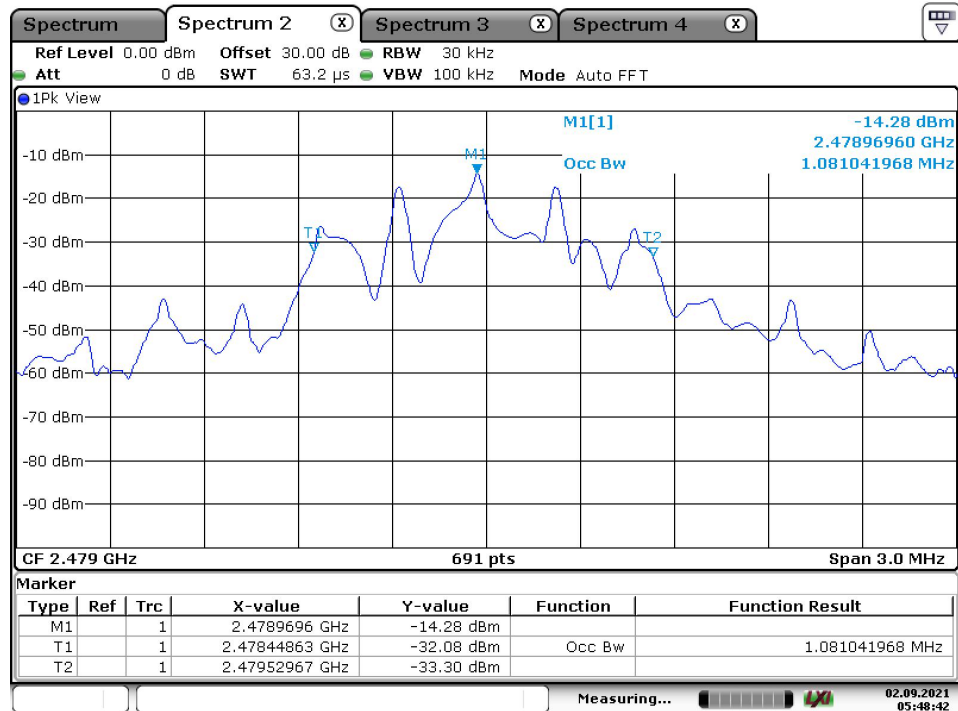


Date: 2.SEP.2021 05:48:42

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz -26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

Appendix B.3: Fundamental & Harmonics Radiated Emission 30MHz - 1GHz

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Low channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

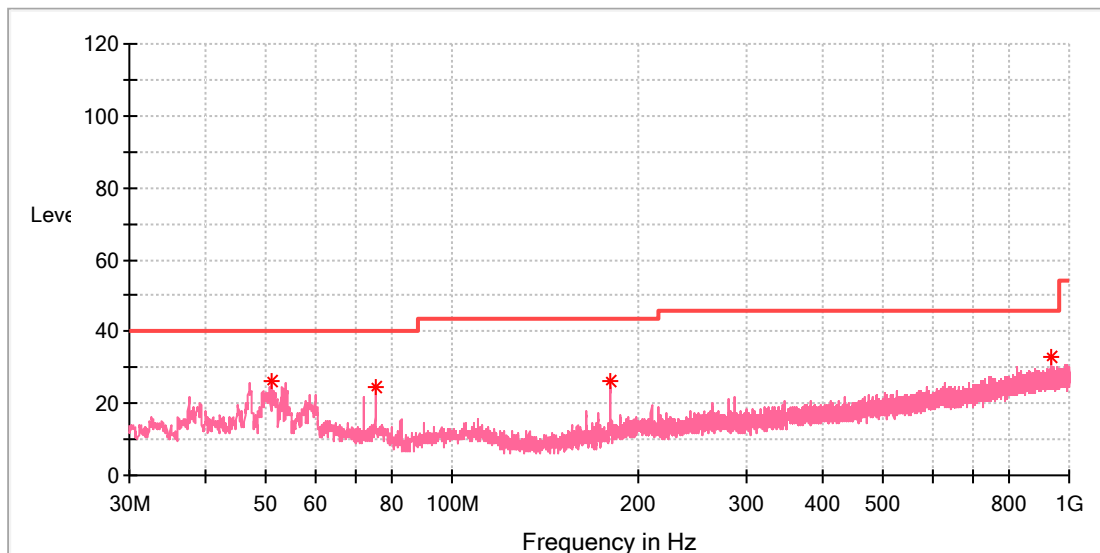


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.097500	26.28	40.00	13.72	100.0	V	2.0	-18.3
75.105000	24.78	40.00	15.22	100.0	V	245.0	-23.4
180.447000	26.07	43.50	17.43	100.0	V	305.0	-20.5
937.532000	32.84	46.00	13.16	100.0	V	279.0	-4.6

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Low channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

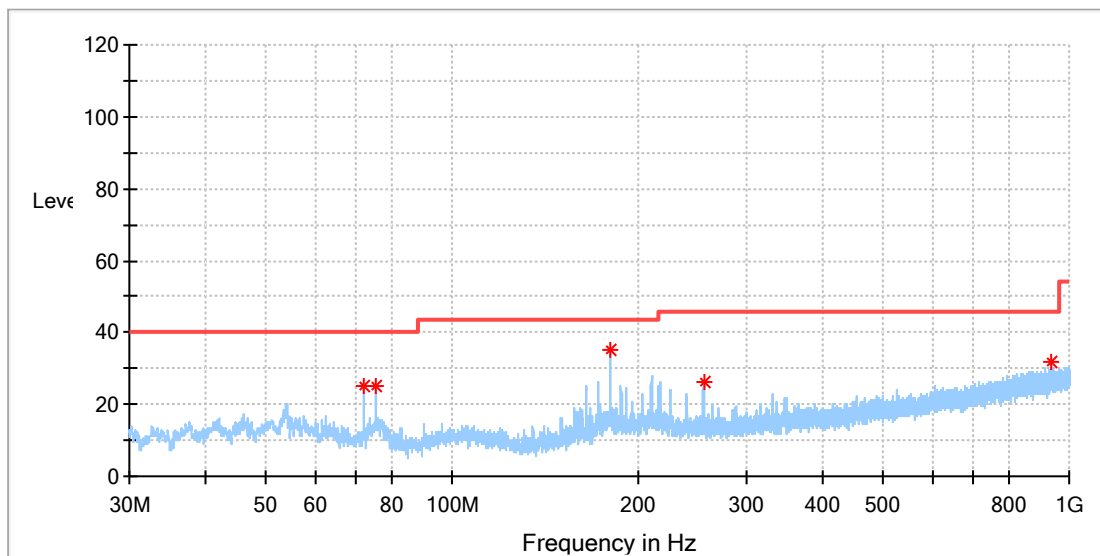


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
72.001000	25.01	40.00	14.99	100.0	H	343.0	-22.5
75.153500	25.08	40.00	14.92	100.0	H	343.0	-23.4
180.301500	35.11	43.50	8.39	100.0	H	274.0	-20.5
255.573500	26.04	46.00	19.96	100.0	H	246.0	-17.2
937.532000	31.91	46.00	14.09	100.0	H	77.0	-4.6

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	High channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

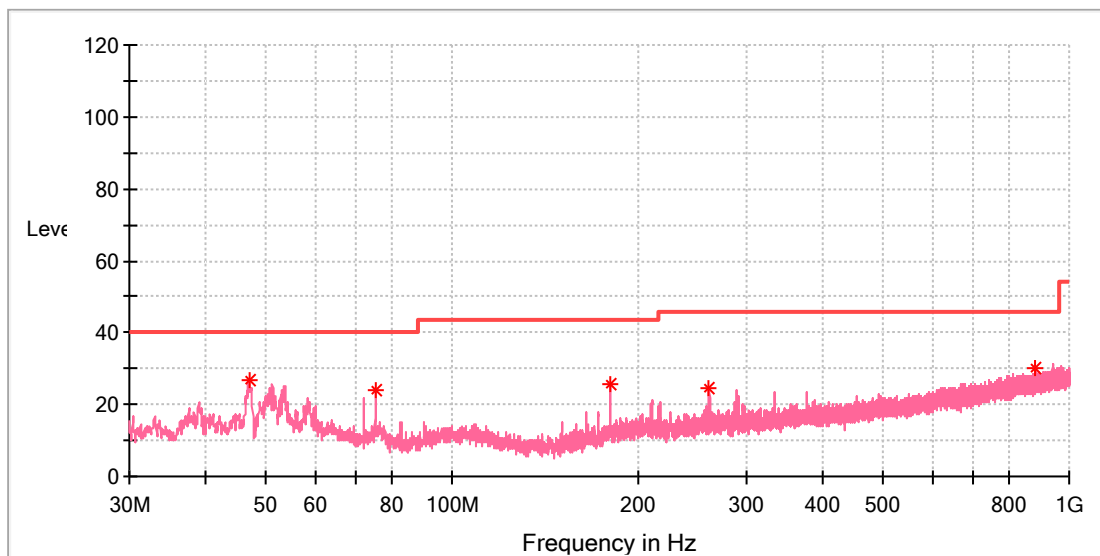


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.878000	27.00	40.00	13.00	100.0	V	131.0	-18.5
75.153500	24.07	40.00	15.93	100.0	V	230.0	-23.4
180.350000	25.78	43.50	17.72	100.0	V	298.0	-20.5
261.248000	24.61	46.00	21.39	100.0	V	298.0	-17.1
883.939500	30.38	46.00	15.62	100.0	V	32.0	-5.1

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: High channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

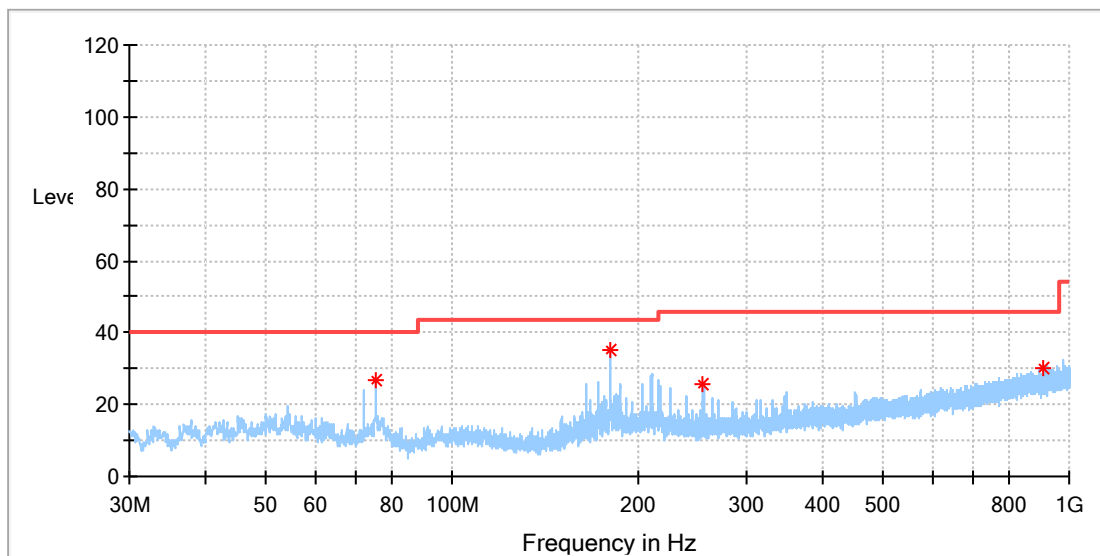


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
75.153500	27.03	40.00	12.97	100.0	H	156.0	-23.4
180.253000	35.00	43.50	8.50	100.0	H	261.0	-20.5
255.476500	25.43	46.00	20.57	100.0	H	230.0	-17.2
908.383500	30.29	46.00	15.71	100.0	H	72.0	-4.9

1GHz - 6.2GHz

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Low channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

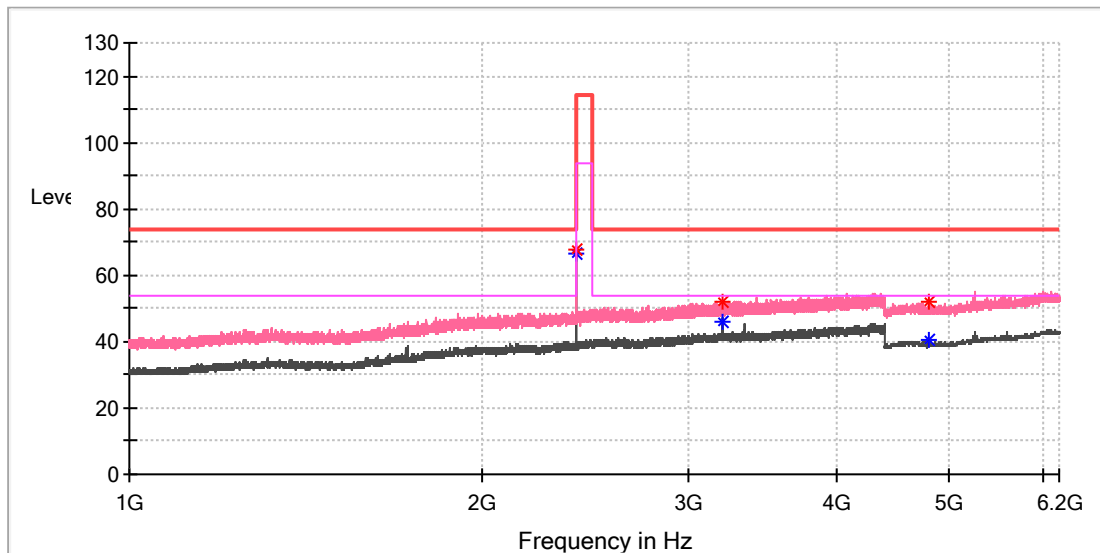


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2400.460000	67.44	---	114.00	46.56	100.0	V	140.0	7.0
2400.970000	---	66.54	94.00	27.46	100.0	V	343.0	7.0
3200.990000	---	45.97	54.00	8.03	100.0	V	292.0	8.6
3202.180000	52.15	---	74.00	21.85	100.0	V	38.0	8.6
4802.500000	---	40.58	54.00	13.42	100.0	V	156.0	11.8
4808.000000	51.71	---	74.00	22.29	100.0	V	318.0	11.8

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Low channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

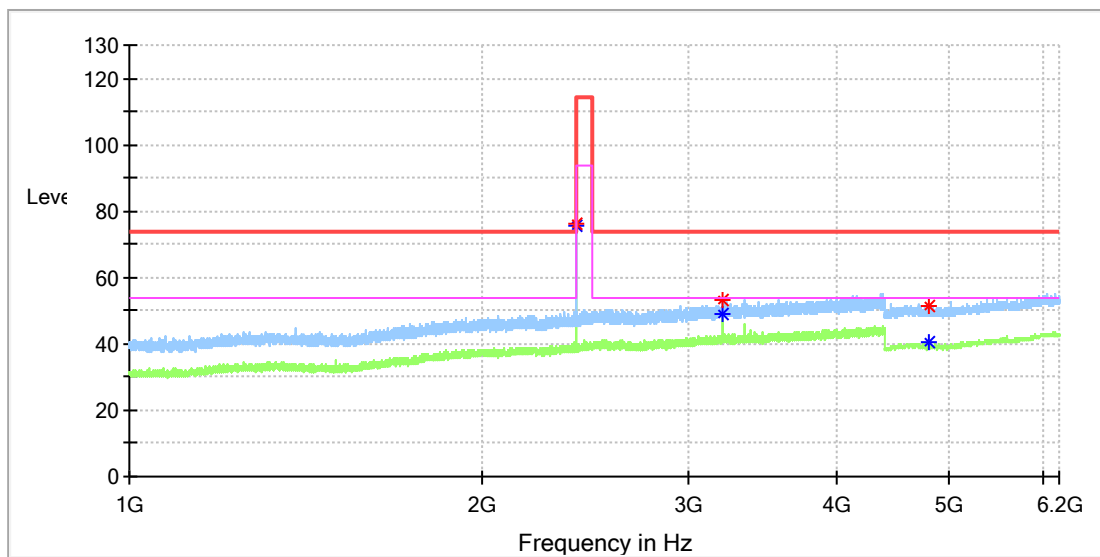


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2400.800000	76.44	---	114.00	37.56	100.0	H	191.0	7.0
2400.970000	---	75.53	94.00	18.47	100.0	H	191.0	7.0
3201.500000	---	48.87	54.00	5.13	100.0	H	143.0	8.6
3201.840000	53.37	---	74.00	20.63	100.0	H	143.0	8.6
4801.500000	51.40	---	74.00	22.60	100.0	H	177.0	11.8
4802.000000	---	40.64	54.00	13.36	100.0	H	234.0	11.8

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: Middle channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

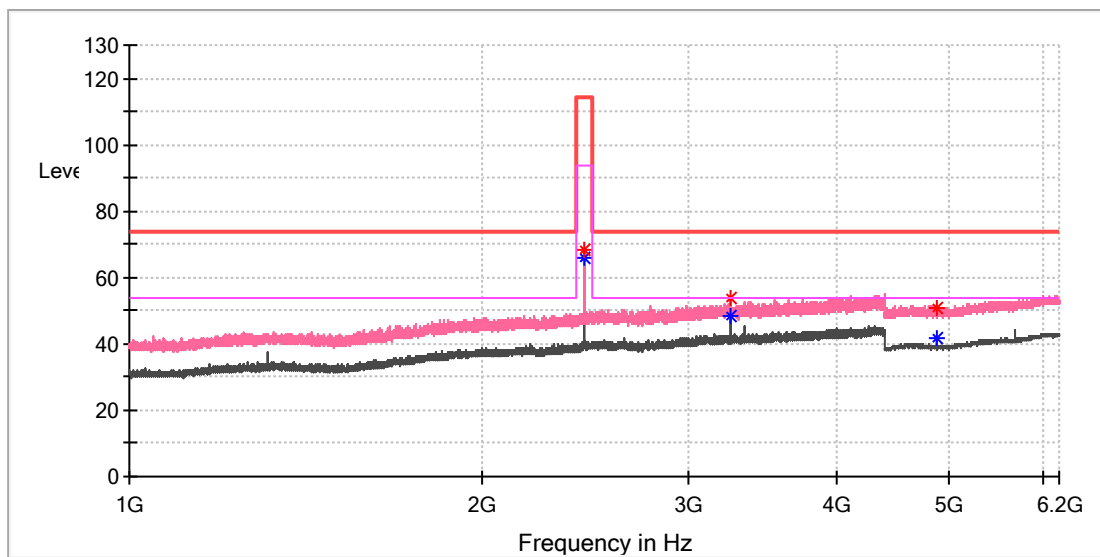


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2440.410000	68.41	---	114.00	45.59	100.0	V	86.0	7.4
2440.410000	---	66.07	94.00	27.93	100.0	V	86.0	7.4
3253.180000	53.59	---	74.00	20.41	100.0	V	39.0	8.5
3253.520000	---	48.38	54.00	5.62	100.0	V	39.0	8.5
4877.000000	50.72	---	74.00	23.28	100.0	V	291.0	11.8
4879.500000	---	41.42	54.00	12.58	100.0	V	129.0	11.8

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Middle channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

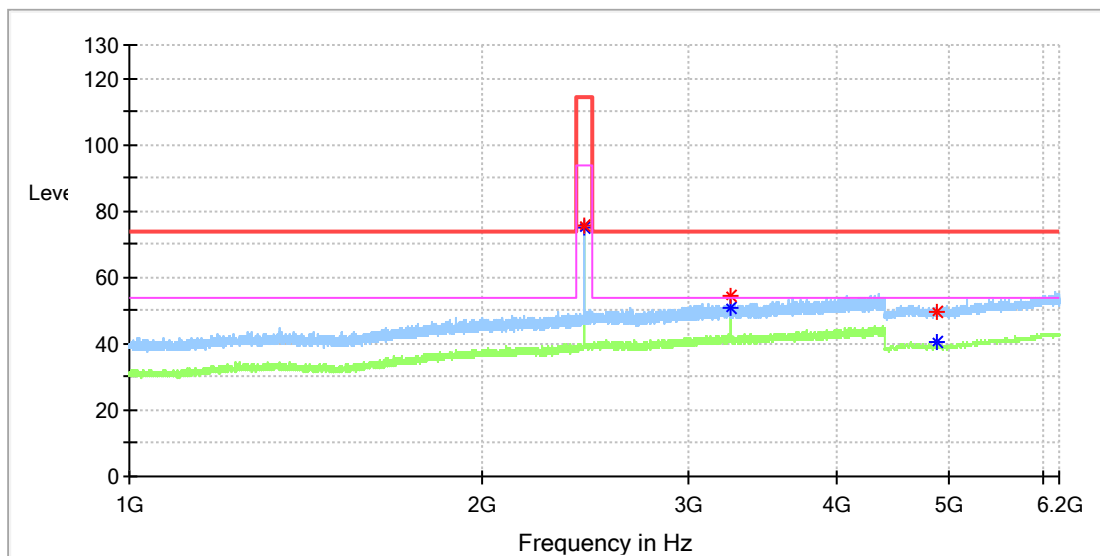


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2439.730000	75.85	---	114.00	38.15	100.0	H	168.0	7.4
2439.900000	---	75.04	94.00	18.96	100.0	H	217.0	7.4
3253.350000	---	50.68	54.00	3.32	100.0	H	248.0	8.5
3253.350000	54.30	---	74.00	19.70	100.0	H	248.0	8.5
4879.500000	---	40.50	54.00	13.50	100.0	H	186.0	11.8
4881.000000	49.84	---	74.00	24.16	100.0	H	352.0	11.8

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	High channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

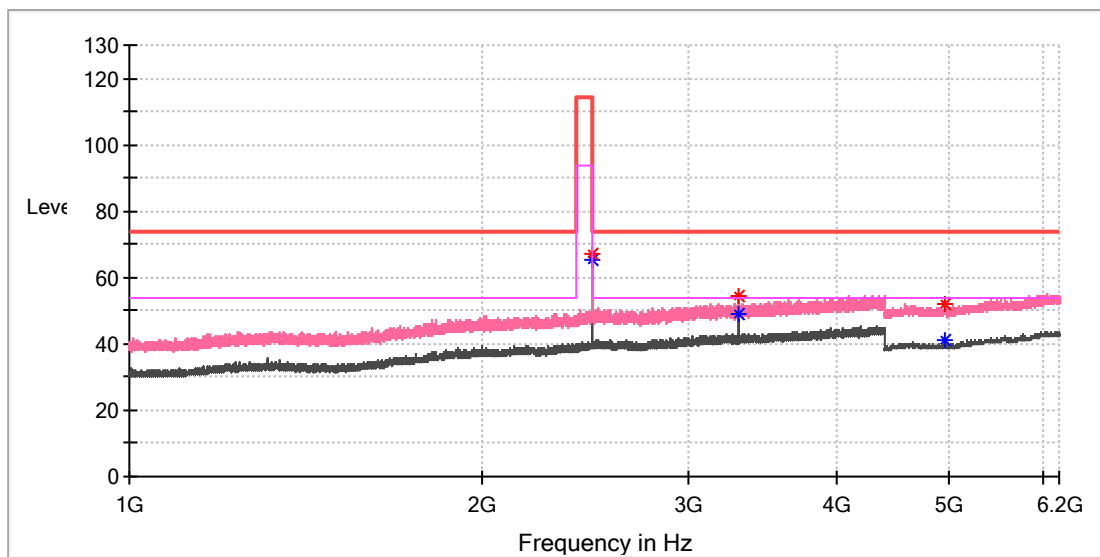


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.850000	67.00	---	114.00	47.00	100.0	V	140.0	7.4
2480.020000	---	65.51	94.00	28.49	100.0	V	140.0	7.4
3306.560000	54.18	---	74.00	19.82	100.0	V	278.0	8.6
3306.900000	---	48.93	54.00	5.07	100.0	V	278.0	8.6
4950.000000	52.10	---	74.00	21.90	100.0	V	329.0	11.8
4960.500000	---	40.90	54.00	13.10	100.0	V	143.0	11.8

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	High channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

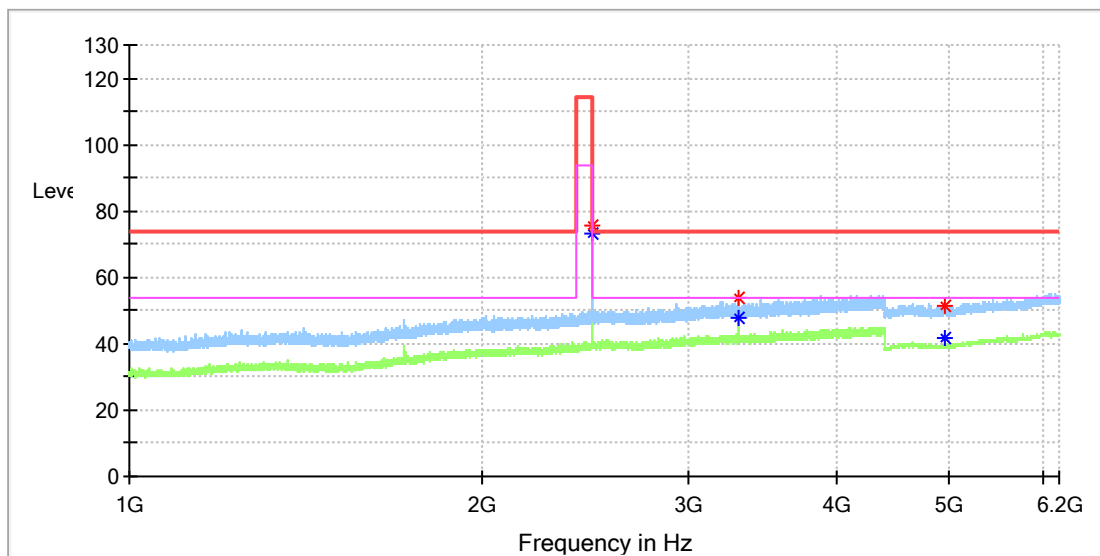


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.680000	75.31	---	114.00	38.69	100.0	H	148.0	7.4
2479.680000	---	73.34	94.00	20.66	100.0	H	148.0	7.4
3306.390000	53.52	---	74.00	20.48	100.0	H	82.0	8.6
3306.730000	---	47.79	54.00	6.21	100.0	H	248.0	8.6
4959.500000	51.14	---	74.00	22.86	100.0	H	246.0	11.8
4960.000000	---	41.84	54.00	12.16	100.0	H	98.0	11.8

6.2GHz - 18GHz

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Low channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

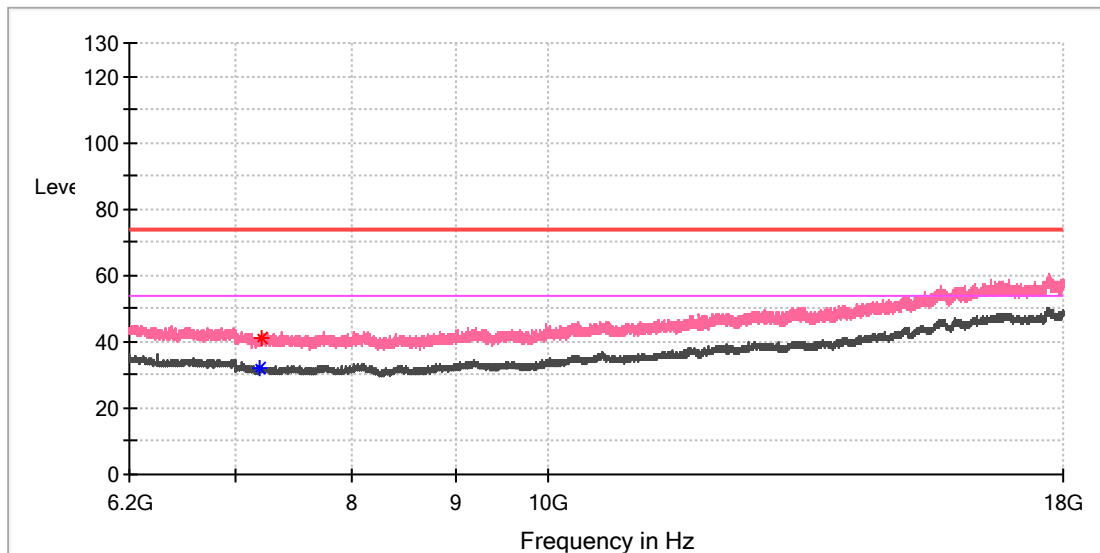


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7201.525000	---	31.96	54.00	22.04	100.0	V	92.0	8.8
7208.900000	40.93	---	74.00	33.07	100.0	V	179.0	8.8

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: Low channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

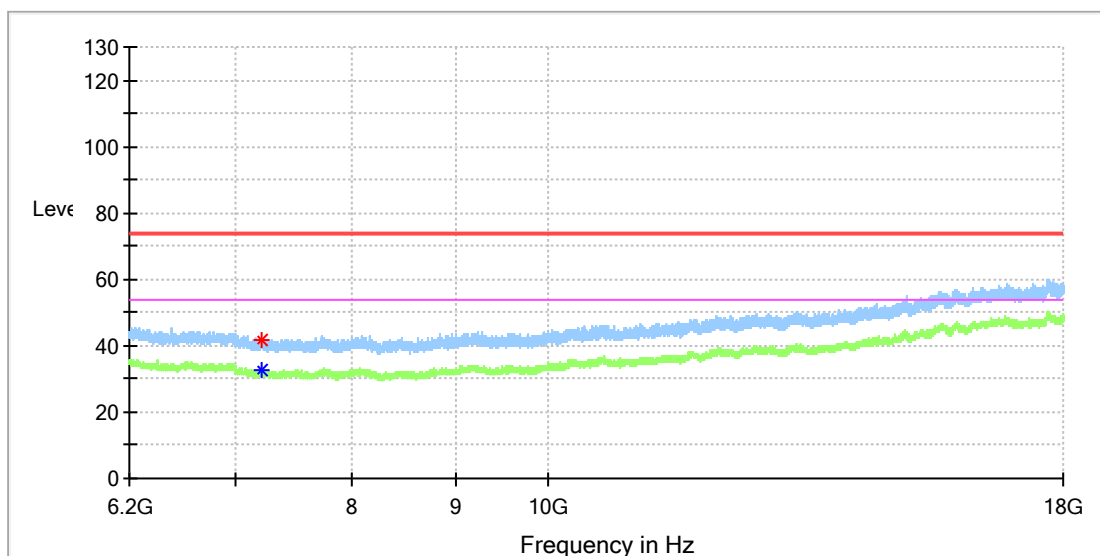


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.950000	41.87	---	74.00	32.13	100.0	H	107.0	8.8
7210.375000	---	32.74	54.00	21.26	100.0	H	5.0	8.7

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: Middle channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

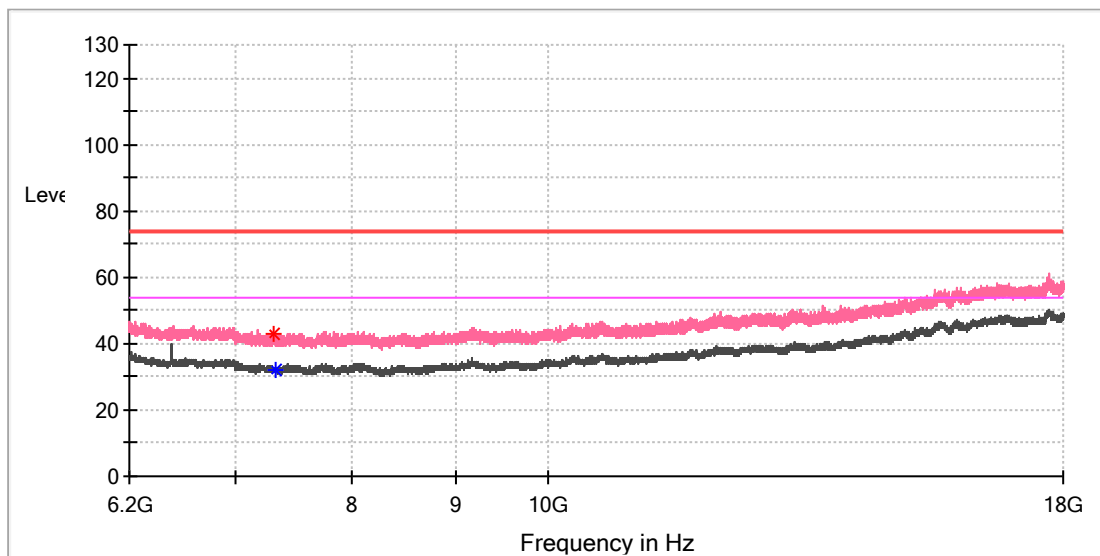


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7316.083333	42.74	---	74.00	31.26	100.0	V	136.0	8.2
7325.916667	---	32.33	54.00	21.67	100.0	V	354.0	8.2

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Middle channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

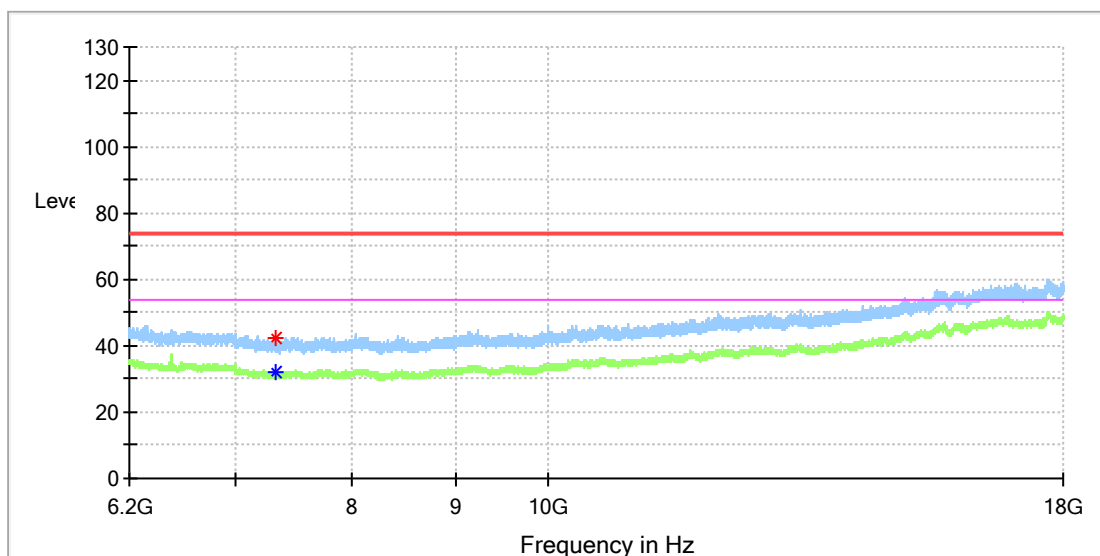


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7318.541667	---	31.88	54.00	22.12	100.0	H	89.0	8.2
7332.800000	42.05	---	74.00	31.95	100.0	H	281.0	8.1

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: High channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

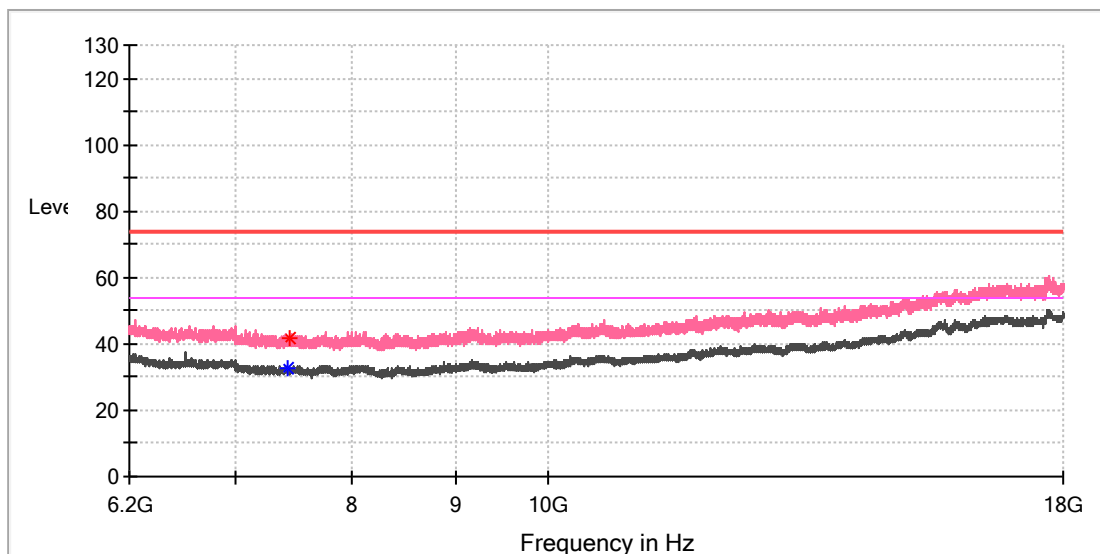


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7435.066667	---	32.76	54.00	21.24	100.0	V	222.0	8.4
7439.000000	41.77	---	74.00	32.23	100.0	V	0.0	8.4

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: High channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

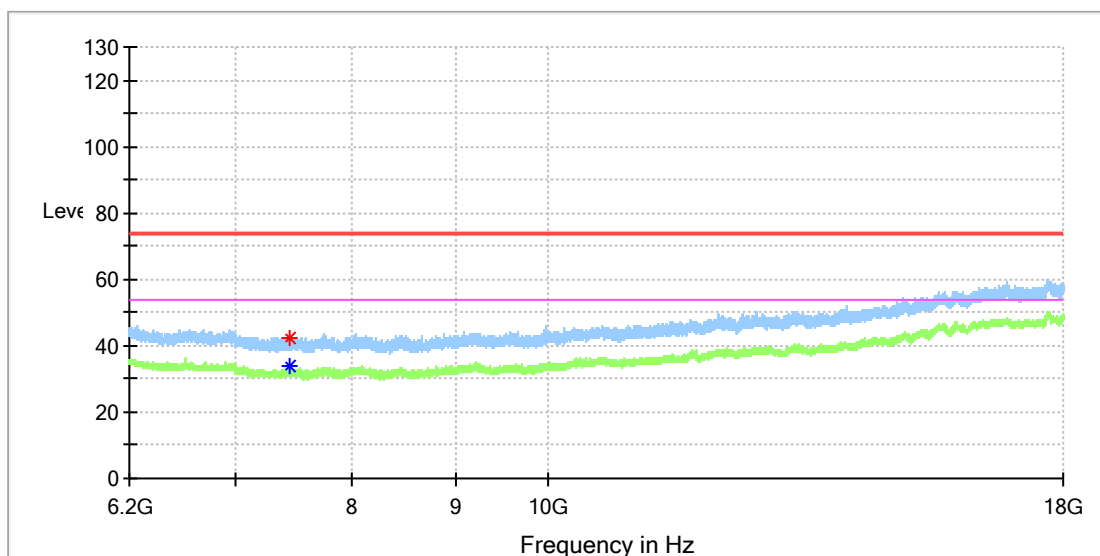


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7447.358333	---	33.68	54.00	20.32	100.0	H	0.0	8.5
7449.325000	42.58	---	74.00	31.42	100.0	H	0.0	8.5

Appendix B.4: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	Low channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

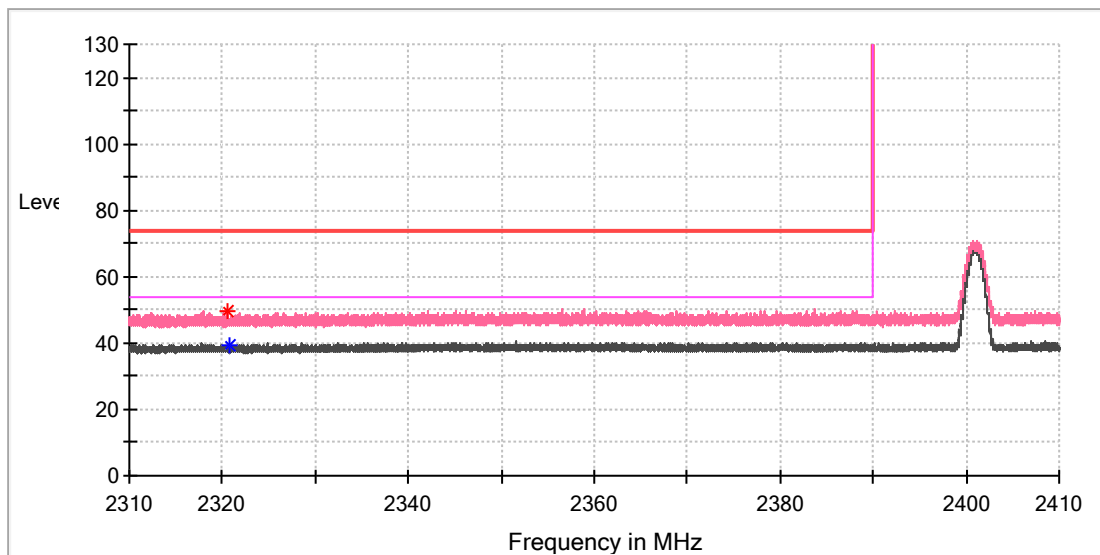


Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2320.455000	49.33	---	74.00	24.67	100.0	V	33.0	6.6
2320.680000	---	39.56	54.00	14.44	100.0	V	45.0	6.6

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: Low channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

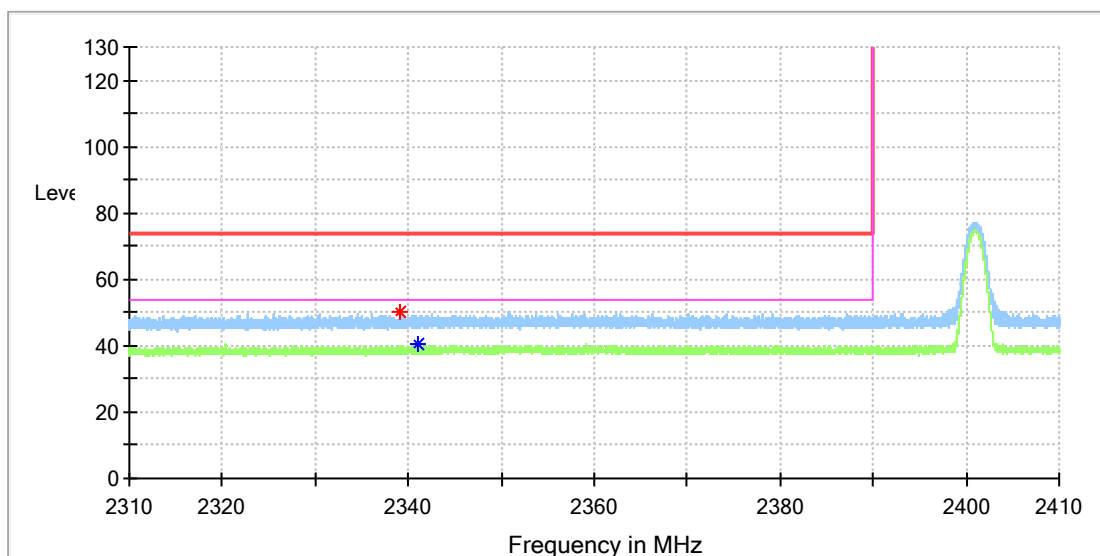


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2339.100000	50.42	---	74.00	23.58	100.0	H	220.0	6.8
2401.065000	---	40.39	54.00	13.61	100.0	H	0.0	6.8

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: High channel
Test Voltage:: DC 3.3V
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

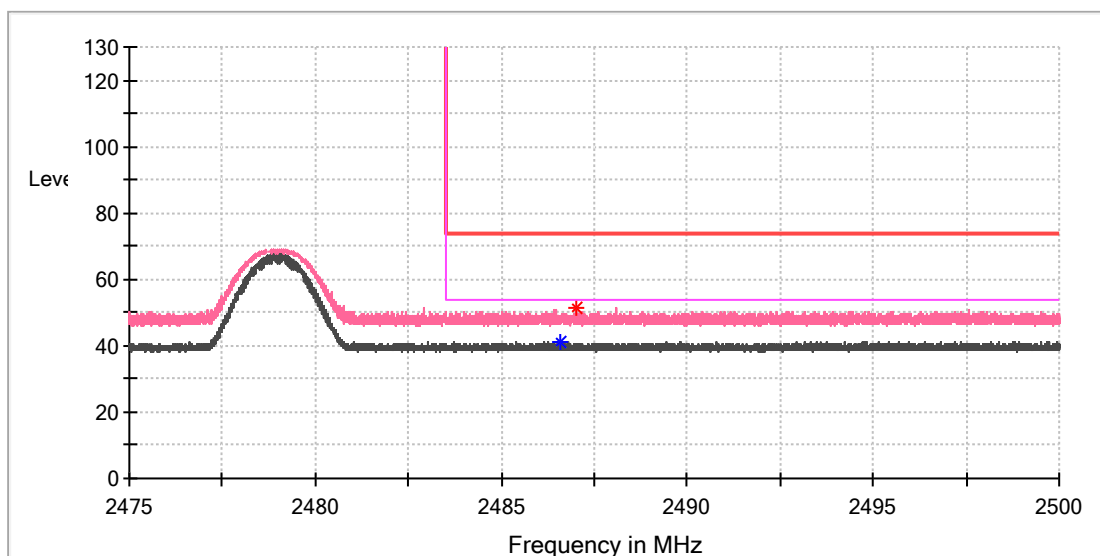


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.602500	---	41.17	54.00	12.83	100.0	V	300.0	7.4
2487.002500	51.38	---	74.00	22.62	100.0	V	124.0	7.4

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model:	NS-XB1CHATPAD
Test Mode:	High channel
Test Voltage::	DC 3.3V
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

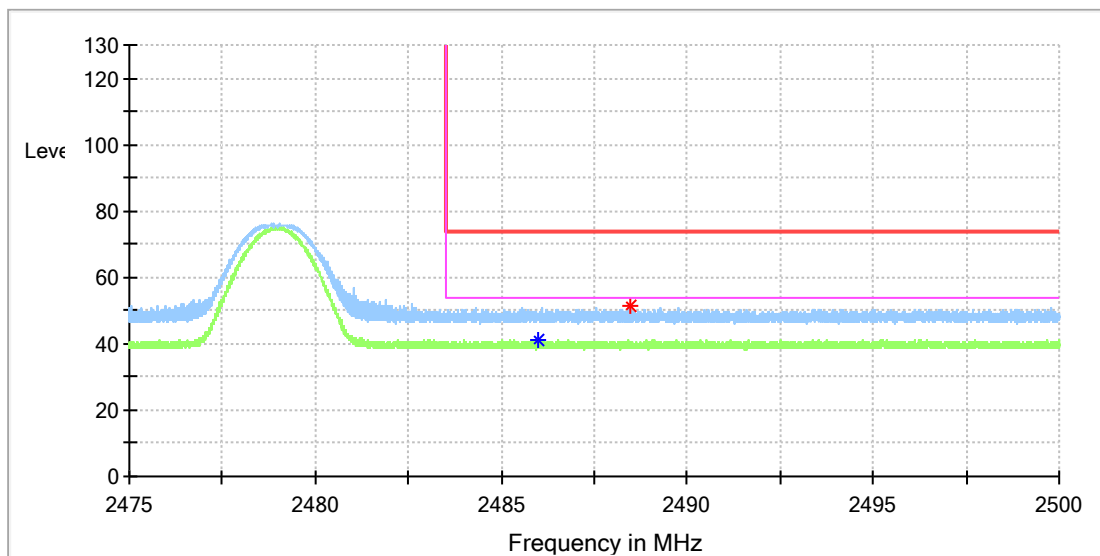


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.973750	---	41.36	54.00	12.64	100.0	H	51.0	7.4
2488.446250	51.12	---	74.00	22.88	100.0	H	31.0	7.4

Appendix B.5: Test Results of Radiated Emissions

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model	NS-XB1CHATPAD
Test Mode:	ON
Test Voltage:	DC 3.3V
Test By:	Kevin Zhou
Review By:	Gary Chen
Remark:	3m Chamber

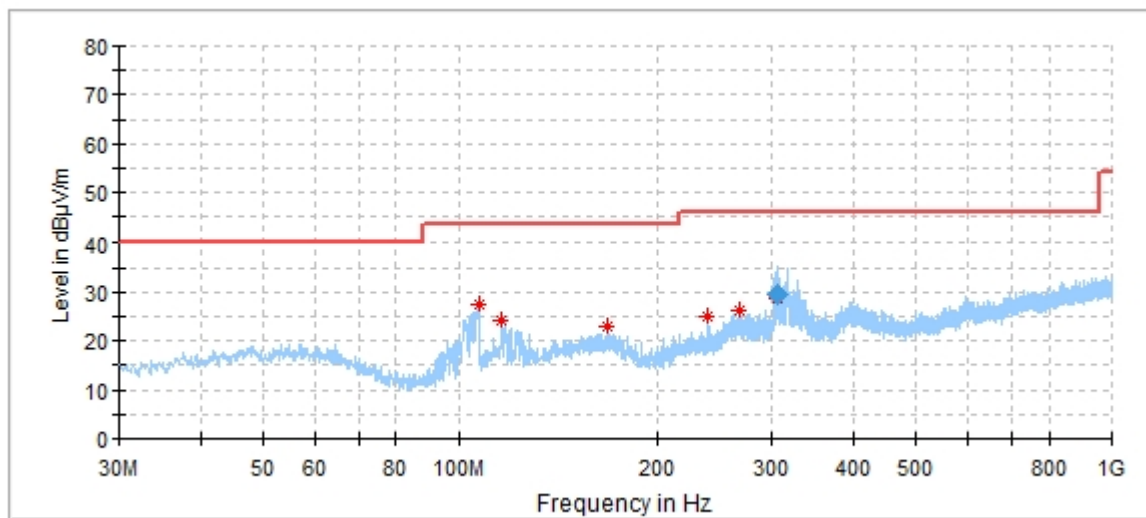

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
107.018000	27.68	43.50	15.82	100.0	H	356.0	17.6
115.942000	24.23	43.50	19.27	100.0	H	202.0	19.1
168.225000	22.89	43.50	20.61	100.0	H	356.0	21.5
239.811000	24.99	46.00	21.01	100.0	H	0.0	18.7
267.165000	26.06	46.00	19.94	100.0	H	268.0	20.4
305.540000	28.57	46.00	10.68	100.0	H	63.0	21.2

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
305.540000	29.51	46.00	16.49	1000.0	120.000	100.0	H	63.0	21.2

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: ON
Test Voltage: DC 3.3V
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

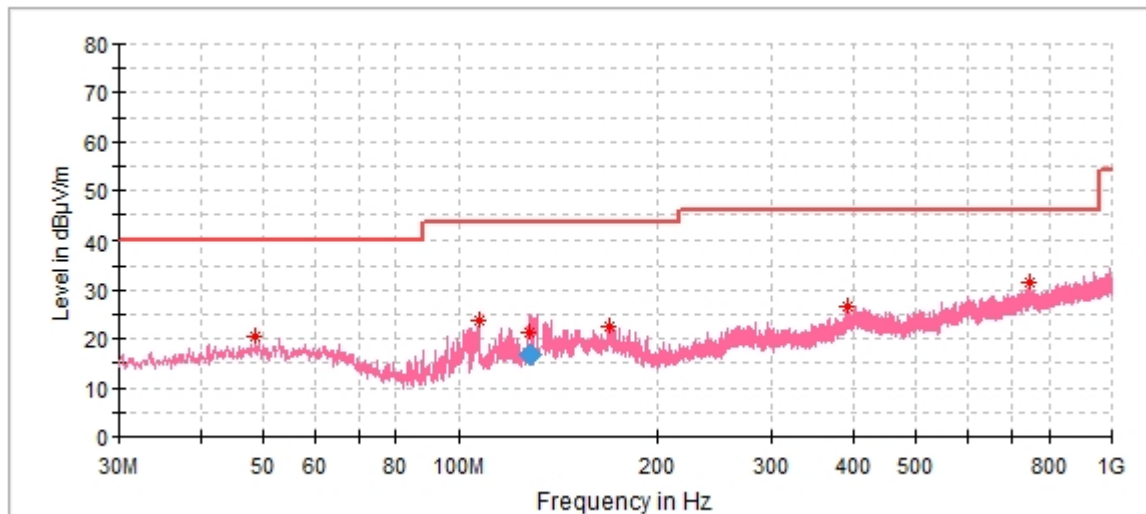

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.721000	20.52	40.00	19.48	100.0	V	298.0	21.2
107.600000	23.98	43.50	19.52	200.0	V	308.0	17.7
127.950000	21.52	43.50	21.98	200.0	V	304.0	19.0
169.098000	22.59	43.50	20.91	200.0	V	301.0	21.6
392.004000	26.69	46.00	19.31	100.0	V	346.0	22.9
750.225000	31.74	46.00	14.26	200.0	V	220.0	30.5

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
127.950000	16.91	43.50	26.59	1000.0	120.000	200.0	V	304.0	19.0

EUT Information

EUT Name: Chat Pad Controller Keyboard for Xbox
Model: NS-XB1CHATPAD
Test Mode: ON
Test Voltage: DC 3.3V
Test By: Kevin Zhou
Review By: Gary Chen
Remark: 3m Chamber

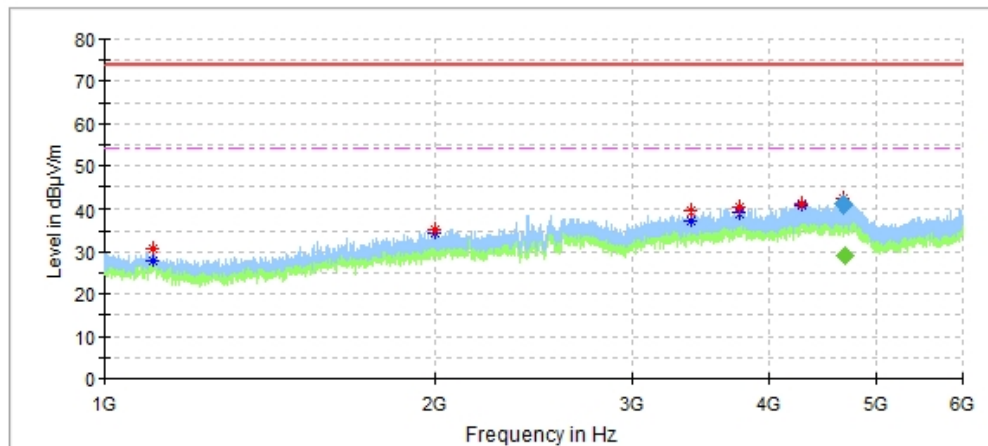

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1106.500000	30.65	---	74.00	43.35	100.0	H	191.0	-12.3
1106.500000	---	27.72	54.00	26.28	100.0	H	191.0	-12.3
1993.500000	35.25	---	74.00	38.75	100.0	H	240.0	-7.6
1993.500000	---	34.45	54.00	19.55	100.0	H	240.0	-7.6
3405.000000	39.23	---	74.00	34.77	100.0	H	336.0	-1.5
3405.000000	---	37.37	54.00	16.63	100.0	H	336.0	-1.5
3766.500000	---	38.77	54.00	15.23	100.0	H	345.0	0.1
3766.500000	40.40	---	74.00	33.60	100.0	H	345.0	0.1
4287.000000	40.99	---	74.00	33.01	100.0	H	249.0	2.1
4287.000000	---	40.49	54.00	13.51	100.0	H	249.0	2.1
4678.800000	42.17	---	74.00	31.83	100.0	H	179.0	2.5
4682.400000	---	29.12	54.00	24.88	100.0	H	167.0	2.5

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4678.800000	41.03	---	74.00	32.97	100.0	H	179.0	2.5
4682.400000	---	29.09	54.00	24.91	100.0	H	167.0	2.5

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox
Model	NS-XB1CHATPAD
Test Mode:	ON
Test Voltage:	DC 3.3V
Test By:	Kevin Zhou
Review By:	Gary Chen
Remark:	3m Chamber

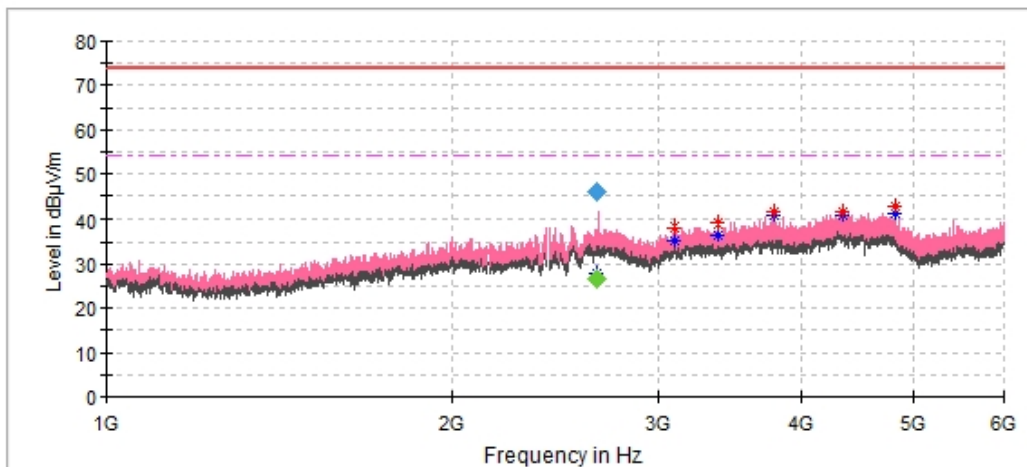

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2657.900000	46.41	---	74.00	27.39	100.0	V	170.0	-3.3
2659.500000	---	27.78	54.00	26.22	100.0	V	163.0	-3.3
3101.000000	---	35.14	54.00	18.86	100.0	V	302.0	-2.9
3101.000000	38.09	---	74.00	35.91	100.0	V	302.0	-2.9
3385.000000	---	36.50	54.00	17.50	100.0	V	288.0	-1.6
3385.000000	39.12	---	74.00	34.88	100.0	V	288.0	-1.6
3790.000000	---	40.51	54.00	13.49	100.0	V	302.0	0.0
3790.000000	41.52	---	74.00	32.48	100.0	V	302.0	0.0
4340.000000	---	40.71	54.00	13.29	100.0	V	209.0	2.2
4340.000000	41.56	---	74.00	32.44	100.0	V	209.0	2.2
4824.500000	---	41.15	54.00	12.85	100.0	V	323.0	2.0
4824.500000	42.72	---	74.00	31.28	100.0	V	323.0	2.0

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2657.900000	46.13	---	74.00	27.87	100.0	V	170.0	-3.2
2659.500000	---	26.62	54.00	27.38	100.0	V	163.0	-3.3