

Prüfbericht-Nr.: <i>Test report no.:</i>	CN20DGMC 001	Auftrags-Nr.: <i>Order no.:</i>	168290636	Seite 1 von 18 <i>Page 1 of 18</i>
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2020-11-16	
Auftraggeber: <i>Client:</i>	ZEN Factory Group (Asia) Limited A5-B, 12/F, Block A, Hong Kong Industrial Centre, 489-491 Castle Peak Road, Kowloon, Hong Kong			
Prüfgegenstand: <i>Test item:</i>	Chat Pad Controller Keyboard for Xbox (Keyboard)			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	NS-XB1CHATPAD, NS-XB1CHATPAD-C, RF-XB1CHATPAD, RF-XB1CHATPAD-C (Trademark: INSIGNIA)			
Auftrags-Inhalt: <i>Order content:</i>	FCC and IC approval			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.249 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart B Section 15.107 CFR47 FCC Part 15: Subpart B Section 15.109		RSS-210 Issue 10 December 2019 RSS-Gen Issue 5 March 2019 ICES-003 Issue 6 April 2019	
Wareneingangsdatum: <i>Date of sample receipt:</i>	2020-11-16	Please refer to photo documents		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A002948033-001			
Prüfzeitraum: <i>Testing period:</i>	2020-11-16 - 2020-12-16			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	 Ryan G. H. Yang	genehmigt von: <i>authorized by:</i>	 Winnie Hou	
Datum: <i>Date:</i>	2020-12-22	Ausstellungsdatum: <i>Issue date:</i>	2020-12-22	
Stellung / Position	Assistant Project Manager	Stellung / Position	Technical Certifier	
Sonstiges / Other: FCC ID: WP85I02001ZEN IC: 8632A-5I0201 HVIN: NS-XB1CHATPAD-C				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged:</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 FUNDAMENTAL & HARMONICS RADIATED EMISSION

RESULT: Pass

5.1.3 20dB BANDWIDTH

RESULT: Pass

5.1.4 99% BANDWIDTH

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSION & BAND EDGE

RESULT: Pass

5.1.6 RADIATED EMISSION

RESULT: Pass

Contents

1	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	12
5.1.1	<i>Antenna Requirement</i>	<i>12</i>
5.1.2	<i>Fundamental & Harmonics Radiated Emission</i>	<i>13</i>
5.1.3	<i>20dB Bandwidth</i>	<i>14</i>
5.1.4	<i>99% Bandwidth</i>	<i>15</i>
5.1.5	<i>Radiated Spurious Emission & Band Edge.....</i>	<i>16</i>
5.1.6	<i>Radiated Emission</i>	<i>17</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	18
7	LIST OF TABLES.....	18

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results of General 2.4GHz

Appendix C: Test Results of FCC Part 15B and ICES-003

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Accreditation Designation No.: CN1260

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

TÜV Rheinland (Shenzhen) Co., Ltd.

Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2021-08-11
Signal Analyzer	R&S	FSV 40	101439	2021-08-10
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2021-08-10
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2021-08-10
Amplifier	R&S	SCU-18F	180070	2021-08-10
Amplifier	R&S	SCU40A	100475	2021-09-10
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13
Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	2021-09-02
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2021-07-06

Radiated Emission				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Horn Antenna	R&S	HF907	102706	2022-08-07
Preamplifier	FIT	SCU-18F	180077	2021-08-16
Active magnetic loop antenna	SCHWARZBECK	FMZB1519B	00080	2021-08-20
Trilog-Broadband antenna	SCHWARZBECK	VULB9168	0945	2021-12-08

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd.. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The product is a Keyboard for Xbox, which supports 2.4GHz wireless technology.

According to the declaration of the applicant, the electrical circuit design, PCB layout and construction Design are identical for all models, only the model No. is different.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Chat Pad Controller Keyboard for Xbox (Keyboard)
Type Designation	NS-XB1CHATPAD, NS-XB1CHATPAD-C, RF-XB1CHATPAD, RF-XB1CHATPAD-C
Trademark	INSIGNIA
FCC ID	WP85I02001ZEN
IC	8632A-5I0201
HVIN	NS-XB1CHATPAD-C
Operating Voltage	DC 3.3V via external battery
Testing Voltage	DC 3.3V
Technical Specification of 2.4GHz	
Frequency Range	2402 - 2480 MHz
Type of Modulation	GFSK
Channel Number	16 channels
Channel Separation	2MHz, 3MHz, 4MHz, 5MHz, 6MHz, 7MHz, 8MHz, 10MHz
Antenna Type	Chip antenna
Antenna Gain	1.7 dBi

Table 3: RF Channel and Frequency of 2.4GHz

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	2402	5	2422	9	2441	13	2463
2	2407	6	2426	10	2445	14	2466
3	2414	7	2436	11	2453	15	2473
4	2419	8	2439	12	2459	16	2480

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441 MHz and highest channel: 2480 MHz

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 2.4GHz transmitting mode
 - 1. Low channel
 - 2. Middle channel
 - 3. High channel
- B. On, Wireless connecting mode
- C. On, Normal operation mode
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Rating Label

- User Manual

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013 and ANSI C63.4: 2014.

According to clause 3.1, all tests were performed on model NS-XB1CHATPAD in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 4: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	T480	PF-16A6N8	N/A
Dongle	ZEN Factory Group (Asia) Limited	NS-XB1CHATPAD	N/A	DC 5.0V by USB port
Handle				

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


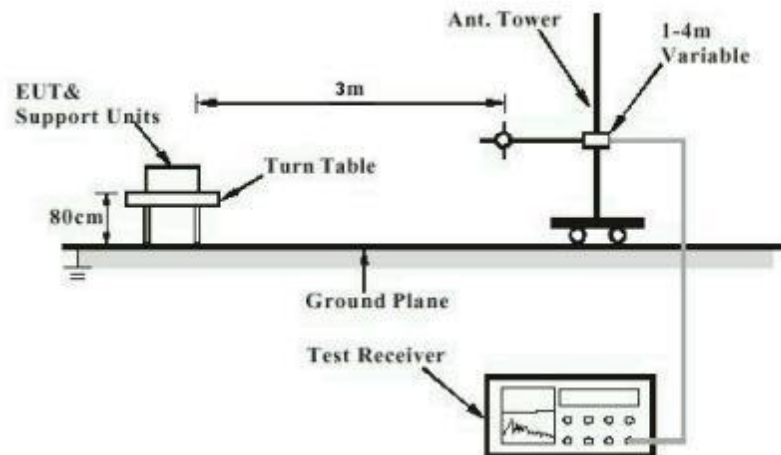


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

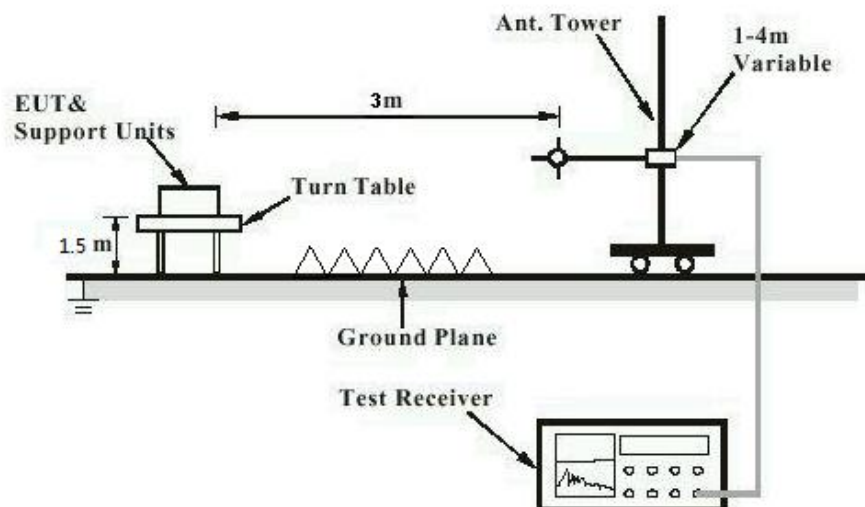

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 6.8

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1.7 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Fundamental & Harmonics Radiated Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.249(a) RSS-210 Issue 10 B.10
Basic standard	: ANSI C63.10: 2013 RSS-210 Issue 10 B.10(a) & Table A2
Limits	: Refer to FCC Part 15.249(a) & 15.209(a)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2020-11-26 ~ 2020-11-27
Input voltage	: DC 3.3V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.3 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.215
RSS-Gen clause 6.7
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 2020-12-16
Input voltage : DC 3.3V
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 56 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: CN20DGMC 001
Test Report No.

Seite 15 von 18
Page 15 of 18

5.1.4 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard	: RSS-Gen clause 6.7
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2020-12-16
Input voltage	: DC 3.3V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

5.1.5 Radiated Spurious Emission & Band Edge

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.249(a) RSS-210 Issue 10 B.10
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to FCC Part 15.249(a) & 15.209(a) RSS-210 Issue 10 B.10(a) & Table A2
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2020-12-07
Input voltage	: DC 3.3V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 56 %
Atmospheric pressure	: 101 kPa

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.6 Radiated Emission

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.109(a) ICES-003 Issue 6
Basic standard	: ANSI C63.4: 2014
Frequency range	: 30 - 6000MHz
Classification	: Class B
Limits	: FCC Part 15.109(a) ICES-003 Issue 6 Table 5 & Table 7
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2020-12-11
Input voltage	: DC 3.3V
Operation mode	: C
Ambient temperature	: 22 °C
Relative humidity	: 54 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix C

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	5
Table 2: Technical Specification of EUT	8
Table 3: RF Channel and Frequency of 2.4GHz	8
Table 4: Auxiliary Equipment Used during Test	10

Appendix B: Test Results of General 2.4GHz

APPENDIX B: TEST RESULTS OF GENERAL 2.4GHZ	1
APPENDIX B.1: FUNDAMENTAL & HARMONICS RADIATED EMISSION	2
30MHz - 1GHz	2
1GHz - 18GHz	6
APPENDIX B.2: TEST RESULTS OF 20DB BANDWIDTH.....	18
APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH.....	20
APPENDIX B.4: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	22


Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz -26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

Appendix B.1: Fundamental & Harmonics Radiated Emission

30MHz - 1GHz

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

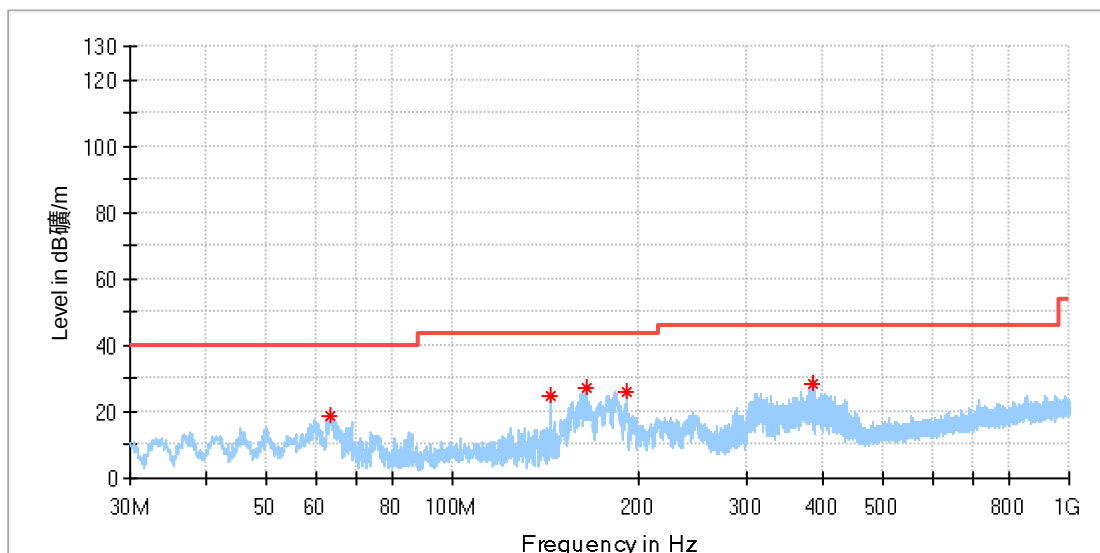

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
63.319500	18.62	---	40.00	21.38	100.0	H	88.0	-19.7
143.975000	24.86	---	43.50	18.64	100.0	H	121.0	-22.2
164.878500	27.27	---	43.50	16.23	100.0	H	71.0	-21.5
191.990000	26.23	---	43.50	17.27	100.0	H	104.0	-19.4
383.613500	28.46	---	46.00	17.54	100.0	H	0.0	-14.1

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

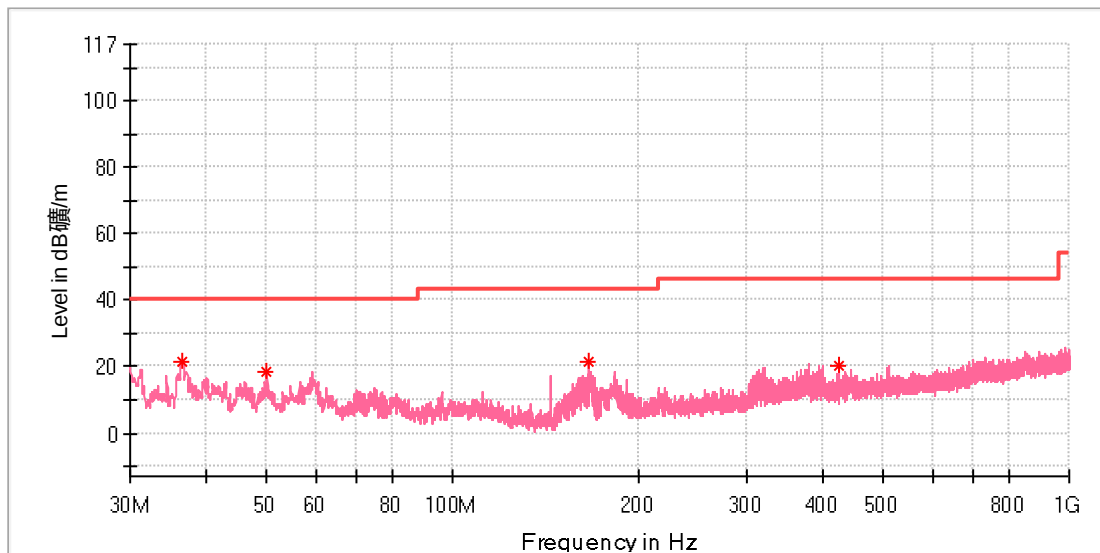

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.402000	21.37	---	40.00	18.63	100.0	V	4.0	-21.4
49.982000	18.49	---	40.00	21.51	100.0	V	134.0	-18.3
166.042500	21.52	---	43.50	21.98	100.0	V	359.0	-21.4
423.383500	20.43	---	46.00	25.57	100.0	V	300.0	-13.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

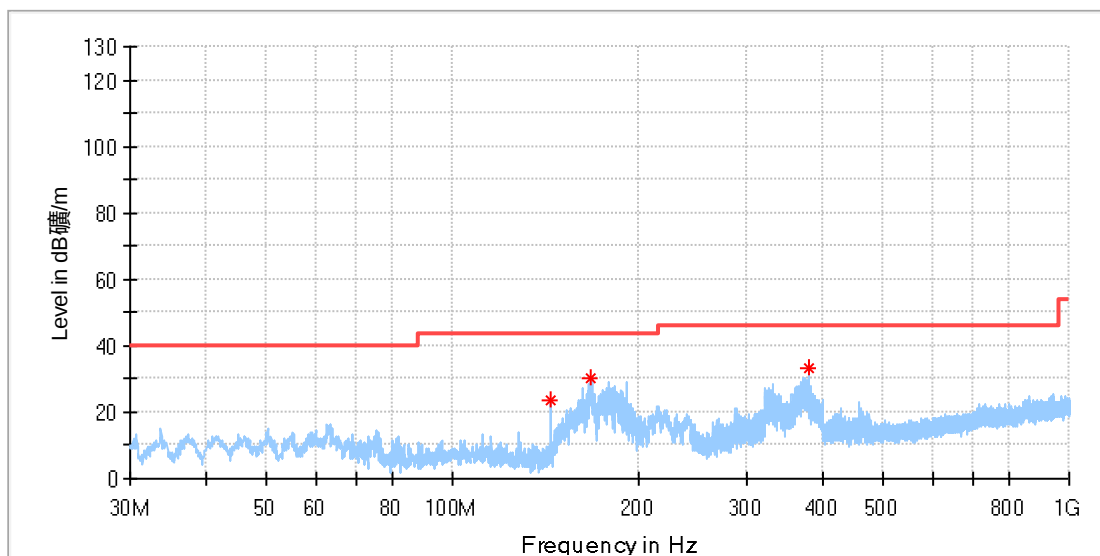

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
143.975000	23.38	---	43.50	20.12	100.0	H	108.0	-22.2
167.109500	30.31	---	43.50	13.19	100.0	H	290.0	-21.3
378.812000	32.96	---	46.00	13.04	100.0	H	0.0	-14.3

Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

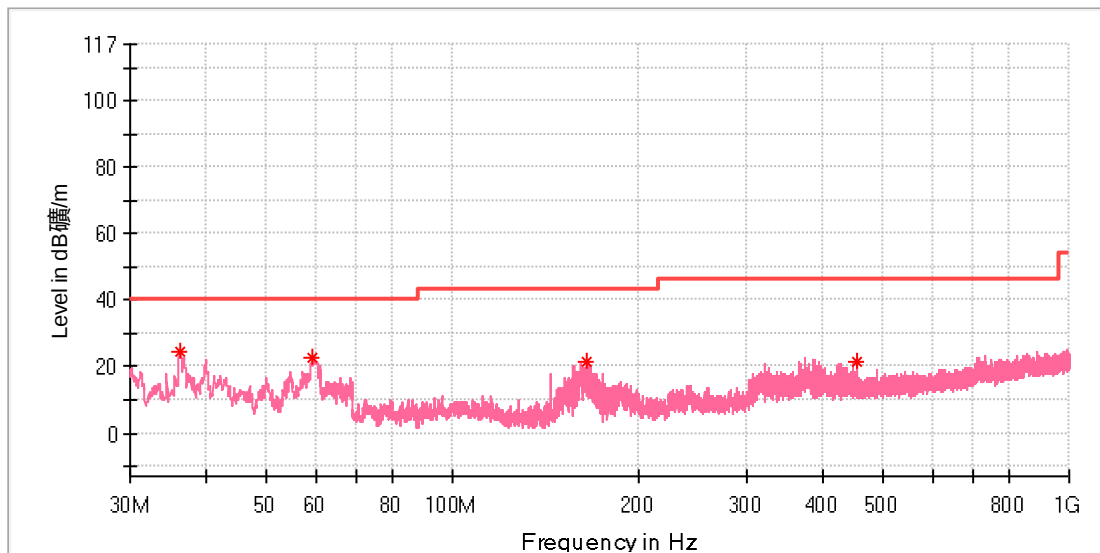

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.111000	24.48	---	40.00	15.52	100.0	V	7.0	-21.5
59.391000	22.47	---	40.00	17.53	100.0	V	134.0	-18.9
165.121000	21.63	---	43.50	21.87	100.0	V	0.0	-21.4
451.853000	21.59	---	46.00	24.41	100.0	V	254.0	-12.9


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

1GHz - 18GHz

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

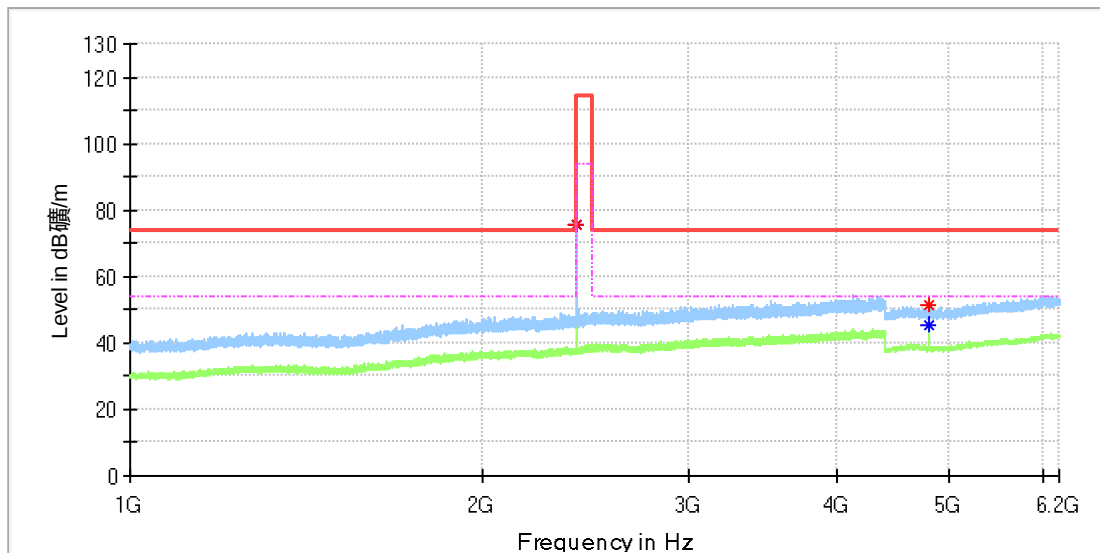

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2401.862500	75.69	---	114.00	38.31	100.0	H	111.0	7.0
2401.862500	---	75.34	94.00	18.66	100.0	H	111.0	7.0
4804.000000	51.27	---	74.00	22.73	100.0	H	189.0	11.8
4804.000000	---	45.62	54.00	8.38	100.0	H	189.0	11.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

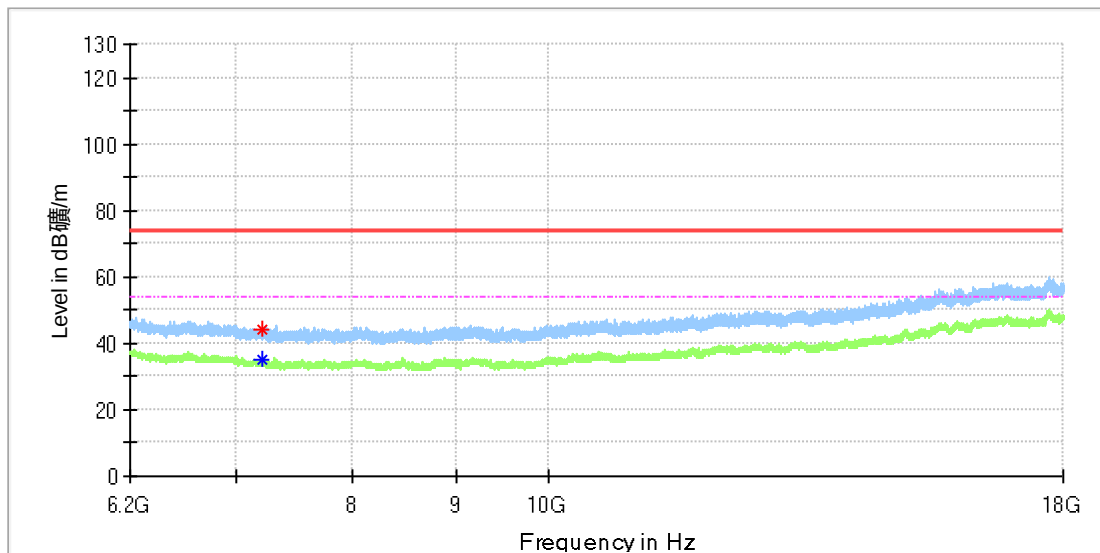

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7206.441667	44.33	---	74.00	29.67	100.0	H	140.0	8.8
7207.425000	---	34.95	54.00	19.05	100.0	H	347.0	8.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

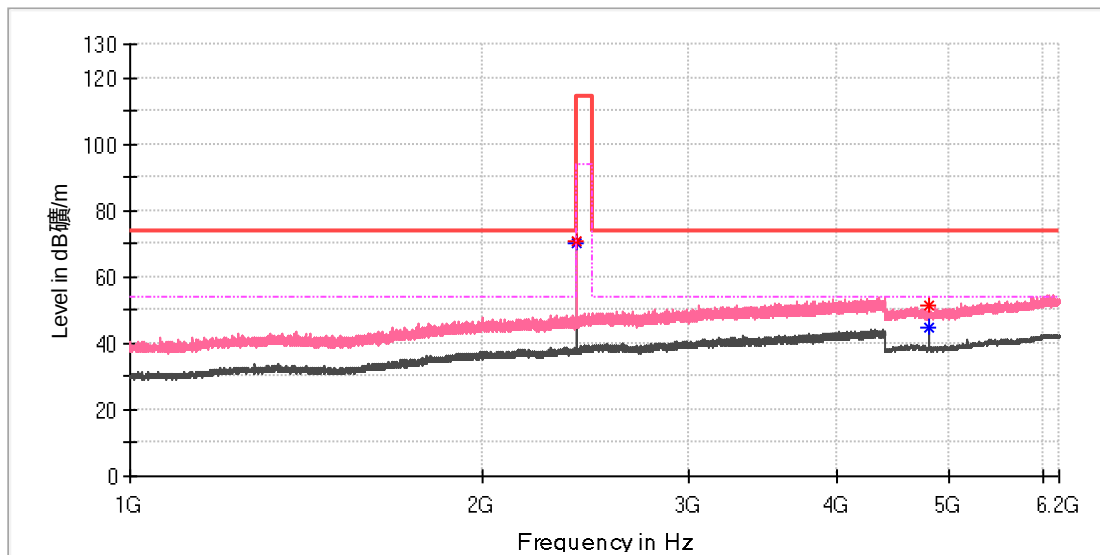

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.075000	70.66	---	114.00	43.34	100.0	V	280.0	7.0
2402.075000	---	70.32	94.00	23.68	100.0	V	280.0	7.0
4804.000000	51.45	---	74.00	22.55	100.0	V	39.0	11.8
4804.000000	---	44.54	54.00	9.46	100.0	V	39.0	11.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

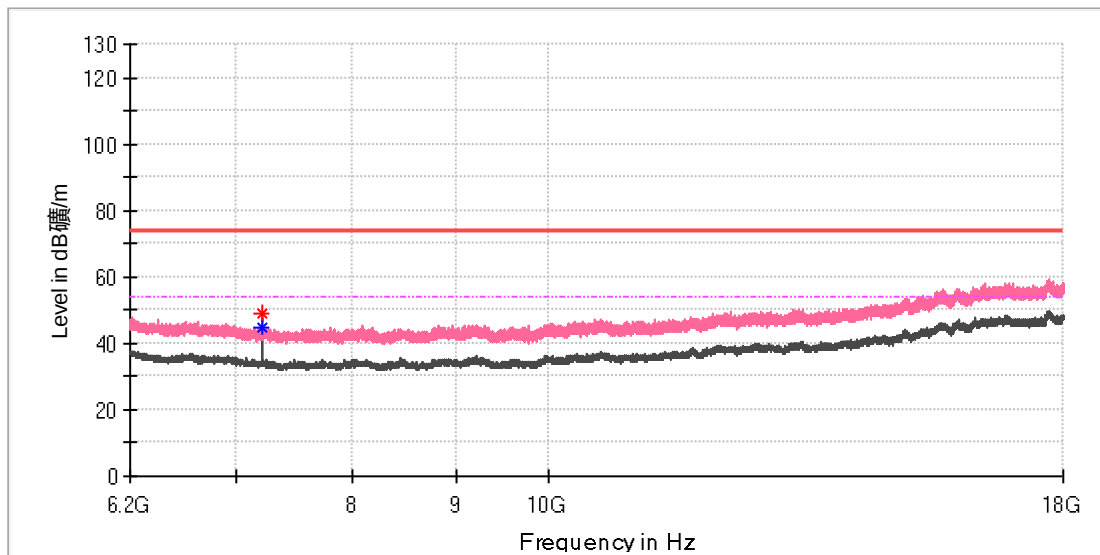

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7206.441667	48.97	---	74.00	25.03	100.0	V	22.0	8.8
7206.441667	---	44.75	54.00	9.25	100.0	V	22.0	8.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Mid CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

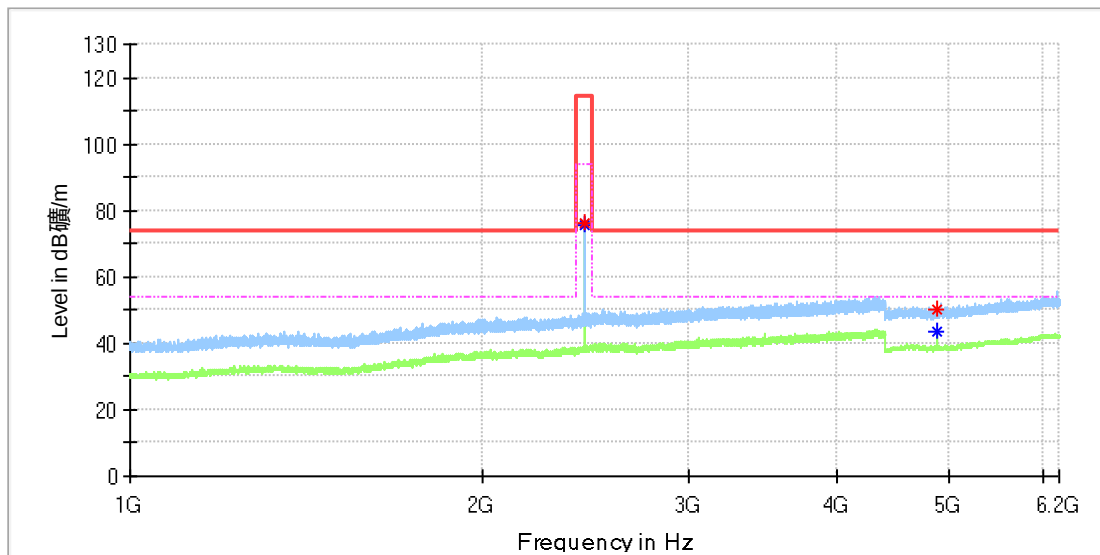

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2440.962500	76.06	---	114.00	37.94	100.0	H	171.0	7.4
2440.962500	---	75.80	94.00	18.20	100.0	H	171.0	7.4
4882.000000	50.08	---	74.00	23.92	100.0	H	190.0	11.8
4882.000000	---	43.46	54.00	10.54	100.0	H	190.0	11.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Mid CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

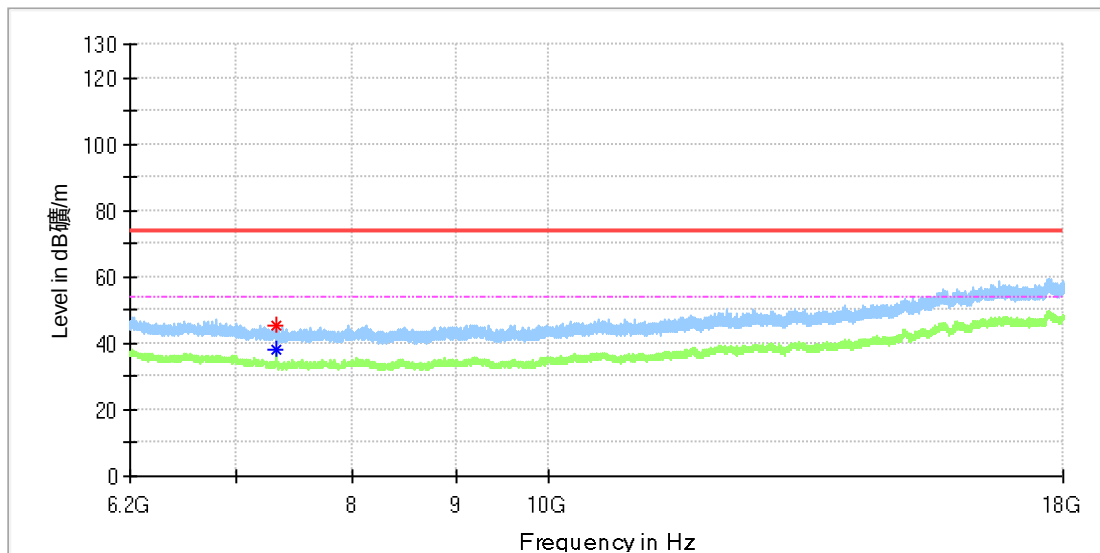

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7323.458333	---	37.90	54.00	16.10	100.0	H	121.0	8.2
7323.458333	45.43	---	74.00	28.57	100.0	H	121.0	8.2

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Mid CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

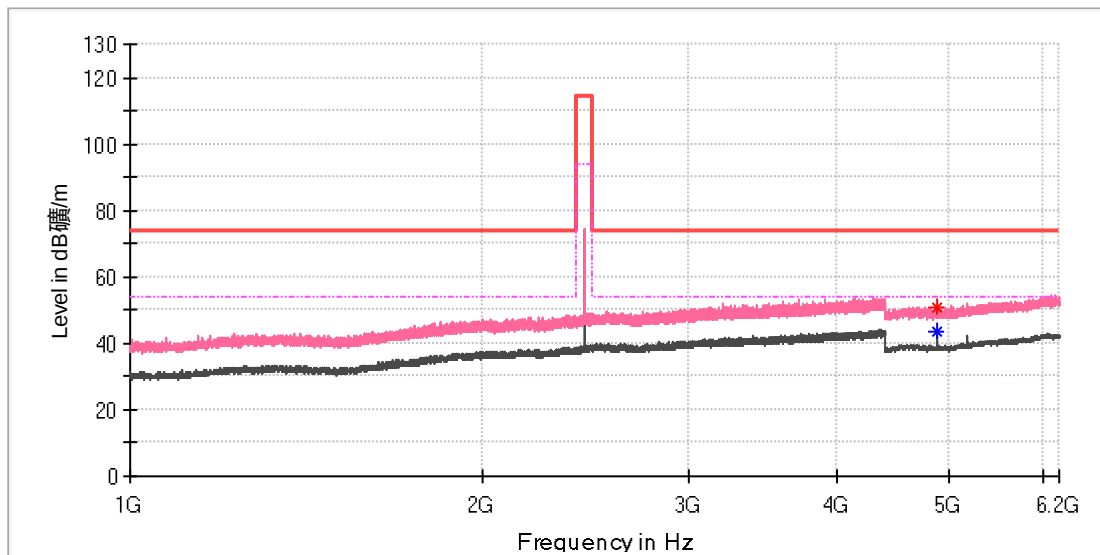

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4882.000000	51.06	---	74.00	22.94	100.0	V	293.0	11.8
4882.000000	---	43.76	54.00	10.24	100.0	V	293.0	11.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Mid CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

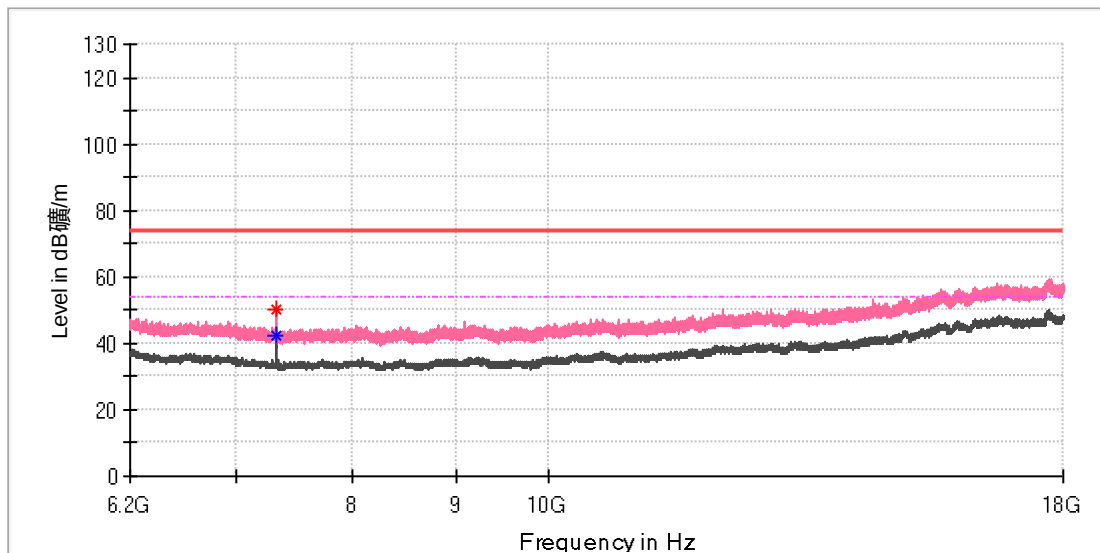

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7321.983333	50.06	---	74.00	23.94	100.0	V	200.0	8.2
7321.983333	---	42.19	54.00	11.81	100.0	V	200.0	8.2

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

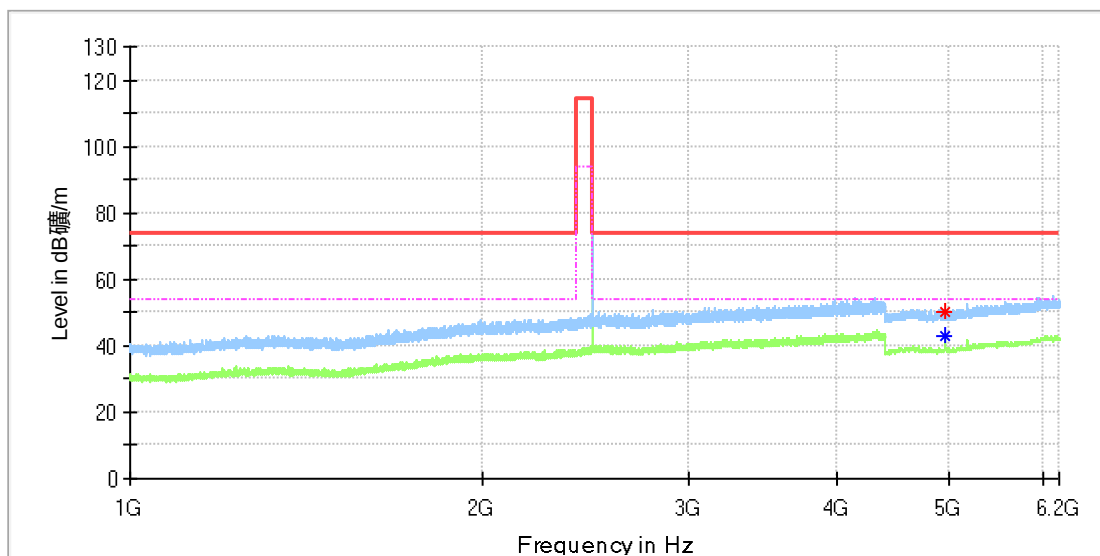

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4960.000000	50.06	---	74.00	23.94	100.0	H	131.0	11.8
4960.000000	---	42.69	54.00	11.31	100.0	H	131.0	11.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

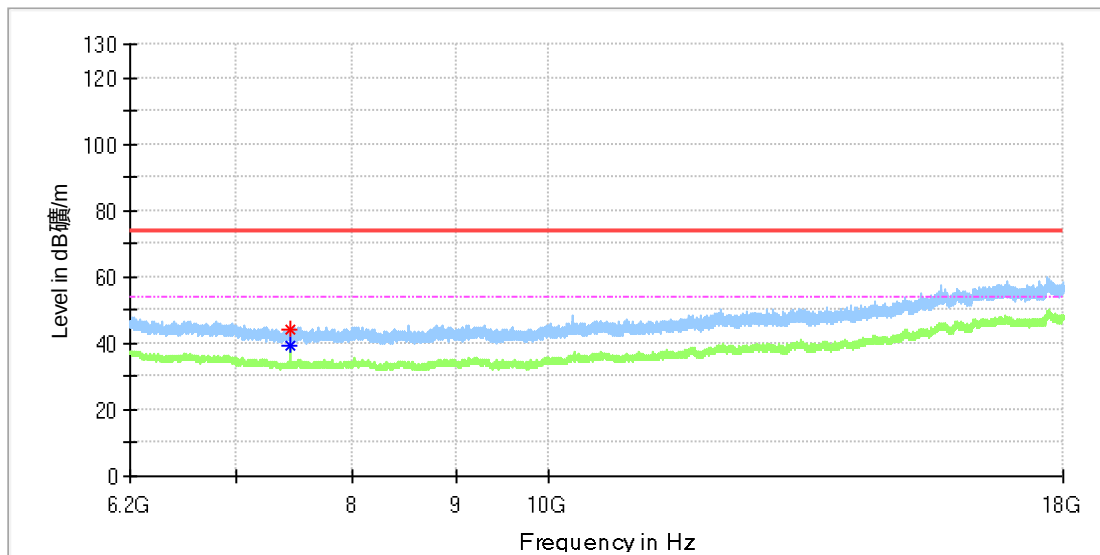

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	44.33	---	74.00	29.67	100.0	H	82.0	8.4
7439.491667	---	39.14	54.00	14.86	100.0	H	82.0	8.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

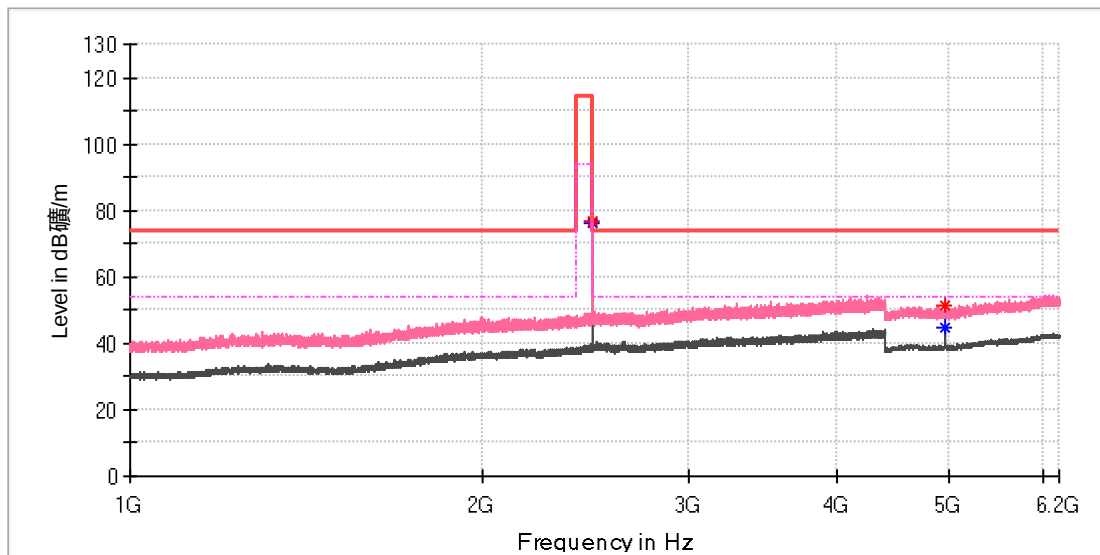

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2479.850000	76.61	---	114.00	37.39	100.0	V	339.0	7.4
2479.850000	---	76.21	94.00	17.79	100.0	V	339.0	7.4
4960.000000	51.56	---	74.00	22.44	100.0	V	288.0	11.8
4960.000000	---	45.01	54.00	8.99	100.0	V	288.0	11.8

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

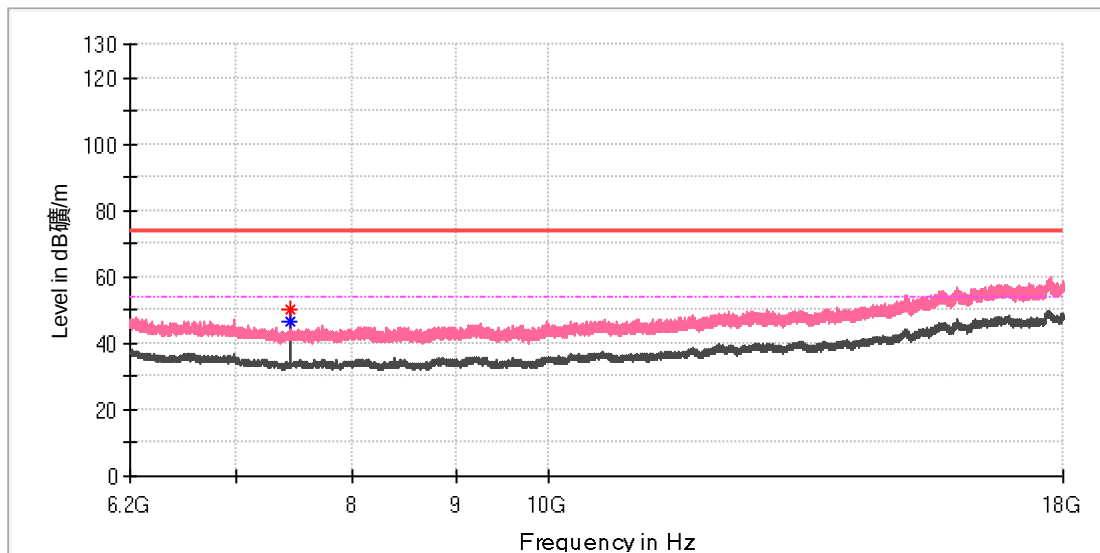



Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.491667	50.14	---	74.00	23.86	100.0	V	199.0	8.4
7439.983333	---	46.67	54.00	7.33	100.0	V	199.0	8.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---



Appendix B.2: Test Results of 20dB Bandwidth

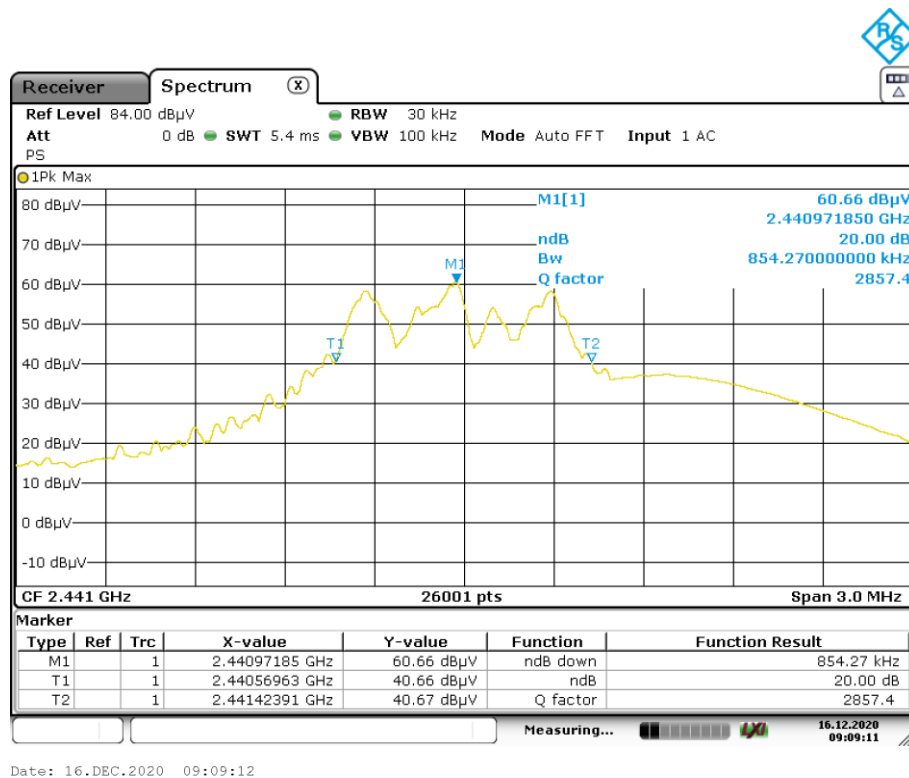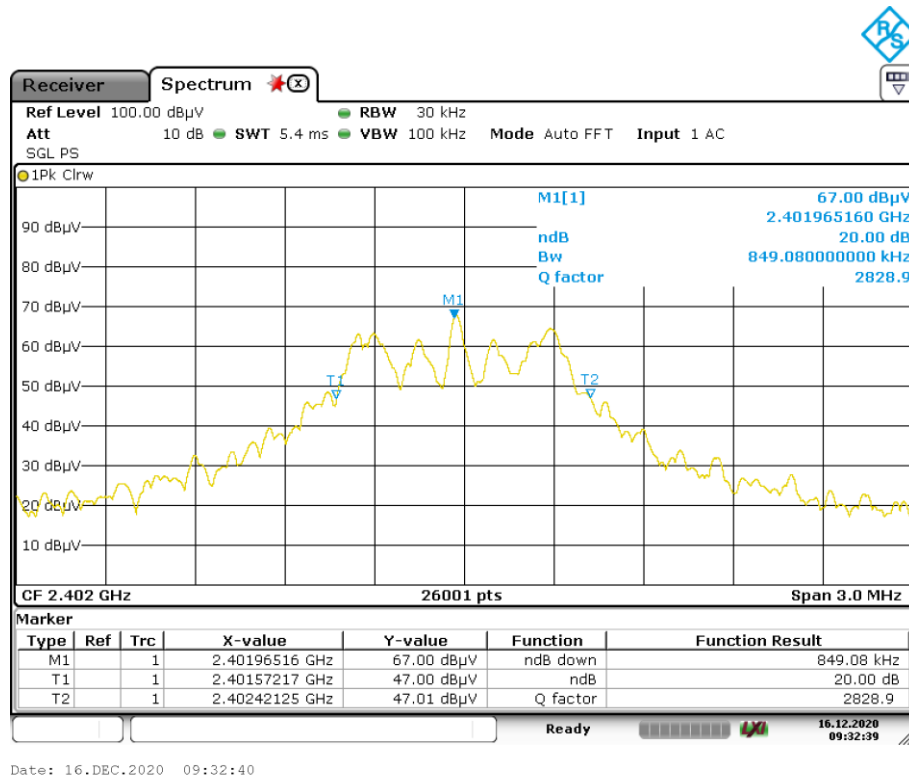


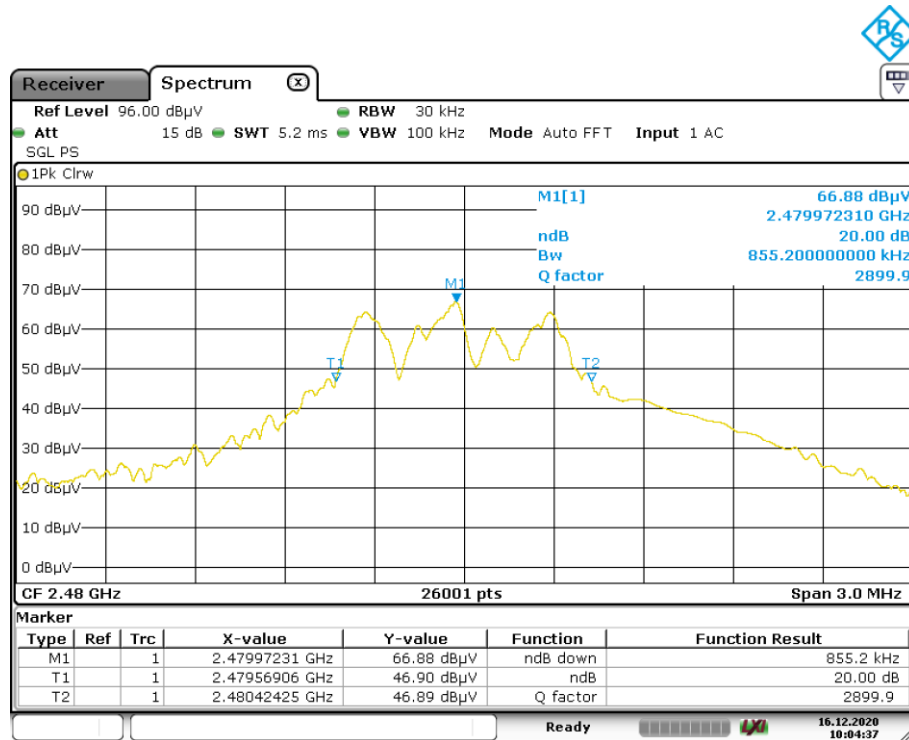

Date: 16.DEC.2020 10:04:37

Appendix B.3: Test Results of 99% Bandwidth

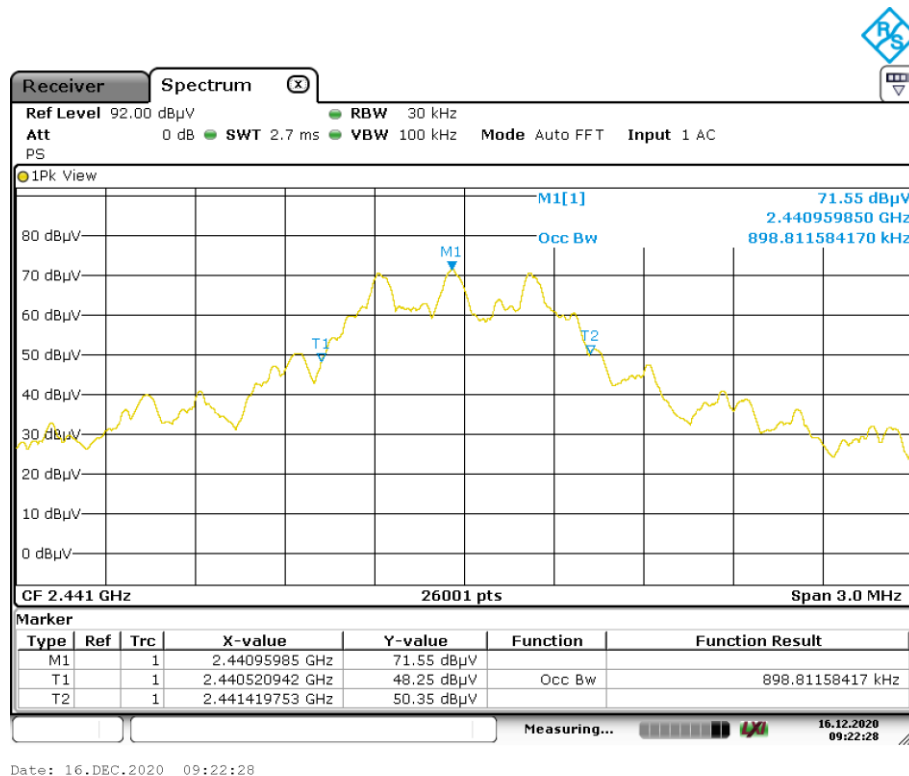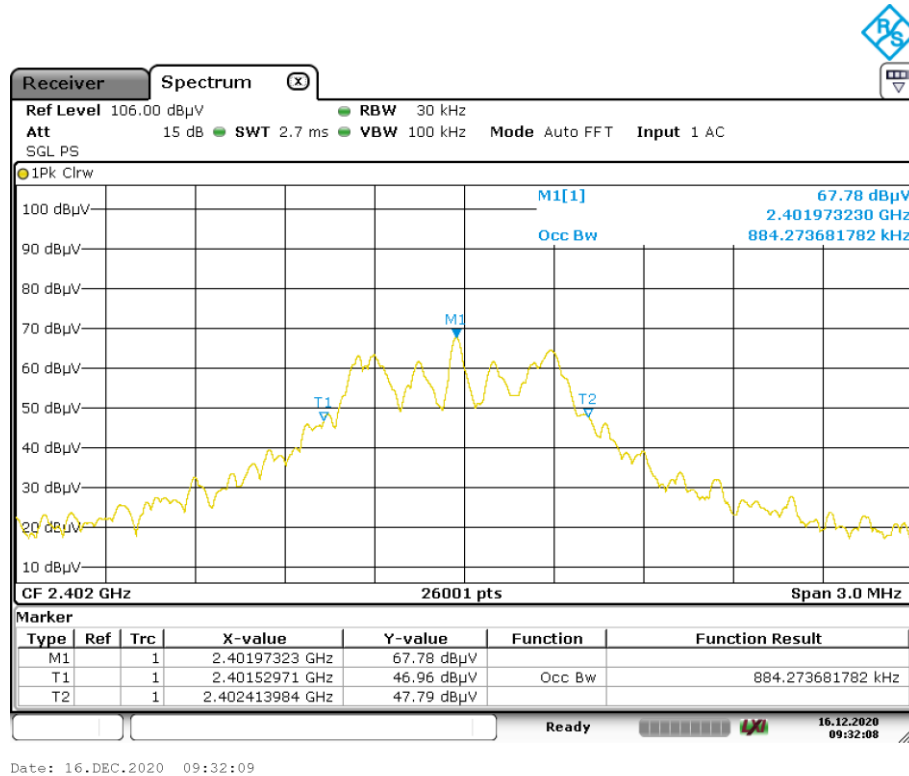

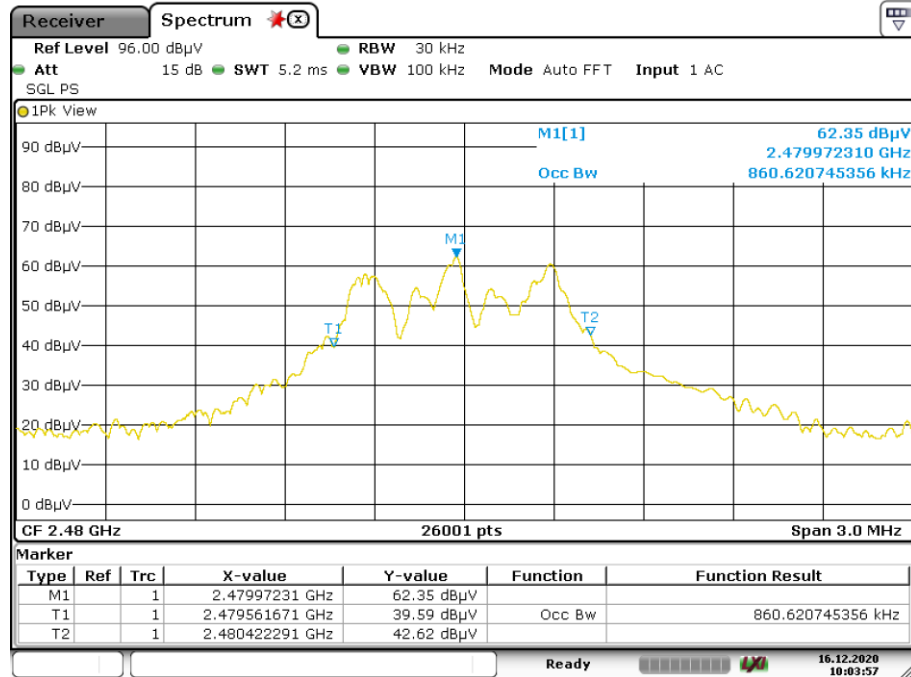


Date: 16.DEC.2020 10:03:58

Appendix B.4: Test Results of Radiated Emissions in Restricted Bands

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

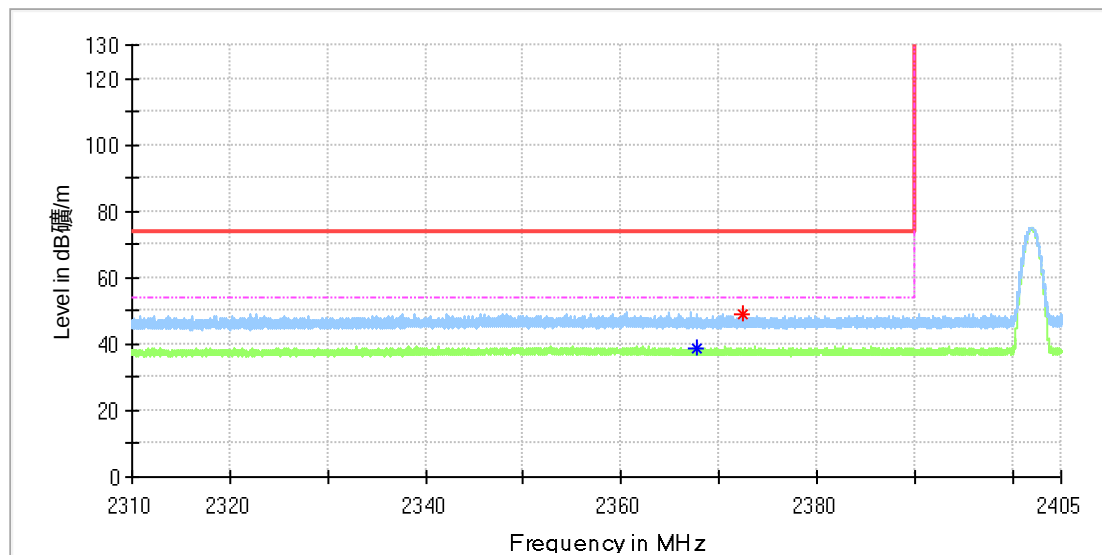

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2367.801563	---	38.90	54.00	15.10	100.0	H	41.0	6.9
2372.504063	49.09	---	74.00	24.91	100.0	H	0.0	6.9

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

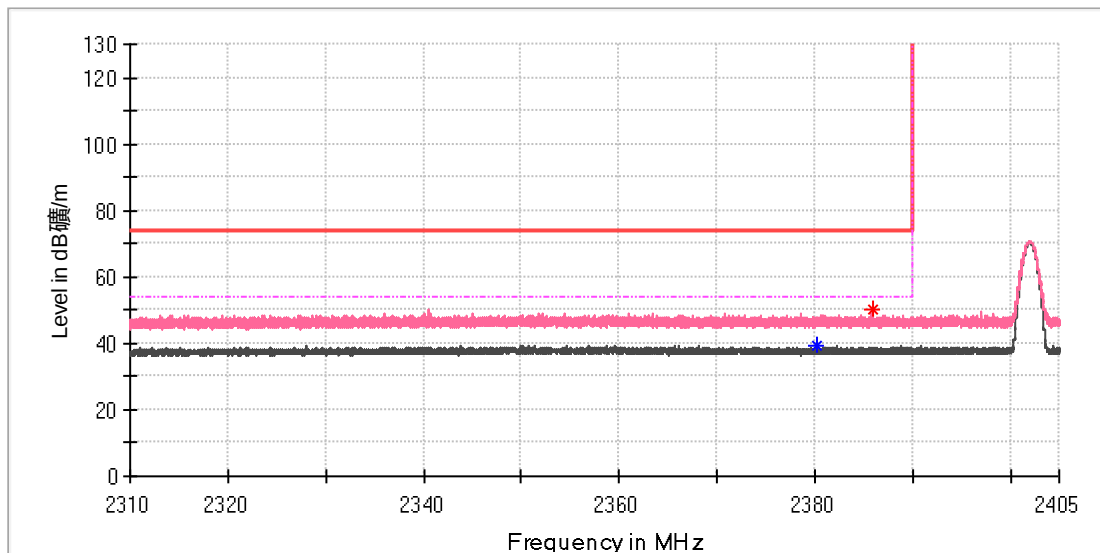

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2380.240625	---	39.60	54.00	14.40	100.0	V	52.0	7.0
2385.881250	49.97	---	74.00	24.03	100.0	V	219.0	7.0

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_High CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

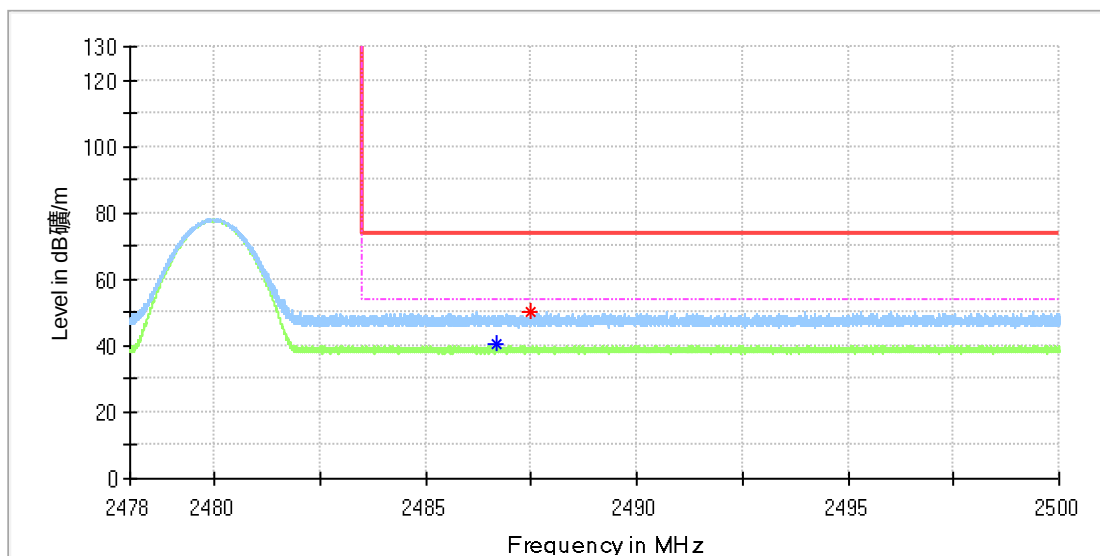

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.688625	---	40.23	54.00	13.77	100.0	H	207.0	7.4
2487.482000	50.37	---	74.00	23.63	100.0	H	294.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---

EUT Information

EUT Name:	Chat Pad Controller Keyboard for Xbox (Keyboard)
Model:	NS-XB1CHATPAD
Test Mode:	TX_2.4G_Low CH
Test Voltage::	Battery
Remark:	Temp 23 Humi:45%
Test Standard:	FCC 15.249
Tested By:	Alano Qu
Reviewed By:	Terry Yin

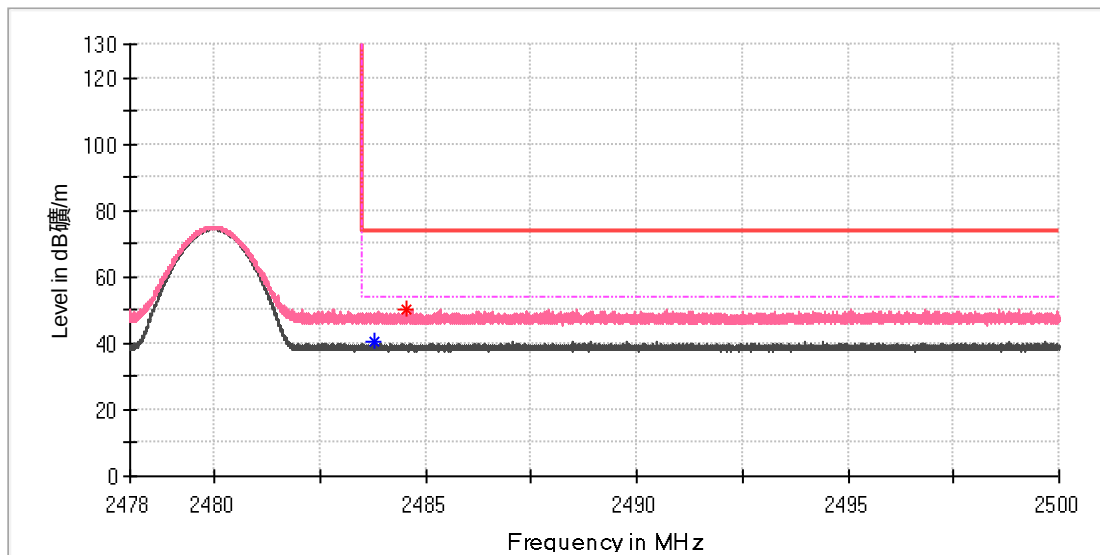

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.768125	---	40.51	54.00	13.49	100.0	V	0.0	7.4
2484.545000	50.25	---	74.00	23.75	100.0	V	34.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---		---	---