

SUBMITTAL **APPLICATION** REPORT

FOR FCC And INDUSTRY CANADA **GRANT OF CERTIFICATION**

FOR

Model: DWM1000RMT 902.9 - 927 MHz FHSS Transmitter

> FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

> > **FOR**

DIGITAL ALLY, INC.

7304 West 130th, Suite 290 Overland, Park, KS 66213

Test Report Number: 080921

Authorized Signatory: Sot DRogers

Scot D. Rogers

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT SN 0490-0009 Test #: 080921 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210

File: Digital Ally DWM1000 RMT TstRpt R2

FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1 Page 1 of 39





ROGERS LABS, INC.

4405 West 259th Terrace Louisburg, KS 66053 Phone / Fax (913) 837-3214

ENGINEERING TEST REPORT **FOR** APPLICATION of **GRANT of CERTIFICATION**

CFR47, PART 15C - INTENTIONAL RADIATORS Paragraph 15.247 and Industry Canada, RSS-210 Frequency Hopping Spread Spectrum Transmitter For

DIGITAL ALLY, INC.

7304 West 130th, Suite 290 Overland, Park, KS 66213 Jeff Burgess **Engineering Manager**

Model: DWM1000RMT

Frequency 902.9-927 MHz FCC ID#: WPZ-DWMRMT1, IC: 7945A-DWMRMT1

Test Date: September 30, 2008

Certifying Engineer:

Sot DRogers

Scot D. Rogers Rogers Labs, Inc.

4405 West 259th Terrace Louisburg, KS 66053 Phone: (913) 837-3214 Fax: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 2 of 39



Table of Contents

TABLE OF CONTENTS	3
FORWARD	5
OPINION / INTERPRETATION OF RESULTS	5
ENVIRONMENTAL CONDITIONS	5
UNITS OF MEASUREMENTS	5
2.1033(B) APPLICATION FOR CERTIFICATION	
TEST SITE LOCATIONS	7
LIST OF TEST EQUIPMENT	
APPLICABLE STANDARDS & TEST PROCEDURES	
AC Line Conducted Emission Test Procedure	
Radiated Emission Test Procedure	
EQUIPMENT TESTED	
EQUIPMENT FUNCTION	
EQUIPMENT CONFIGURATION	
SUBPART B – UNINTENTIONAL RADIATORS	
AC Line Conducted EMI	
Figure One AC Line Conducted Emissions Line 1 (MW1212)	
Figure Two AC Line Conducted Emissions Line 2 (MW1212)	
Figure Three AC Line Conducted Emissions Line 1 (MW117RA1203B01)	
Figure Four AC Line Conducted Emissions Line 2 (MW117RA1203B01)	
Figure Five AC Line Conducted Emissions Line 1 (TR1512)	
Figure Six AC Line Conducted Emissions Line 2 (TR1512)	13
Radiated EMI	14
Figure Seven Plot of General Radiated Emissions	15
Figure Eight Plot of General Radiated Emissions	15
Figure Nine Plot of General Radiated Emissions	16
Figure Ten Plot of General Radiated Emissions	16
Figure Eleven Plot of General Radiated Emissions	
AC Line Conducted Emissions Data (7 Highest Emissions)	
General Radiated Emissions Data from EUT	18
Summary of Results for AC Line Conducted Emissions	18
Summary of Results for General Radiated Emissions	18
Statement of Modifications and Deviations	
SUBPART C - INTENTIONAL RADIATORS	19
15.203 Antenna Requirements	
15.205 Restricted Bands of Operation	19

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

SN 0490-0009 Test #: 080921 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 3 of 39



Radiated Emissions Data in Restricted Bands (Worst-case)	20
Summary of Results for Radiated Emissions in Restricted Bands	20
15.209 Radiated Emissions Limits; General Requirements	21
Radiated EMI	21
General Radiated Emissions Data from EUT (15.209)	21
Summary of Results for Radiated Emissions	21
15.247 Operation in the Band 902.9-927 MHz	22
Figure Twelve Plot of Radiated Emissions	23
Figure Thirteen Plot of Radiated Emissions	24
Figure Fourteen Plot of Radiated Emissions	24
Figure Fifteen Plot of Radiated Emissions	25
Figure Sixteen Plot of Radiated Emissions	25
Figure Seventeen of output Power and number of channels in band	26
Figure Eighteen Plot of output Power and number of channels in band	26
Figure Nineteen Plot of Occupied Bandwidth low frequency	27
Figure Twenty Plot of Occupied Bandwidth middle frequency	27
Figure Twenty-one Plot of Occupied Bandwidth high frequency	28
Figure Twenty-two Plot of Channel Spacing	28
Figure Twenty-three Plot of Dwell Time on channel	29
Figure Twenty-four Plot of Channel Occupancy over 20-second period	29
Figure Twenty-five Plot of lower frequency band edge	30
Figure Twenty-six Plot of higher frequency band edge	30
Radiated Emissions Data per 15.247	31
Peak Conducted Output Power	31
Summary of Results for Radiated Emissions of Intentional Radiator	32
Statement of Modifications and Deviations	32
NNEX	33
Annex A Measurement Uncertainty Calculations	34
Annex B Test Equipment List For Rogers Labs, Inc	36
Annex C Qualifications	37
Annex D FCC Site Registration Letter	38
Annex E Industry Canada Site Registration Letter	39

Revision 2

Test #: 080921 SN 0490-0009 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2

Page 4 of 39



Forward

The following information is submitted for consideration in obtaining Grant of Certification for frequency hopping spread spectrum intentional radiator operating under CFR47 Paragraph 15.247 and Industry Canada standard RSS-210.

Name of Applicant:

Digital Ally, Inc.

7304 West 130th, Suite 290 Overland, Park, KS 66213

Model: DWM1000RMT wireless transceiver

FCC I.D.: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Frequency Range: 902.99-927 MHz

Operating Power: Peak 102.7 dBµV/m @ 3-meters (3- meter radiated measurement)

Opinion / Interpretation of Results

Tests Performed	Results
Emissions Tests	_
Emissions as per CFR47 paragraphs 2 and 15.205	Complies
Emissions as per CFR47 paragraphs 2 and 15.207	Complies
Emissions as per CFR47 paragraphs 2 and 15.209	Complies
Emissions as per CFR47 paragraphs 2 and 15.247, and RSS-210	Complies

Environmental Conditions

Ambient Temperature 25.0° C

Relative Humidity 42%

Atmospheric Pressure 30.17 in Hg

Units of Measurements

Conducted EMI Data is in dBuV; dB referenced to one microvolt.

Radiated EMI Data is in dBµV/m; dB/m referenced to one microvolt per meter.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Digital Ally, Inc. Model: DWM1000RMT

Louisburg, KS 66053 Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 5 of 39

Revision 2 File: Digital Ally DWM1000 RMT TstRpt R2 Date: October 15, 2008



2.1033(b) Application for Certification

Manufacturer: **(1)** Digital Ally, Inc.

7304 West 130th, Suite 290

Overland, Park, KS 66213

Identification: Model: DWM1000RMT Wireless Transceiver (2)

FCC I.D.: WPZ-DWMRMT1

IC: 7945A-DWMRMT1

(3) Instruction Book

Refer to Exhibit for Instruction Manual.

Description of Circuit Functions: **(4)**

Refer to Exhibit of Operational Description.

(5) Block Diagram with Frequencies:

Refer to Exhibit of Operational Description.

(6) Report of Measurements:

Report of measurements follows in this Report.

(7) Photographs: Construction, Component Placement, etc.:

Refer to Exhibit for photographs of equipment.

- (8) No Peripheral Equipment was Necessary.
- (9) Transition Provisions of 15.37 are not being requested.
- Equipment is not a scanning receiver and this section is not applicable. (10)
- (11)The equipment does not operate in the 59 - 64 GHz frequency band and this section is not applicable.
- (12)The equipment is not software defined and this section is not applicable.

Revision 2

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 6 of 39



Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded

screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace,

Louisburg, KS.

The radiated emissions tests were performed at the 3 meters, Open Area Radiated EMI

Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace,

Louisburg, KS.

Refer to Annex for FCC and Industry Canada Site Registration Letters Site Approval

List of Test Equipment

A Hewlett Packard 8591EM Spectrum Analyzer was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

HP 8591 EM Analyzer Settings					
	Conducted Emissions				
RBW	AVG. BW	Detector Function			
9 kHz	30 kHz	Peak / Quasi Peak			
	Radiated Emissions				
RBW	AVG. BW	Detector Function			
120 kHz	300 kHz	Peak / Quasi Peak			
	HP 8562A Analyzer Settings				
RBW	Video BW	Detector Function			
100 kHz	100 kHz	Peak			
1 MHz	1 MHz	Peak / Average			

Revision 2



EQUIPMENT	MFG.	MODEL	CAL. DATE	DUE.
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/07	10/08
LISN	Comp. Design	1762	2/08	2/09
Antenna	ARA	BCD-235-B	10/07	10/08
Antenna	EMCO	3147	10/07	10/08
Antenna	EMCO	3143	5/08	5/09
Analyzer	HP	8591EM	5/08	5/09
Analyzer	HP	8562A	5/08	5/09

Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2007, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247, and Industry Canada standard RSS-210 the following information is submitted. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document FCC, documents DA00-1407 and DA00-705 and/or TIA/EIA 603-1.

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions testing was performed as defined in sections 7 and 13.1.3 of ANSI C63.4. The test setup including the EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50 μHy choke. EMI was coupled to the spectrum analyzer through a 0.1 μF capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

Radiated Emission Test Procedure

Testing for the unintentional radiated emissions was performed as defined in section 8 and 13.1.4 of ANSI C63.4. The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the exhibits for EUT placement.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 8 of 39



Equipment Tested

Equipment Model FCC ID IC

EUT DWM1000RMT WPZ-DWMRMT1 7945A-DWMRMT1


AC Charger MW1212 N/A

MW117RA1203B01 N/A AC Charger AC Charger TR1512 N/A

Equipment Function

The EUT is a 902.9-927 MHz radio transmitter used to wirelessly interface with remote compliant equipment offering communications and data information exchange in the law enforcement profession. The DWM1000RMT is the remote microphone communications point for interfacing with remote complaint equipment in a professional environment. The unit is marketed for use to incorporate a wireless microphone link in the law enforcement profession. The link offers officers the ability to communicate to the patrol vehicle mounted equipment while outside the vehicle. Test software was installed in a test sample allowing for special testing requirements and purposes. The modified software allowed the transmitter to be set to transmit and receive on channels for testing purposes. The equipment was tested for compliance while operating through all normal modes available (stand-alone and recharging in the base while connected to AC power). These configurations represented the worst-case emissions profile for the equipment and results are recorded in this report. The equipment operates from internal rechargeable battery power and requires the approved AC charging station to replenish the battery.

Equipment Configuration

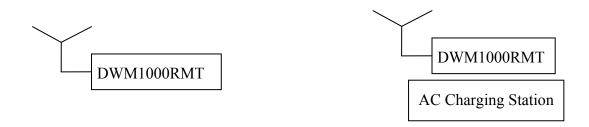

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

SN 0490-0009 Test #: 080921 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 9 of 39



Subpart B – Unintentional Radiators

AC Line Conducted EMI

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied AC power adapter options were connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 µF capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worstcase configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the AC Line conducted emissions of the MW1212. Refer to figures three and four for plots of the AC Line conducted emissions of the MW117RA1203B01. Refer to figures five and six for plots of the AC Line conducted emissions of the TR1512.

FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 10 of 39



MARKER 15Ø kHz 49.42 dBW ACTV DET: PEAK

MEAS DET: PEAK QP AVG MKR 15Ø kHz

49.42 dB µV

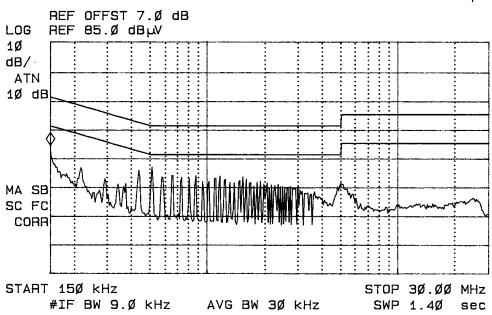


Figure One AC Line Conducted Emissions Line 1 (MW1212)

MARKER ACTV DET: PEAK 15Ø kHz MEAS DET: PEAK QP AVG 44.6Ø dB W MKR 15Ø kHz 44.6Ø dBµV REF OFFST 7.Ø dB LOG REF 85.0 dBW 1Ø dB/-ATN 1Ø dB MA SB SC FC CORR START 150 kHz STOP 3Ø.ØØ MHz AVG BW 3Ø kHz #IF BW 9.Ø kHz SWP 1.40 sec

Figure Two AC Line Conducted Emissions Line 2 (MW1212)

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 11 of 39



MARKER 2ØØ kHz 44.19 dBµV ACTV DET: PEAK

MEAS DET: PEAK QP AVG

MKR 2ØØ kHz 44.19 dB \u03b4V

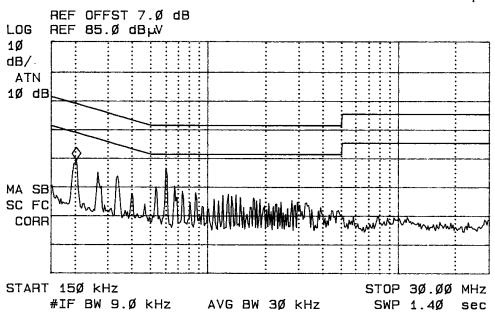


Figure Three AC Line Conducted Emissions Line 1 (MW117RA1203B01)

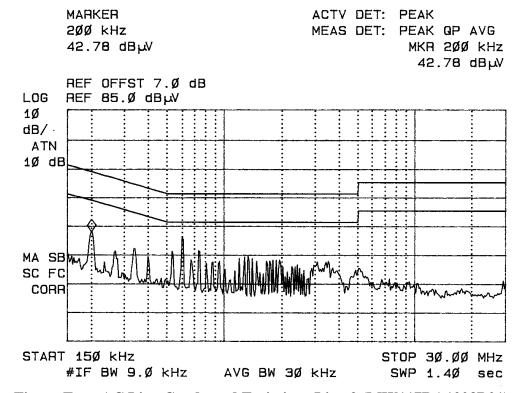


Figure Four AC Line Conducted Emissions Line 2 (MW117RA1203B01)

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 12 of 39



MARKER 18Ø kHz 49.25 dB W ACTV DET: PEAK

MEAS DET: PEAK QP AVG MKR 18Ø kHz

49.25 dBµV

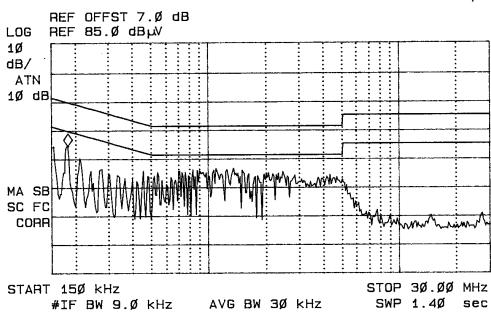


Figure Five AC Line Conducted Emissions Line 1 (TR1512)

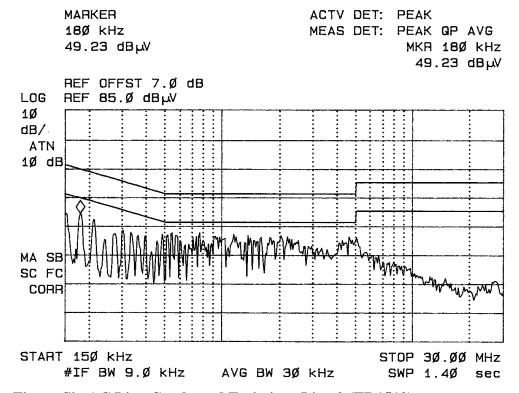


Figure Six AC Line Conducted Emissions Line 2 (TR1512)

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT Test #: 080921

SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 13 of 39



Radiated EMI

The unit typically receives power from the internal battery and offers recharging capability using the approved charge station. For testing purposes the equipment was powered from batteries located inside the EUT and/or while placed on the charging station during testing. The EUT was arranged a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the frequency spectrum from 30 MHz to 10,000 MHz for the preliminary testing. Refer to figures seven through eleven showing plots of the radiated emissions spectrum taken in a screen room. The highest radiated emission was then remaximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 12,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 5 GHz and or, double ridge or pyramidal horns and mixers from 4 GHz to 40 GHz, notch filters and appropriate amplifiers were utilized.

Revision 2

Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2

SN 0490-0009

FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 14 of 39



MARKER 1ØB.Ø MHz 33.34 dB W ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 1Ø8.Ø MHz 33.34 dBµV

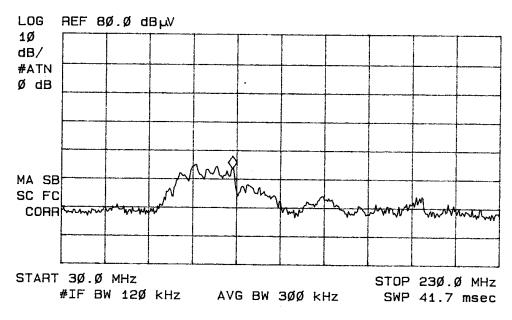


Figure Seven Plot of General Radiated Emissions

MARKER 1.Ø78 GHz 21.72 dBµV

ACTV DET: PEAK MEAS DET: PEAK QP

MKR 1.078 GHz 21.72 dBµV

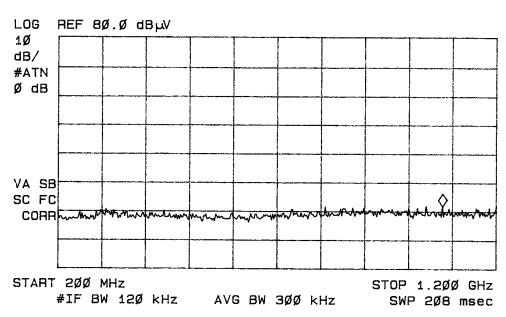


Figure Eight Plot of General Radiated Emissions

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 15 of 39



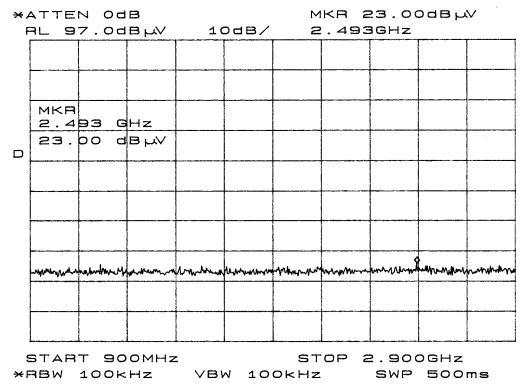


Figure Nine Plot of General Radiated Emissions

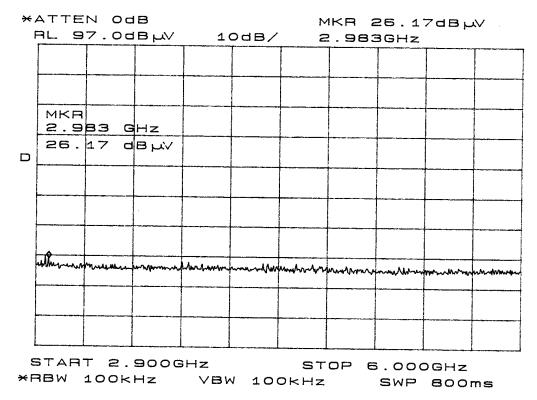


Figure Ten Plot of General Radiated Emissions

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 16 of 39



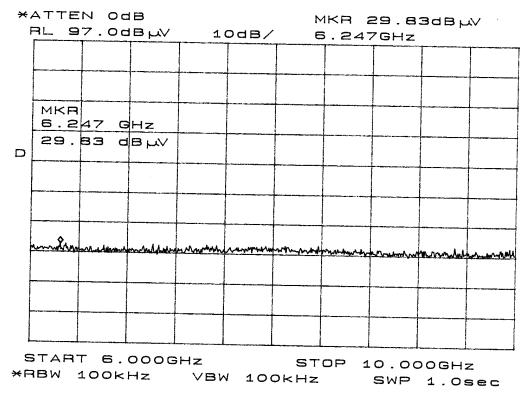


Figure Eleven Plot of General Radiated Emissions

AC Line Conducted Emissions Data (7 Highest Emissions)

Frequency band	L1 Level (dBμV)			L2 Level (dBμV)			CISPR 22 Limit Q.P.
(MHz)	Peak	Q.P.	AVE	Peak	Q.P.	AVE	Ave(dBμV)
0.15 - 0.5	49.3	44.7	30.2	49.2	48.5	44.2	66 / 56
0.5 - 5	42.2	40.8	25.5	45.1	43.2	28.8	56 / 46
5 – 10	39.2	36.6	20.7	42.5	40.0	22.6	60 / 50
10 – 15	24.2	18.4	11.0	31.4	28.9	20.5	60 / 50
15 – 20	25.6	20.7	10.7	25.8	22.1	13.9	60 / 50
20 – 25	22.4	17.0	10.2	27.6	21.8	13.5	60 / 50
25 – 30	25.2	20.0	10.8	27.6	23.9	15.0	60 / 50

Other emissions present had amplitudes at least 10 dB below the limit.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 17 of 39



General Radiated Emissions Data from EUT

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	FCC Class B Limit @ 3m (dBµV/m)
84.1	37.0	38.8	7.6	30	14.6	16.4	40.0
86.0	43.8	40.4	7.6	30	21.4	18.0	40.0
88.9	46.5	45.5	7.6	30	24.1	23.1	43.5
89.6	48.6	42.6	7.6	30	26.2	20.2	43.5
100.5	49.7	42.3	7.3	30	27.0	19.6	43.5
114.8	53.4	49.2	6.7	30	30.1	25.9	43.5
117.5	52.8	49.6	7.1	30	29.9	26.7	43.5

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The conducted emissions for the EUT meet the requirements for CFR47 and RSS-210. The EUT demonstrated a 12.8 dB minimum margin below the Quasi-Peak limit, and an 11.8 dB minimum margin below the average limit. Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.

Summary of Results for General Radiated Emissions

The radiated emissions of the EUT comply with requirements for CFR47, and Industry Canada. The EUT demonstrated an 18.6 minimum margin below the limit. Other emissions were present with amplitudes at least 20 dB below the limit.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to comply with the CISPR 22, CFR47, and Industry Canada requirements. There were no deviations or exceptions to the specifications.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 18 of 39

NVLAP Lab Code 200087-0

Subpart C - Intentional Radiators

As per CFR47 Part 15, Subpart C, paragraphs 15.203, 15.205, 15.209, 15.247 and RSS-210 the

following information is submitted.

15.203 Antenna Requirements

The equipment is professionally installed and maintained in controlled environments. The unit is

produced with a unique antenna connection used by authorized service personnel and professional

installers only. The equipment offers no other provision for user service, replacement, or antenna

modification. The requirements of 15.203 are fulfilled and there are no deviations or exceptions to

the specification.

15.205 Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at a

distance of three meters at the OATS. The EUT utilizes frequency, determining circuitry, which

generates harmonics falling in the restricted bands. Emissions were checked at the OATS, using

appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other

significant emission was observed which fell into the restricted bands of operation.

Sample Calculations:

RFS $(dB\mu V/m @ 3m) = FSM(dB\mu V) + A.F.(dB) - Gain(dB)$

= 20.7 + 29.0 - 30

= 19.7

Revision 2



Radiated Emissions Data in Restricted Bands (Worst-case)

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	FCC Class B Limit @ 3m (dBµV/m)
2709.0	20.7	22.8	29.0	30.0	19.7	21.8	54.0
2745.0	20.3	22.8	29.0	30.0	19.3	21.8	54.0
2780.7	24.5	24.5	29.0	30.0	23.5	23.5	54.0
3612.0	21.1	25.5	30.7	30.0	21.8	26.2	54.0
3660.0	19.8	23.5	30.7	30.0	20.5	24.2	54.0
3707.6	20.3	21.4	30.7	30.0	21.0	22.1	54.0
4515.0	21.3	23.4	32.5	30.0	23.8	25.9	54.0
4575.0	20.3	22.2	32.5	30.0	22.8	24.7	54.0
4634.5	20.1	20.2	32.5	30.0	22.6	22.7	54.0
5418.0	19.6	20.8	33.1	30.0	22.7	23.9	54.0

Other emissions present had amplitudes at least 20 dB below the margin.

Summary of Results for Radiated Emissions in Restricted Bands

The radiated emissions in restricted bands comply with requirements of CFR47 and RSS-210. The EUT demonstrated a 27.8 dB minimum margin below the limits for restricted bands of operation. Both average and peak amplitudes above 1000 MHz were checked for compliance with the regulations. No other emissions where found in the restricted frequency bands. Other emissions were present with amplitudes at least 20 dB below the Limits.

Revision 2



15.209 Radiated Emissions Limits; General Requirements

Radiated EMI

The EUT was arranged in a typical equipment configuration and operated through all of its various modes. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Emissions were checked in the screen room from 30 to 12,000 MHz and plots were made of the frequency spectrum from 30 MHz to 12,000 MHz for the preliminary testing. The highest radiated emission was then re-maximized at this location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open area test site at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 12,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Biconilog from 30 MHz to 1000 MHz, Log Periodic from 200 MHz to 5 GHz, and/or Pyramidal Horns from 4 GHz to 40 GHz.

General Radiated Emissions Data from EUT (15.209)

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	FCC Class B Limit @ 3m (dBµV/m)

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for Radiated Emissions

The radiated emissions for the EUT meet the requirements for CFR47 Part 15C, and Industry Canada. The EUT had at least at least a 20 dB minimum margin below the general emissions limit. Other emissions were present with amplitudes at least 20 dB below the limit.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

SN 0490-0009 Test #: 080921 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1 Page 21 of 39



15.247 Operation in the Band 902.9-927 MHz

The power output was measured on an Open Area Test Site at a 3 meters distance. The EUT and test fixture was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of the carrier frequency was measured using a spectrum analyzer. The peak and average amplitude of the spurious emissions above 1000 MHz were measured using a spectrum analyzer then data was recorded from the analyzer display. Refer to figures twelve through sixteen for plots of the transmitter radiated emissions taken in the screen room. Refer to figures seventeen through twenty-six for plots of the spectrum analyzer display demonstrating compliance to the specifications. The EUT is a frequency hopping spread spectrum intentional radiator utilizing at least 50 hopping channels. Figures seventeen and eighteen demonstrate power output and number of channels used in 902.9-927 MHz frequency band. Figures nineteen through twentyone demonstrate power output, and occupied bandwidth of channels in the 902.9-927 MHz band. The 20-dB bandwidth of 76.3 kHz complies with the requirement of less than 250 kHz wide and utilizing at least 50 hopping frequencies. Figure twenty-two demonstrates the 95 kHz channel spacing in the 902.9-927 MHz band. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a twenty-second-time period. Figures twenty-three and twenty-four demonstrate dwell time on channel and number of times on channel in a 20-second period. These plots demonstrate compliance with 11 mS dwell time and number of times on channel in a 20-second period. As described in the operational description exhibit, the equipment complies with requirements of channel occupancy. The 902 and 928 MHz band edges are protected due to the 902.9–927 MHz channels used for frequency of operation. Figures twenty-five and twenty-six demonstrate compliance at band edges.

The maximum peak output power of the unit was measured at the antenna port and again at a distance of three meters while tested on the OATS with the available antenna options. The amplitudes of each emission and spurious emission were measured at a distance of 3 meters from the FSM antenna on the OATS. The amplitude of each emission was maximized by varying the FSM antenna height, polarization, and by rotating the turntable. Emissions were measured in dBμV/m at three meters. The amplitude of each measured emission was maximized by varying

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 22 of 39



the FSM antenna height, polarization, and by rotating the turntable. A Biconilog Antenna was used for measuring emissions from 30 to 1000 MHz, a Log Periodic Antenna for 200 to 5000 MHz, and Double Ridge and/or Pyramidal Horn Antennas from 4 GHz to 40 GHz. Data was taken per Paragraph 2.1046(a), 15.247 and RSS-210.

Sample Calculation

RFS (dB
$$\mu$$
V/m @ 3m) = FSM(dB μ V) + A.F.(dB) - Gain(dB)
= 108.9 + 23.3 - 30

= 102.2

MARKER 77.5 MHz 25.00 dBW ACTV DET: PEAK MEAS DET: PEAK QP

MKR 77.5 MHz 25.00 dBW

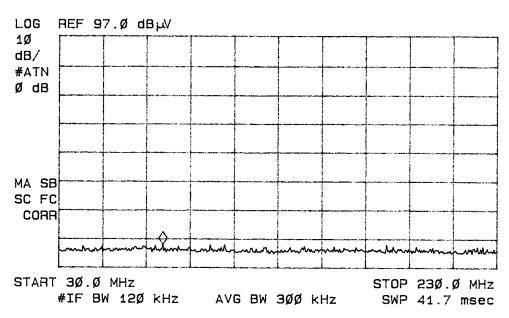


Figure Twelve Plot of Radiated Emissions

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 23 of 39



MARKER 913 MHz 96.53 dBW ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 913 MHz 96.53 dBW

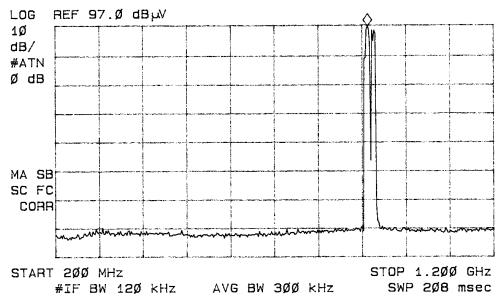


Figure Thirteen Plot of Radiated Emissions

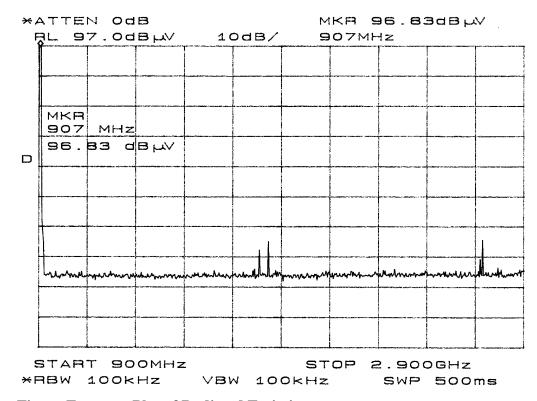


Figure Fourteen Plot of Radiated Emissions

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 24 of 39



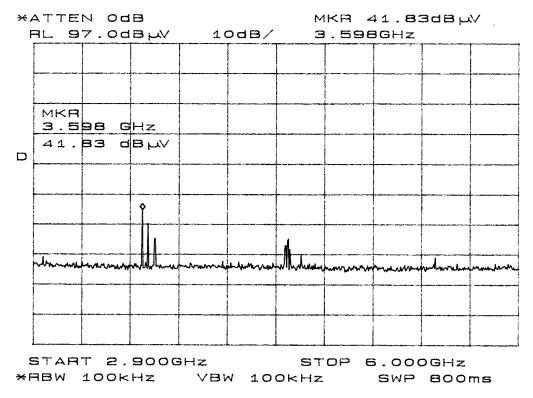


Figure Fifteen Plot of Radiated Emissions

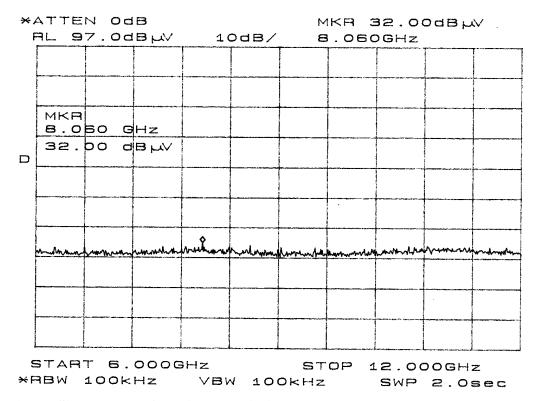


Figure Sixteen Plot of Radiated Emissions

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 25 of 39



MARKER 91Ø.Ø3 MHz 95.84 dB W ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 91Ø.Ø3 MHz 95.84 dBW

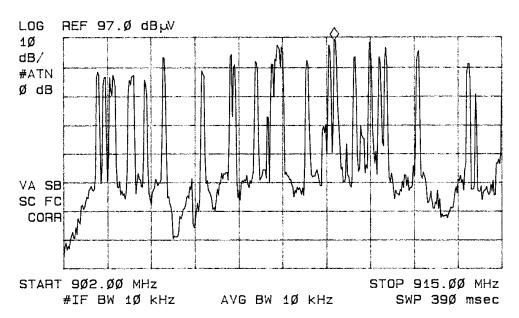


Figure Seventeen of output Power and number of channels in band

MARKER 926.77 MHz 94.34 dBW

ACTV DET: PEAK MEAS DET: PEAK QP

MKR 926.77 MHz 94.34 dBW

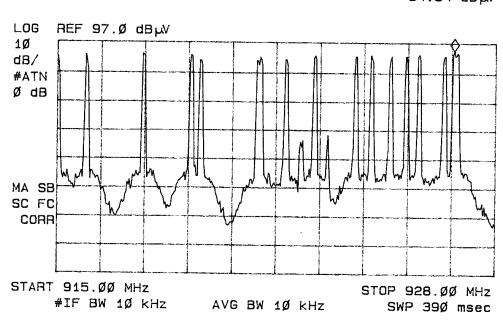


Figure Eighteen Plot of output Power and number of channels in band

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 26 of 39



MARKER A 75.Ø kHz .28 dB

ACTV DET: PEAK MEAS DET: PEAK QP

MKR 75.0 kHz

.28 dB

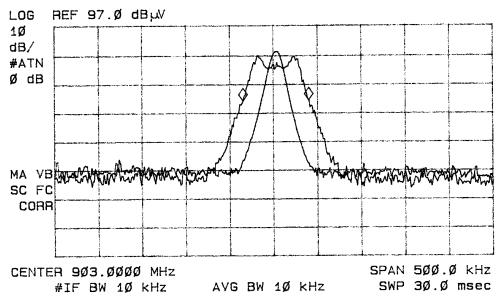


Figure Nineteen Plot of Occupied Bandwidth low frequency

MARKER A 76.3 kHz -1.Ø3 dB

ACTV DET: PEAK MEAS DET: PEAK QP

MKR 76.3 kHz

-1.Ø3 dB

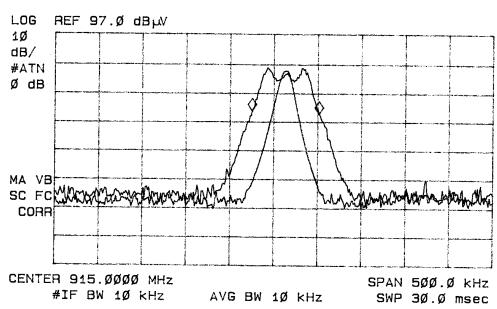


Figure Twenty Plot of Occupied Bandwidth middle frequency

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 27 of 39



MARKER A 75.Ø kHz .68 dB

ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 75.0 kHz .68 dB

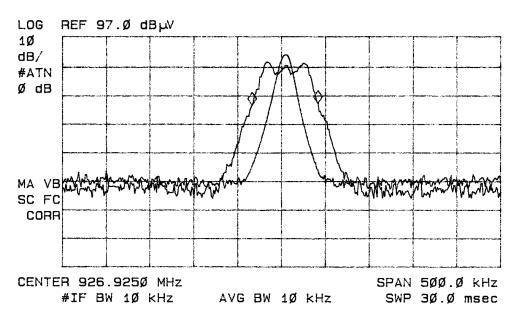


Figure Twenty-one Plot of Occupied Bandwidth high frequency

MARKER A 94.9 kHz 1.35 dB

ACTV DET: PEAK MEAS DET: PEAK OP

> MKR 94.9 kHz 1.35 dB

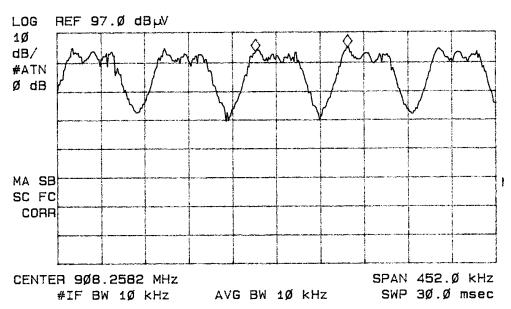


Figure Twenty-two Plot of Channel Spacing

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 28 of 39



MARKER A 1Ø.75Ø msec -57.97 dB

ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 1Ø.75Ø msec -57.97 dB

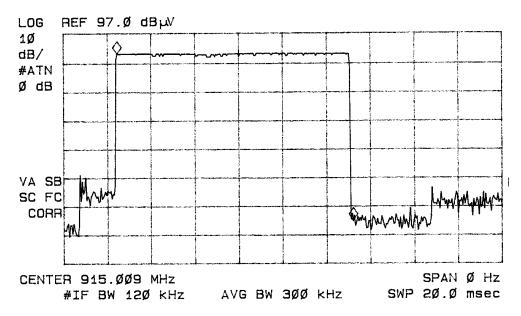


Figure Twenty-three Plot of Dwell Time on channel

MARKER 6.2000 sec 26.09 dBW

ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 6.2000 sec 26.09 dB W

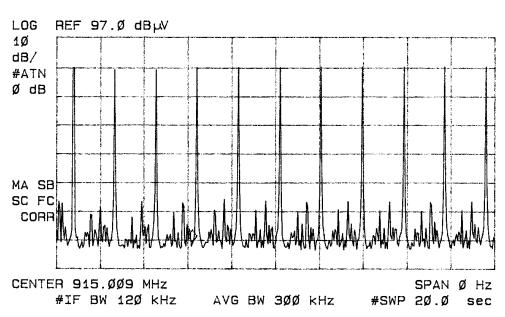


Figure Twenty-four Plot of Channel Occupancy over 20-second period

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 29 of 39



MARKER 9Ø2.Ø15 MHz 36.09 dB W

ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 9Ø2.Ø15 MHz 36.09 dB µV

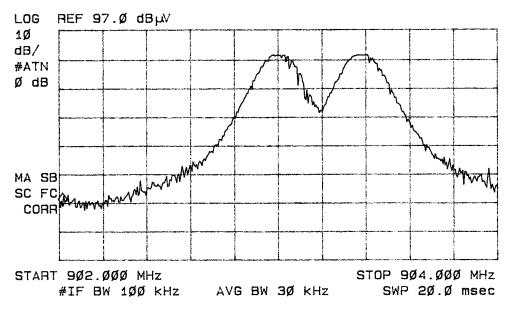


Figure Twenty-five Plot of lower frequency band edge

MARKER 927.99Ø MHz 37.43 dBW

ACTV DET: PEAK MEAS DET: PEAK QP

MKR 927.99Ø MHz 37.43 dB µV

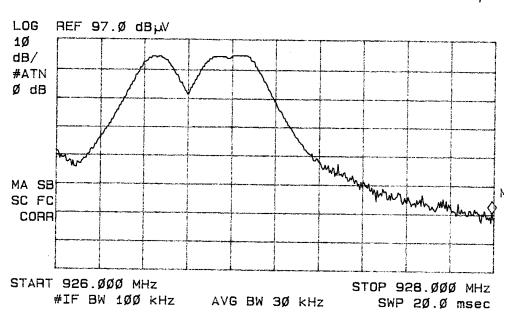


Figure Twenty-six Plot of higher frequency band edge

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 30 of 39



Radiated Emissions Data per 15.247

Emission Frequency (MHz)	FSM Horz. (dBµV)	FSM Vert. (dBµV)	Ant. Factor (dB)	Amp Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
902.9(Peak)	108.9	108.4	23.3	30	102.2	101.7	
1806.0	24.6	25.5	29.8	30	24.4	25.3	54.0
2709.0	20.7	22.8	29.0	30	19.7	21.8	54.0
3612.0	21.1	25.5	30.7	30	21.8	26.2	54.0
4515.0	21.3	23.4	32.5	30	23.8	25.9	54.0
5418.0	19.6	20.8	33.1	30	22.7	23.9	54.0
915.0(Peak)	109.4	107.8	23.3	30	102.7	101.1	
1830.0	23.3	25.2	29.8	30	23.1	25.0	54.0
2745.0	20.3	22.8	29.0	30	19.3	21.8	54.0
3660.0	19.8	23.5	30.7	30	20.5	24.2	54.0
4575.0	20.3	22.2	32.5	30	22.8	24.7	54.0
5490.0	18.8	20.5	33.1	30	21.9	23.6	54.0
926.9(Peak)	108.9	106.5	23.4	30	102.3	99.9	
1853.8	24.0	23.9	29.8	30	23.8	23.7	54.0
2780.7	24.5	24.5	29.0	30	23.5	23.5	54.0
3707.6	20.3	21.4	30.7	30	21.0	22.1	54.0
4634.5	20.1	20.2	32.5	30	22.6	22.7	54.0
5561.4	20.0	20.1	33.1	30	23.1	23.2	54.0

Other emissions present had amplitudes at least 20 dB below the margin.

Peak Conducted Output Power

Frequency (MHz)	902.9	915.0	926.9
Output Power (Watts)	1.0	1.0	1.0

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Revision 2

Digital Ally, Inc. Model: DWM1000RMT

SN 0490-0009 Test #: 080921 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 31 of 39

NVLAP Lab Code 200087-0

Summary of Results for Radiated Emissions of Intentional Radiator

The EUT had the highest radiated peak emission of 102.7 dBµV/m at 3 meters at the

fundamental frequency of operation. The EUT had a worst-case of 27.8 dB margin below the

limit for the harmonic emissions. The radiated emissions for the EUT meet the requirements for

CFR47 Part 15.247 Intentional Radiators and RSS-210. There are no measurable emissions in

the restricted bands other than those recorded in this report. Other emissions were present with

amplitudes at least 20 dB below the limits. The specifications of 15.247 and RSS-210 were met;

there are no deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with CFR47

Part 15C or RSS-210 emissions standards. There were no modifications or deviations to the

specifications.

Revision 2

File: Digital Ally DWM1000 RMT TstRpt R2



Annex

- Annex A, Measurement Uncertainty Calculations
- Annex B, Test Equipment List.
- Annex C, Rogers Qualifications.
- Annex D, FCC Site Registration Letter.
- Annex E, Industry Canada Site Registration Letter.

Page 33 of 39

Date: October 15, 2008

IC: 7945A-DWMRMT1

FCC ID: WPZ-DWMRMT1



Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

	Probability	Uncertainty
Contribution	Distribution	(dB)
Antenna factor calibration	normal(k = 2)	±0.58
Cable loss calibration	normal $(k = 2)$	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of k = 2 will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^{n} (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 x \pm 1.6 dB = \pm 3.2 dB$$

Notes:

- Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with k = 2.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - -Unwanted reflections from adjacent objects.
 - -Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - -Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - -Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Rogers Labs, Inc. Digital Ally, Inc.

 4405 W. 259th Terrace
 Model: DWM1000RMT
 FCC ID: WPZ-DWMRMT1

 Louisburg, KS 66053
 Test #: 080921
 SN 0490-0009
 IC: 7945A-DWMRMT1

Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 Page 34 of 39

Revision 2 File: Digital Ally DWM1000 RMT TstRpt R2 Date: October 15, 2008



Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

	Probability	Uncertainty
Contribution	Distribution	(dB)
Receiver specification	rectangular	±1.5
LISN coupling specification	rectangular	±1.5
Cable and input attenuator calibration	normal (k=2)	±0.5

Combined standard uncertainty $u_c(y)$ is

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of k = 2 will suffice, therefore:

$$U = 2 U_c(y) = 2 x \pm 1.2 dB = \pm 2.4 dB$$

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 35 of 39



Annex B Test Equipment List For Rogers Labs, Inc.

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/08
Wattmeter: Bird 43 with Load Bird 8085	2/08
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/08
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/08
R.F. Generator: HP 606A	2/08
R.F. Generator: HP 8614A	2/08
R.F. Generator: HP 8640B	2/08
Spectrum Analyzer: HP 8562A,	5/08
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591EM	5/08
Frequency Counter: Leader LDC825	2/08
Antenna: EMCO Biconilog Model: 3143	5/08
Antenna: EMCO Log Periodic Model: 3147	10/07
Antenna: Antenna Research Biconical Model: BCD 235	10/07
Antenna: EMCO Dipole Set 3121C	2/08
Antenna: C.D. B-101	2/08
Antenna: Solar 9229-1 & 9230-1	2/08
Antenna: EMCO 6509	2/08
Audio Oscillator: H.P. 201CD	2/08
R.F. Power Amp 65W Model: 470-A-1010	2/08
R.F. Power Amp 50W M185- 10-501	2/08
R.F. PreAmp CPPA-102	2/08
LISN 50 μHy/50 ohm/0.1 μf	10/07
LISN Compliance Eng. 240/20	2/08
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/08
Peavey Power Amp Model: IPS 801	2/08
Power Amp A.R. Model: 10W 1010M7	2/08
Power Amp EIN Model: A301	2/08
ELGAR Model: 1751	2/08
ELGAR Model: TG 704A-3D	2/08
ESD Test Set 2010i	2/08
Fast Transient Burst Generator Model: EFT/B-101	2/08
Current Probe: Singer CP-105	2/08
Current Probe: Solar 9108-1N	2/08
Field Intensity Meter: EFM-018	2/08
KEYTEK Ecat Surge Generator	2/08
Shielded Room 5 M x 3 M x 3.0 M	

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Revision 2

Digital Ally, Inc. Model: DWM1000RMT SN 0490-0009 Test #: 080921 Phone/Fax: (913) 837-3214 Test to: FCC 15c (15.247), IC RSS-210

FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 36 of 39

File: Digital Ally DWM1000 RMT TstRpt R2 Date: October 15, 2008 NVLAP Lab Code 200087-0

Annex C Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

Positions Held:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- Bachelor of Science Degree in Business Administration Kansas State University. 2)
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D Rogers

Scot D. Rogers

Revision 2



Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division 7435 Oakland Mills Road Columbia, MD 21046

June 18, 2008

Registration Number: 90910

Rogers Labs, Inc. 4405 West 259th Terrace, Louisburg, KS 66053

Attention:

Scot Rogers

Re:

Measurement facility located at Louisburg

3 & 10 meter site

Date of Renewal: June 18, 2008

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Industry Analyst

Revision 2

File: Digital Ally DWM1000 RMT TstRpt R2



Annex E Industry Canada Site Registration Letter



Industrie Canada

Rogers Labs Inc. 4405 West 259th Terrace Louisburg KY 66053 USA

Attention: Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the registration / renewal of a 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (3040A-1). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please be informed that the Bureau is now utilizing a new site numbering scheme in order to simplify the electronic filing process. Our goal is to reduce the number of secondary codes associated to one particular company. The following changes have been made to your records.

Your primary code is: 3041

The company number associated to the site(s) located at the above address is: 3041A The table below is a summary of the changes made to the unique site registration number(s):

New Site Number	Obsolete Site Number	Description of Site	Expiry Date (YYYY-MM-DD)
3041A-1	3041-1	3 / 10m OATS	2010-07-29

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 meter OATS or 3 meter chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca
Please reference our file and submission number above for all correspondence.
Yours sincerely,

S. Proulx Wireless Laboratory Manager Certification and Engineering Bureau Industry Canada 3701 Carling Ave., Building 94 Ottawa, Ontario K2H 8S2 Canada

5/1

Canada

OUR FILE: 46405-3041 Submission No: 127059

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 2

Digital Ally, Inc.
Model: DWM1000RMT

Test #: 080921 SN 0490-0009 Test to: FCC 15c (15.247), IC RSS-210 File: Digital Ally DWM1000 RMT TstRpt R2 FCC ID: WPZ-DWMRMT1 IC: 7945A-DWMRMT1

Page 39 of 39