

Mode:			802.11 n(HT40) Transmitting			Channel:		2437MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1134.6756	11.43	37.46	48.89	74.00	25.11	PASS	H	PK
2	1668.3112	13.98	37.16	51.14	74.00	22.86	PASS	H	PK
3	3546.6864	-13.79	54.46	40.67	74.00	33.33	PASS	H	PK
4	5022.2848	-8.09	49.15	41.06	74.00	32.94	PASS	H	PK
5	7303.2869	-2.88	46.79	43.91	74.00	30.09	PASS	H	PK
6	11990.7494	3.12	45.58	48.70	74.00	25.30	PASS	H	PK
7	1170.4114	11.46	38.26	49.72	74.00	24.28	PASS	V	PK
8	1623.7749	13.75	37.45	51.20	74.00	22.80	PASS	V	PK
9	3194.363	-14.48	59.62	45.14	74.00	28.86	PASS	V	PK
10	5310.254	-7.05	55.84	48.79	74.00	25.21	PASS	V	PK
11	7792.1195	-1.99	45.61	43.62	74.00	30.38	PASS	V	PK
12	12015.451	3.06	45.33	48.39	74.00	25.61	PASS	V	PK

Mode:			802.11 n(HT40) Transmitting			Channel:		2452MHz	
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1151.8768	11.50	37.55	49.05	74.00	24.95	PASS	H	PK
2	1616.7078	13.71	37.35	51.06	74.00	22.94	PASS	H	PK
3	3327.6218	-14.04	54.57	40.53	74.00	33.47	PASS	H	PK
4	4978.0819	-8.09	49.25	41.16	74.00	32.84	PASS	H	PK
5	8310.8541	-1.04	46.69	45.65	74.00	28.35	PASS	H	PK
6	11986.1991	3.12	44.72	47.84	74.00	26.16	PASS	H	PK
7	1093.7396	11.31	37.96	49.27	74.00	24.73	PASS	V	PK
8	1407.8939	12.89	37.05	49.94	74.00	24.06	PASS	V	PK
9	3241.1661	-14.17	57.08	42.91	74.00	31.09	PASS	V	PK
10	5040.486	-8.07	49.33	41.26	74.00	32.74	PASS	V	PK
11	7632.2088	-2.21	45.93	43.72	74.00	30.28	PASS	V	PK
12	12354.7737	4.15	43.31	47.46	74.00	26.54	PASS	V	PK

Remark:


- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Restricted bands:

Test plot as follows:

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

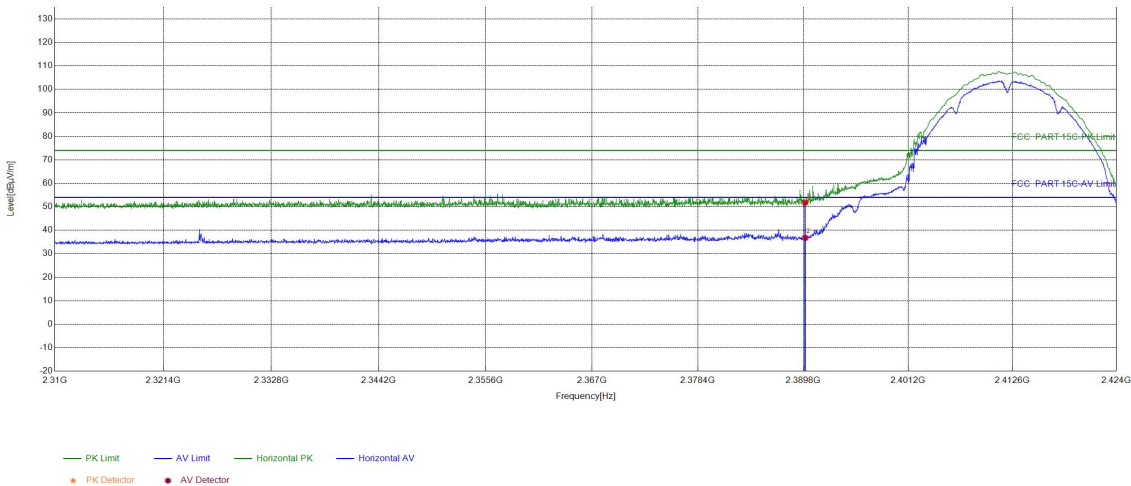

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.87	51.83	74.00	22.17	PASS	Horizontal	PK
2	2390	15.96	20.84	36.80	54.00	17.20	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

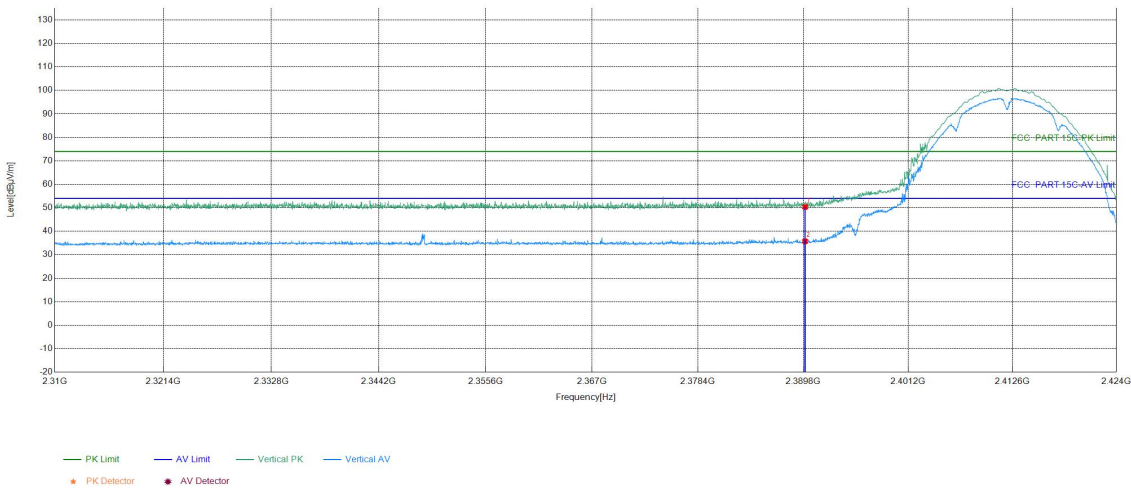

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.38	50.34	74.00	23.66	PASS	Vertical	PK
2	2390	15.96	19.77	35.73	54.00	18.27	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

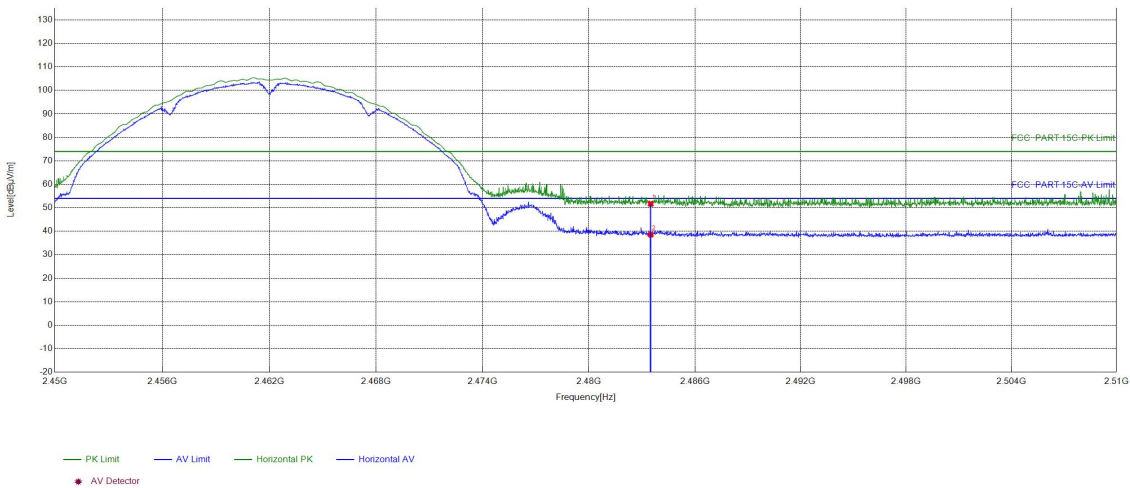

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.38	51.67	74.00	22.33	PASS	Horizontal	PK
2	2483.5	16.29	22.27	38.56	54.00	15.44	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 b Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

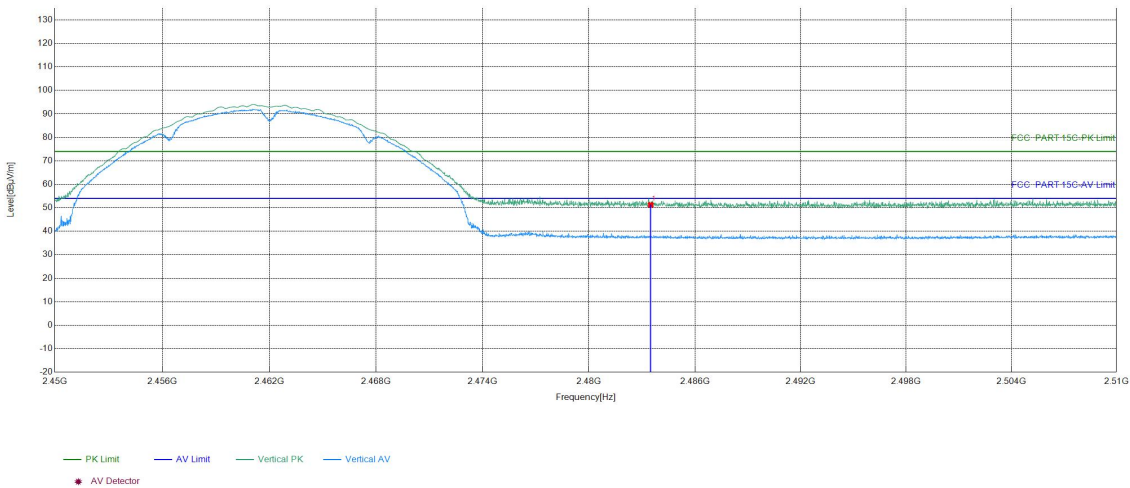

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.97	51.26	74.00	22.74	PASS	Vertical	PK

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

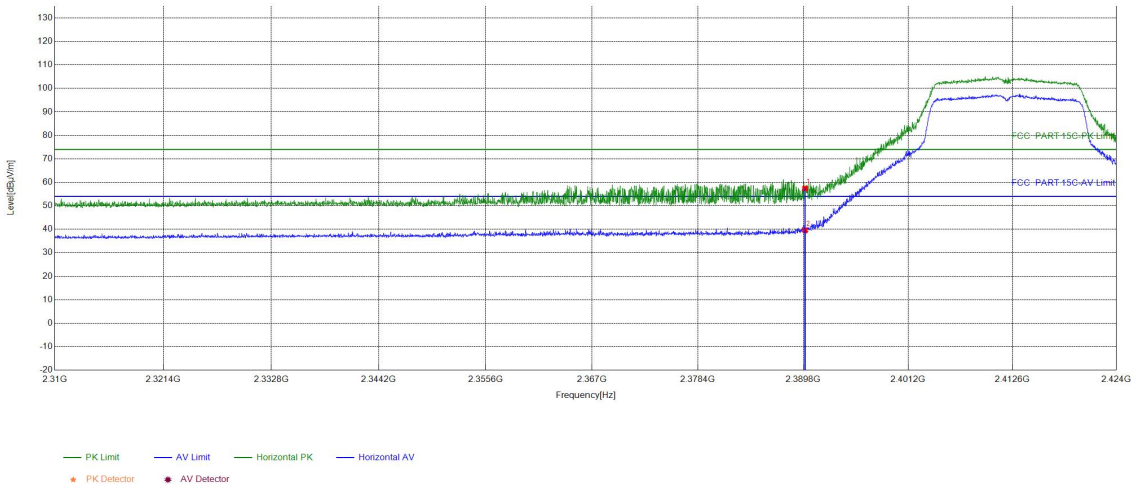

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	41.47	57.43	74.00	16.57	PASS	Horizontal	PK
2	2390	15.96	23.57	39.53	54.00	14.47	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

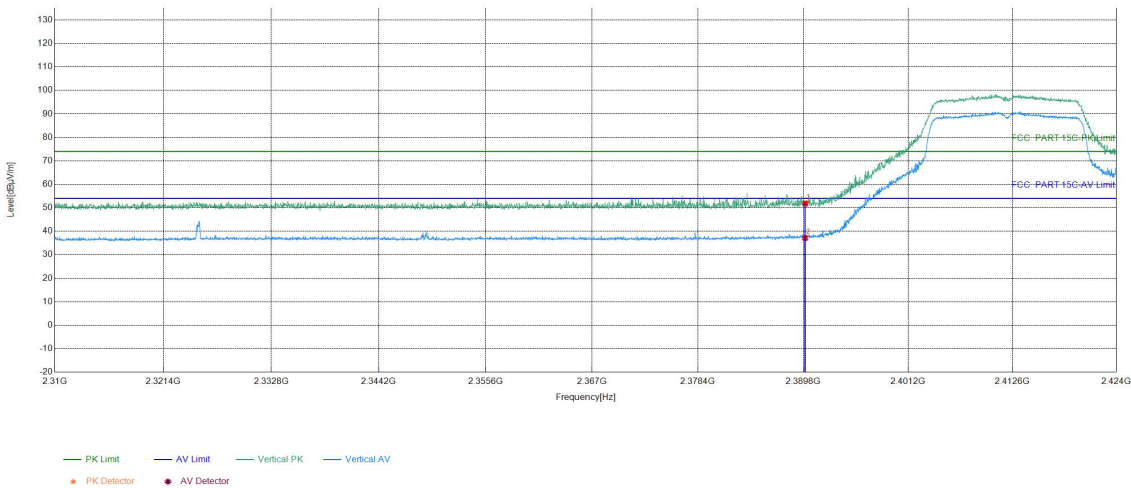

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.95	51.91	74.00	22.09	PASS	Vertical	PK
2	2390	15.96	21.18	37.14	54.00	16.86	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

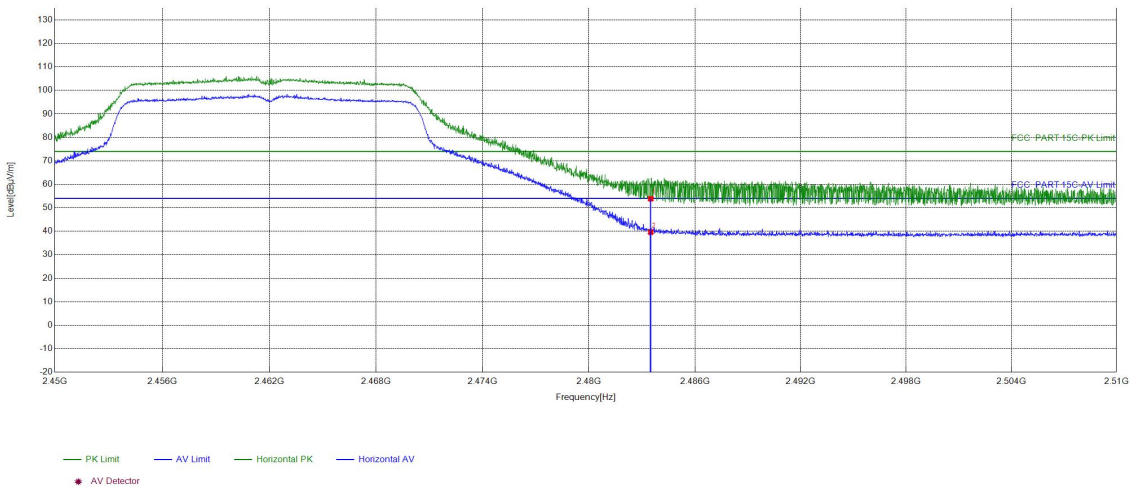

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.55	53.84	74.00	20.16	PASS	Horizontal	PK
2	2483.5	16.29	23.33	39.62	54.00	14.38	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 g Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

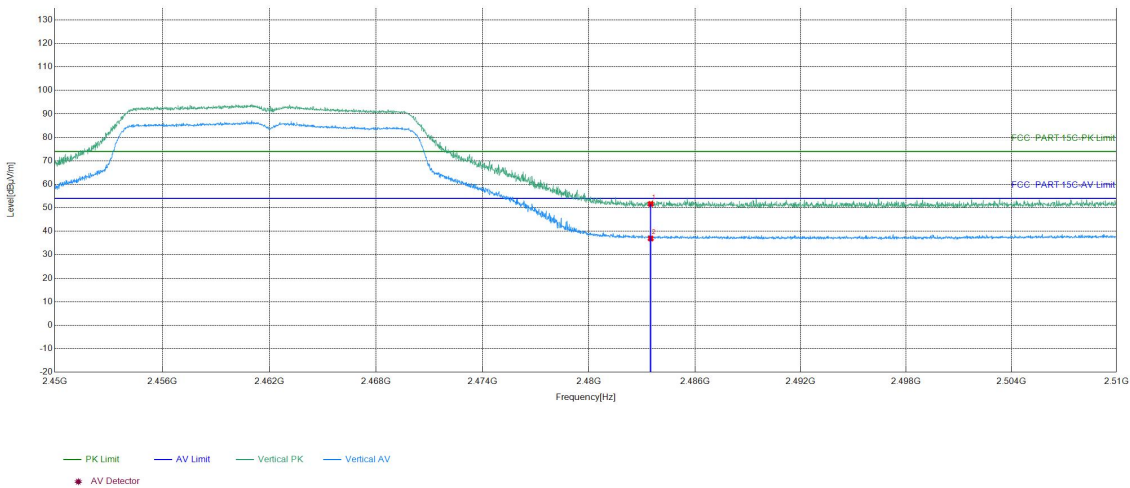

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.34	51.63	74.00	22.37	PASS	Vertical	PK
2	2483.5	16.29	20.64	36.93	54.00	17.07	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

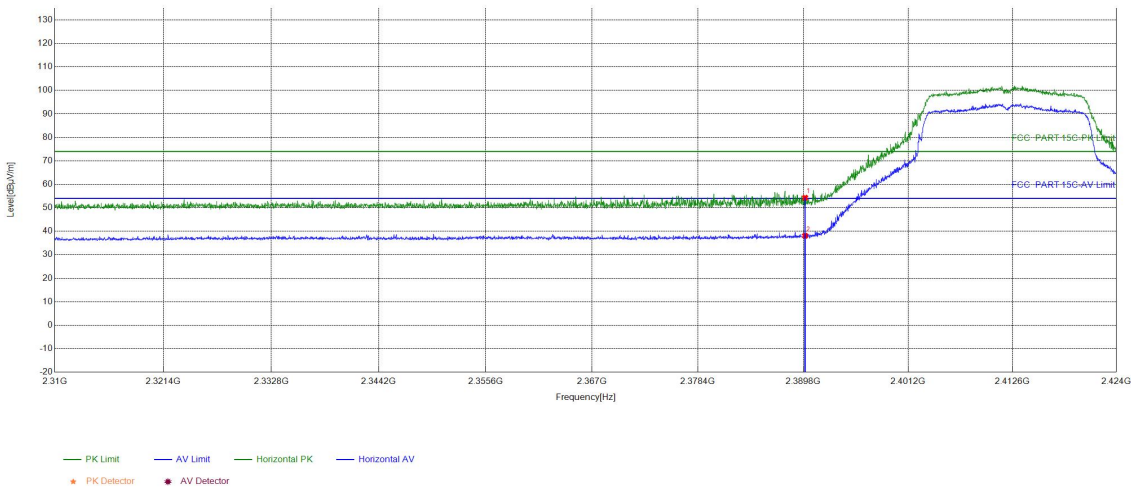

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	38.32	54.28	74.00	19.72	PASS	Horizontal	PK
2	2390	15.96	22.12	38.08	54.00	15.92	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

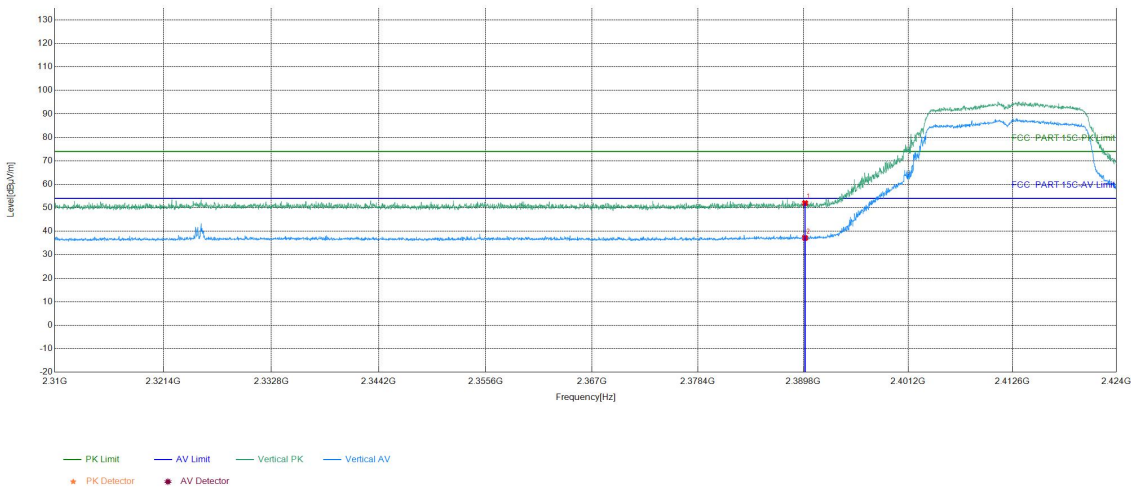

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.04	52.00	74.00	22.00	PASS	Vertical	PK
2	2390	15.96	21.18	37.14	54.00	16.86	PASS	Vertical	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			


Test Graph

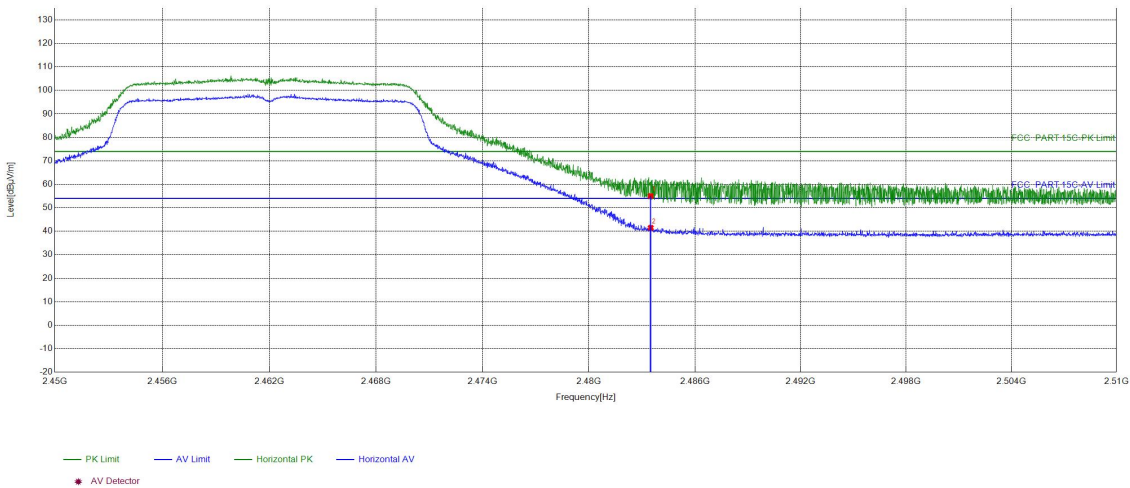

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.74	55.03	74.00	18.97	PASS	Horizontal	PK
2	2483.5	16.29	25.20	41.49	54.00	12.51	PASS	Horizontal	AV

EUT_Name		Test_Model	
Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462Mhz
Tset_Engineer	chenjun	Test_Date	2025/05/22
Remark			

Test Graph

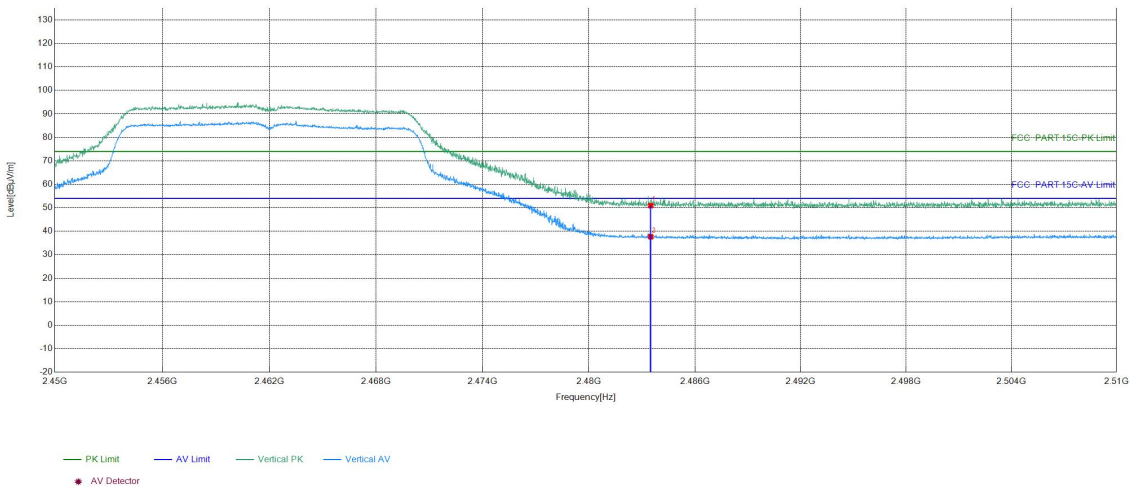

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.65	50.94	74.00	23.06	PASS	Vertical	PK
2	2483.5	16.29	21.38	37.67	54.00	16.33	PASS	Vertical	AV