

System Check_H2450

DUT: Dipole 2450 MHz; Type:D2450V2; SN:835

Communication System: CW; Frequency: 2450 MHz;Duty Cycle: 1:1

Medium: H2450_1223 Medium parameters used: $f = 2450\text{ MHz}$; $\sigma = 1.79\text{ S/m}$; $\epsilon_r = 40.105$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : $22.4\text{ }^{\circ}\text{C}$; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(8.06, 8.06, 8.06); Calibrated: 2021/3/30;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2021/3/11
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=250mW/Area Scan (41x51x1): Interpolated grid: $dx=2.000\text{ mm}$, $dy=2.000\text{ mm}$

Maximum value of SAR (interpolated) = 25.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{ mm}$, $dy=5\text{ mm}$, $dz=5\text{ mm}$

Reference Value = 114.7 V/m ; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 13.24 W/kg ; SAR(10 g) = 6.13 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

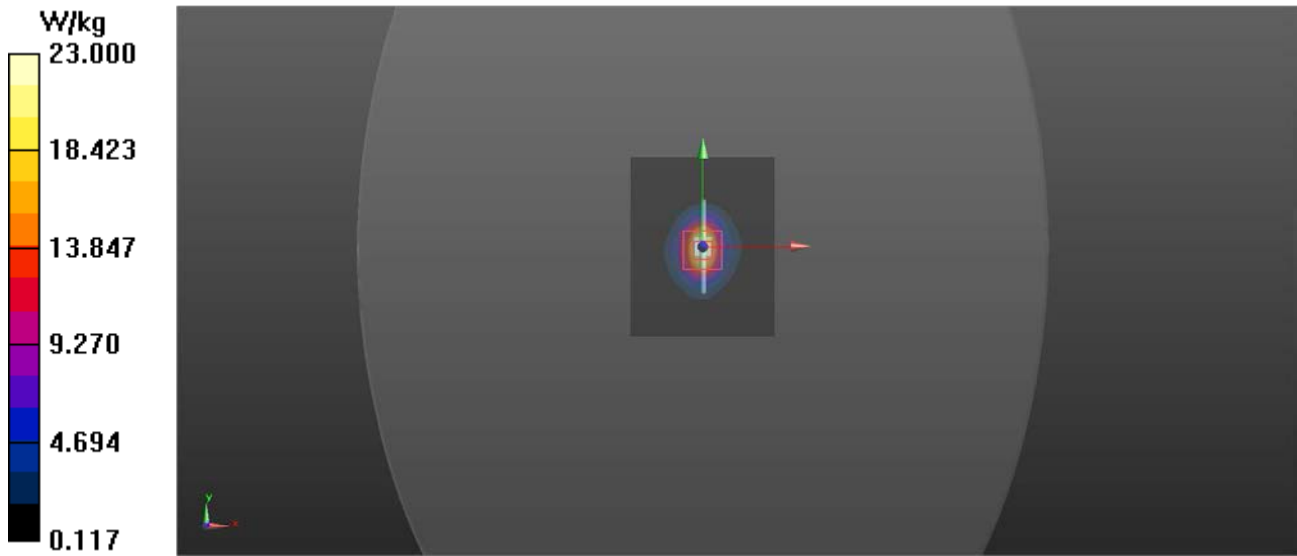

System Check_H5200

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1040

Communication System: CW; Frequency: 5200 MHz;Duty Cycle: 1:1

Medium: H5G_0119 Medium parameters used: $f = 5200\text{ MHz}$; $\sigma = 4.687\text{ S/m}$; $\epsilon_r = 36.998$; $\rho = 1000\text{ kg/m}^3$

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.85, 5.85, 5.85); Calibrated: 2021/3/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2021/3/11
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000mm

Maximum value of SAR (interpolated) = 22.2 W/kg


Pin=100mW/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm,dz=2mm

Reference Value = 57.229 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 37.6 W/kg

SAR(1 g) = 7.54 W/kg; SAR(10 g) = 2.13 W/kg

Maximum value of SAR (measured) = 23.4 W/kg

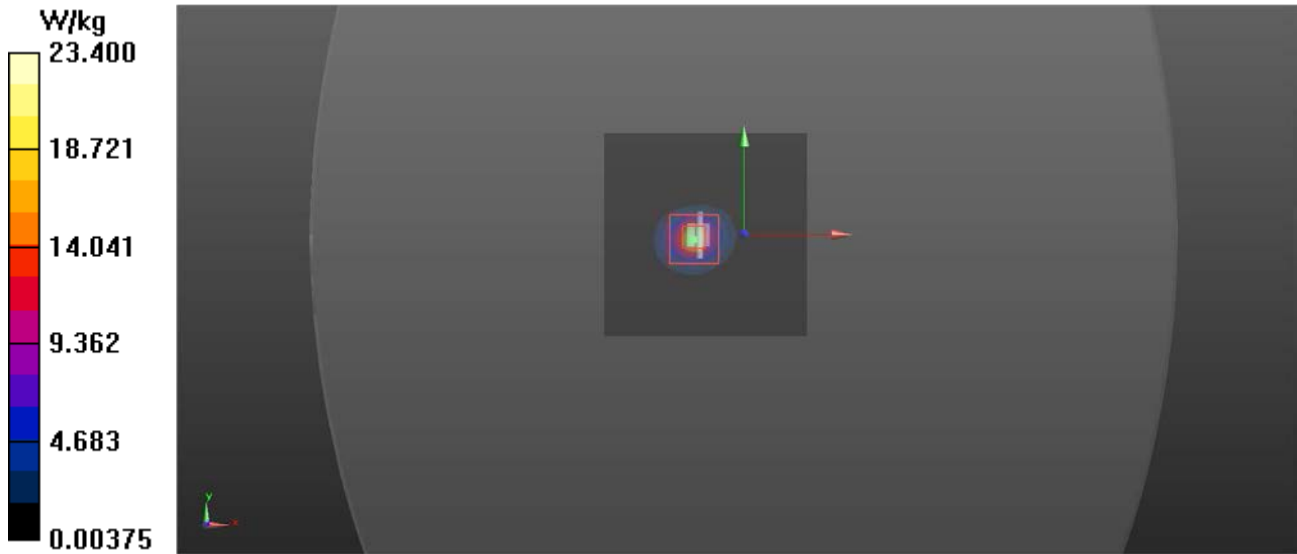

System Check_H5800

DUT: Dipole 5GHzV2;Type:D5GHzV2; SN:1040

Communication System: CW; Frequency: 5800 MHz;Duty Cycle: 1:1

Medium: H5G_0119 Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.415 \text{ S/m}$; $\epsilon_r = 35.658$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3970; ConvF(5.2, 5.2, 5.2); Calibrated: 2021/3/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1418; Calibrated: 2021/3/11
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:1231
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Pin=100mW/Area Scan (91x91x1): Interpolated grid: dx=1.000 mm, dy=1.000mm

Maximum value of SAR (interpolated) = 20.6 W/kg

Pin=100mW/Zoom Scan (7x7x5)/Cube 0: Measurement grid: dx=4mm, dy=4mm,dz=2mm

Reference Value = 50.784 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.18 W/kg

Maximum value of SAR (measured) = 21.5 W/kg

