

FCC TEST REPORT

Client Name : Autel Intelligent Technology Corp., Ltd.

Address : 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili,
Nanshan Shenzhen China

Product Name : Smart Watch

Date : May 31, 2022

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information	4
1.1. Client Information	4
1.2. Description of Device (EUT)	4
1.3. Auxiliary Equipment Used During Test	5
1.4. Description of Test Modes	5
1.5. List of Channels	5
1.6. Description of Test Setup	6
1.7. Test Equipment List	7
1.8. Description of Test Facility	8
2. Summary of Test Results	9
3. Conducted Emission Test	10
3.1. Test Standard and Limit	10
3.2. Test Setup	10
3.3. Test Procedure	10
3.4. Test Data	11
4. Radiated Emission and Band Edge	14
4.1. Test Standard and Limit	14
4.2. Test Setup	15
4.3. Test Procedure	16
4.4. Test Data	17
5. 20DB Occupy Bandwidth Test	29
5.1. Test Standard and Limit	29
5.2. Test Setup	29
5.3. Test Procedure	29
5.4. Test Data	29
6. Dwell Time Test	33
6.1. Test Standard and Limit	33
6.2. Test Setup	33
6.3. Test Procedure	33
6.4. Test Data	33
7. Antenna Requirement	36
7.1. Test Standard and Requirement	36
7.2. Antenna Connected Construction	36
APPENDIX I -- TEST SETUP PHOTOGRAPH	37
APPENDIX II -- EXTERNAL PHOTOGRAPH	39
APPENDIX III -- INTERNAL PHOTOGRAPH	39



TEST REPORT

Applicant : Autel Intelligent Technology Corp., Ltd.
Manufacturer : Autel Intelligent Technology Corp., Ltd.
Product Name : Smart Watch
Model No. : SW2101
Trade Mark : OTOFIX
Rating(s) : Input: DC 5V, 0.5A(with DC 3.85V, 300mAh, 1.15Wh battery inside)

Test Standard(s) : **FCC Part15 Subpart C, Section 15.231**

Test Method(s) : **ANSI C63.10: 2020**

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

May 19, 2022

Date of Test

May 19~25, 2022

Prepared by

Tu Tu Hong
(TuTu Hong)

Approved & Authorized Signer

Snowy Meng
(Snowy Meng)

Shenzhen Anbotech Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

Code:AB-RF-05-a



Hotline
400-003-0500
www.anbotech.com

1. General Information

1.1. Client Information

Applicant	:	Autel Intelligent Technology Corp., Ltd.
Address	:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan Shenzhen China
Manufacturer	:	Autel Intelligent Technology Corp., Ltd.
Address	:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan Shenzhen China
Factory	:	Jiaxing Yongrui Electronic Technology Co., Ltd.
Address	:	No.777,Ya Zhong Road,Daqiao Town, Nan Hu district,Jiaxing city

1.2. Description of Device (EUT)

Product Name	:	Smart Watch
Model No.	:	SW2101
Trade Mark	:	OTOFIX
Test Power Supply	:	AC 120V, 60Hz for adapter/ DC 3.85V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	BT: 2402-2480MHz SRD: 315MHz, 434MHz
	Number of Channel:	BT BDR+EDR: 79 Channels BT BLE: 40 Channels SRD: 2 Channels
	Modulation Type:	BT BDR+EDR: GFSK, $\pi/4$ -DQPSK, 8DPSK BT BLE: GFSK SRD: FSK, OOK
	Antenna Type:	BT/SRD: LDS Antenna
	Antenna Gain(Peak):	BT: -5.15 dBi (Provided by customer) SRD: 0 dBi (Provided by customer)
	Adapter:	N/A
Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for SRD module.		

1.3. Auxiliary Equipment Used During Test

Adapter	:	M/N: A2023 Input: AC 100-240V, 0.7A, 50-60Hz USB1 Output: DC 5V, 2.4A USB2 Output: DC 5V, 2.4A
---------	---	---

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Charging
Mode 2	315 MHz(TX)
Mode 3	434 MHz(TX)

For Radiated Emission	
Final Test Mode	Description
Mode 1	Charging

For Radiated Emission	
Final Test Mode	Description
Mode 2	315 MHz(TX)
Mode 3	434 MHz(TX)


Note: During the test, the EUT was keeping continuous transmission, Duty cycle $\geq 98\%$.

1.5. List of Channels


Channels	Frequency
01	315 MHz
02	434 MHz

1.6. Description of Test Setup

CE

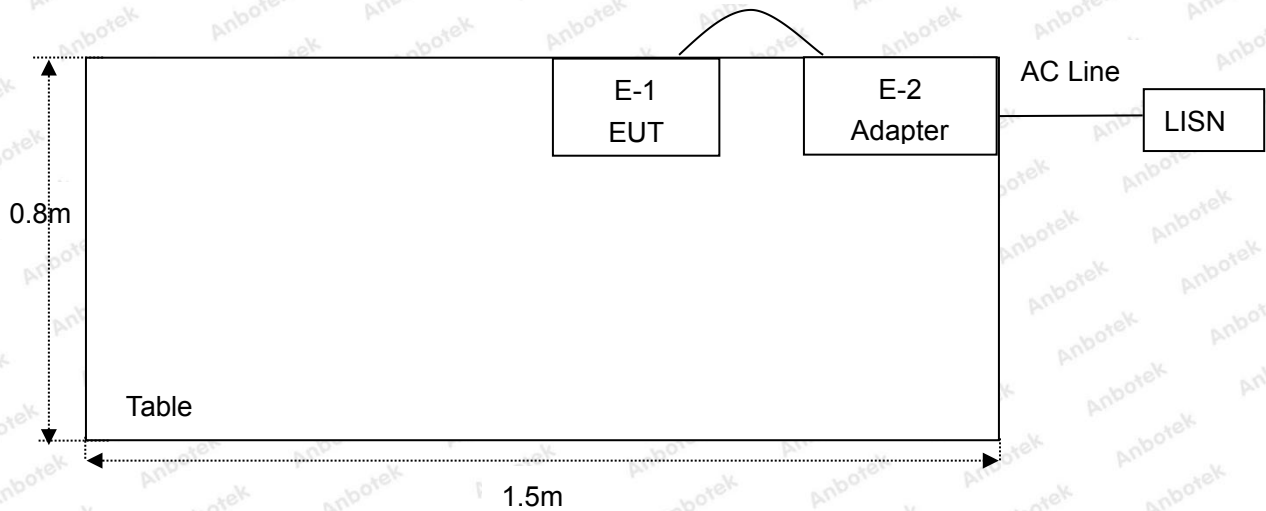

RE

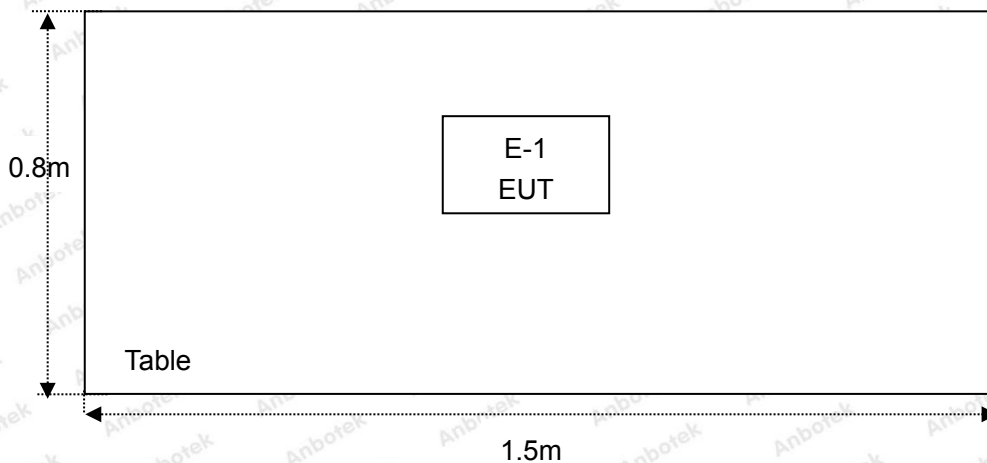

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040DT001	Jul 05, 2021	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 22, 2021	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 22, 2021	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Oct. 22, 2021	2 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Oct. 22, 2021	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 22, 2021	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 22, 2021	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 22, 2021	1 Year
16.	MXA Spectrum Analysis	KEYSIGHT	N9020A	MY53280032	Oct. 22, 2021	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 22, 2021	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 22, 2021	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 22, 2021	1 Year

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209/15.231(b)	Spurious Emission	PASS
15.231(c)	20dB Occupied Bandwidth	PASS
15.231(e)	Dwell time	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

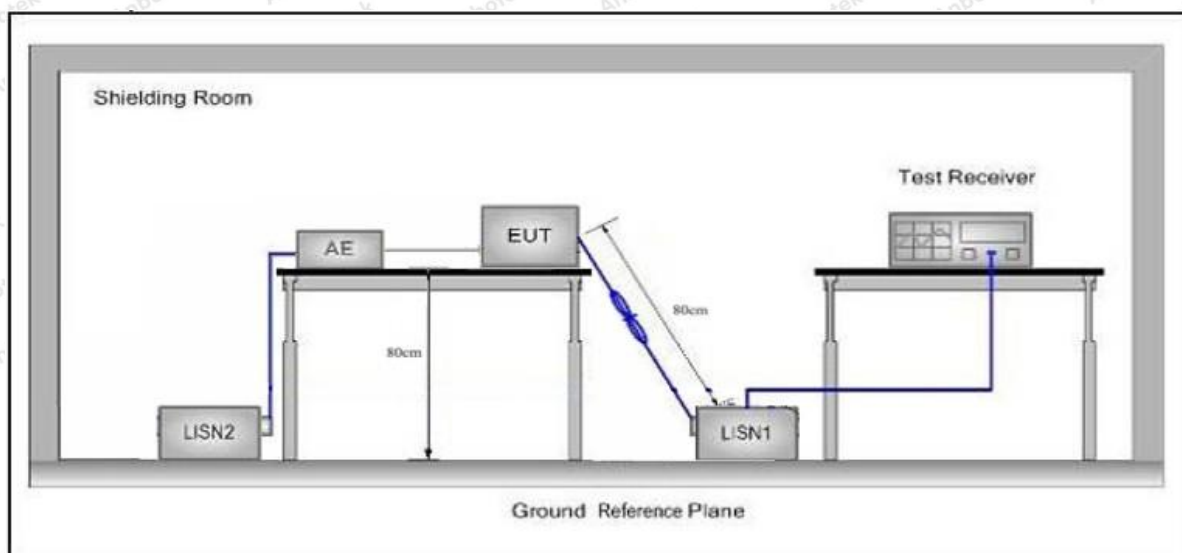

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test CAR REMOTE (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.4. Test Data

Only the worst case data was showed in the report, please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 22.8°C Hum.: 47%

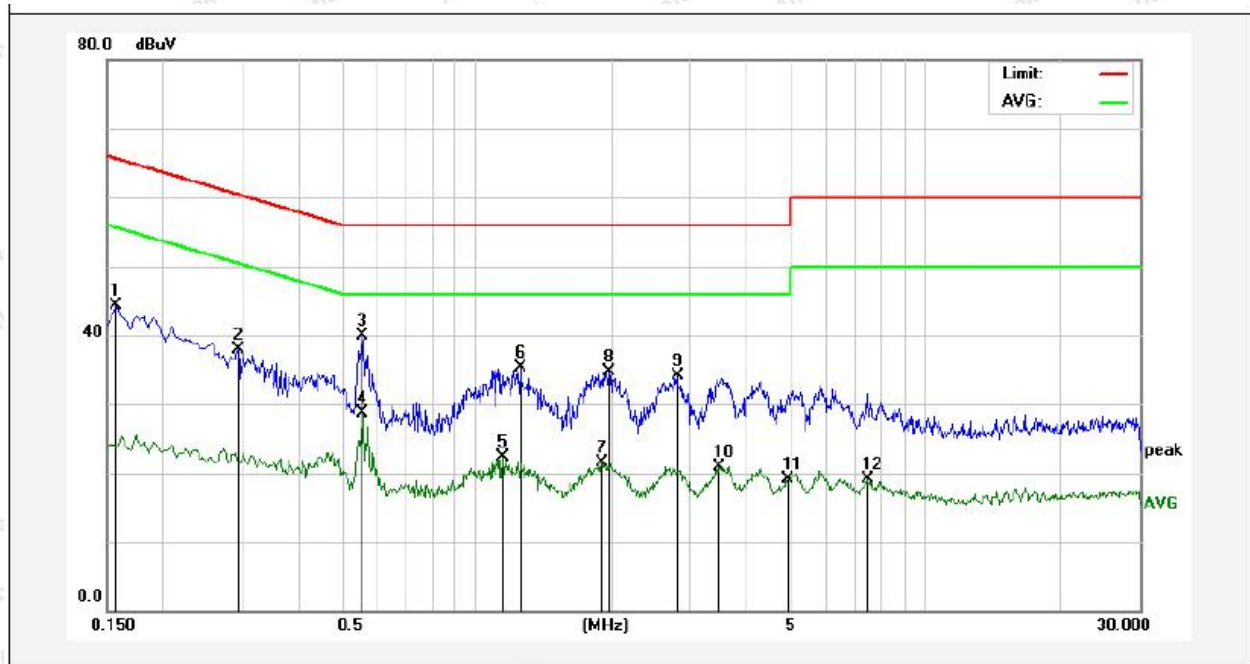


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	24.48	19.90	44.38	65.56	-21.18	QP	
2	0.2940	18.05	19.89	37.94	60.41	-22.47	QP	
3	0.5580	19.91	20.00	39.91	56.00	-16.09	QP	
4	0.5580	8.63	20.00	28.63	46.00	-17.37	AVG	
5	1.1460	2.19	20.12	22.31	46.00	-23.69	AVG	
6	1.2500	15.20	20.12	35.32	56.00	-20.68	QP	
7	1.8980	1.34	20.14	21.48	46.00	-24.52	AVG	
8	1.9740	14.48	20.14	34.62	56.00	-21.38	QP	
9	2.8020	14.02	20.16	34.18	56.00	-21.82	QP	
10	3.4660	0.80	20.17	20.97	46.00	-25.03	AVG	
11	4.9380	-1.02	20.20	19.18	46.00	-26.82	AVG	
12	7.4260	-1.14	20.27	19.13	50.00	-30.87	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: Mode 1
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 22.8℃ Hum.: 47%

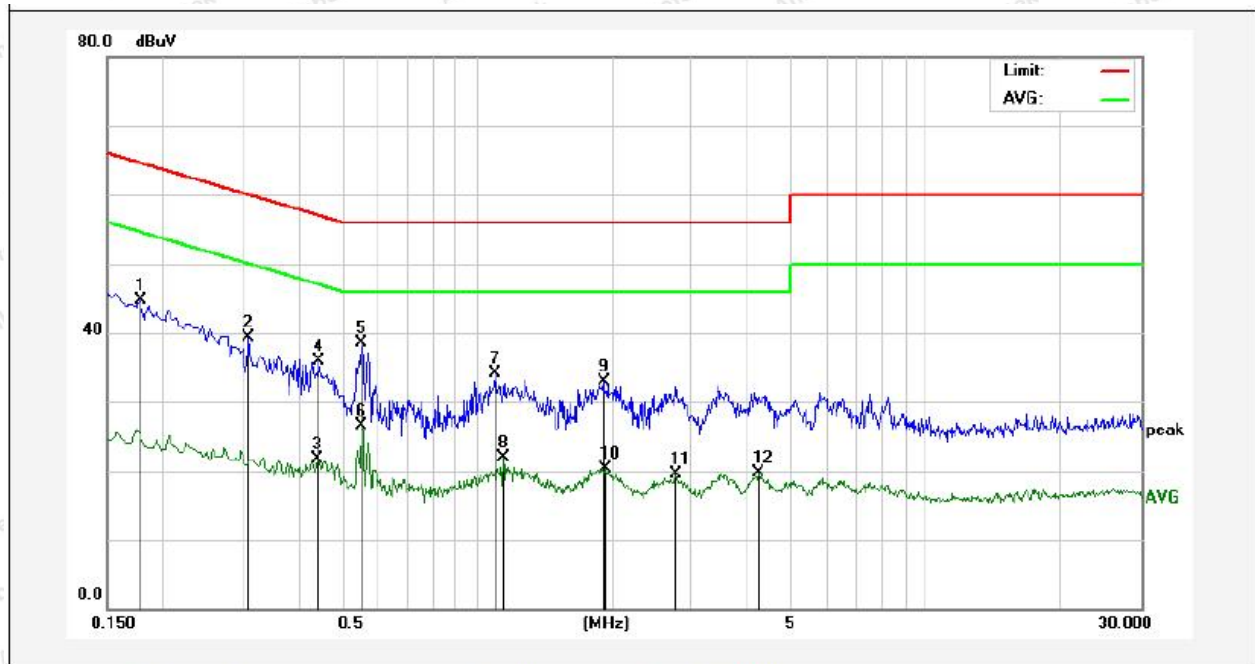

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1780	24.89	19.90	44.79	64.57	-19.78	QP	
2	0.3100	19.34	19.89	39.23	59.97	-20.74	QP	
3	0.4420	1.81	19.95	21.76	47.02	-25.26	AVG	
4	0.4460	15.96	19.96	35.92	56.95	-21.03	QP	
5	0.5540	18.53	20.00	38.53	56.00	-17.47	QP	
6	0.5540	6.55	20.00	26.55	46.00	-19.45	AVG	
7	1.0980	13.93	20.12	34.05	56.00	-21.95	QP	
8	1.1460	1.70	20.12	21.82	46.00	-24.18	AVG	
9	1.9140	12.77	20.14	32.91	56.00	-23.09	QP	
10	1.9340	0.15	20.14	20.29	46.00	-25.71	AVG	
11	2.7700	-0.68	20.16	19.48	46.00	-26.52	AVG	
12	4.2380	-0.54	20.19	19.65	46.00	-26.35	AVG	



4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.231(e)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1) The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level

Emission Level (dBuV/m)=20log Emission Level(uV/m)

The field strength of emission limits have been calculated in below table:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)@3m
315	67.66 (AVG)
315	87.66 (Peak)
434	72.87 (AVG)
434	92.87 (Peak)

4.2. Test Setup

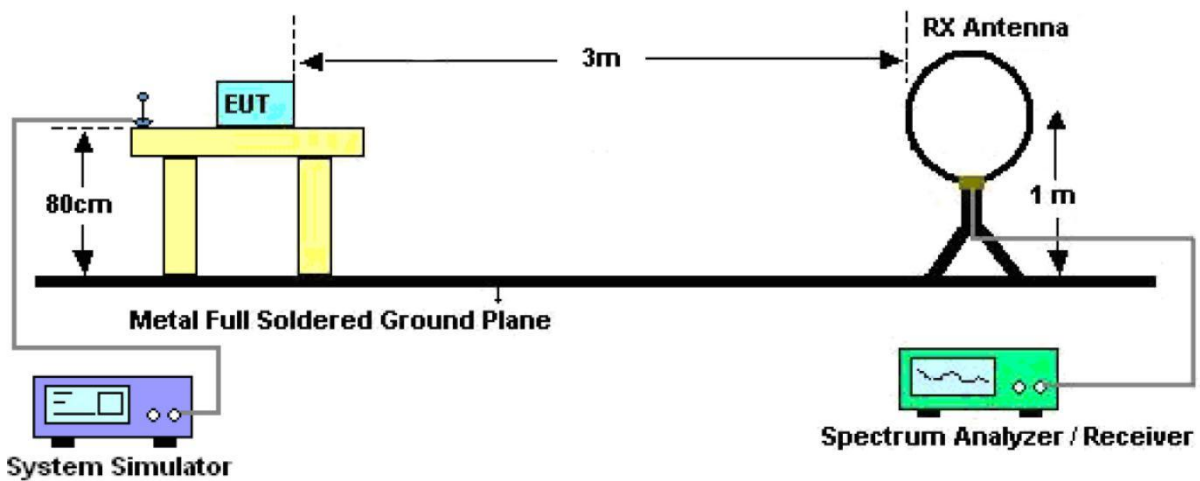


Figure 1. Below 30MHz

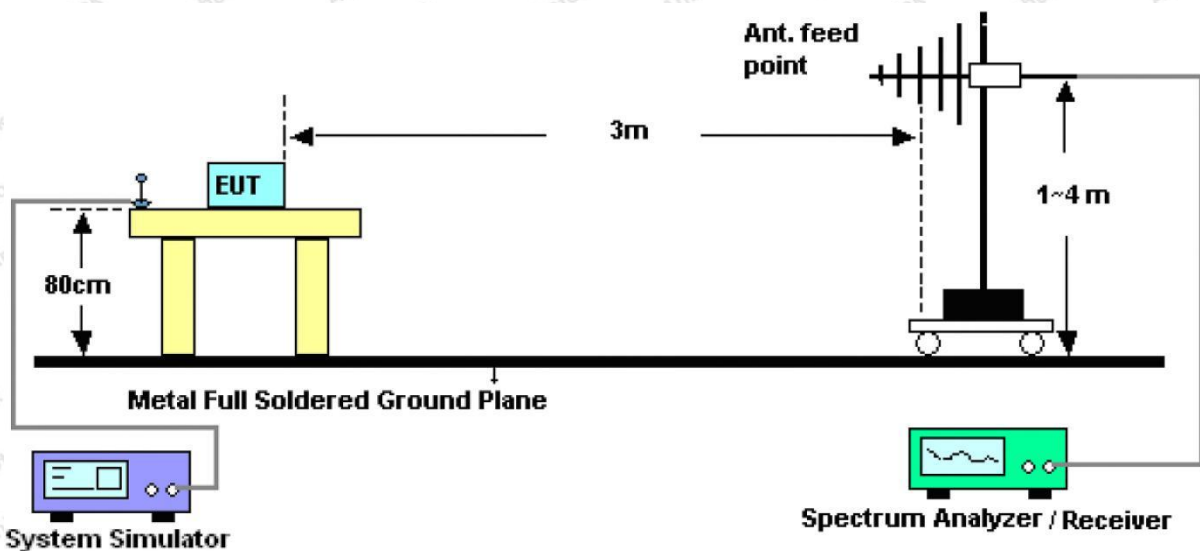


Figure 2. 30MHz to 1GHz

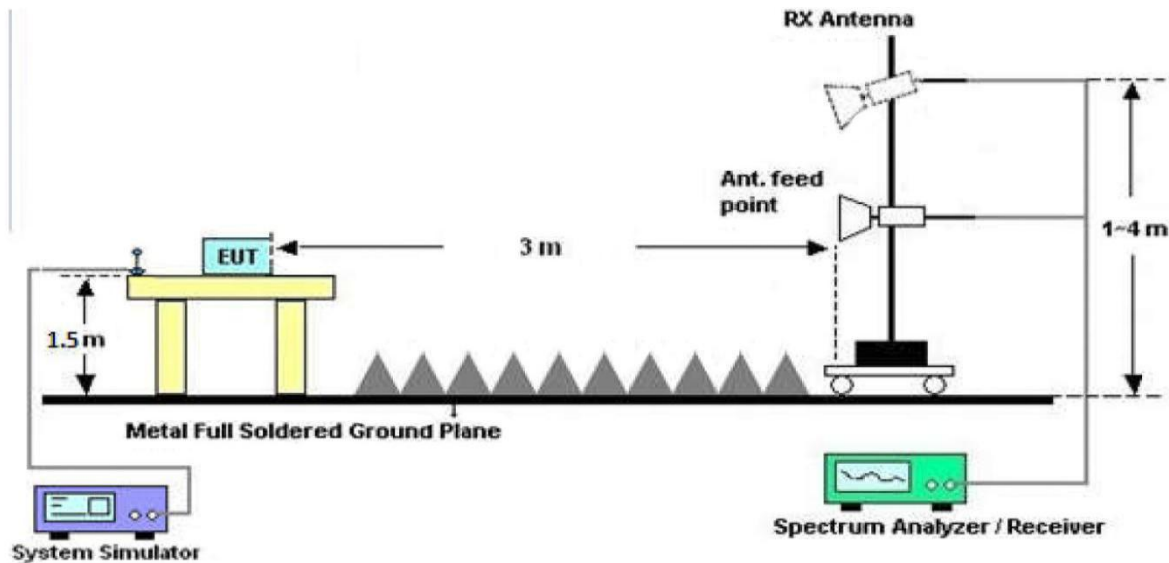


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.


The test results of 9kHz-30MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Test Results (30~1000MHz)

Test Mode: Mode 2 (FSK)
Power Source: DC 3.85V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

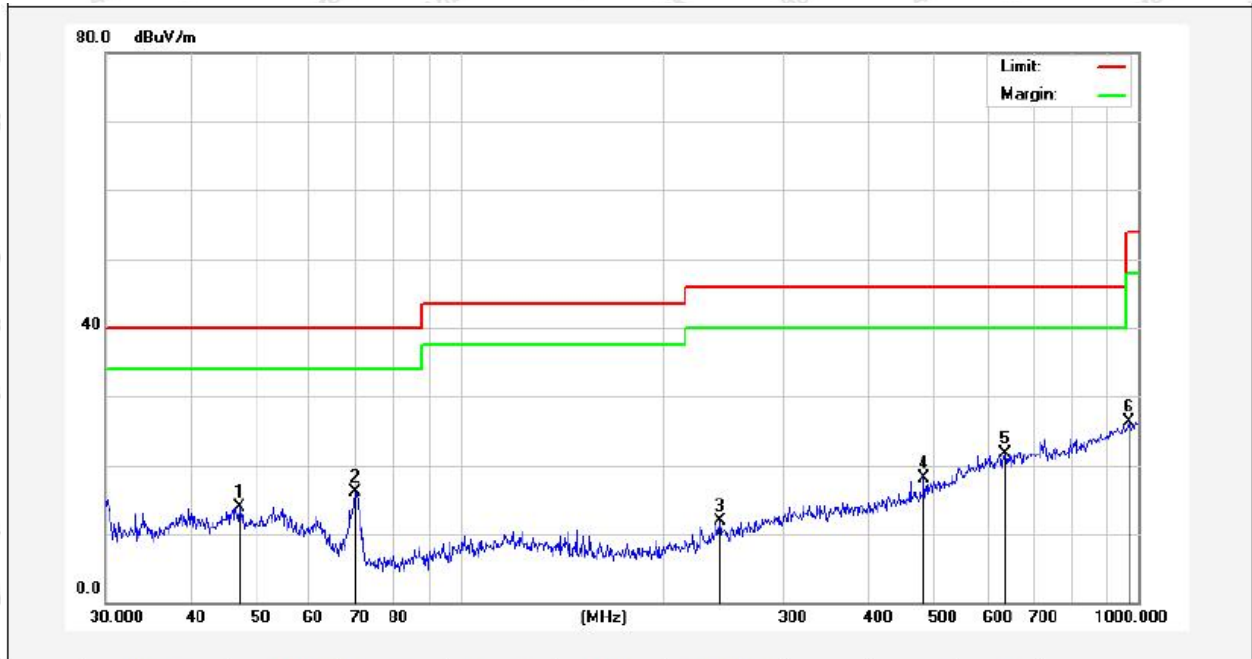


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	47.3253	29.39	-15.47	13.92	40.00	-26.08	QP			
2	70.0902	38.36	-22.25	16.11	40.00	-23.89	QP			
3	241.6762	33.53	-21.64	11.89	46.00	-34.11	QP			
4	483.9094	32.43	-14.32	18.11	46.00	-27.89	QP			
5	636.1340	32.37	-10.62	21.75	46.00	-24.25	QP			
6	968.9338	31.55	-5.31	26.24	54.00	-27.76	QP			



Test Results (30~1000MHz)

Test Mode: Mode 2 (FSK)
Power Source: DC 3.85V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

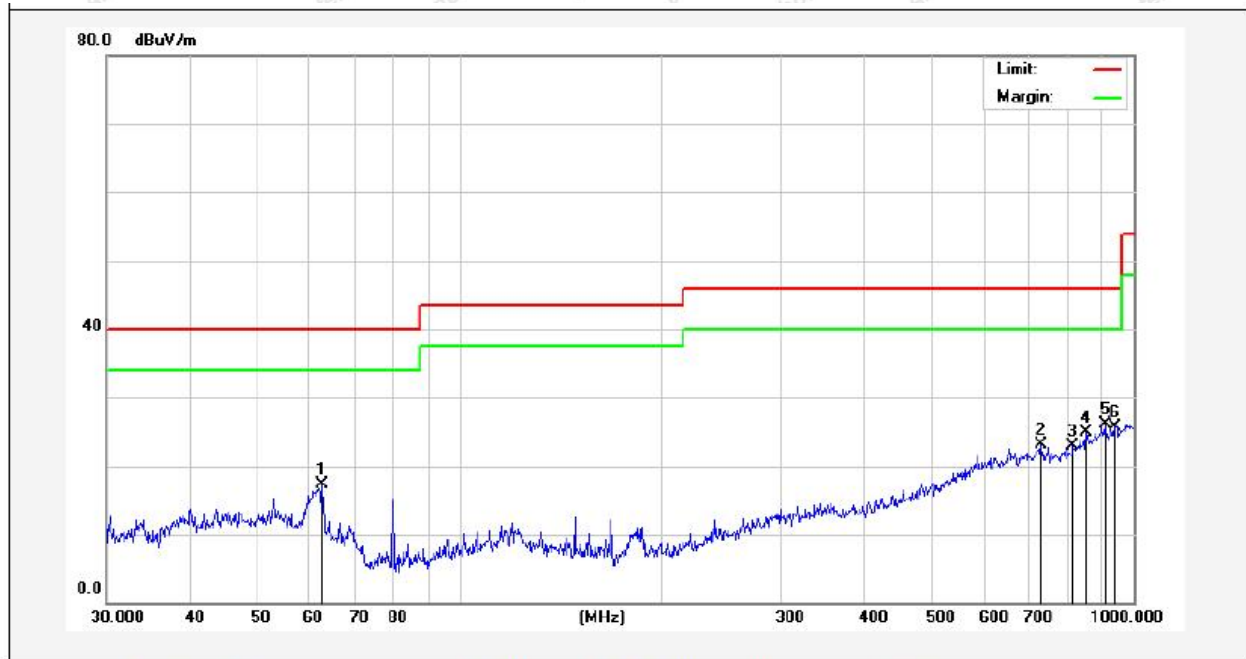


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	62.6507	35.72	-18.46	17.26	40.00	-22.74	QP			
2	729.3583	32.53	-9.52	23.01	46.00	-22.99	QP			
3	813.1115	31.02	-8.06	22.96	46.00	-23.04	QP			
4	851.0353	32.41	-7.46	24.95	46.00	-21.05	QP			
5	906.4824	32.18	-6.14	26.04	46.00	-19.96	QP			
6	938.8326	31.53	-5.77	25.76	46.00	-20.24	QP			



Test Results (30~1000MHz)

Test Mode: Mode 2 (OOK)
Power Source: DC 3.85V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

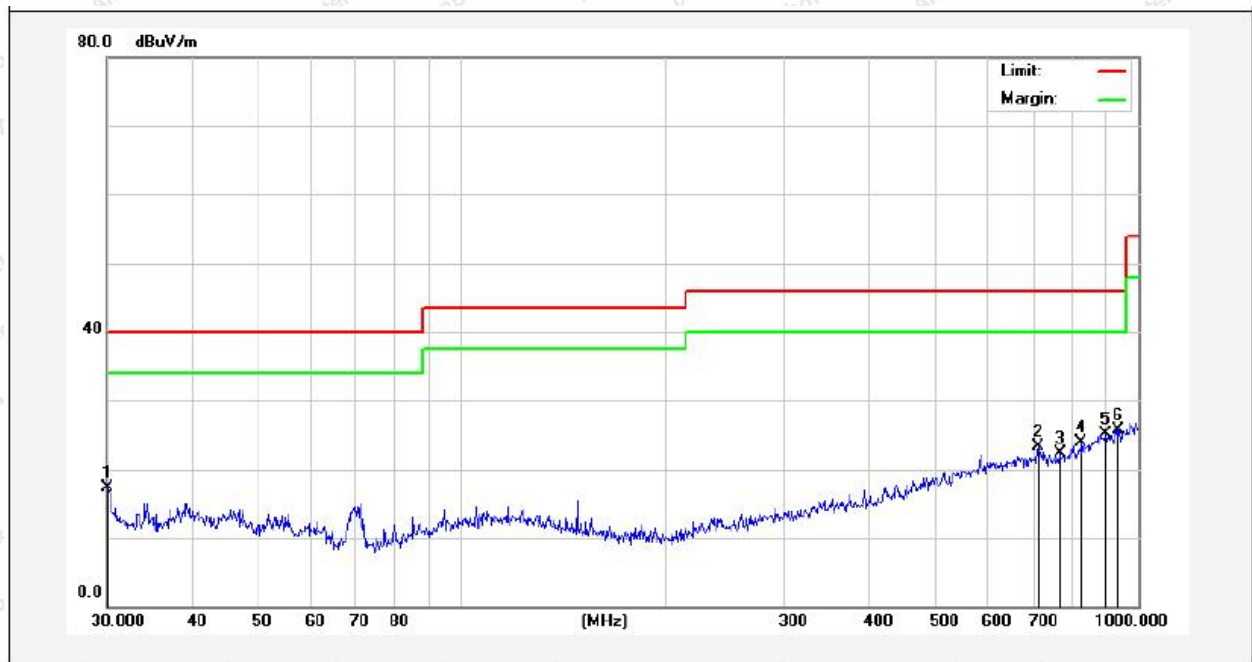


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.1054	37.52	-20.22	17.30	40.00	-22.70	QP			
2	711.6734	33.14	-9.76	23.38	46.00	-22.62	QP			
3	766.0571	31.32	-8.93	22.39	46.00	-23.61	QP			
4	824.5968	31.85	-7.88	23.97	46.00	-22.03	QP			
5	896.9965	31.36	-6.29	25.07	46.00	-20.93	QP			
6	935.5463	31.61	-5.81	25.80	46.00	-20.20	QP			



Test Results (30~1000MHz)

Test Mode: Mode 2 (OOK)
Power Source: DC 3.85V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

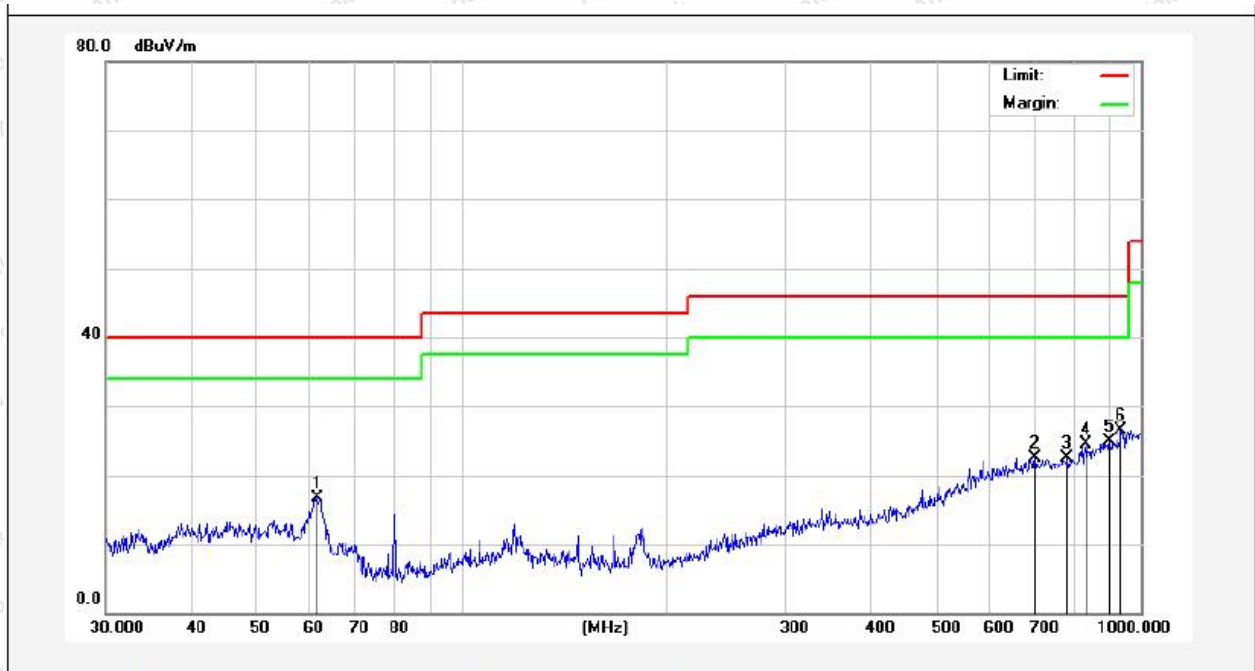


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	61.3463	34.76	-17.98	16.78	40.00	-23.22	QP			
2	699.3046	32.45	-9.92	22.53	46.00	-23.47	QP			
3	779.6068	31.16	-8.66	22.50	46.00	-23.50	QP			
4	830.4002	32.28	-7.80	24.48	46.00	-21.52	QP			
5	900.1474	31.03	-6.22	24.81	46.00	-21.19	QP			
6	935.5463	32.38	-5.81	26.57	46.00	-19.43	QP			



Test Results (30~1000MHz)

Test Mode: Mode 3 (FSK)
 Power Source: DC 3.85V battery inside
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

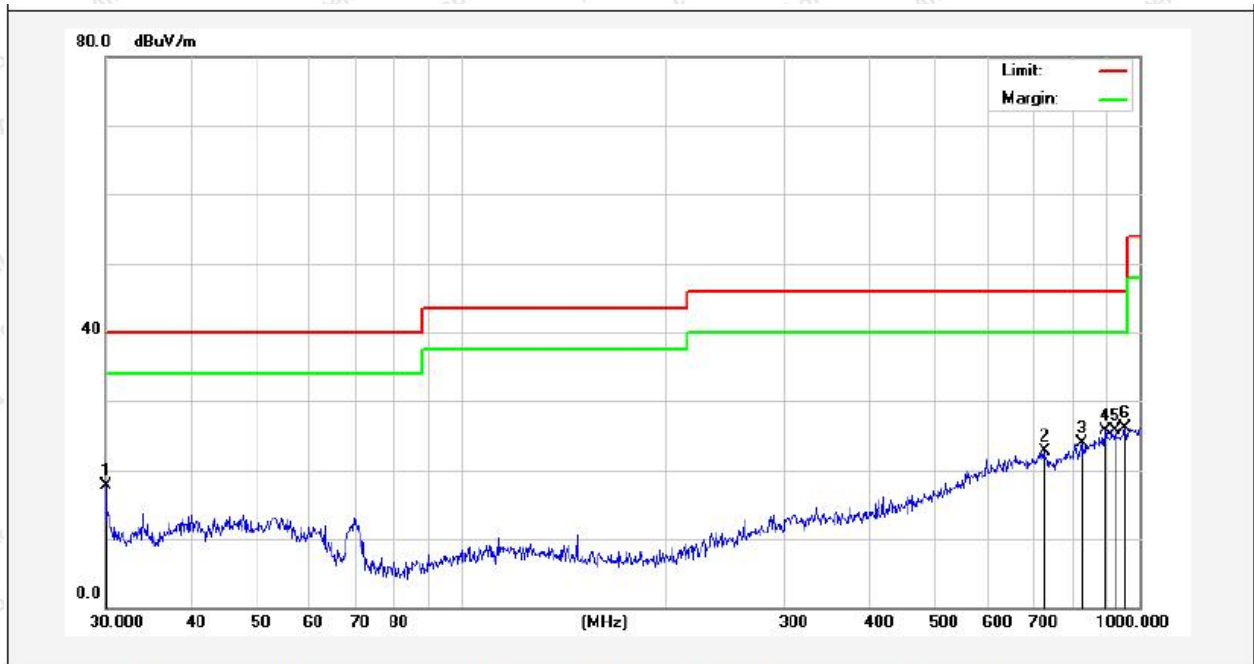


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	37.96	-20.26	17.70	40.00	-22.30	QP			
2	724.2611	32.37	-9.59	22.78	46.00	-23.22	QP			
3	821.7103	31.83	-7.93	23.90	46.00	-22.10	QP			
4	890.7278	32.14	-6.46	25.68	46.00	-20.32	QP			
5	922.5157	31.59	-5.96	25.63	46.00	-20.37	QP			
6	952.0937	31.73	-5.61	26.12	46.00	-19.88	QP			



Test Results (30~1000MHz)

Test Mode: Mode 3 (FSK)
Power Source: DC 3.85V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

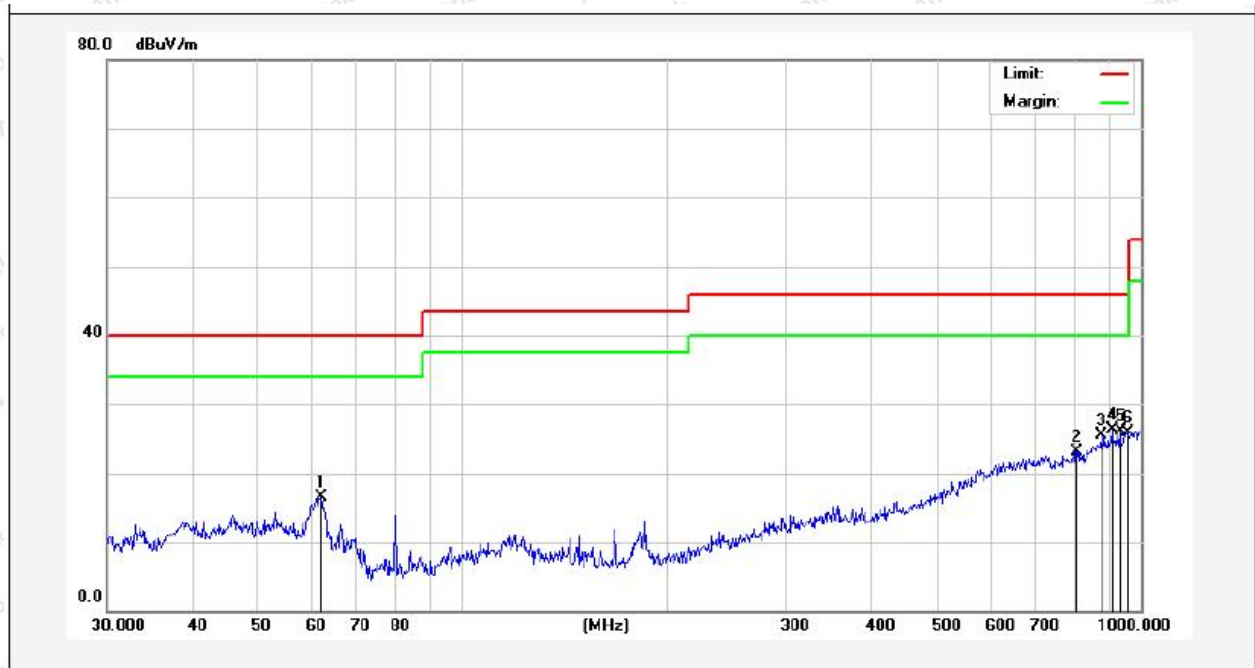


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	61.9951	34.80	-18.22	16.58	40.00	-23.42	QP			
2	804.6028	31.32	-8.19	23.13	46.00	-22.87	QP			
3	875.2470	32.36	-6.85	25.51	46.00	-20.49	QP			
4	906.4824	32.35	-6.14	26.21	46.00	-19.79	QP			
5	932.2715	32.00	-5.85	26.15	46.00	-19.85	QP			
6	955.4381	31.39	-5.55	25.84	46.00	-20.16	QP			



Test Results (30~1000MHz)


Test Mode: Mode 3 (OOK)
Power Source: DC 3.85V battery inside
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

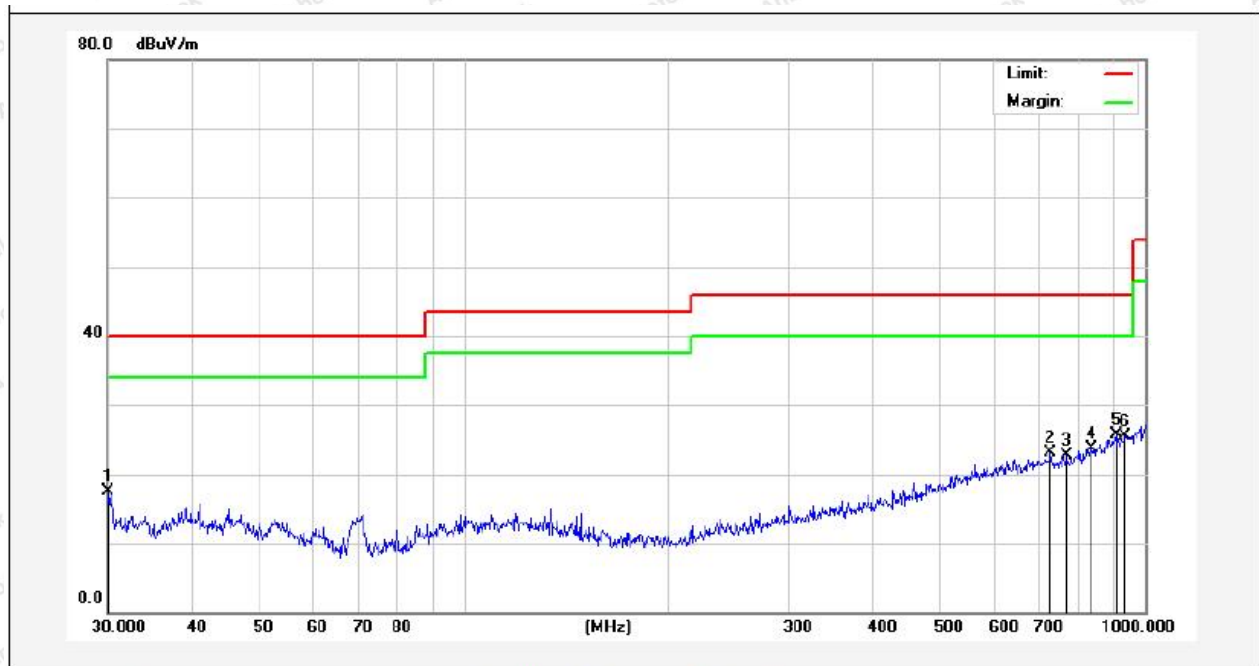

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.1054	37.70	-20.22	17.48	40.00	-22.52	QP			
2	726.8052	32.58	-9.56	23.02	46.00	-22.98	QP			
3	768.7481	31.61	-8.87	22.74	46.00	-23.26	QP			
4	836.2443	31.47	-7.70	23.77	46.00	-22.23	QP			
5	906.4824	31.92	-6.14	25.78	46.00	-20.22	QP			
6	935.5463	31.25	-5.81	25.44	46.00	-20.56	QP			

Test Results (30~1000MHz)

Test Mode: Mode 3 (OOK)
Power Source: DC 3.85V battery inside
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 23.4°C/50%RH

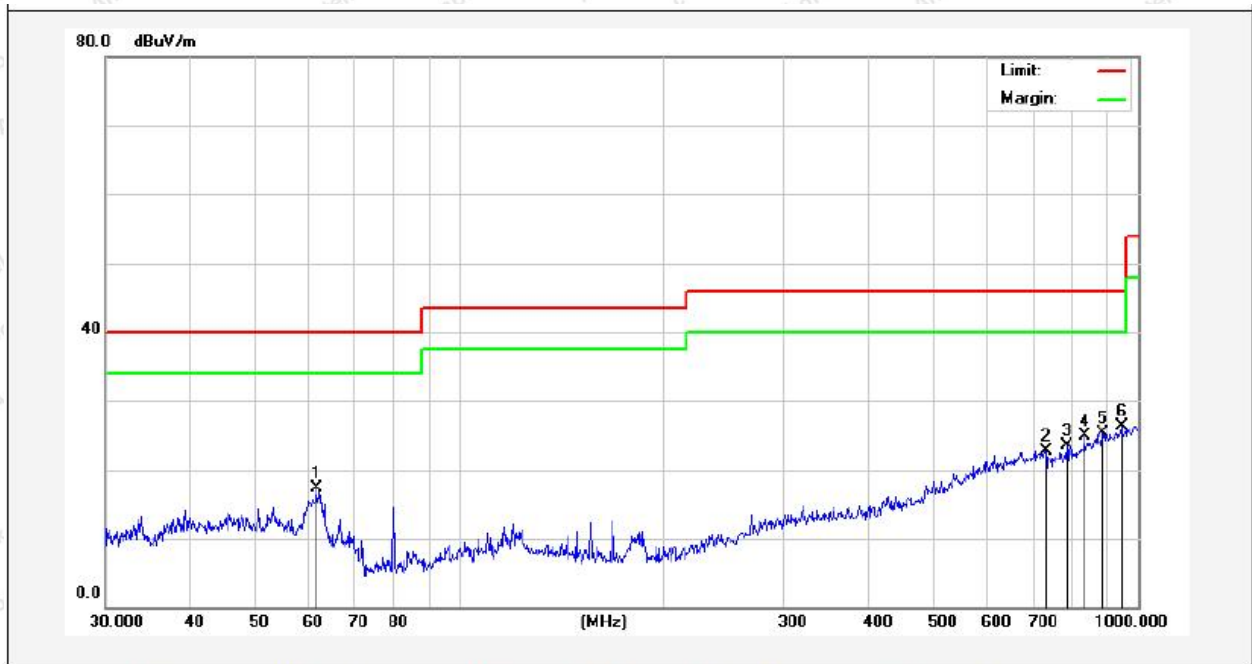

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	61.3463	35.35	-17.98	17.37	40.00	-22.63	QP			
2	731.9203	32.27	-9.48	22.79	46.00	-23.21	QP			
3	785.0935	32.14	-8.55	23.59	46.00	-22.41	QP			
4	833.3171	32.63	-7.74	24.89	46.00	-21.11	QP			
5	887.6099	31.74	-6.53	25.21	46.00	-20.79	QP			
6	945.4399	31.99	-5.69	26.30	46.00	-19.70	QP			

Remark:

1. Results = Reading + Cable Loss +Ant Factor –Amplifier



Test Results (Fundamental)

Mode	Freq. (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Results (dBuV/m)	Limits (dBuV/m)	Det. Mode
TX Mode (FSK)	315.00	H	86.51	1.52	12.71	31.45	69.29	87.66	PK
	315.00	H	76.51	1.52	12.71	31.45	59.29	67.66	AV
	315.00	V	85.79	1.52	12.71	31.45	68.57	87.66	PK
	315.00	V	75.79	1.52	12.71	31.45	58.57	67.66	AV
TX Mode (OOK)	315.00	H	87.99	1.52	12.71	31.45	70.77	87.66	PK
	315.00	H	77.99	1.52	12.71	31.45	60.77	67.66	AV
	315.00	V	85.02	1.52	12.71	31.45	67.80	87.66	PK
	315.00	V	75.02	1.52	12.71	31.45	57.80	67.66	AV
TX Mode (FSK)	434.00	H	88.55	1.52	12.71	31.45	71.28	92.87	PK
	434.00	H	78.55	1.52	12.71	31.45	61.28	72.87	AV
	434.00	V	88.68	1.52	12.71	31.45	71.46	92.87	PK
	434.00	V	78.68	1.52	12.71	31.45	61.46	72.87	AV
TX Mode (OOK)	434.00	H	88.84	1.52	12.71	31.45	71.62	92.87	PK
	434.00	H	78.84	1.52	12.71	31.45	61.62	72.87	AV
	434.00	V	87.90	1.52	12.71	31.45	70.68	92.87	PK
	434.00	V	77.90	1.52	12.71	31.45	60.68	72.87	AV

Remark:

1. Result = Reading + Cable Loss + Ant Factor – Amplifier

Mode	Freq.(MHz)	Pulse Width (ms)	2/Pulse Width(kHz)
TX Mode	315(FSK)	1000.000	0.002
TX Mode	315(OOK)	1000.000	0.002
TX Mode	434(FSK)	1000.000	0.002
TX Mode	434(OOK)	1000.000	0.002

2. Pulse Desensitization Correction Factor

RBW(1000kHz) > 2/Pulse Width

Therefore PDCF is not needed.

Test Results (Harmonics Emissions+Radiated Emissions from 1G-4G)**315MHz(FSK)**

Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Results (dBuV/m)	Limits (dBuV/m)	Det Mode
630.00	H	72.50	1.92	12.71	31.72	55.41	67.66	PK
630.00	H	62.50	1.92	12.71	31.72	45.41	47.66	AV
630.00	V	75.59	1.92	12.71	31.72	58.50	67.66	PK
630.00	V	63.59	1.92	12.71	31.72	46.50	47.66	AV
945.00	H	62.81	2.38	21.43	32.45	54.17	67.66	PK
945.00	H	52.81	2.38	21.43	32.45	44.17	47.66	AV
945.00	V	64.21	2.38	18.56	32.45	52.70	67.66	PK
945.00	V	54.21	2.38	18.56	32.45	42.70	47.66	AV

315MHz(OOK)

Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Results (dBuV/m)	Limits (dBuV/m)	Det Mode
630.00	H	72.65	1.92	12.71	31.72	55.56	67.66	PK
630.00	H	62.65	1.92	12.71	31.72	45.56	47.66	AV
630.00	V	75.84	1.92	12.71	31.72	58.75	67.66	PK
630.00	V	63.84	1.92	12.71	31.72	46.75	47.66	AV
945.00	H	62.20	2.38	21.43	32.45	53.56	67.66	PK
945.00	H	52.20	2.38	21.43	32.45	43.56	47.66	AV
945.00	V	64.65	2.38	18.56	32.45	53.14	67.66	PK
945.00	V	54.65	2.38	18.56	32.45	43.14	47.66	AV

434MHz(FSK)

Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Results (dBuV/m)	Limits (dBuV/m)	Det Mode
868.00	H	73.48	1.92	12.71	31.72	56.39	72.87	PK
868.00	H	63.48	1.92	12.71	31.72	46.39	52.87	AV
868.00	V	76.12	1.92	12.71	31.72	59.03	72.87	PK
868.00	V	66.12	1.92	12.71	31.72	49.03	52.87	AV
1302.00	H	63.33	2.38	21.43	32.45	54.69	72.87	PK
1302.00	H	53.33	2.38	21.43	32.45	44.69	52.87	AV
1302.00	V	65.03	2.38	18.56	32.45	53.52	72.87	PK
1302.00	V	55.03	2.38	18.56	32.45	43.52	52.87	AV

434MHz(OOK)

Frequency (MHz)	Antenna Pol.	Reading (dBuV/m)	Cable Loss (dB)	Ant Factor (dB)	Amplifier (dB)	Results (dBuV/m)	Limits (dBuV/m)	Det Mode
868.00	H	73.50	1.92	12.71	31.72	56.41	72.87	PK
868.00	H	63.50	1.92	12.71	31.72	46.41	52.87	AV
868.00	V	75.28	1.92	12.71	31.72	58.19	72.87	PK
868.00	V	65.28	1.92	12.71	31.72	48.19	52.87	AV
1302.00	H	62.42	2.38	21.43	32.45	53.78	72.87	PK
1302.00	H	52.42	2.38	21.43	32.45	43.78	52.87	AV
1302.00	V	64.37	2.38	18.56	32.45	52.86	72.87	PK
1302.00	V	54.37	2.38	18.56	32.45	42.86	52.87	AV

Remark:


1. Result = Reading + Cable Loss + Ant Factor – Amplifier

5. 20DB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.231 (c)
Test Limit	According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

5.2. Test Setup



5.3. Test Procedure

1. Place the EUT on the table and set it in the continuously transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 1% to 5% of the OBW, $VBW \geq 3 \times RBW$,
Span = $2 \times OBW \sim 5 \times OBW$
Detector = Peak
Trace mode = Max hold.
Sweep = auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data

Test Item	: 20dB Bandwidth
Test Voltage	: DC 3.85V battery inside
Test Result	: PASS

Test Mode	: Continuously transmitting
Temperature	: 22.7°C
Humidity	: 55%RH


Mode	Freq. (MHz)	Modulation Type	20DB Bandwidth (kHz)	Limit (kHz)	Results
TX Mode	315	FSK	68.52	≤ 787.5	PASS
TX Mode	315	OOK	9.234	≤ 787.5	PASS
TX Mode	434	FSK	68.25	≤ 1085	PASS
TX Mode	434	OOK	9.436	≤ 1085	PASS

Note: Limit=0.0025*Freq.




315 MHz(FSK)

Plot of 20DB Bandwidth

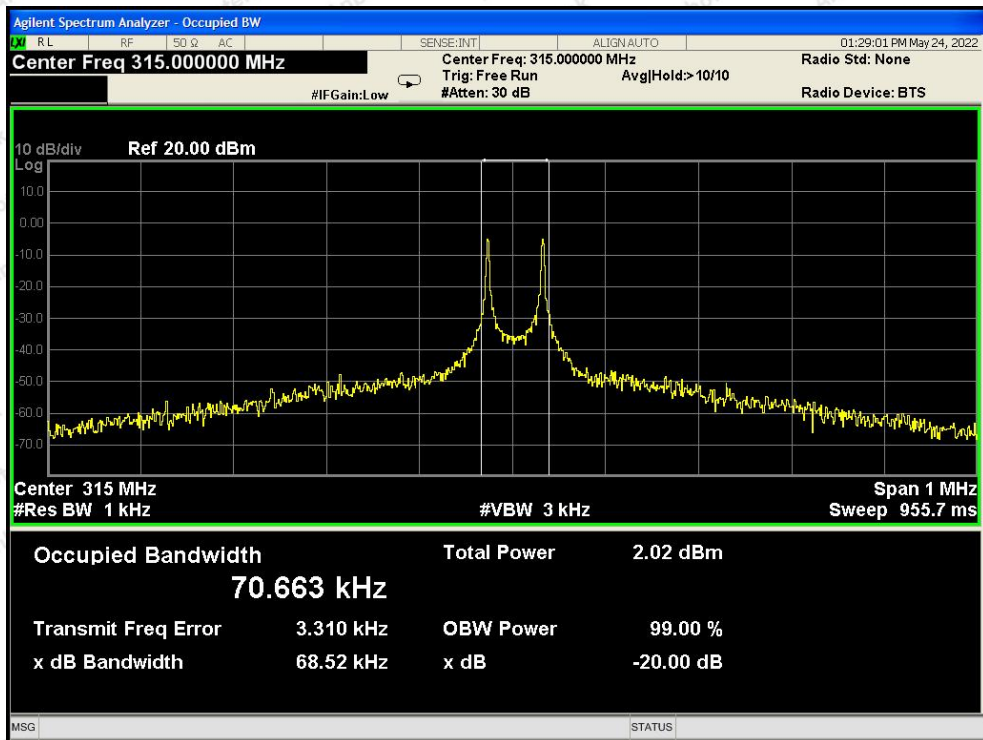


315 MHz(OOK)

Plot of 20DB Bandwidth

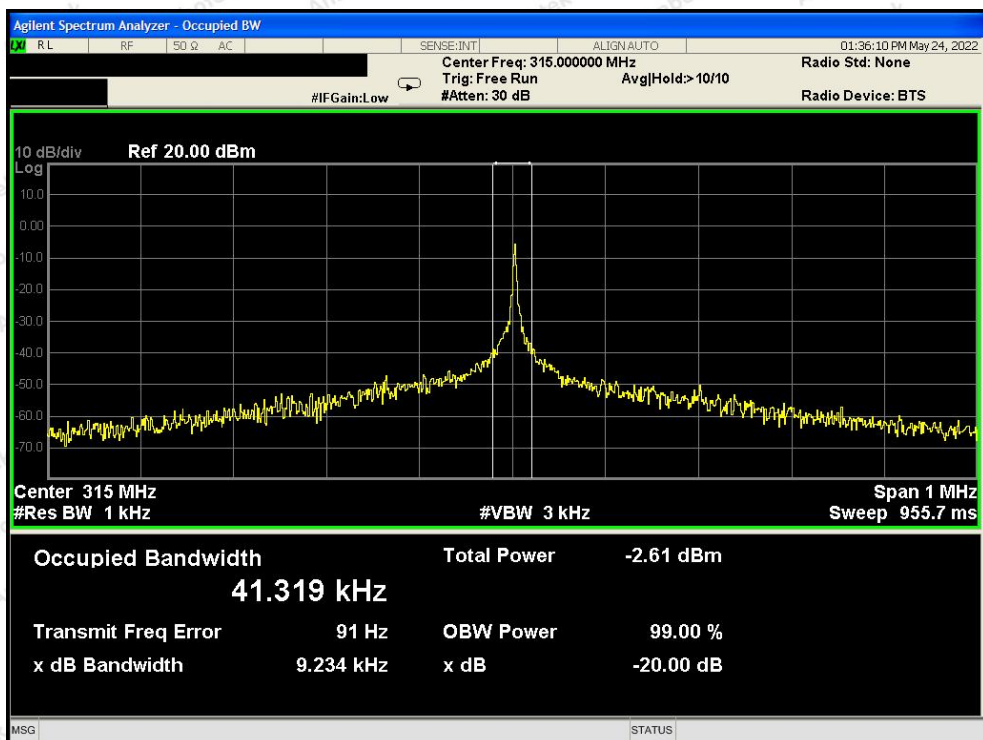


434MHz(FSK)

Plot of 20DB Bandwidth

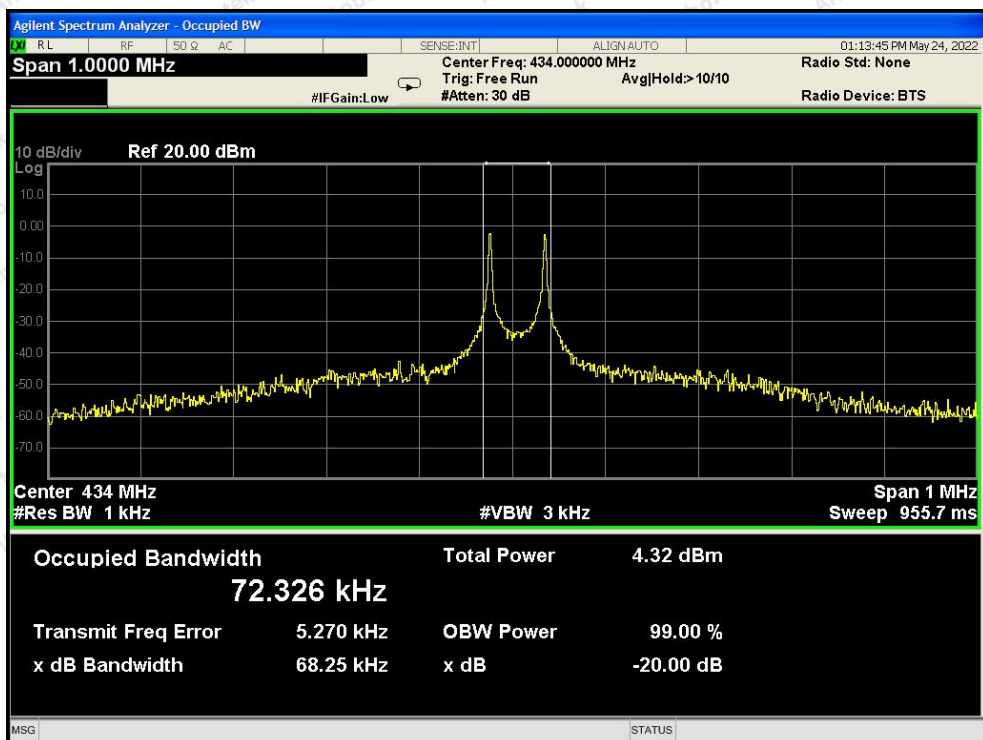

434MHz(OOK)

Plot of 20DB Bandwidth

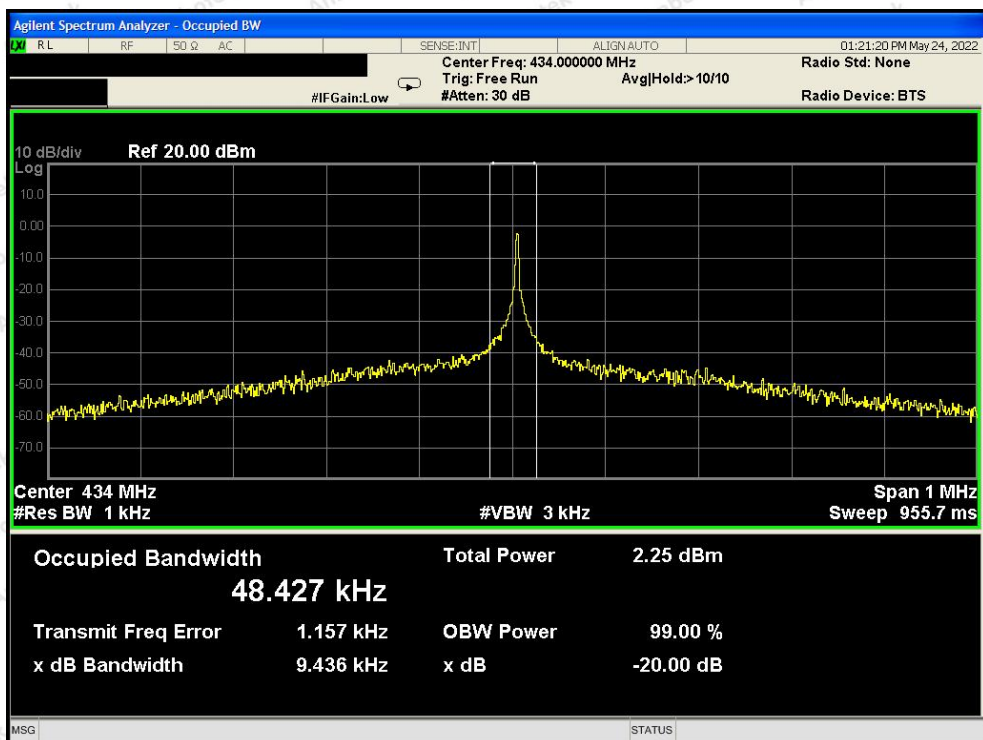


6. Dwell Time Test

6.1. Test Standard and Limit

Test Standard	FCC Part 15.231(e)
Test Limit	Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in continuously transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as
RBW=1000kHz, VBW= 1000 kHz, Span= 0Hz, Sweep Time= 20 Seconds.
3. Record the Delta mark time.

6.4. Test Data

Test Item : Dwell Time

Test Voltage : DC 3.85V battery inside

Test Result : PASS

Test Mode : Continuously transmitting


Temperature : 22.7℃

Humidity : 55%RH


Mode	Freq. (MHz)	Modulation Type	Transmitting time(s)	Limit(s)	T-off time(s)	T-off Limit(s)	Results
TX Mode	315	FSK	1	<1	30.6	>30	PASS
TX Mode	315	OOK	1	<1	30.48	>30	PASS
TX Mode	434	FSK	1	<1	31.8	>30	PASS
TX Mode	434	OOK	1	<1	31.64	>30	PASS

Please refer the following plot.


315 MHz(FSK)

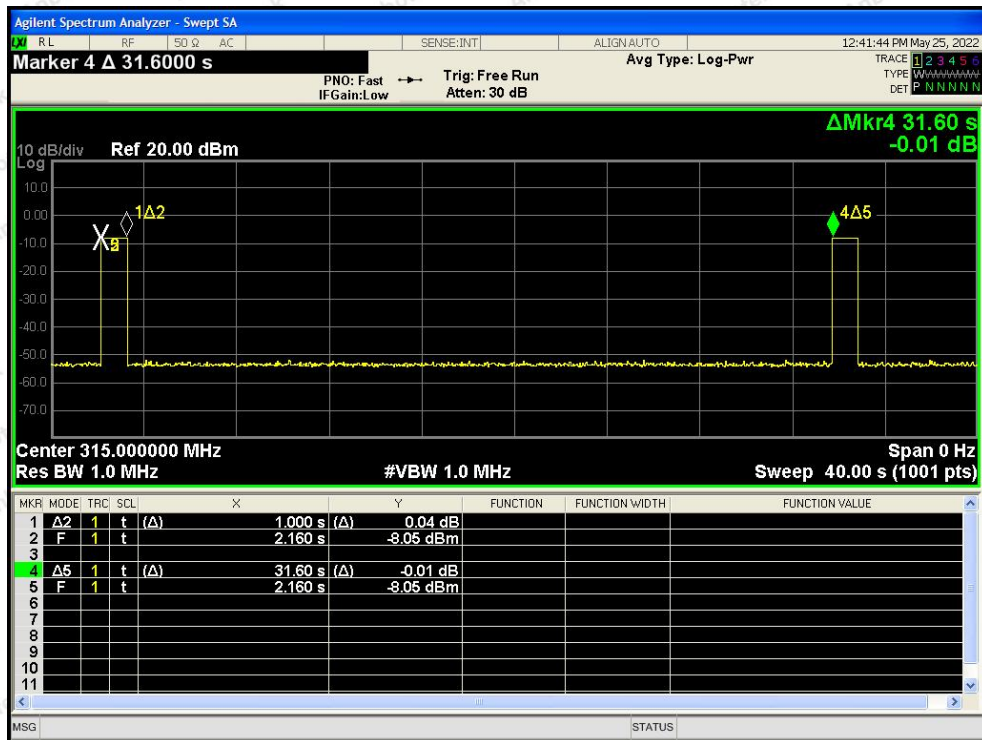


315 MHz(OOK)

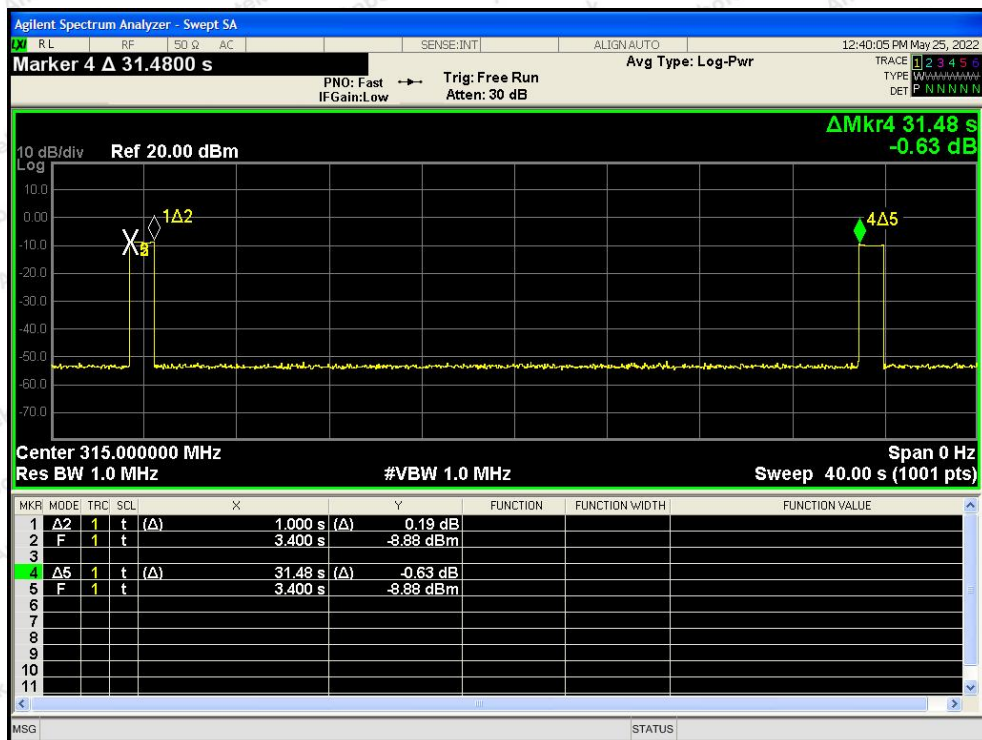

434 MHz(FSK)

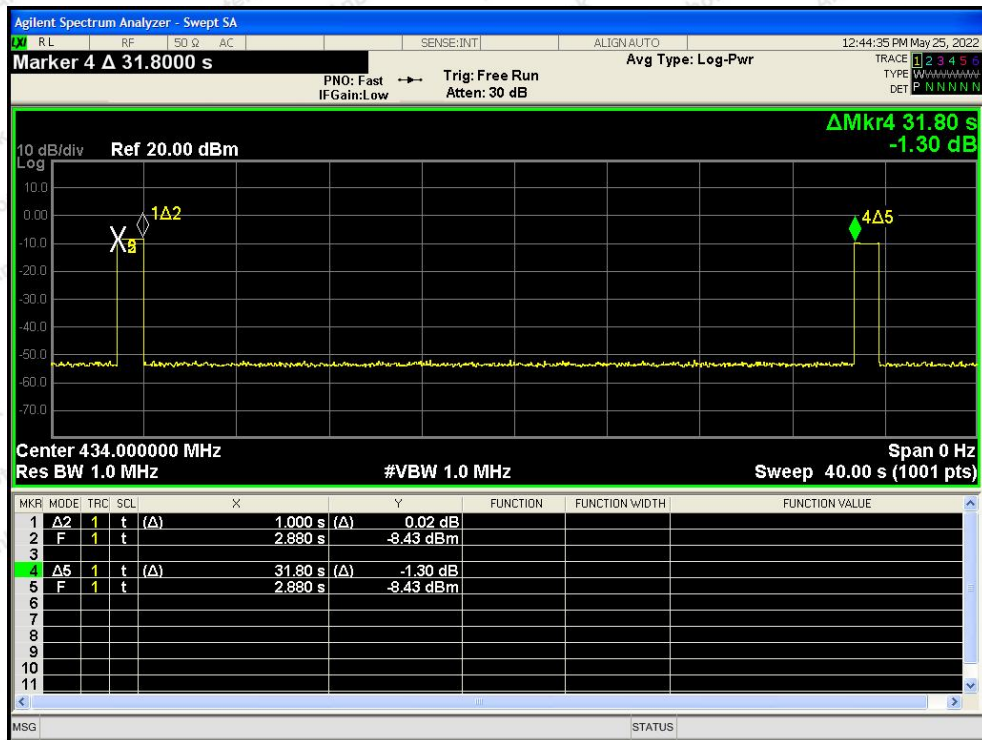

434 MHz(OOK)

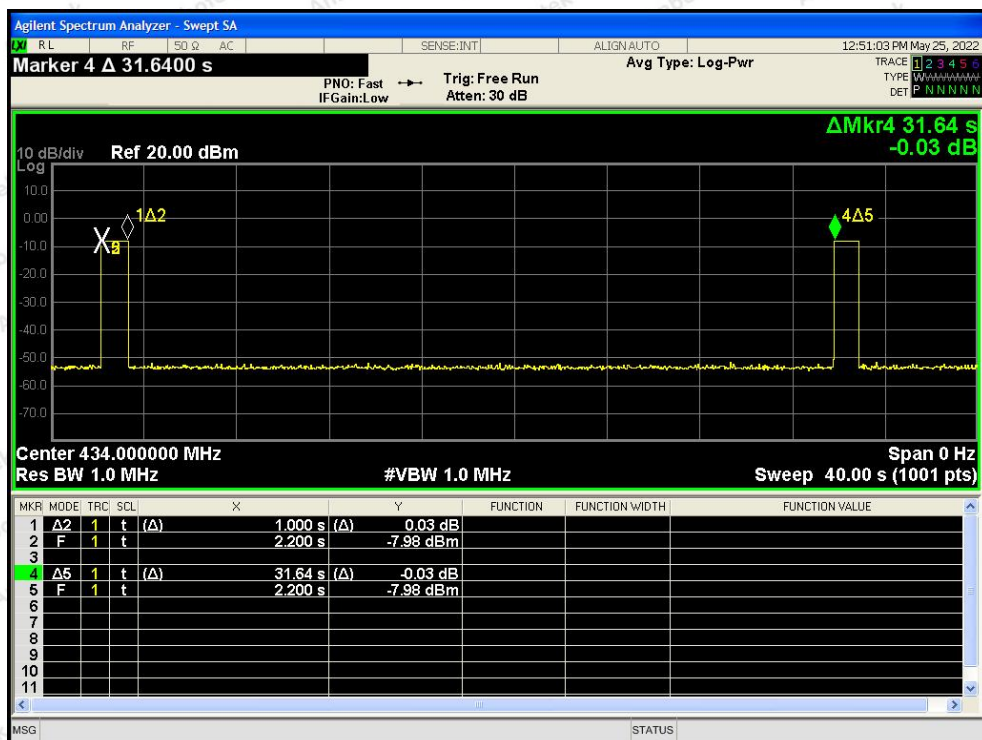

7. Antenna Requirement

7.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna requirement must meet at least one of the following: 1) Antenna must be permanently attached to device. 2) The antenna must use a unique type of connector to attach to the device. 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

7.2. Antenna Connected Construction

The antenna is a FPC antenna which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test





APPENDIX II -- EXTERNAL PHOTOGRAPH

Reference to the test report 18220WC20108601.

APPENDIX III -- INTERNAL PHOTOGRAPH

Reference to the test report 18220WC20108601.

----- End of Report -----

