

FCC TEST REPORT

Client Name : Autel Intelligent Tech. Corp., Ltd.

Address : 7th-8th, 10th Floor, Bldg. B1, Zhiyuan,Xueyuan Rd. Xili,
Nanshan Shenzhen China

Product Name : Intelligent TPMS & Tire Service tool

Date : Nov. 12, 2020

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. List of Channels.....	6
1.5. Description Of Test Setup.....	7
1.6. Test Equipment List.....	8
1.7. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. 20dB Emission Bandwidth.....	22
5.1. Test Standard.....	22
5.2. Test Setup.....	22
5.3. Test Procedure.....	22
5.4. Test Data.....	22
6. Antenna Requirement.....	24
5.1. Test Standard and Requirement.....	24
6.2. Antenna Connected Construction.....	24



TEST REPORT

Applicant : Autel Intelligent Tech. Corp., Ltd.
Manufacturer : Autel Intelligent Tech. Corp., Ltd.
Product Name : Intelligent TPMS & Tire Service tool
Model No. : MaxiTPMS ITS600
Trade Mark : AUTEL
Rating(s) : Input: DC 5V, 1.8A (with DC 3.8V, 5000mAh Battery inside)
Adapter input: DC 5V, 2A

Test Standard(s) : FCC Part15 Subpart C, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Sept. 07, 2020

Date of Test

Sept. 07~21, 2020

Prepared By

Yilia Zhong

(Engineer / Yilia Zhong)

Reviewer

Bibo Zhang

(Supervisor / Bibo Zhang)

Approved & Authorized Signer

Kingkong Jin

(Manager / Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Autel Intelligent Tech. Corp., Ltd.
Address	:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan,Xueyuan Rd. Xili, Nanshan Shenzhen China
Manufacturer	:	Autel Intelligent Tech. Corp., Ltd.
Address	:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan,Xueyuan Rd. Xili, Nanshan Shenzhen China
Factory 1	:	Autel Intelligent Technology Corp.,Ltd.
Address	:	6th Floor, Building 1, Yanxiang Zhigu, NO.11 Gaoxin West Rd, Guangming New District, Shenzhen City, Guangdong Province, China.
Factory 2	:	AUTEL VIETNAM COMPANY LIMITED
Address	:	4th Floor, Factory#6, Land#CN1, An Duong Industrial Zone, Hong Phong Township, An Duong County, Hai Phong, Viet Nam

1.2. Description of Device (EUT)

Product Name	:	Intelligent TPMS & Tire Service tool
Model No.	:	MaxiTPMS ITS600
Trade Mark	:	AUTEL
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter DC 3.8V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	WiFi 2.4G: 802.11g/ n(HT20) 2412-2462MHz BT: 2402-2480MHz WiFi 5.1G: 5180MHz~5240MHz WiFi 5.8G: 5745MHz~5825MHz 433.92MHz 315 MHz 125KHz
	Number of Channel:	WiFi 2.4G: 11 Channels for 802.11g/ n(HT20) BDR&EDR: 79 Channels WiFi 5.1G: 4 Channels for 802.11a 4 Channels for 802.11n(HT20) 4 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80)

		WiFi 5.8G: 5 Channels for 802.11a 5 Channels for 802.11n(HT20) 5 Channels for 802.11ac(HT20) 2 Channels for 802.11n(HT40) 2 Channels for 802.11ac(HT40) 1 Channels for 802.11ac(HT80) 433.92MHz: 1 Channels
	Modulation Type:	WiFi 2.4G: 802.11g/n OFDM BDR&EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK WiFi 5.1G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM WiFi 5.8G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM 433.92MHz: ASK / FSK 315 MHz: ASK / FSK 125KHz: ASK
	Antenna Type:	BT: PIFA Antenna WiFi 2.4G & WiFi 5.1G & WiFi 5.8G: PIFA Antenna 433.92MHz: PCB Antenna 315 MHz: PCB Antenna 125KHz: Inductive loop coil Antenna
	Antenna Gain(Peak):	BT: 1.6 dBi WiFi 2.4G: 2.3 dBi WiFi 5.1G & WiFi 5.8G: 2.7 dBi 433.92MHz: -10 dBi 315 MHz: -10 dBi 125KHz: -10 dBi

Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.2) This report is for 125KHz module.

1.3. Auxiliary Equipment Used During Test.

Adapter	:	MODEL:GME10C-050200FUu I/P:100-240V~50-60Hz 0.28A O/P: DC 5V, 2A
---------	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For Conducted Emission	
Final Test Mode	Description
125KHz	TX


For Radiated Emission	
Final Test Mode	Description
125KHz	TX

1.5. List of Channels

Channel	Freq. (MHz)
01	0.125



1.5. Description Of Test Setup

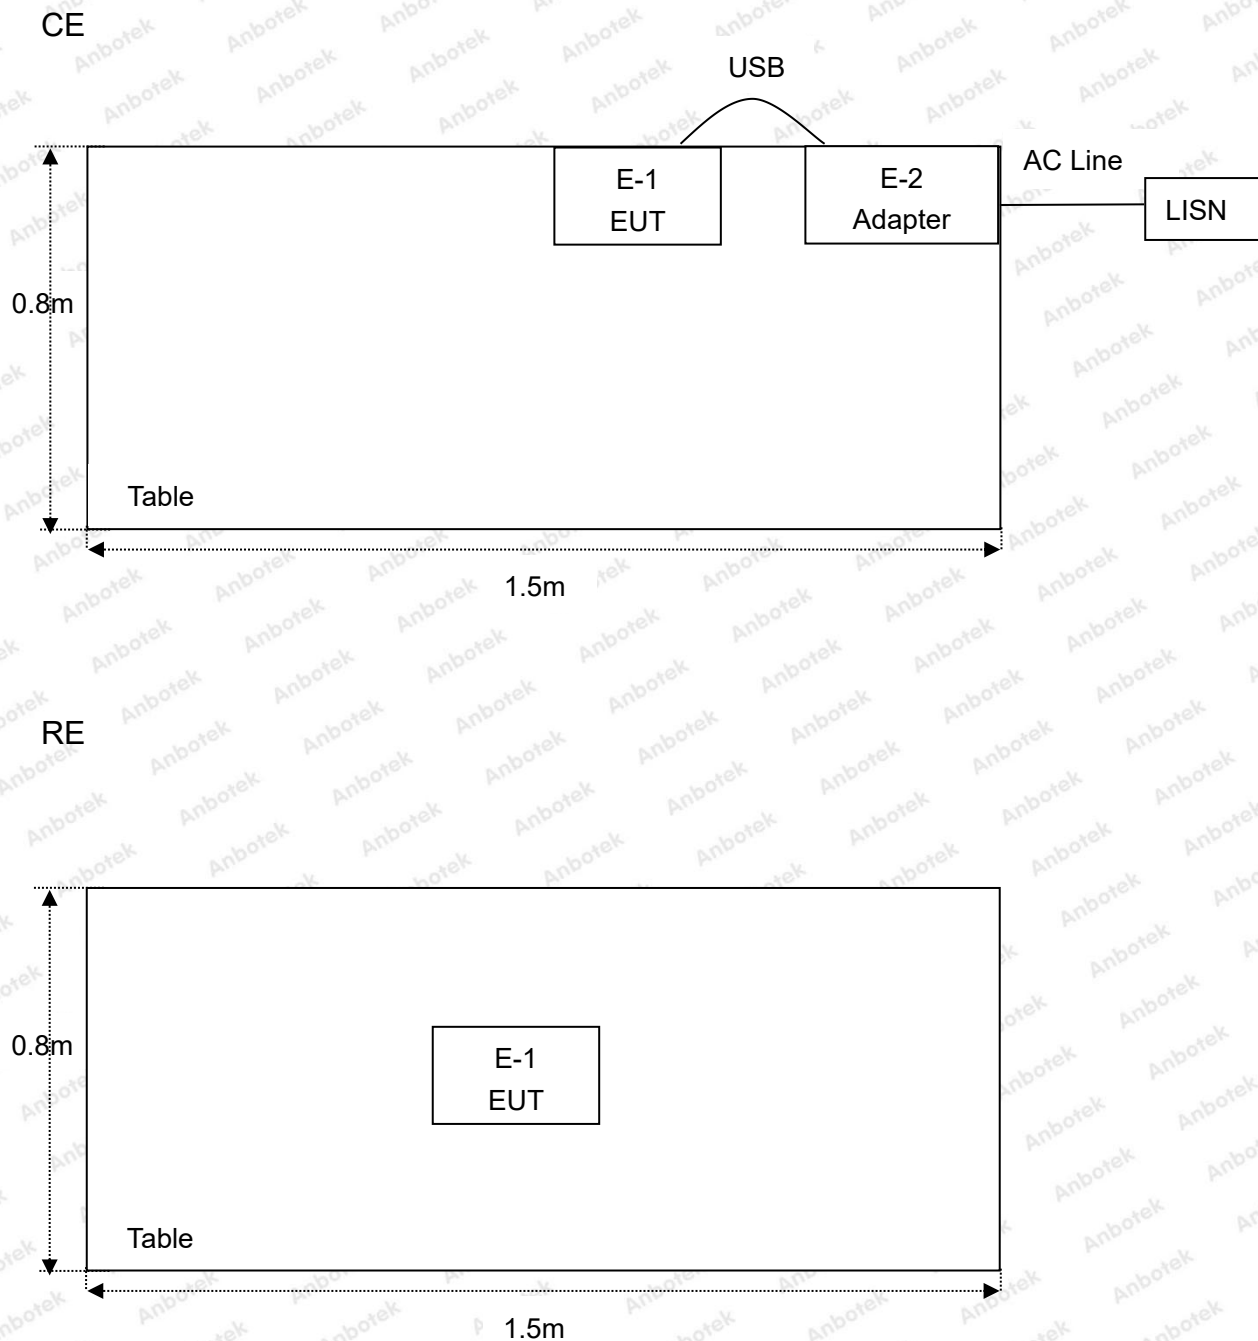

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 04, 2019	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 04, 2019	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 04, 2019	1 Year
4.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
5.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Nov. 04, 2019	1 Year
6.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 01, 2019	1 Year
7.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 01, 2019	1 Year
8.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 01, 2019	1 Year
9.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 01, 2019	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Nov. 04, 2019	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 04, 2019	1 Year
13.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 04, 2019	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 04, 2019	1 Year
15.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 04, 2019	1 Year
16.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 04, 2019	1 Year
17.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 04, 2019	1 Year
18.	DC Power Supply	LW	TPR-6420D	374470	Nov. 04, 2019	1 Year
19.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Nov. 04, 2019	1 Year



1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
FCC Part 15, Paragraph 15.203	Antenna Requirement	PASS
FCC Part 15, Paragraph 15.215 (c)	20dB Emission Bandwidth	PASS




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

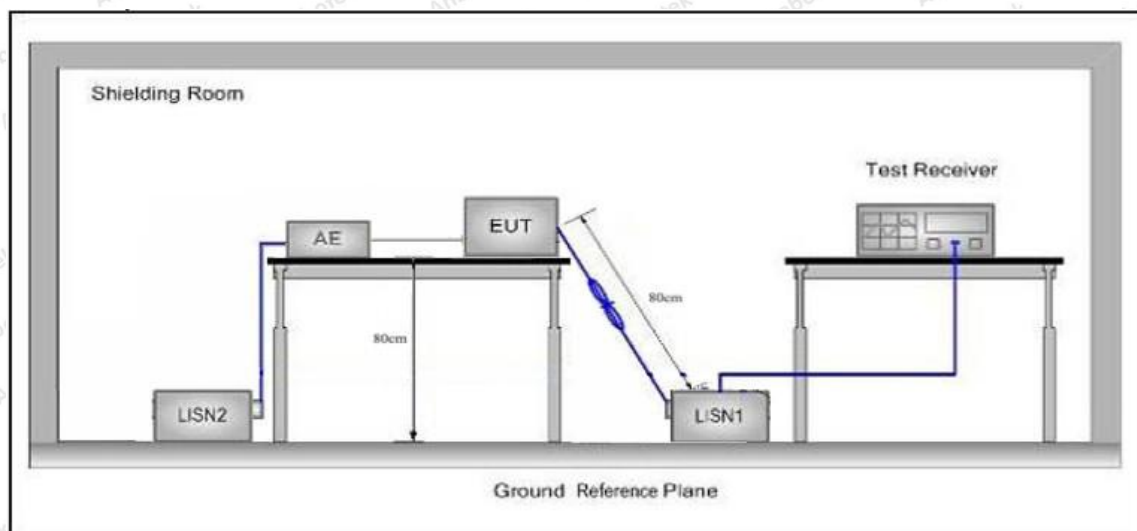

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: 125KHz
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.0°C Hum.: 53%

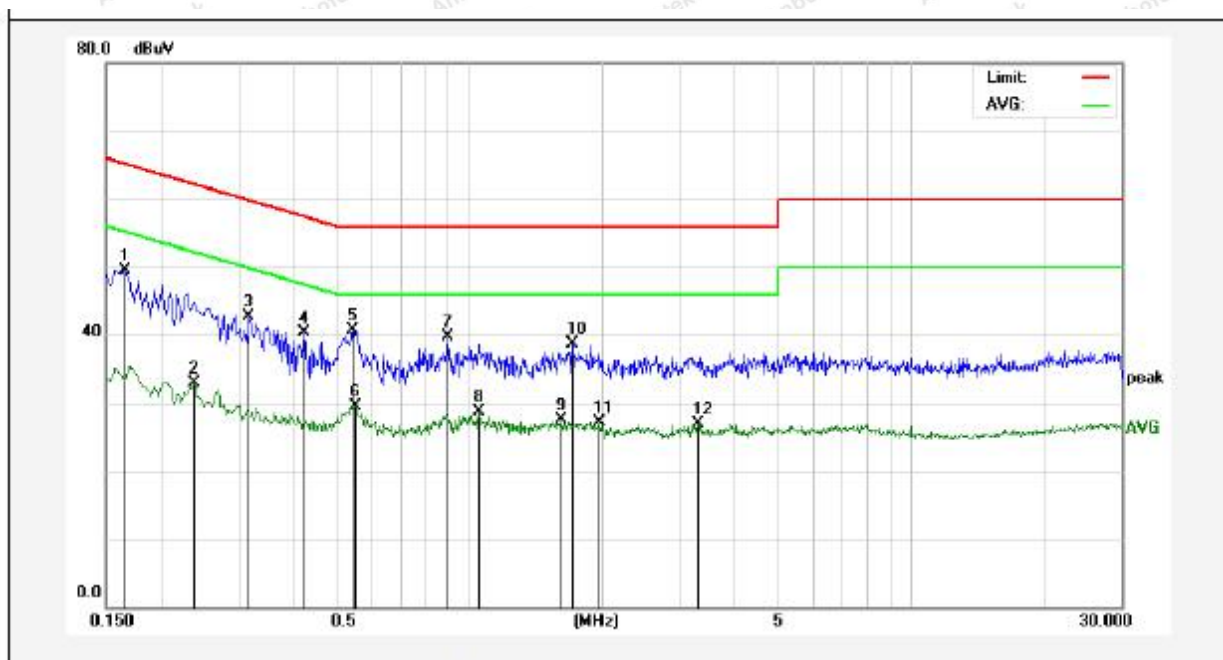

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1660	19.96	29.46	49.42	65.15	-15.73	QP	
2	0.2380	3.41	29.44	32.85	52.16	-19.31	AVG	
3	0.3180	13.29	29.44	42.73	59.76	-17.03	QP	
4	0.4220	10.74	29.47	40.21	57.41	-17.20	QP	
5	0.5460	11.21	29.52	40.73	56.00	-15.27	QP	
6	0.5540	0.05	29.53	29.58	46.00	-16.42	AVG	
7	0.8940	10.04	29.61	39.65	56.00	-16.35	QP	
8	1.0500	-0.86	29.64	28.78	46.00	-17.22	AVG	
9	1.6140	-2.04	29.64	27.60	46.00	-18.40	AVG	
10	1.7140	8.97	29.64	38.61	56.00	-17.39	QP	
11	1.9780	-2.63	29.65	27.02	46.00	-18.98	AVG	
12	3.2980	-2.80	29.68	26.88	46.00	-19.12	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 125KHz
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.0°C Hum.: 53%

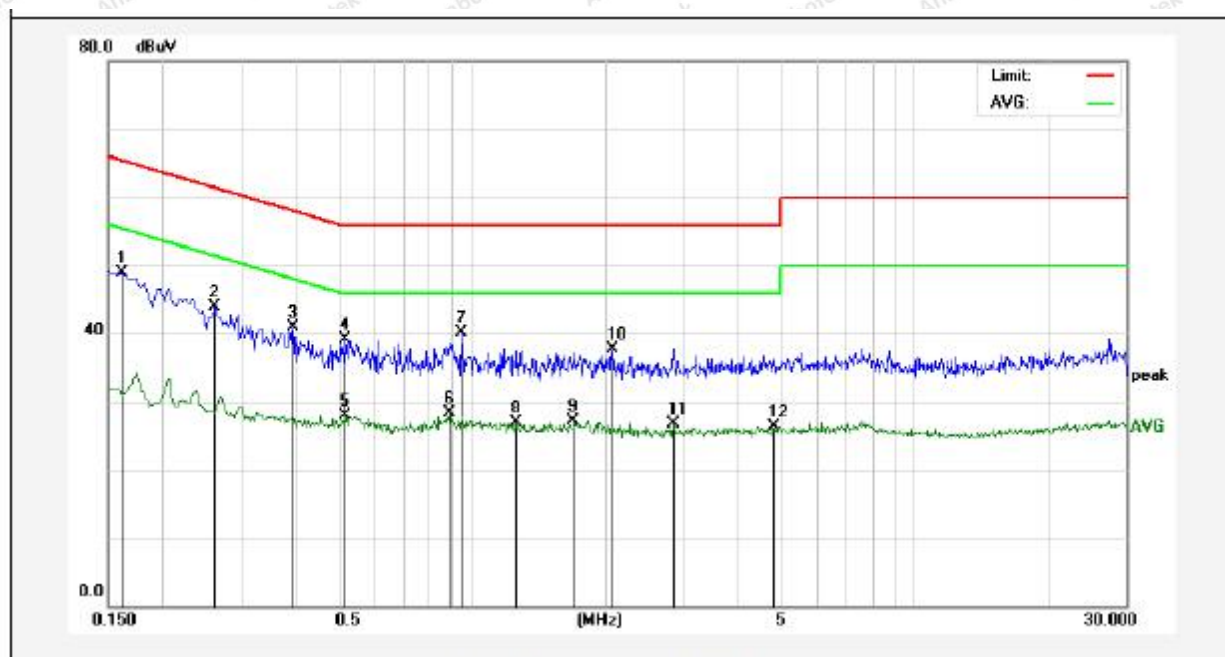


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	19.54	29.46	49.00	65.36	-16.36	peak	
2	0.2620	14.41	29.43	43.84	61.36	-17.52	peak	
3	0.3940	11.37	29.47	40.84	57.98	-17.14	peak	
4	0.5180	9.50	29.52	39.02	56.00	-16.98	peak	
5	0.5180	-1.69	29.52	27.83	46.00	-18.17	AVG	
6	0.8860	-1.27	29.61	28.34	46.00	-17.66	AVG	
7	0.9460	10.39	29.63	40.02	56.00	-15.98	peak	
8	1.2500	-2.64	29.64	27.00	46.00	-19.00	AVG	
9	1.6980	-2.59	29.64	27.05	46.00	-18.95	AVG	
10	2.0700	7.97	29.65	37.62	56.00	-18.38	peak	
11	2.8500	-3.01	29.67	26.66	46.00	-19.34	AVG	
12	4.7940	-3.44	29.72	26.28	46.00	-19.72	AVG	



Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: 125KHz
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.0°C Hum.: 53%

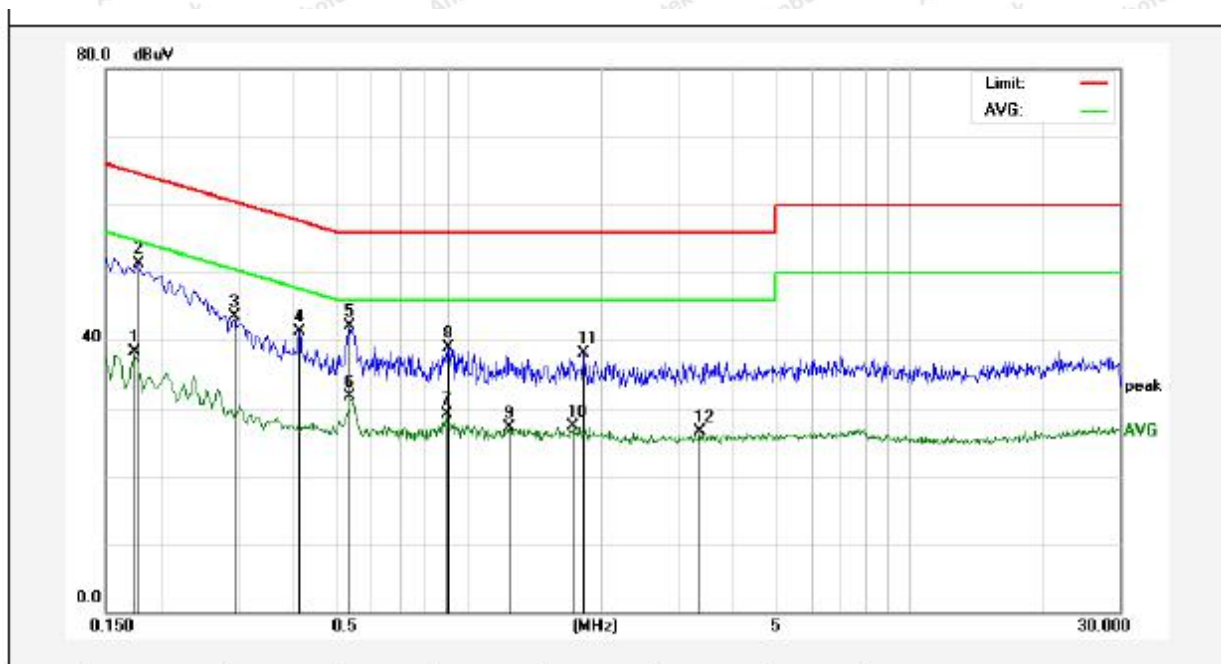

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	8.89	29.46	38.35	54.76	-16.41	AVG	
2	0.1780	21.93	29.46	51.39	64.57	-13.18	QP	
3	0.2940	13.98	29.43	43.41	60.41	-17.00	QP	
4	0.4140	11.91	29.47	41.38	57.57	-16.19	QP	
5	0.5380	12.67	29.52	42.19	56.00	-13.81	QP	
6	0.5380	2.12	29.52	31.64	46.00	-14.36	AVG	
7	0.8900	-0.49	29.61	29.12	46.00	-16.88	AVG	
8	0.9020	9.24	29.61	38.85	56.00	-17.15	QP	
9	1.2420	-2.57	29.64	27.07	46.00	-18.93	AVG	
10	1.7300	-2.39	29.64	27.25	46.00	-18.75	AVG	
11	1.8260	8.48	29.65	38.13	56.00	-17.87	QP	
12	3.3540	-3.19	29.68	26.49	46.00	-19.51	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 125KHz
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 24.0°C Hum.: 53%

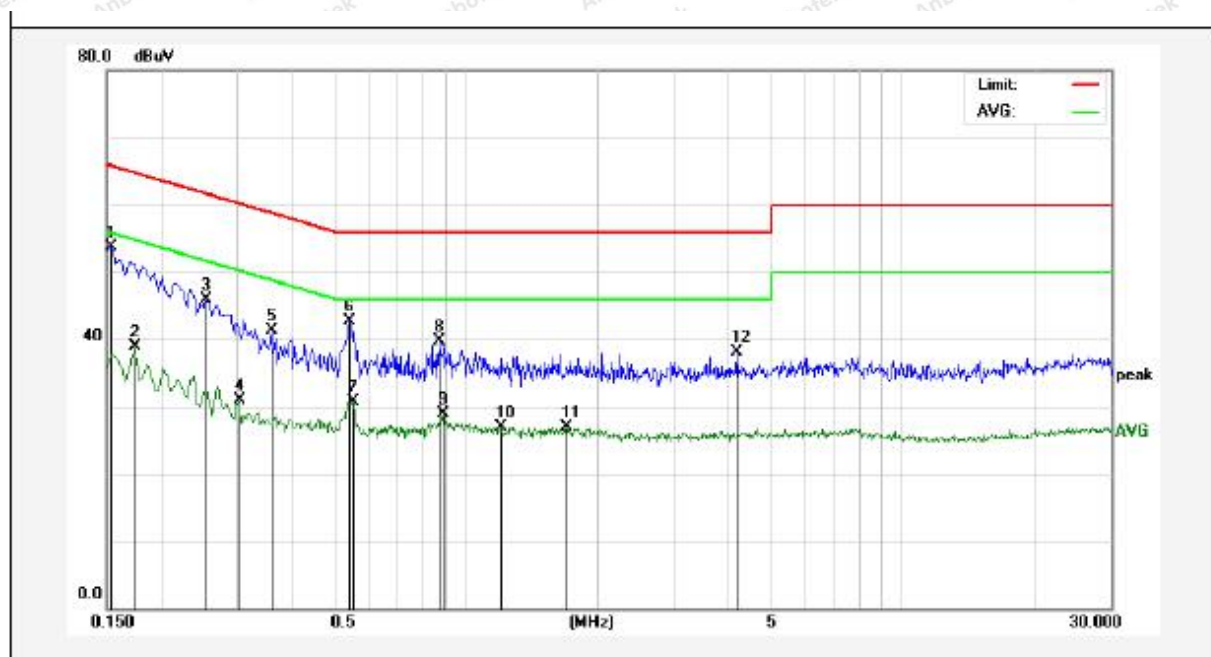

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	24.15	29.46	53.61	65.78	-12.17	QP	
2	0.1740	9.38	29.46	38.84	54.76	-15.92	AVG	
3	0.2540	16.46	29.44	45.90	61.62	-15.72	QP	
4	0.3020	1.52	29.43	30.95	50.19	-19.24	AVG	
5	0.3580	11.82	29.46	41.28	58.77	-17.49	QP	
6	0.5420	13.11	29.52	42.63	56.00	-13.37	QP	
7	0.5540	1.26	29.53	30.79	46.00	-15.21	AVG	
8	0.8700	10.04	29.61	39.65	56.00	-16.35	QP	
9	0.8860	-0.76	29.61	28.85	46.00	-17.15	AVG	
10	1.2059	-2.78	29.64	26.86	46.00	-19.14	AVG	
11	1.7020	-2.64	29.64	27.00	46.00	-19.00	AVG	
12	4.1660	8.40	29.70	38.10	56.00	-17.90	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz~1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz~30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

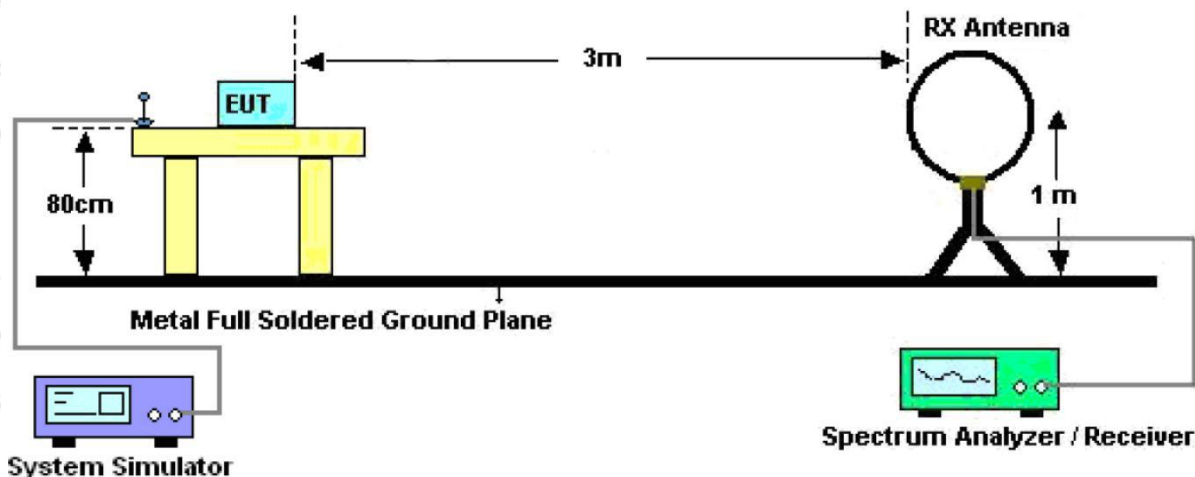


Figure 1. Below 30MHz

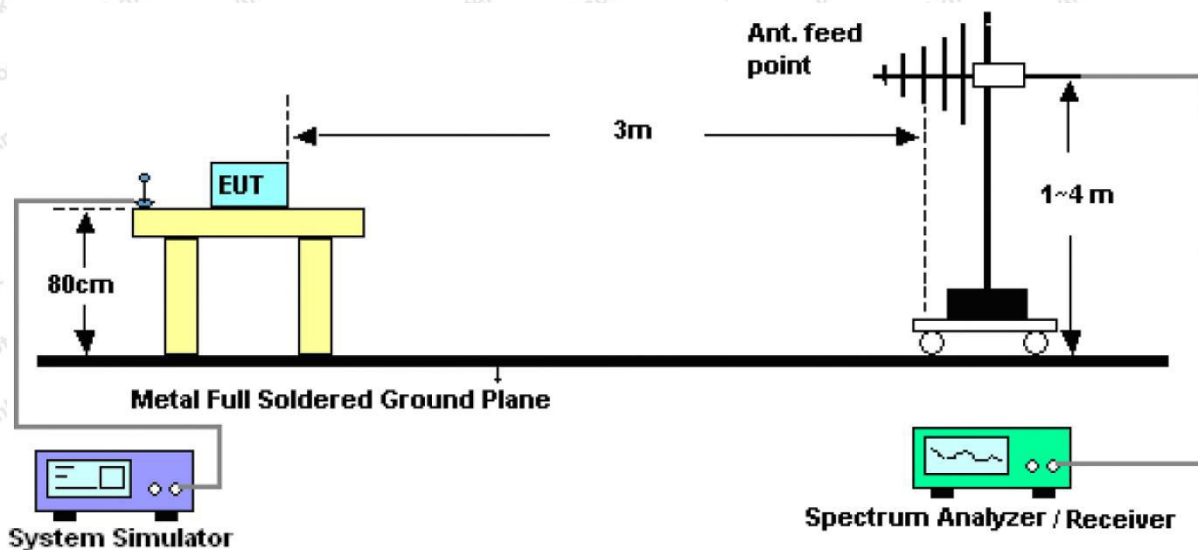


Figure 2. 30MHz to 1GHz

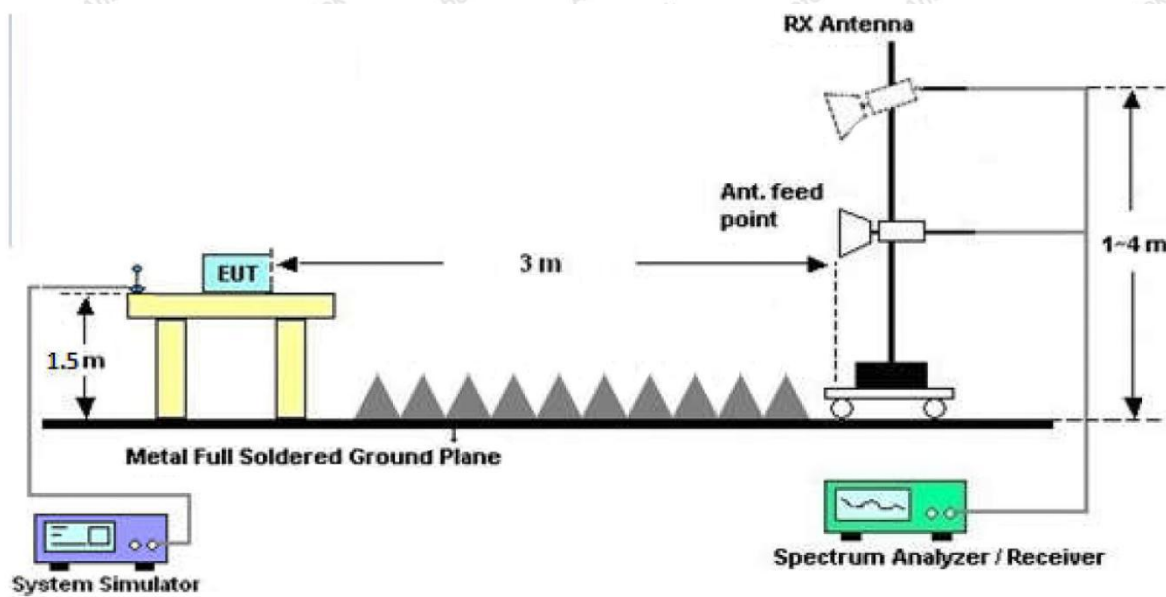


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS


During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

Note: The data is in TX mode, and this is the worst mode.



Test Results

(Between 9KHz – 30MHz)

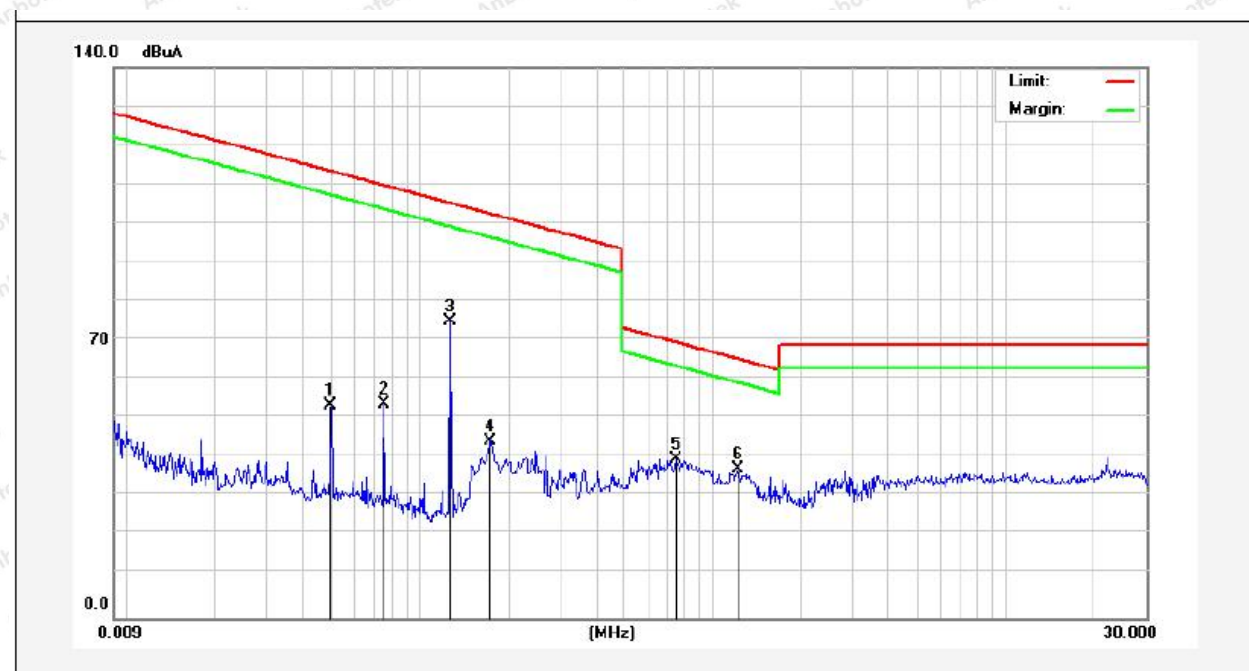
Job No.: 18220WC00130001**Standard:** FCC PART15 C_3m**Power Source:** DC 3.8V Battery insider**Test item:** Radiation Test**Temp.(C)/Hum.(%RH):** 24.3℃/54%RH**Test Mode:** 125KHz**Distance:** 3m

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree (dgc)
0.0497	52.06	19.30	2.53	0	73.89	133.57	-59.68	Peak	100
0.0497	32.14	19.30	2.53	0	53.97	113.57	-59.60	AV	100
0.0756	45.95	19.35	2.55	0	67.85	129.94	-62.09	Peak	250
0.0756	32.42	19.35	2.55	0	54.32	109.94	-55.62	AV	250
0.1270	63.05	20.01	2.60	0	85.66	125.46	-39.80	Peak	110
0.1270	52.77	20.01	2.60	0	75.38	105.46	-30.08	AV	110
0.1737	42.27	20.01	2.61	0	64.89	122.76	-57.87	Peak	15
0.1737	22.35	20.01	2.61	0	44.97	102.76	-57.79	AV	15
0.7459	16.78	21.03	2.72	0	40.53	70.15	-29.62	QP	90
1.2137	14.07	21.06	2.74	0	37.87	65.92	-28.05	QP	90

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.

Job No.: 18220WC00130001
Standard: FCC PART15 C _3m
Test item: Radiation Test
Test Mode: 125KHz

Polarization: Horizontal
Power Source: DC 3.8V Battery inside
Temp.(C)/Hum.(%RH): 24.6°C/50%RH
Distance: 3m

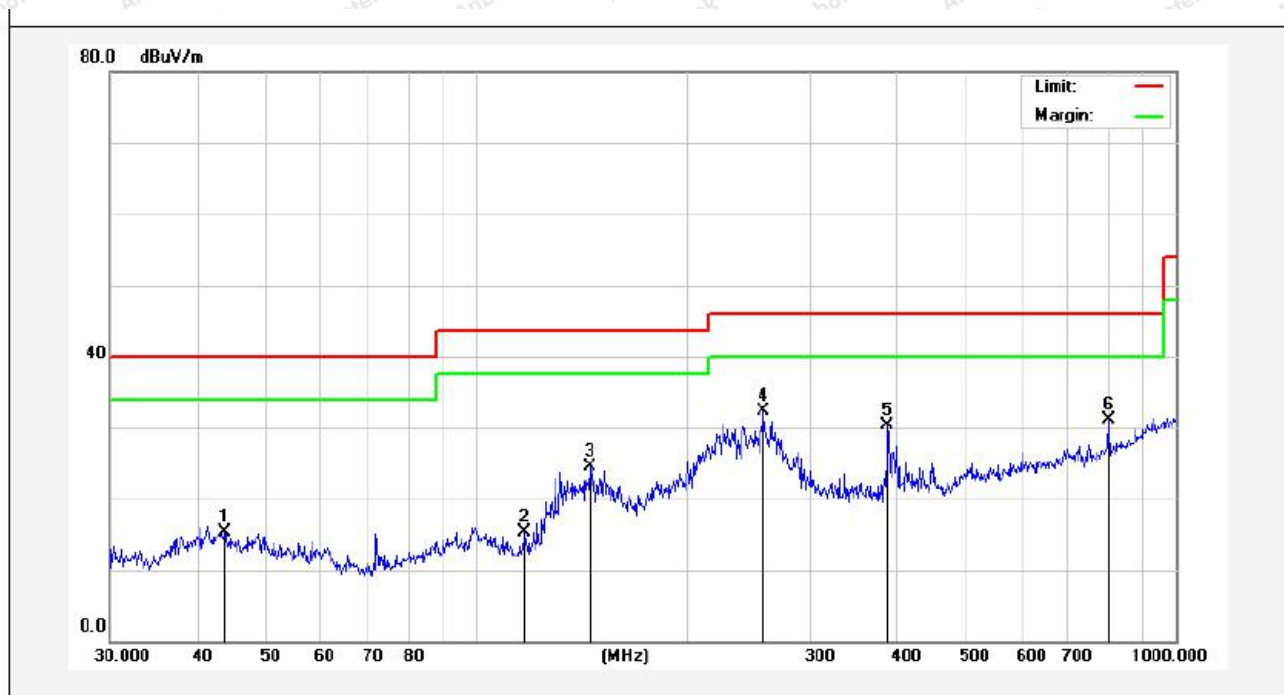


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	43.6584	29.69	-14.47	15.22	40.00	-24.78	QP	100	0	
2	117.3603	37.06	-21.75	15.31	43.50	-28.19	QP	100	360	
3	145.3506	45.24	-20.80	24.44	43.50	-19.06	QP	100	0	
4	257.4222	50.38	-18.16	32.22	46.00	-13.78	QP	100	360	
5	386.6338	43.34	-12.98	30.36	46.00	-15.64	QP	100	0	
6	798.9797	35.28	-4.17	31.11	46.00	-14.89	QP	100	360	



Job No.: 18220WC00130001
Standard: FCC PART15 C_3m
Test item: Radiation Test
Test Mode: 125KHz

Polarization: Vertical
Power Source: DC 3.8V Battery inside
Temp.(C)/Hum.(%RH): 24.6°C/50%RH
Distance: 3m

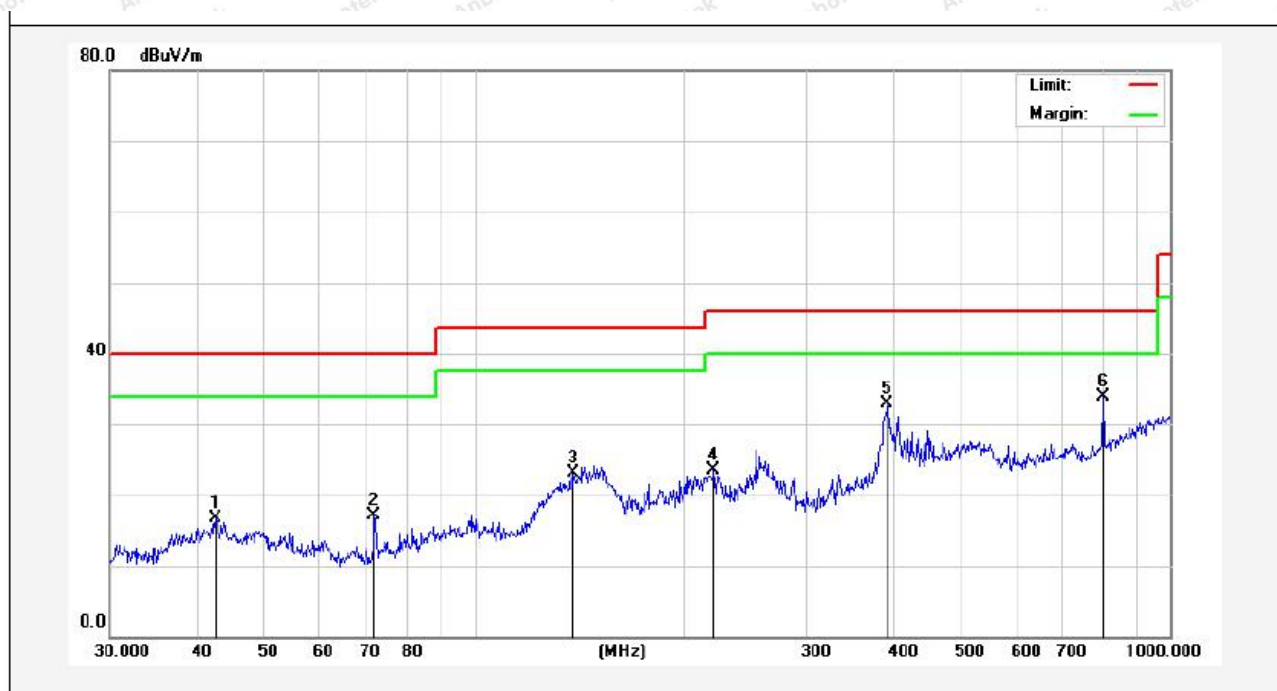


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	42.4508	30.62	-13.84	16.78	40.00	-23.22	QP	100	0	
2	71.8320	35.59	-18.49	17.10	40.00	-22.90	QP	100	360	
3	138.8735	43.06	-19.99	23.07	43.50	-20.43	QP	100	0	
4	220.6171	39.99	-16.41	23.58	46.00	-22.42	QP	100	360	
5	392.0951	44.29	-11.40	32.89	46.00	-13.11	QP	100	0	
6	801.7863	38.01	-4.13	33.88	46.00	-12.12	QP	100	360	

5. 20dB Emission Bandwidth

5.1. Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

5.2. Test Setup



5.3. Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 220 Hz.
3. Set the VBW = set approximately 3 x RBW.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

5.4. Test Data


Test Item	: 20dB Bandwidth
Test Voltage	: DC 3.8V Battery inside
Test Result	: PASS

Test Mode	: 125KHz
Temperature	: 23.6° C
Humidity	: 49 %

20dB Down BW (KHz)	99% BW (KHz)	Modulation Mode
1.943	1.7558	FSK



Plot of 99% Bandwidth

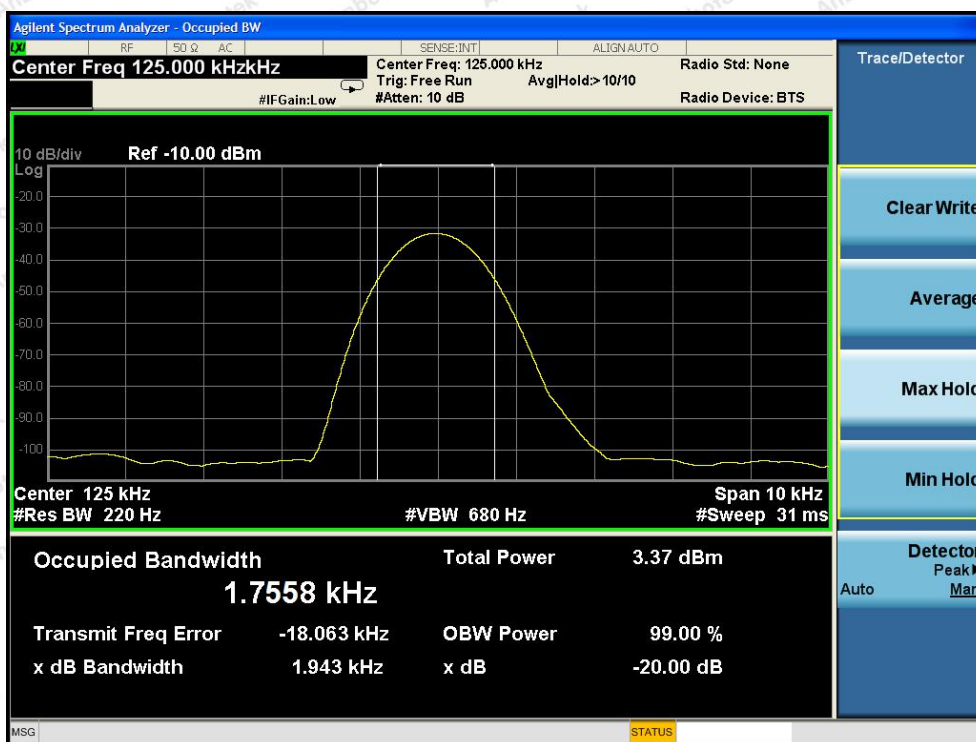

6. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can

6.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is -10 dBi. It complies with the standard requirement.

----- End of Report -----

