

EMC TEST REPORT

Applicant	ID TECH
FCC ID	WQJ-AP6800L
Product	AP6800
Brand	ID TECH
Model	AP6800-0318; AP6800-0318D
Report No.	R2405A0524-E2
Issue Date	November 29, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Xu Kai

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test.....	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	7
2.4	Test Mode	8
3	Test Case Results.....	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	14
4	Uncertainty Measurement.....	17
5	Main Test Instruments	18
	ANNEX A: The EUT Appearance.....	19
	ANNEX B: Test Setup Photos.....	20
	ANNEX C: Product Change Description	21

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: July 24, 2024 ~ August 8, 2024 Date of Sample Received: May 17, 2024			
Note: 1. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			

AP6800 (Report No.: R2405A0524-E2) is a variant model of AP6800 (Report No.: R2405A0524-E1). This report only adds WCDMA Band II/IV/V, and other band(s) please refer to the original report (Report No.: R2405A0524-E1).

The detailed product change description please refers to the *C2PC Letter*.

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company:	Eurofins TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Xu Kai
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	https://www.eurofins.com/electrical-and-electronics
E-mail:	Kain.Xu@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	ID TECH
Applicant address	10721 Walker Street, Cypress, California 90630, United States
Manufacturer	ID TECH TAIWAN
Manufacturer address	No. 16, Lane 22, GaoQing Rd., YanMei Dist., TaoYuan City 326, Taiwan

2.2 General Information

EUT Description			
Device Type	Movable Device		
Model	AP6800-0318; AP6800-0318D		
SN	416T278398		
HW Version	Rev.A		
SW Version	v1.00		
Power Rating	DC 9V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna	Bluetooth LE; Wi-Fi 2.4G; Wi-Fi 5G; NFC	
	External Antenna	WCDMA Band II/IV/V/LTE Band 2/4/12	
Frequency	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	WCDMA Band IV	1710 ~ 1755	2110 ~ 2155
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
	LTE Band 4	1710 ~ 1755	2110 ~ 2155
	LTE Band 12	699 ~ 716	729 ~ 746
	Bluetooth LE	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 2.4G	2400 ~ 2483.5	2400 ~ 2483.5
	Wi-Fi 5G (U-NII-1)	5150 ~ 5250	5150 ~ 5250
	Wi-Fi 5G (U-NII-2A)	5250 ~ 5350	5250 ~ 5350
	Wi-Fi 5G (U-NII-2C)	5470 ~ 5725	5470 ~ 5725
	Wi-Fi 5G (U-NII-3)	5725 ~ 5850	5725 ~ 5850
	NFC	13.56	13.56
Auxiliary Test Equipment			
Adapter	Manufacturer: LITEON		

	Model: PA-1450-50 5.0V/15.0W, 20.0V/45W Input: 100-240V~1.3A 50/60Hz Output: 5.0V $\overline{\text{---}}$ 3.0A; 9.0V $\overline{\text{---}}$ 3.0A; 12.0V $\overline{\text{---}}$ 3.0A; 15.0V $\overline{\text{---}}$ 3.0A; 20.0V $\overline{\text{---}}$ 2.25A
Display screen	Manufacturer: Sculptor Model: MF 156LR
Note: 1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant. 2. AP6800-0318 and AP6800-0318D are the same except for different models, and this report only tests AP6800-0318D.	

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2023)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	Adapter + cable + EUT + Front camera On + WCDMA/LTE/ Bluetooth LE /WLAN/NFC receiver
Mode 2	Adapter + cable + EUT + WCDMA/LTE/Bluetooth/WLAN/NFC standby

Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2	Mode 1
Conducted Emission	Mode 1, 2	Mode 1
During the test, the preliminary test was performed in all modes, the test data of the worst-case condition was recorded in this report.		

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

Below 1GHz

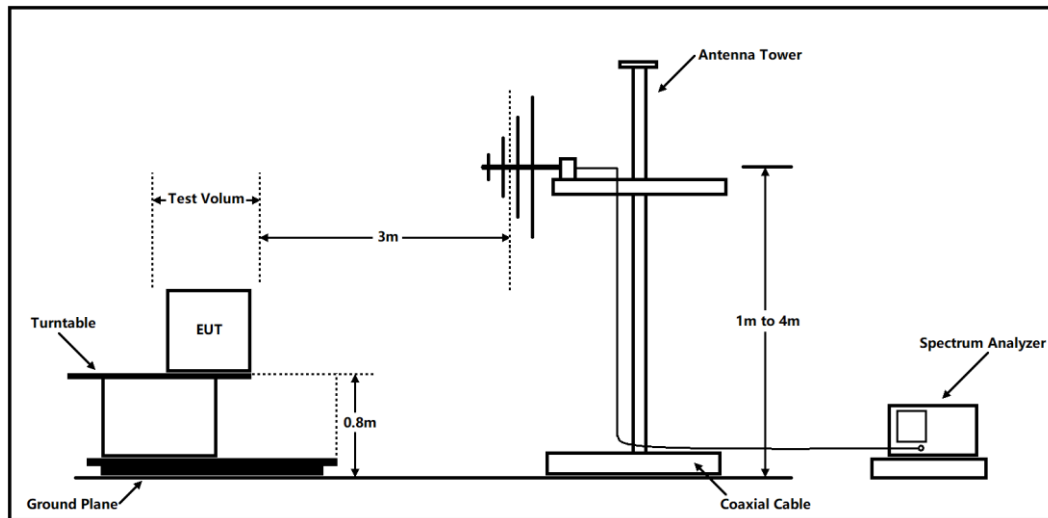

Above 1GHz

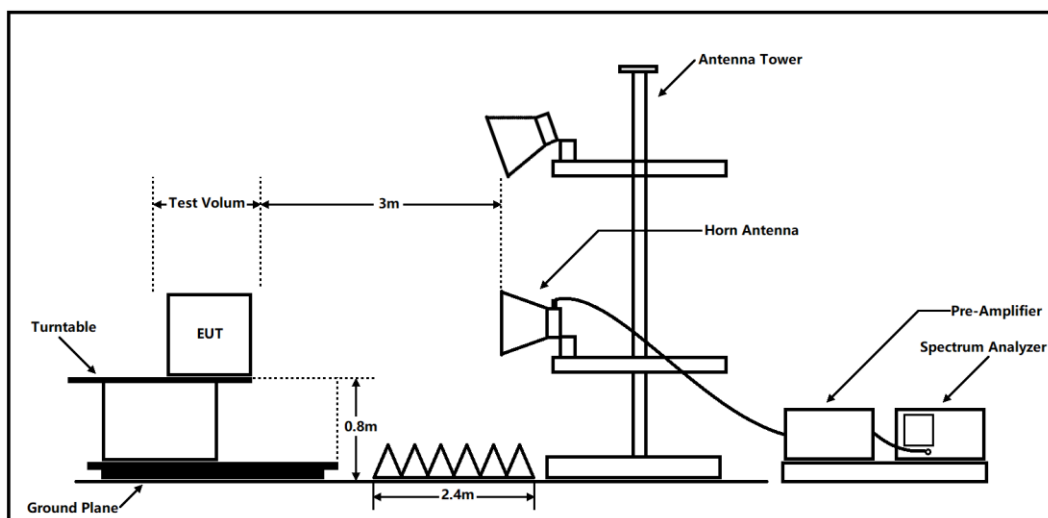

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak


Frequency range of radiated measurements

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 40GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

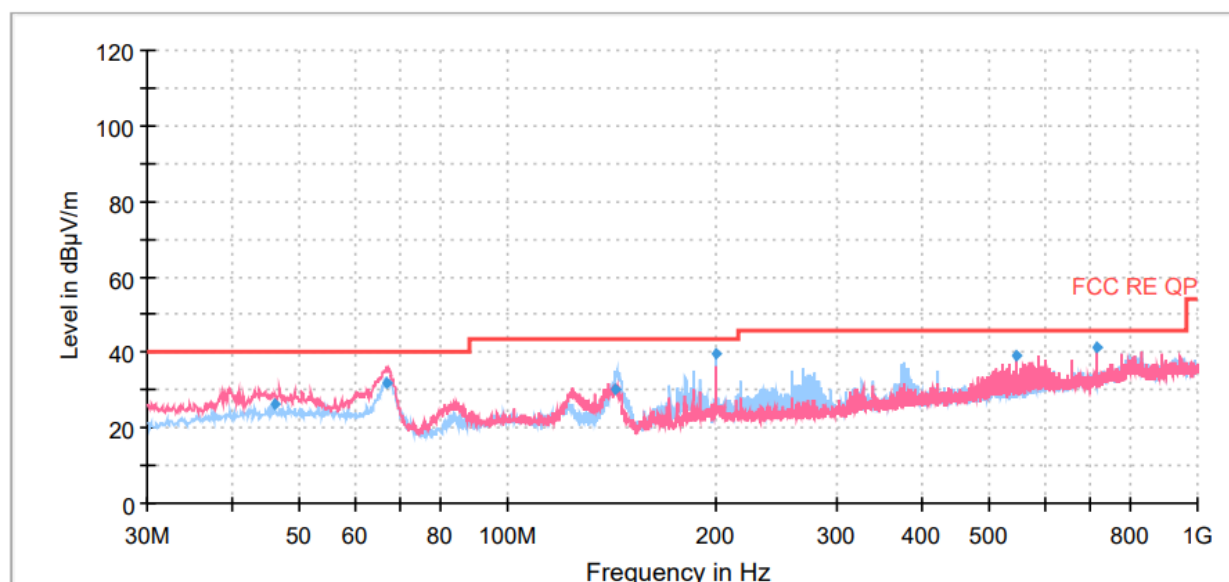


 QP Level @Spectrum Overview H  QP Level @Spectrum Overview V  QP Level @Final Results  QP Limit

Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
45.95	26.16	40.00	13.84	123.0	V	304.00	20
66.70	31.69	40.00	8.31	100.0	V	314.00	17
143.22	30.33	43.50	13.17	175.0	H	13.00	15
200.51	39.37	43.50	4.13	123.0	H	210.00	18
544.29	39.22	46.00	6.78	100.0	V	112.00	26
716.17	41.18	46.00	4.82	100.0	V	132.00	28

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss)

2. Margin = Limit – Quasi-Peak

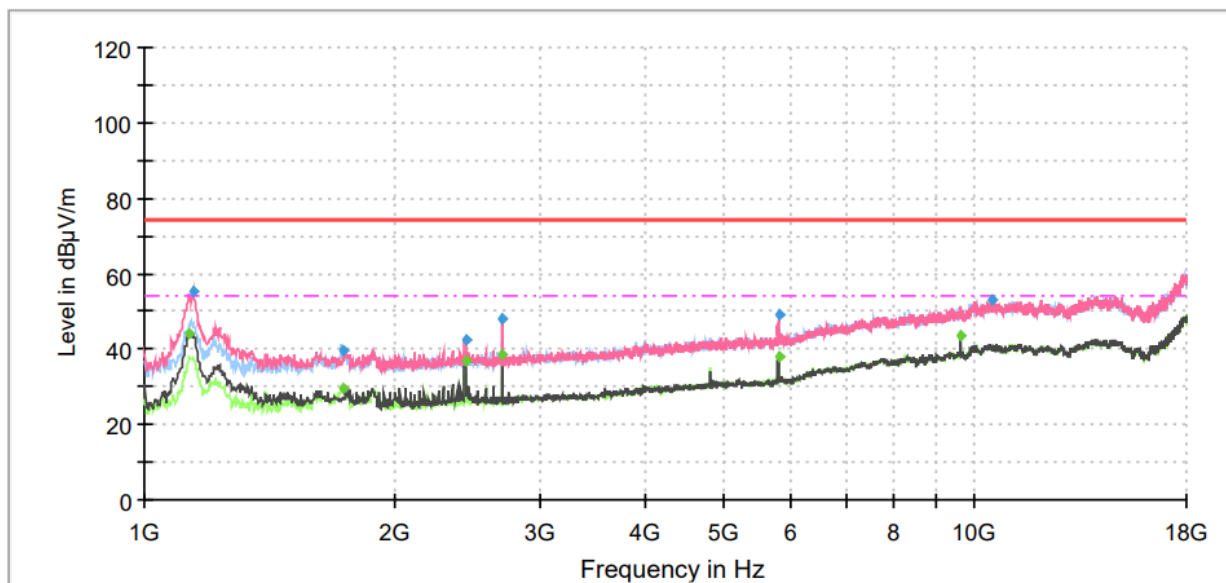

~ PK Level @Spectrum Overview H ~ PK Level @Spectrum Overview V ◆ PK Level @Final Results — PK Limit
~ AVG Level @Spectrum Overview H ~ AVG Level @Spectrum Overview V ◆ AVG Level @Final Results --- AVG Limit

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1133.88	---	43.95	54.00	10.05	500.00	200.0	V	0.00	-22
1144.50	55.31	---	74.00	18.69	500.00	200.0	V	356.00	-22
1735.25	---	29.52	54.00	24.48	500.00	100.0	H	126.00	-20
1737.38	39.81	---	74.00	34.19	500.00	100.0	H	126.00	-20
2438.63	42.27	---	74.00	31.73	500.00	200.0	V	269.00	-17
2438.63	---	36.76	54.00	17.24	500.00	200.0	V	269.00	-17
2697.88	48.28	---	74.00	25.72	500.00	100.0	V	7.00	-17
2697.88	---	38.76	54.00	15.24	500.00	100.0	V	7.00	-17
5804.63	---	38.16	54.00	15.84	500.00	100.0	V	294.00	-9
5806.75	48.92	---	74.00	25.08	500.00	100.0	V	294.00	-9
9599.88	---	43.30	54.00	10.70	500.00	200.0	V	247.00	-2
10483.88	52.88	---	74.00	21.12	500.00	200.0	V	306.00	0

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

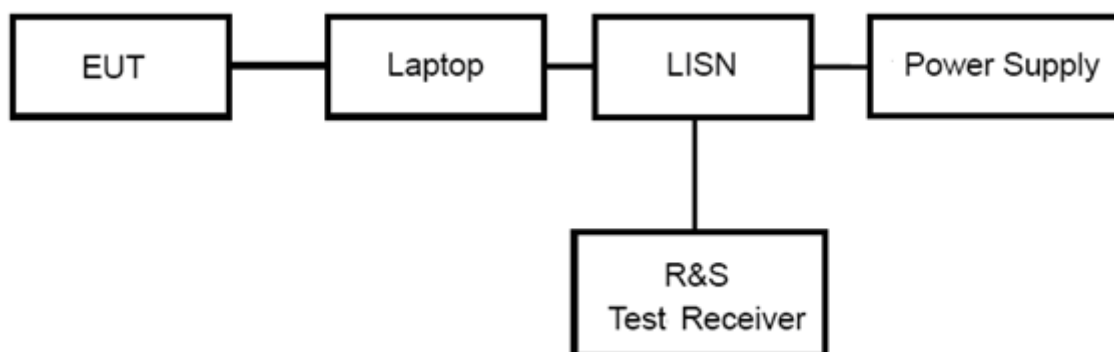

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.


Limits

Frequency (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50
*: Decreases with the logarithm of the frequency.				

Note: The EUT should meet CLASS B limit.

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

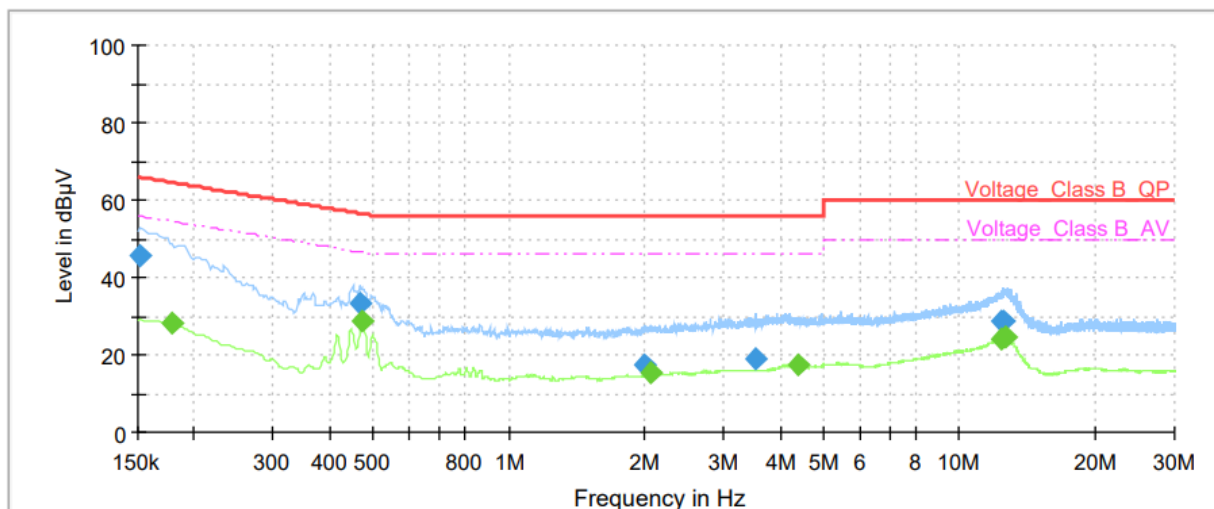


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	45.69	---	65.88	20.19	1000.0	9.000	L1	ON	21.0
0.18	---	28.25	54.52	26.27	1000.0	9.000	L1	ON	21.1
0.47	33.16	---	56.56	23.40	1000.0	9.000	L1	ON	20.9
0.47	---	28.59	46.48	17.89	1000.0	9.000	L1	ON	20.9
2.00	17.45	---	56.00	38.55	1000.0	9.000	L1	ON	19.7
2.06	---	15.23	46.00	30.77	1000.0	9.000	L1	ON	19.7
3.53	19.04	---	56.00	36.96	1000.0	9.000	L1	ON	19.5
4.40	---	17.28	46.00	28.72	1000.0	9.000	L1	ON	19.5
12.34	28.64	---	60.00	31.36	1000.0	9.000	L1	ON	19.6
12.37	---	24.16	50.00	25.84	1000.0	9.000	L1	ON	19.6
12.57	28.90	---	60.00	31.10	1000.0	9.000	L1	ON	19.6
12.62	---	24.43	50.00	25.57	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 kHz to 30 MHz

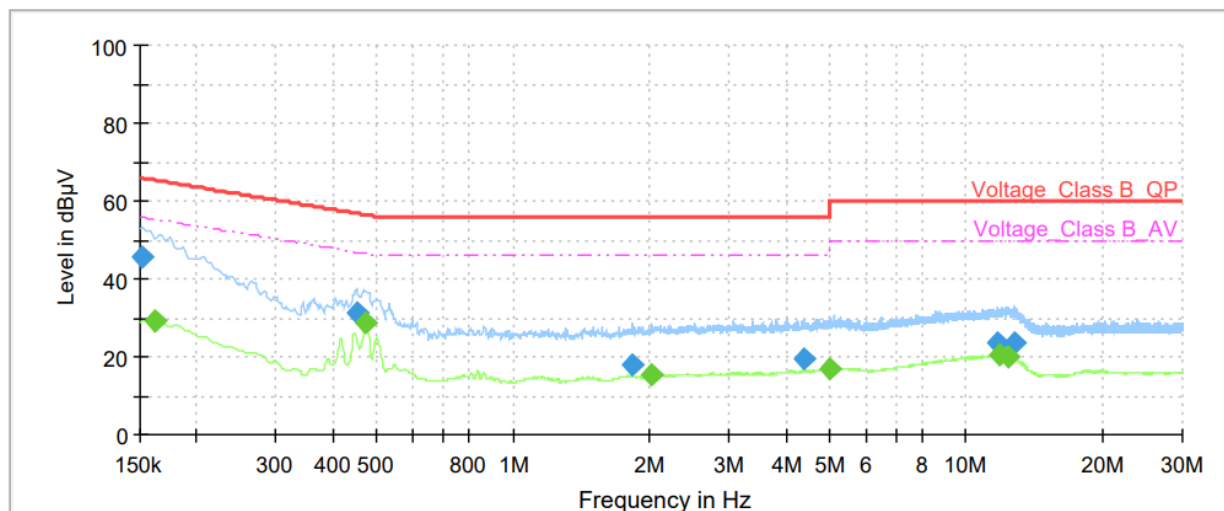

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	45.55	---	65.88	20.33	1000.0	9.000	N	ON	21.0
0.16	---	29.05	55.40	26.35	1000.0	9.000	N	ON	21.0
0.45	31.47	---	56.85	25.38	1000.0	9.000	N	ON	20.9
0.47	---	28.70	46.48	17.78	1000.0	9.000	N	ON	20.9
1.83	17.81	---	56.00	38.19	1000.0	9.000	N	ON	19.8
2.03	---	15.46	46.00	30.54	1000.0	9.000	N	ON	19.7
4.39	19.28	---	56.00	36.72	1000.0	9.000	N	ON	19.5
4.99	---	16.70	46.00	29.30	1000.0	9.000	N	ON	19.5
11.72	23.68	---	60.00	36.32	1000.0	9.000	N	ON	19.6
11.88	---	20.40	50.00	29.60	1000.0	9.000	N	ON	19.6
12.41	---	20.10	50.00	29.90	1000.0	9.000	N	ON	19.6
12.77	23.39	---	60.00	36.61	1000.0	9.000	N	ON	19.6

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 kHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Radiated Emission 18GHz – 26.5GHz	5.90 dB	1.96
Radiated Emission 26.5GHz – 40GHz	5.92 dB	1.96
Conducted Emission	2.57 dB	2

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101186	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESR	102720	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESR	102721	2024-05-07	2025-05-06
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

ANNEX C: Product Change Description

The Product Change Description are submitted separately.

******* END OF REPORT *******