

Project No: TM-2202000106P  
Report No.: TMWK2202000584KR

FCC ID: WQJ-VP3350BT  
IC: 9847A-VP3350BT

Page: 1 / 47  
Rev.: 00

# RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

## INDUSTRY CANADA RSS-247

<b>Test Standard</b>	<b>FCC Part 15.247</b> <b>RSS-247 issue 2 and RSS-GEN issue 5</b>
<b>Product name</b>	<b>VP3350</b>
<b>Brand Name</b>	<b>ID TECH</b>
<b>Model No.</b>	<b>IDMR-SBT93D</b>
<b>Test Result</b>	<b>Pass</b>
<b>Statements of Conformity</b>	<b>Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.</b>

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)

Approved by:



---

Shawn Wu  
Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: TMWK2202000584KR

## Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 10, 2022	Initial Issue	ALL	Doris Chu

## Table of contents

1. GENERAL INFORMATION .....	4
1.1 EUT INFORMATION .....	4
1.2 EUT CHANNEL INFORMATION .....	5
1.3 ANTENNA INFORMATION .....	5
1.4 MEASUREMENT UNCERTAINTY.....	6
1.5 FACILITIES AND TEST LOCATION .....	7
1.6 INSTRUMENT CALIBRATION.....	7
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT .....	9
1.8 TEST METHODOLOGY AND APPLIED STANDARDS .....	9
2. TEST SUMMARY .....	10
3. DESCRIPTION OF TEST MODES.....	11
3.1 THE WORST MODE OF OPERATING CONDITION .....	11
3.2 THE WORST MODE OF MEASUREMENT .....	12
3.3 EUT DUTY CYCLE.....	13
4. TEST RESULT .....	14
4.1 AC POWER LINE CONDUCTED EMISSION .....	14
4.2 6DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%) .....	17
4.3 OUTPUT POWER MEASUREMENT .....	21
4.4 POWER SPECTRAL DENSITY .....	24
4.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION .....	27
4.6 RADIATION BANDEdge AND SPURIOUS EMISSION .....	31
APPENDIX 1 - PHOTOGRAPHS OF EUT	

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

Applicant	<b>FCC:</b> ID TECH 10721 Walker Street Cypress, CA 90630 United States <b>IC:</b> ID tech 10721 Walker Street Cypress CA 90630 United States Of America (Excluding The States Of Alaska)
Manufacturer	ID TECH No.16,Ln.22, Gaoqing Rd., Yangmei Dist., Taoyuan City 32667, Taiwan
Equipment	VP3350
Model No.	IDMR-SBT93D
Model Discrepancy	N/A
Trade Name	ID TECH
Received Date	February 15, 2022
Date of Test	March 2 ~ April 6, 2022
Power Supply	Power from Host System.
HW Version	Rev:A
SW Version	Rev:A
EUT Serial #	150T858806

**Remark:**

1. For more details, please refer to the User's manual of the EUT.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.

## 1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	GFSK for BLE 1 Mbps
Number of channels	40 Channels

**Remark:**

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

## 1.3 ANTENNA INFORMATION

Antenna Type	<input checked="" type="checkbox"/> Chip <input type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	Gain :1.00 dBi

**Remark:**

1.The antenna(s) of the EUT are permanently attached and there are no provisions for connection to an external antenna. So the EUT complies with the requirements of §15.203 and RSS-Gen 6.8.

Report No.: TMWK2202000584KR

## 1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~1G (Horizontally)	+/- 3.91
3M Semi Anechoic Chamber / 30M~1G (Vertically)	+/- 4.57
3M Semi Anechoic Chamber / 1G~6G	+/- 5.20
3M Semi Anechoic Chamber / 6G~18G	+/- 5.18
3M Semi Anechoic Chamber / 18G~40G	+/- 3.68

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

CAB identifier: TW1309

Test site	Test Engineer	Remark
AC Conduction Room	Jack Chen	-
Radiation	Ray Li	-
RF Conducted	Jack Chen	-

**Remark:** The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC public Access Link (PAL) database, FCC Registration No. :444940, the FCC Designation No.:TW1309

## 1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EXA Signal Analyzer	KEYSIGHT	N9010B	MY55460167	09/07/2021	09/06/2022
Power Meter	Anritsu	ML2496A	2136002	12/06/2021	12/05/2022
Power Sensor	Anritsu	MA2411B	1911386	08/19/2021	08/18/2022
Power Sensor	Anritsu	MA2411B	1911387	08/19/2021	08/18/2022
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	09/17/2021	09/16/2022
Software	Radio Test Software Ver. 21				

Conducted Emission Room					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
CABLE	EMCI	CFD300-NL	CERF	06/28/2021	06/27/2022
EMI Test Receiver	R&S	ESCI	100064	07/05/2021	07/04/2022
LISN	SCHAFFNER	NNB 41	03/10013	02/15/2022	02/14/2023
Software	EZ-EMC(CCS-3A1-CE-WUGU)				

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	112	11/23/2021	11/22/2022
Bilog Antenna	Sunol Sciences	JB3	A030105	07/19/2021	07/18/2022
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/23/2022	02/22/2023
Coaxial Cable	EMCI	EMC105	190914+1111	09/17/2021	09/16/2022
Coaxial Cable	Woken	J-1099	201709090004	12/23/2021	12/22/2022
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	12/28/2021	12/27/2022
Horn Antenna	ETS LINDGREN	3116	00026370	11/30/2021	11/29/2022
Horn Antenna	ETS LINDGREN	3117	00055165	07/29/2021	07/28/2022
K Type Cable	Huber+Suhner	SUCOFLEX 102	29406/2	12/05/2021	12/04/2022
Loop Ant	COM-POWER	AL-130	121051	04/07/2021	04/06/2022
Pre-Amplifier	EMEC	EM330	060609	02/23/2022	02/22/2023
Pre-Amplifier	HP	8449B	3008A00965	12/24/2021	12/23/2022
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	12/06/2021	12/05/2022
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 210616				

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC
	N/A					

Support Equipment						
No.	Equipment	Brand	Model	Series No.	FCC ID	IC
1	NB	Lenovo	T460P	N/A	N/A	N/A
2	NB(G)	Lenovo	IBM 1951	N/A	N/A	N/A
3	NB(E)	Lenovo	IBM 7663	N/A	N/A	N/A

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, RSS-247 Issue 2 and RSS-GEN Issue 5

## 2. TEST SUMMARY

FCC Standard Section	IC Standard Section	Report Section	Test Item	Result
15.203	RSS-Gen 6.8	1.3	Antenna Requirement	Pass
15.207(a)	RSS-GEN 8.8	4.1	AC Conducted Emission	Pass
15.247(a)(2)	RSS-247(5.2)(a)	4.2	6 dB Bandwidth	Pass
-	RSS-GEN 6.7	4.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	RSS-247(5.4)(d)	4.3	Output Power Measurement	Pass
15.247(e)	RSS-247(5.2)(b)	4.4	Power Spectral Density	Pass
15.247(d)	RSS-247(5.5)	4.5	Conducted Band Edge	Pass
15.247(d)	RSS-247(5.5)	4.5	Conducted Spurious Emission	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.6	Radiation Band Edge	Pass
15.247(d)	RSS-GEN 8.9, 8.10	4.6	Radiation Spurious Emission	Pass

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	BLE Mode (1Mbps)
Test Channel Frequencies	1.Lowest Channel : 2402MHz 2.Middle Channel : 2442MHz 3.Highest Channel : 2480MHz

**Remark:**

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

### 3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
<b>Test Condition</b>	AC Power line conducted emission for line and neutral
<b>Power supply Mode</b>	Mode 1: EUT power by NB
<b>Worst Mode</b>	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
<b>Test Condition</b>	Radiated Emission Above 1G
<b>Power supply Mode</b>	Mode 1: EUT power by Host System
<b>Worst Mode</b>	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
<b>Worst Position</b>	<input type="checkbox"/> Placed in fixed position. <input checked="" type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
<b>Test Condition</b>	Radiated Emission Below 1G
<b>Power supply Mode</b>	Mode 1: EUT power by Host System
<b>Worst Mode</b>	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

*Remark:*

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X, Y, Z and two polarity, for radiated measurement. The worst case(X-Plane) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

### 3.3 EUT DUTY CYCLE


Temperature: 22.9°C

Test date: April 6, 2022

Humidity: 57% RH

Tested by: Jack Chen

Duty Cycle				
Configuration	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log ( 1/Duty Cycle )	1/T (kHz)	VBW Setting (kHz)
BLE 1M	62.40	2.05	2.56	3.00

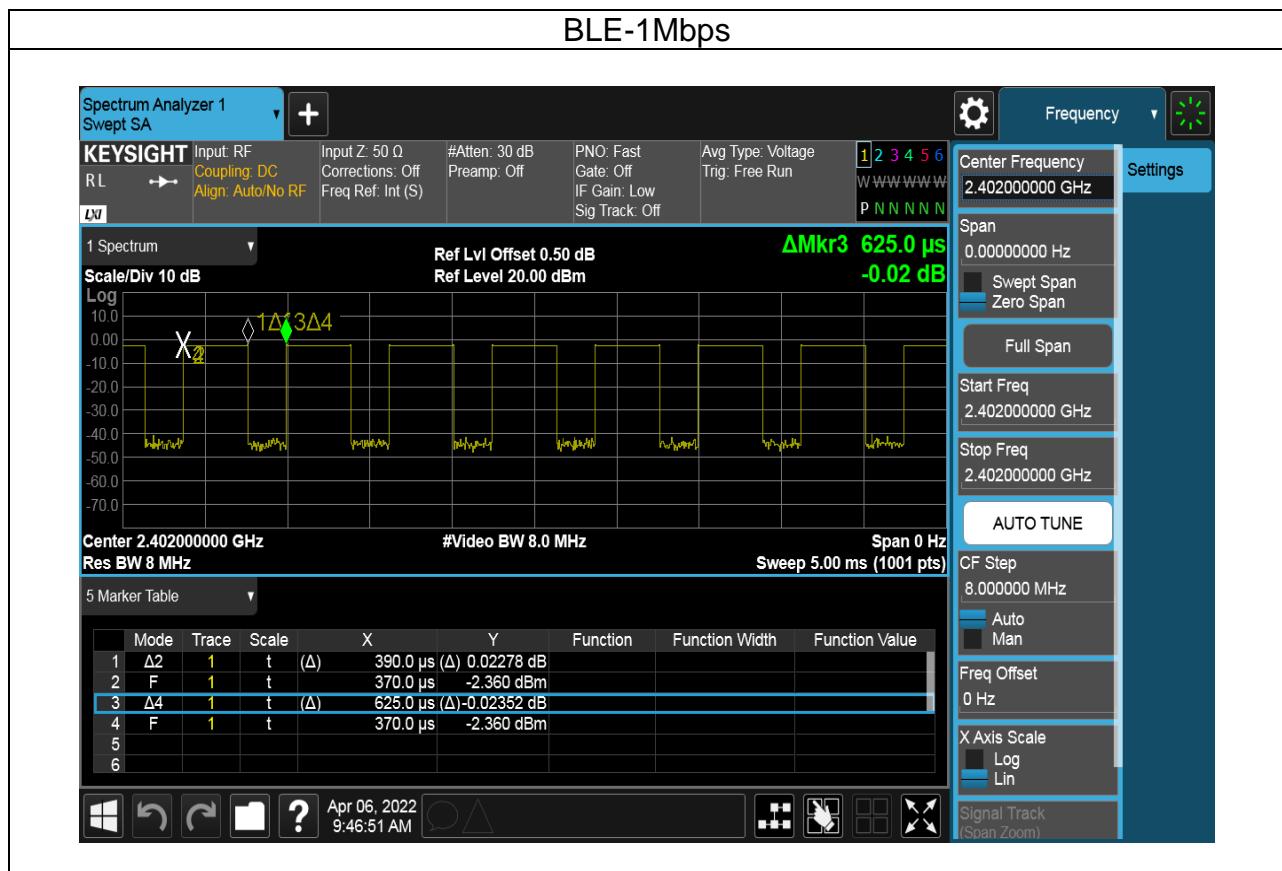

## 4. TEST RESULT

## 4.1 AC POWER LINE CONDUCTED EMISSION

### 4.1.1 Test Limit

According to §15.207(a) and RSS-GEN section 8.8,

Frequency Range (MHz)	Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


\* Decreases with the logarithm of the frequency.

### 4.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed above horizontal ground plane and 0.4m above vertical ground plane
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

### 4.1.3 Test Setup

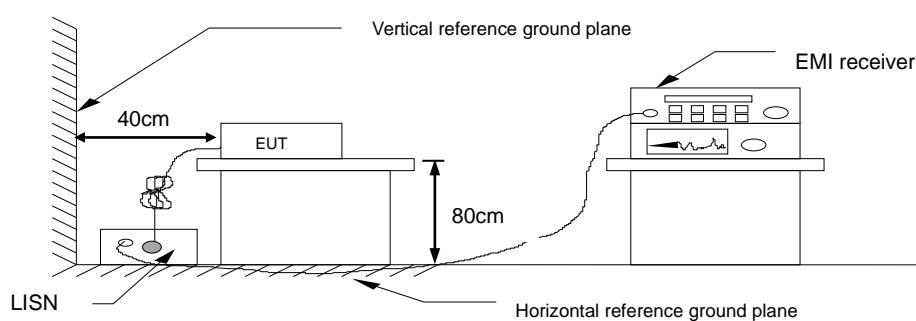


#### 4.1.4 Test Result

PASS


## Test Data

Test Mode:	Mode 1	Temp/Hum	23.9(°C)/ 56%RH
Phase:	Line	Test Date	March 2, 2022
Configuration	BLE-1Mbps	Test Engineer	Jack Chen

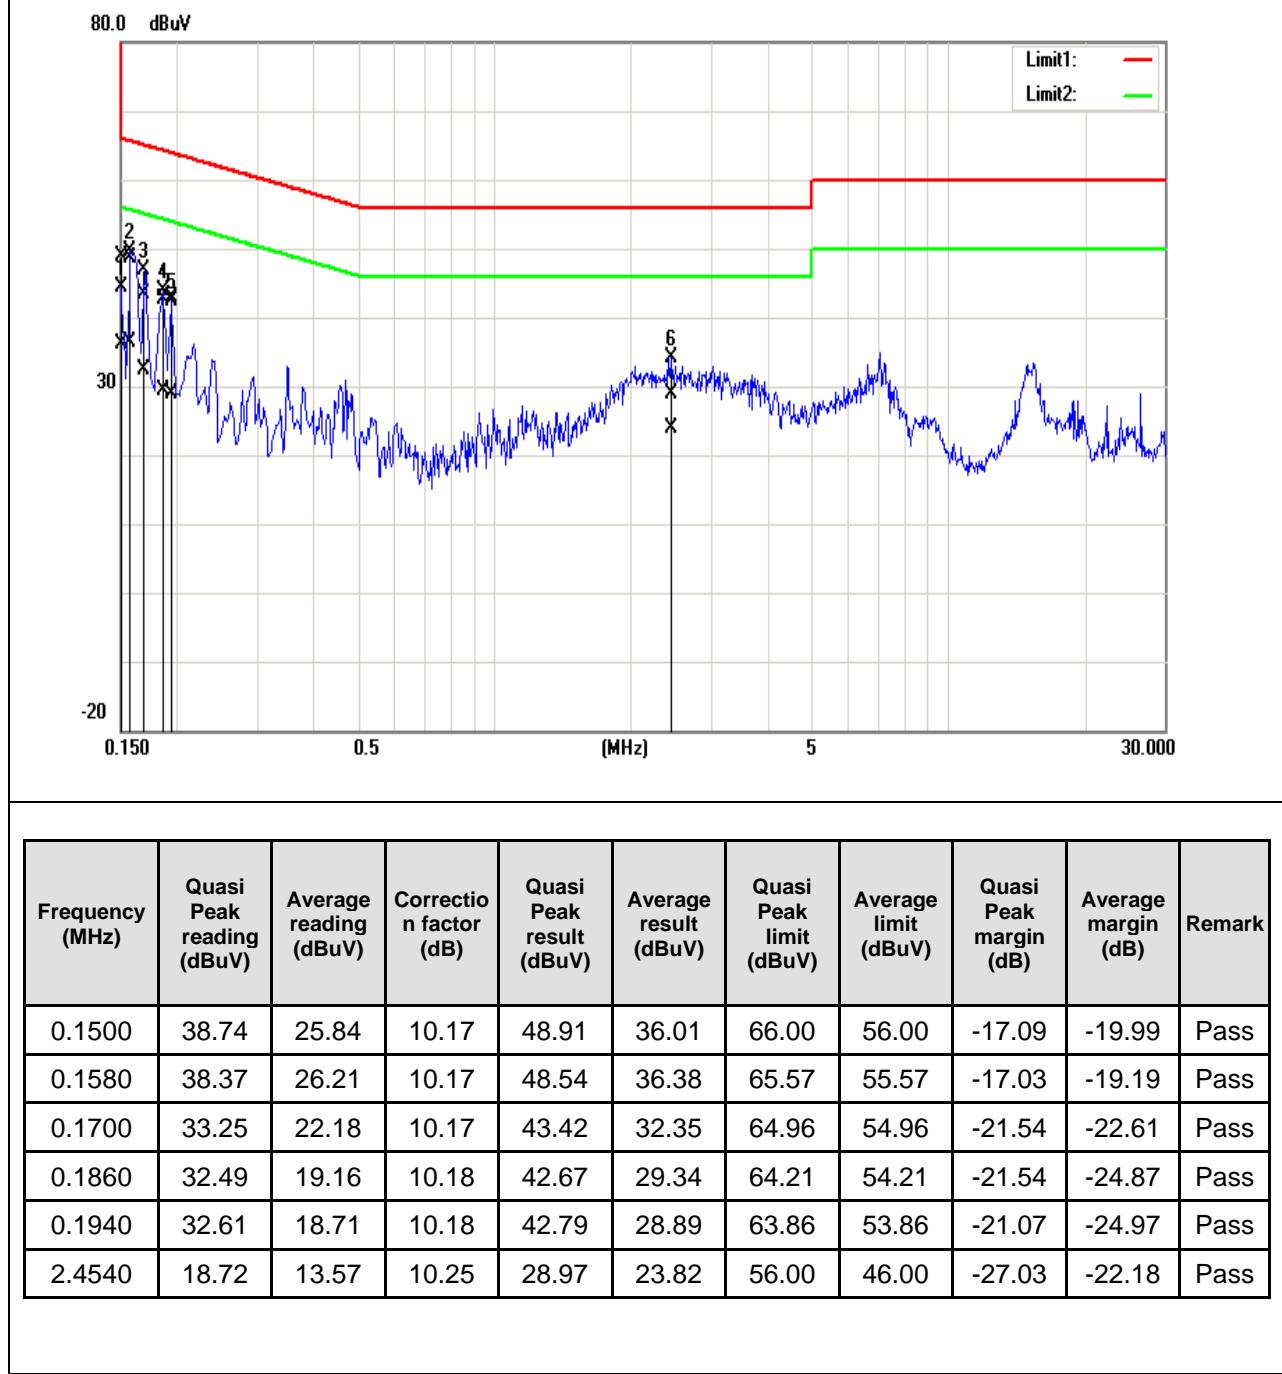

Note: Correction factor = LISN loss + Cable loss.

Test Mode:	Mode 1	Temp/Hum	23.9(°C)/ 56%RH
Phase:	Neutral	Test Date	March 2, 2022
Configuration	BLE-1Mbps	Test Engineer	Jack Chen

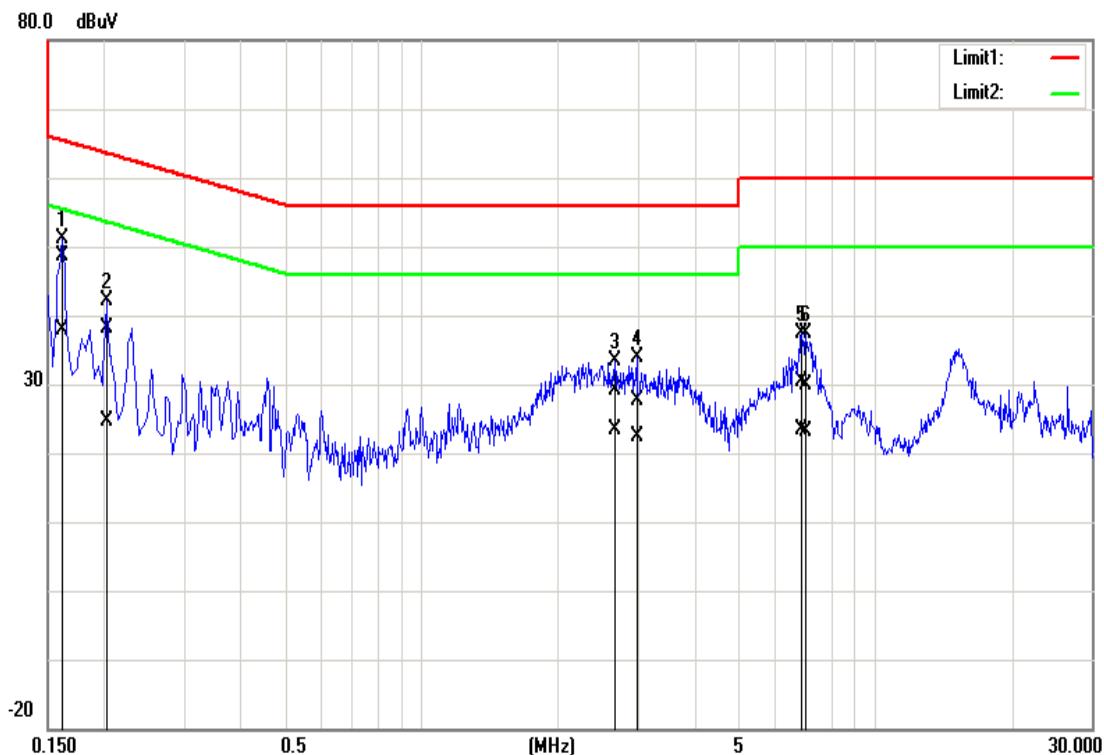

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1620	38.49	27.78	10.17	48.66	37.95	65.36	55.36	-16.70	-17.41	Pass
0.2020	27.86	14.41	10.17	38.03	24.58	63.53	53.53	-25.50	-28.95	Pass
2.6700	18.92	13.13	10.25	29.17	23.38	56.00	46.00	-26.83	-22.62	Pass
2.9780	17.26	12.14	10.25	27.51	22.39	56.00	46.00	-28.49	-23.61	Pass
6.8980	20.07	13.01	10.31	30.38	23.32	60.00	50.00	-29.62	-26.68	Pass
7.0500	19.59	12.79	10.32	29.91	23.11	60.00	50.00	-30.09	-26.89	Pass

Note: Correction factor = LISN loss + Cable loss.

## 4.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

### 4.2.1 Test Limit

According to §15.247(a)(2) and RSS-247 section 5.2(a)

#### 6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

### 4.2.2 Test Procedure

Test method Refer as ANSI C63.10: 2013,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. SA set RBW =100KHz, VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

### 4.2.3 Test Setup

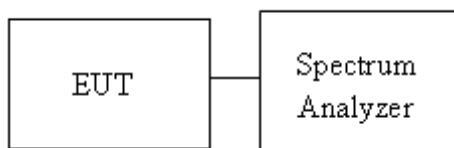

#### 4.2.4 Test Result

**Temperature:** 22.9°C

**Test date:** April 6, 2022


**Humidity:** 57% RH

**Tested by:** Jack Chen

<b>Test mode: BLE-1Mbps mode / 2402-2480 MHz</b>				
<b>Channel</b>	<b>Frequency (MHz)</b>	<b>OBW (99%) (MHz)</b>	<b>6dB BW (MHz)</b>	<b>6dB limit (kHz)</b>
Low	2402	1.0782	0.7314	≥500
Mid	2442	1.0759	0.7297	
High	2480	1.0782	0.7398	


## Test Data

### 6dB BANDWIDTH

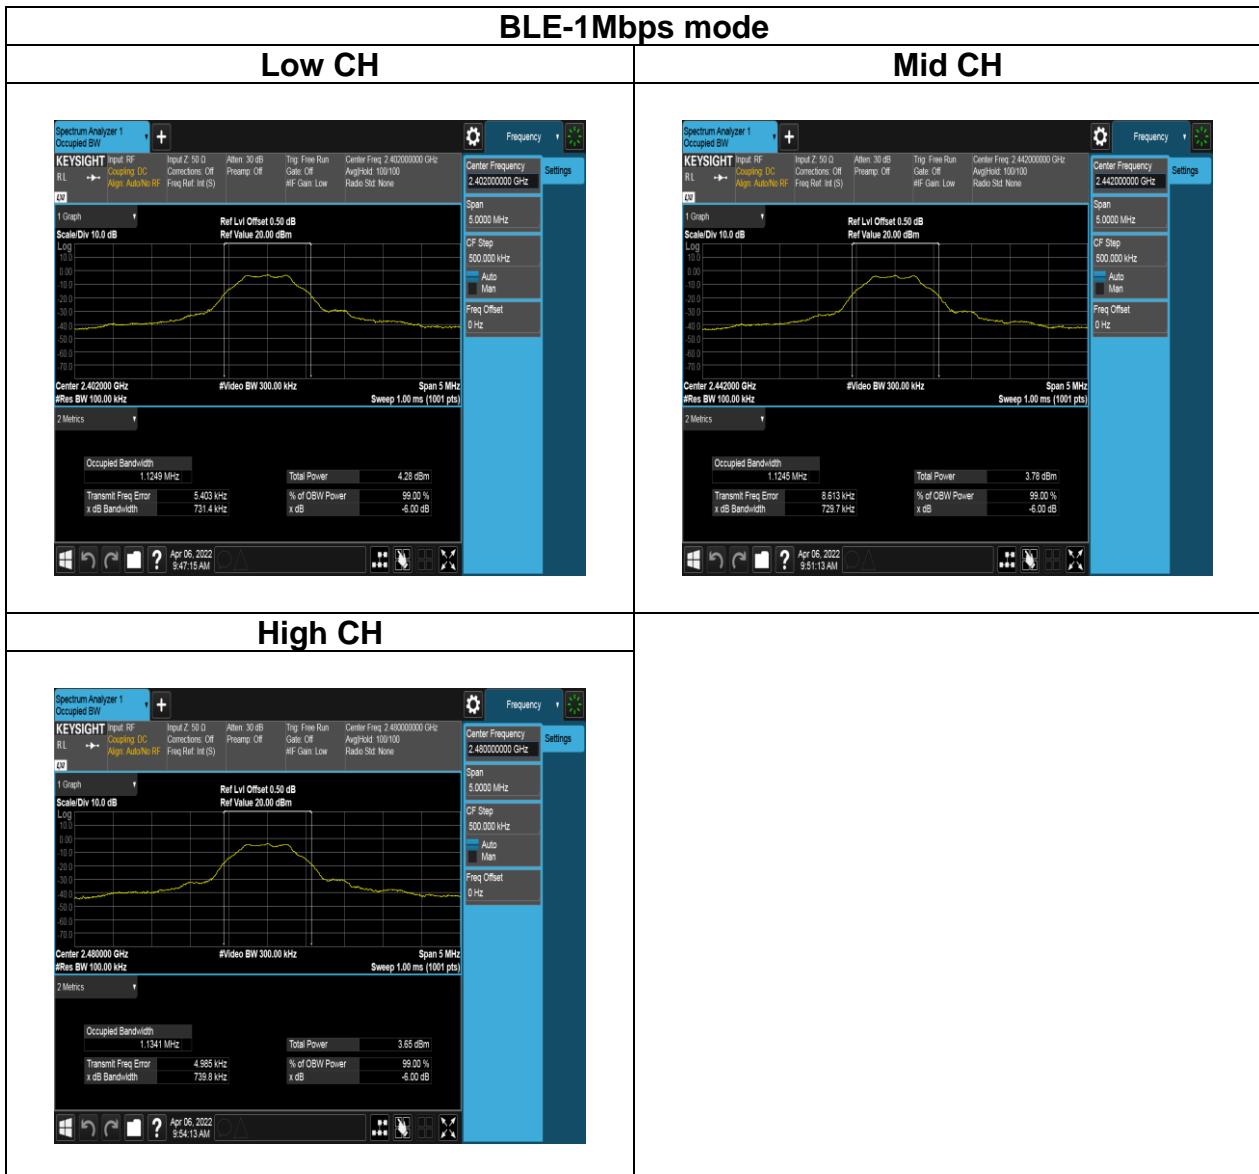

## Test Data

### BANDWIDTH (99%)

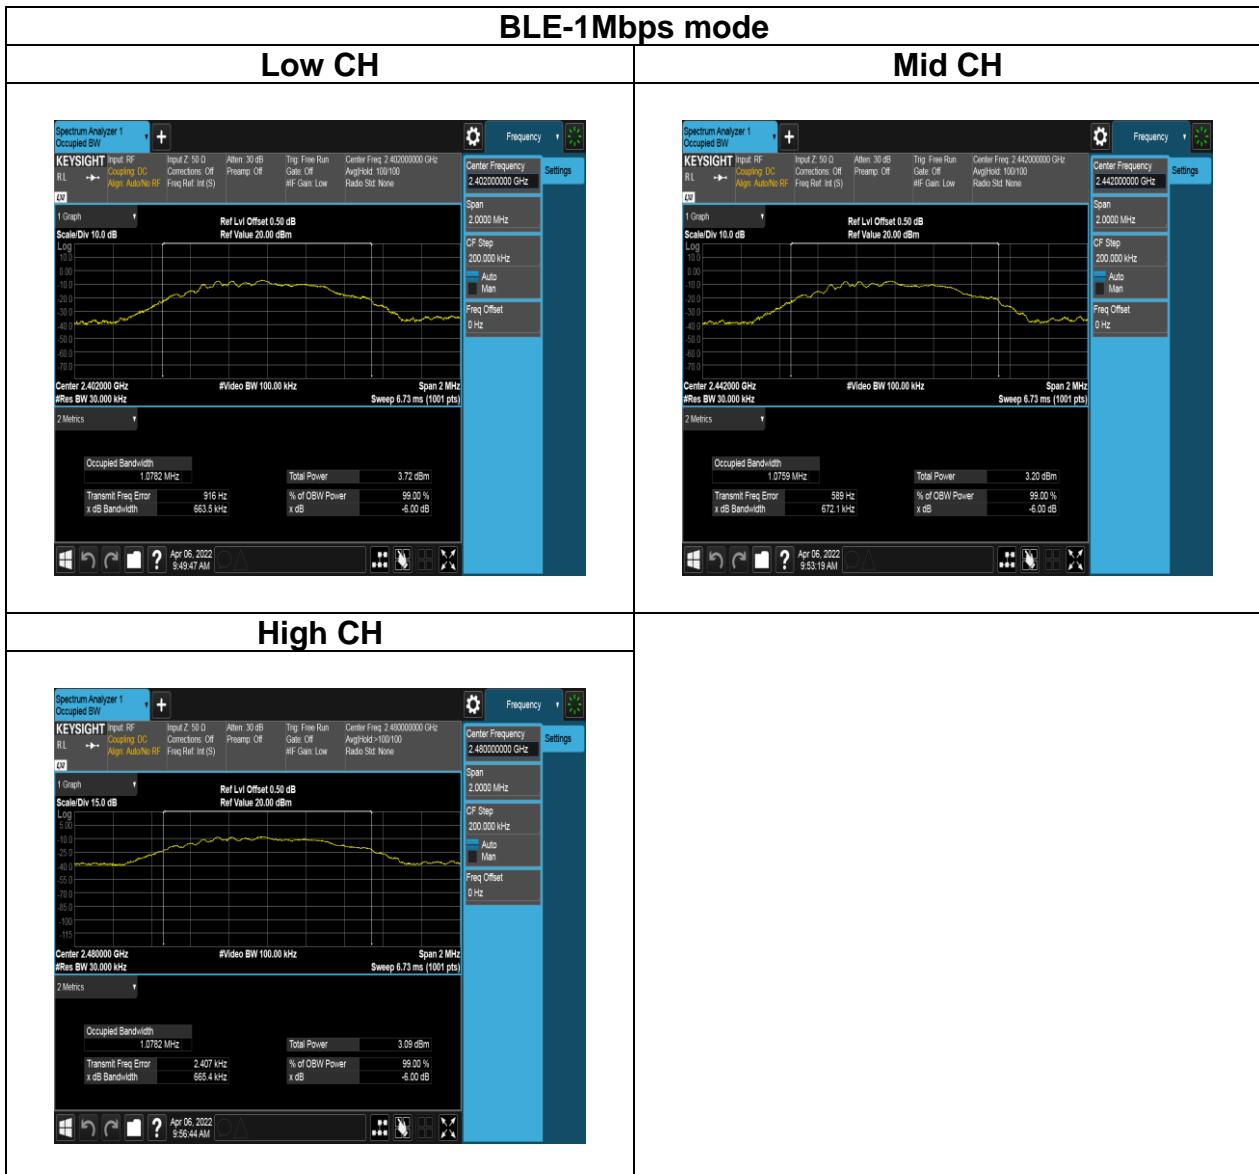

## 4.3 OUTPUT POWER MEASUREMENT

### 4.3.1 Test Limit

According to §15.247(b)(3) and RSS-247 section 5.4(d)

#### Peak output power :

##### **FCC**

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement,

##### **IC**

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [ Limit = 30 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation
-------	---


Average output power : For reporting purposes only.

### 4.3.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### 4.3.3 Test Setup

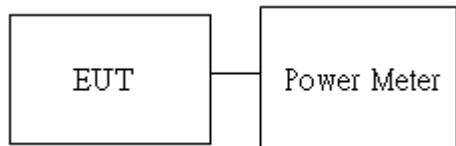

#### 4.3.4 Test Result

**Temperature:** 22.9°C

**Test date:** April 6, 2022

**Humidity:** 57% RH

**Tested by:** Jack Chen

##### Peak output power :

BLE 1M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	2402	default	-2.32	30
Mid	2442	default	-2.83	30
High	2480	default	-3.14	30

##### Average output power :

BLE 1M mode:

CH	Frequency (MHz)	Power set	Max. Avg. Output Power (dBm)	Required Limit (dBm)
Low	2402	default	-2.37	30
Mid	2442	default	-2.86	30
High	2480	default	-3.22	30

##### EIRP power :

EIRP BLE 1M mode

CH	Frequency (MHz)	Power set	Max. Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit
Low	2402	default	-2.37	1.00	-1.37	4W= 36 dBm
Mid	2442	default	-2.86	1.00	-1.86	4W= 36 dBm
High	2480	default	-3.22	1.00	-2.22	4W= 36 dBm

## 4.4 POWER SPECTRAL DENSITY

### 4.4.1 Test Limit

According to §15.247(e) and RSS-247 section 5.2(b)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi [ Limit = 8 – (DG – 6) ] <input type="checkbox"/> Point-to-point operation :
-------	---

### 4.4.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 10kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

### 4.4.3 Test Setup

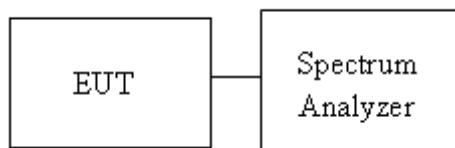

#### 4.4.4 Test Result

**Temperature:** 22.9°C

**Test date:** April 6, 2022


**Humidity:** 57% RH

**Tested by:** Jack Chen

##### BLE 1M mode

Frequency (MHz)	RF Power Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2402	-17.18	8	PASS
2442	-17.62	8	PASS
2480	-17.97	8	PASS

## Test Data

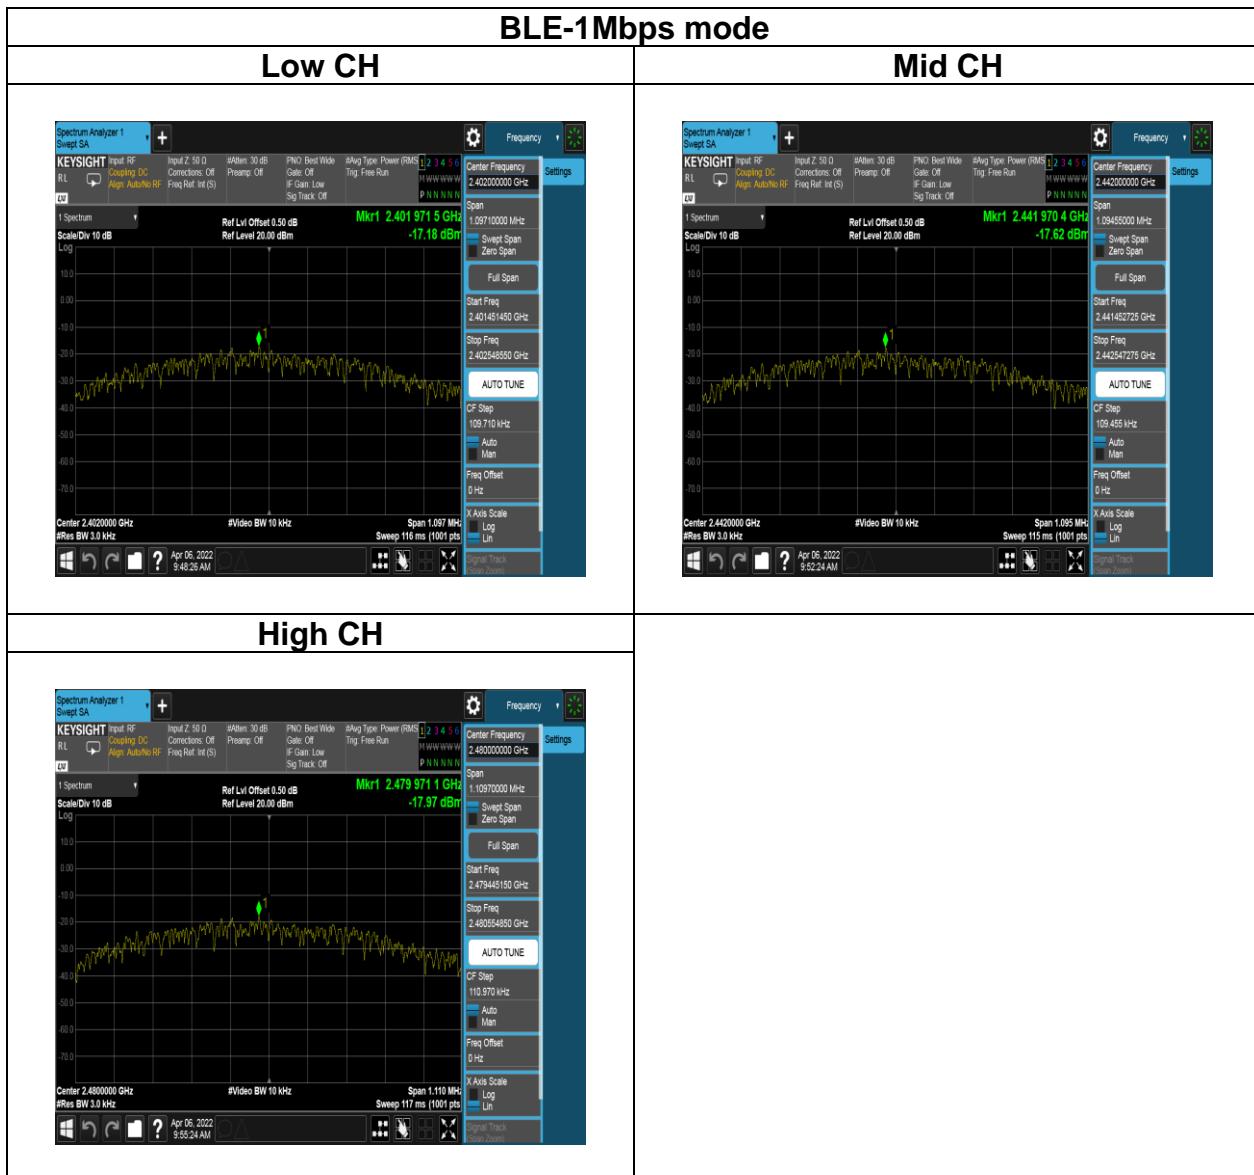

## 4.5 CONDUCTED BAND EDGE AND SPURIOUS EMISSION

### 4.5.1 Test Limit

According to §15.247(d) and RSS-247 section 5.5

**FCC:** In any 100 kHz bandwidth outside the authorized frequency band,

Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


**IC:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### 4.5.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 4.5.3 Test Setup

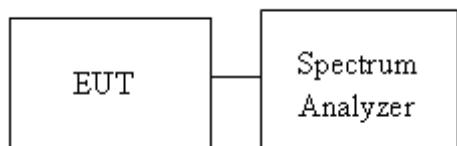

## 4.5.4 Test Result


### Test Data


Temperature: 22.9°C


Humidity: 57% RH

Test date: April 6, 2022

Tested by: Jack Chen

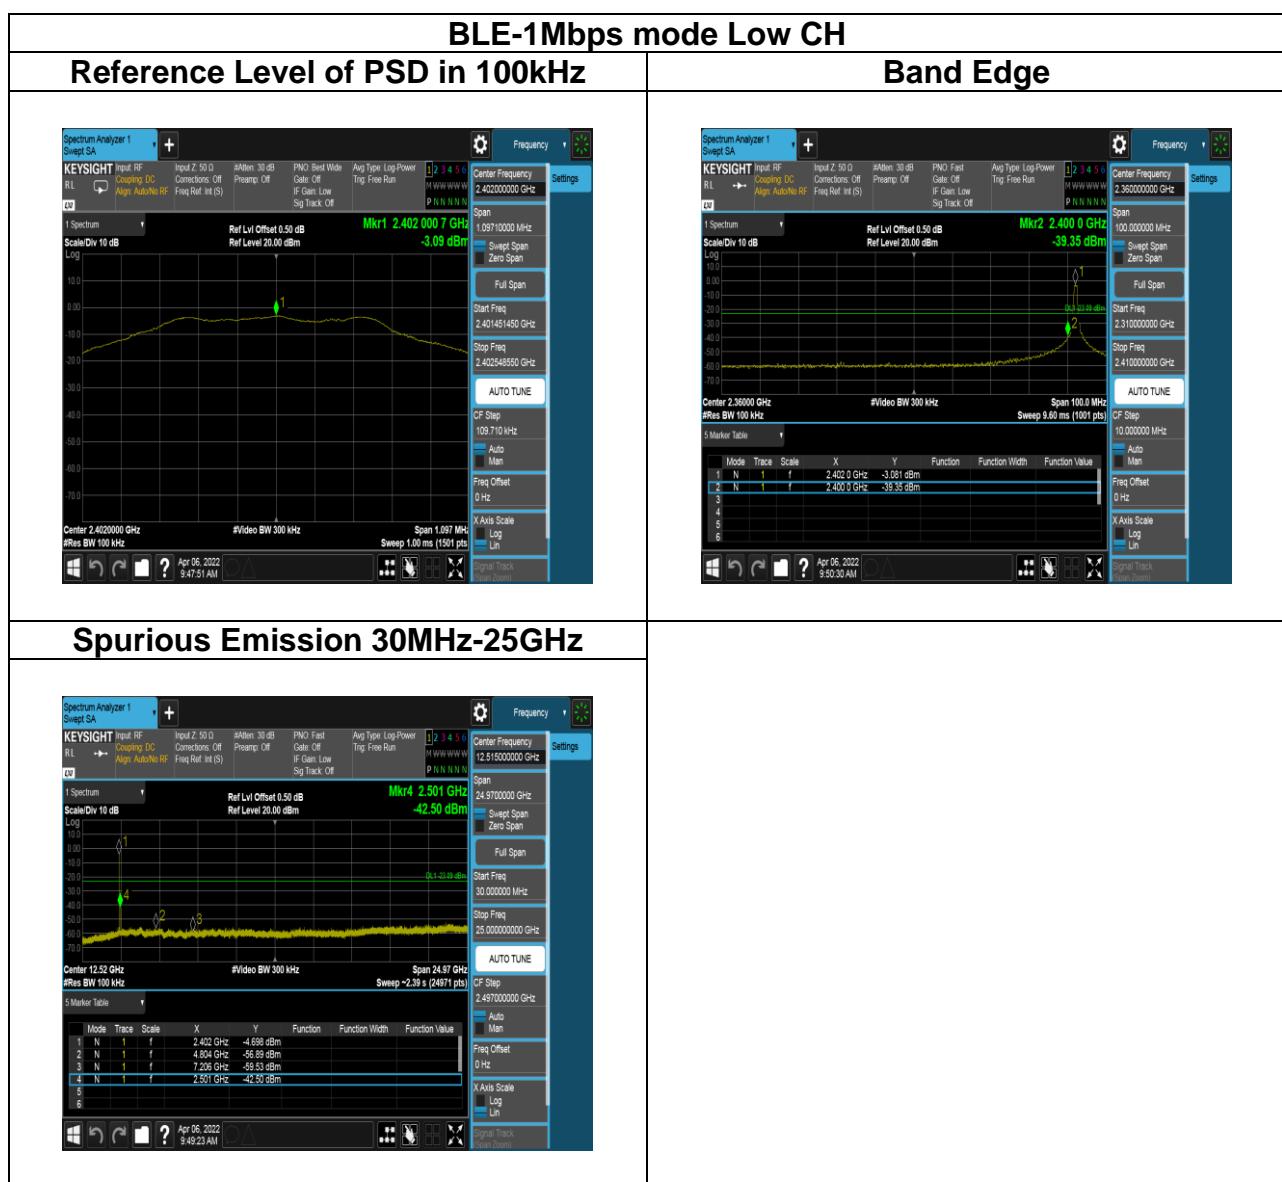

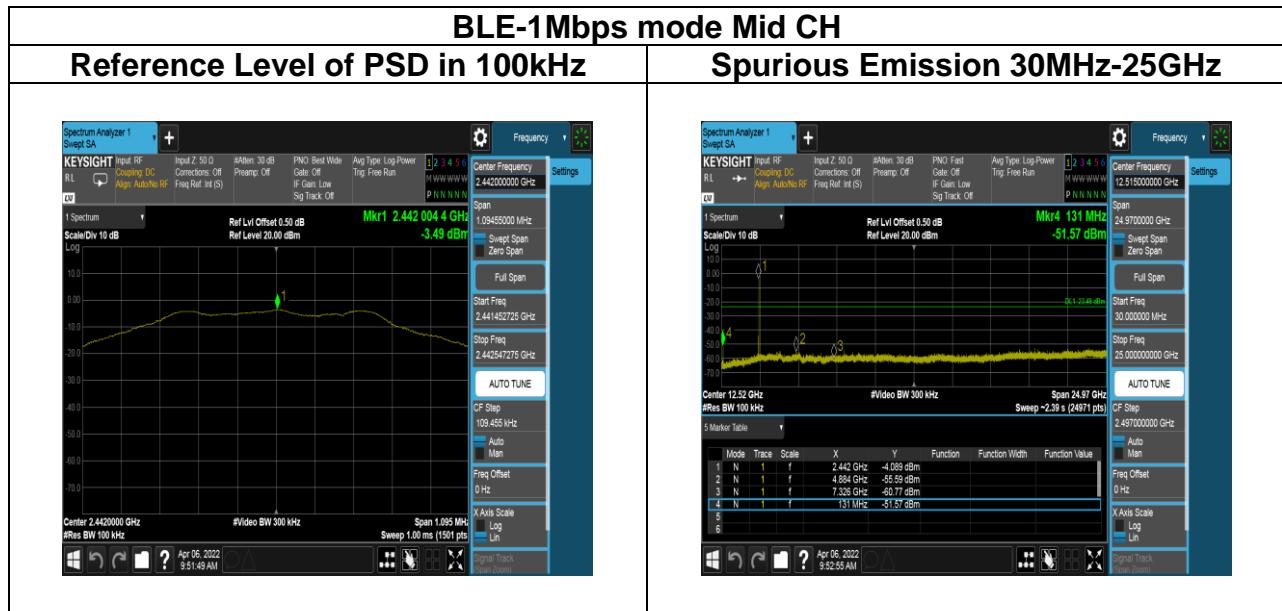

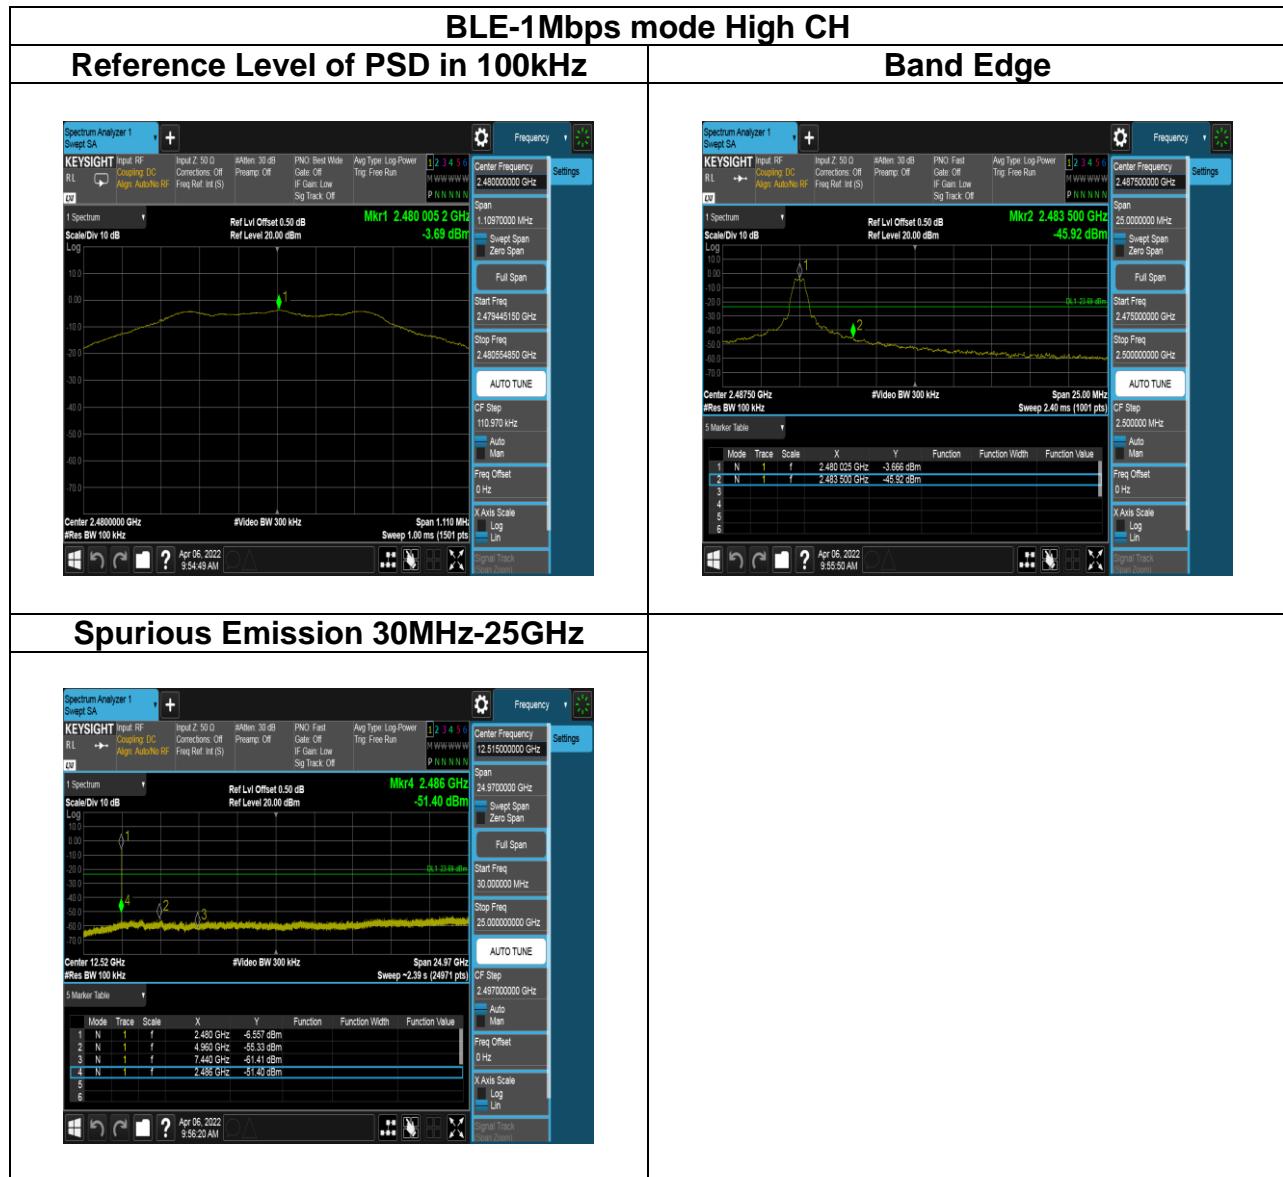

## 4.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

### 4.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

#### Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

#### Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

IC according to RSS-247 section 5.5, RSS-Gen, Section 8.9 and 8.10

**RSS-Gen Table 3 and Table 5 – General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz** (Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

**Note:** Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with Section 6.6.

**RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement Distance (m)
9-490 kHz <small>Note</small>	6.37/F (F in kHz)	300
490-1,705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

**Note:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

## 4.6.2 Test Procedure

Test method Refer as ANSI C63.10:2013.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9KHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Remark:

1. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
2. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

3. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
  - (2.1) For Peak measurement : RBW = 1MHz, VBW  $\geq$  3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
  - (2.2) For Average measurement : RBW = 1MHz, VBW
    - If Duty Cycle  $\geq$  98%, VBW=10Hz.
    - If Duty Cycle < 98%, VBW=1/T.


4. Data result

Actual FS=Spectrum Reading Level+Factor


Margin=Actual FS- Limit

### 4.6.3 Test Setup


#### 9kHz ~ 30MHz

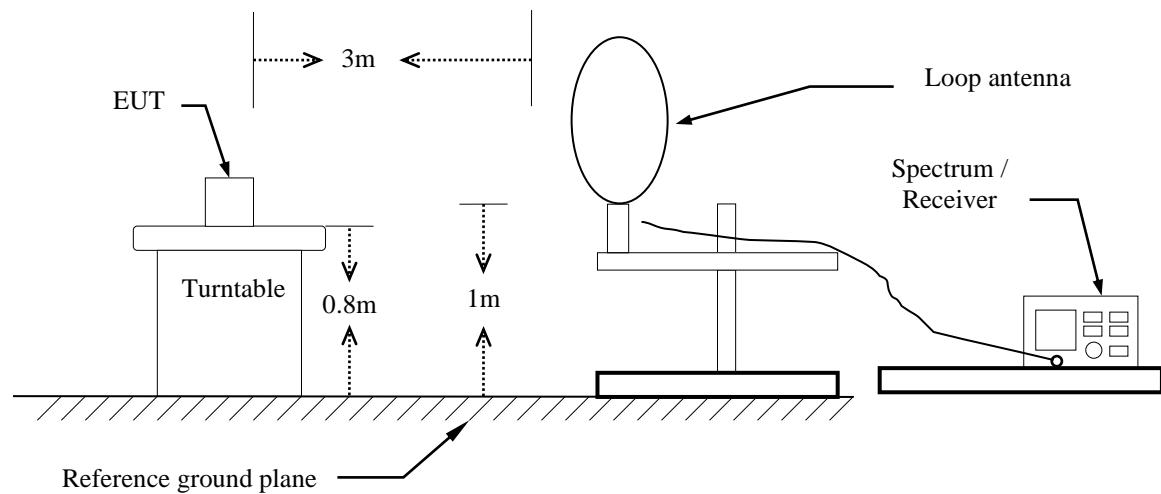

#### 30MHz ~ 1GHz

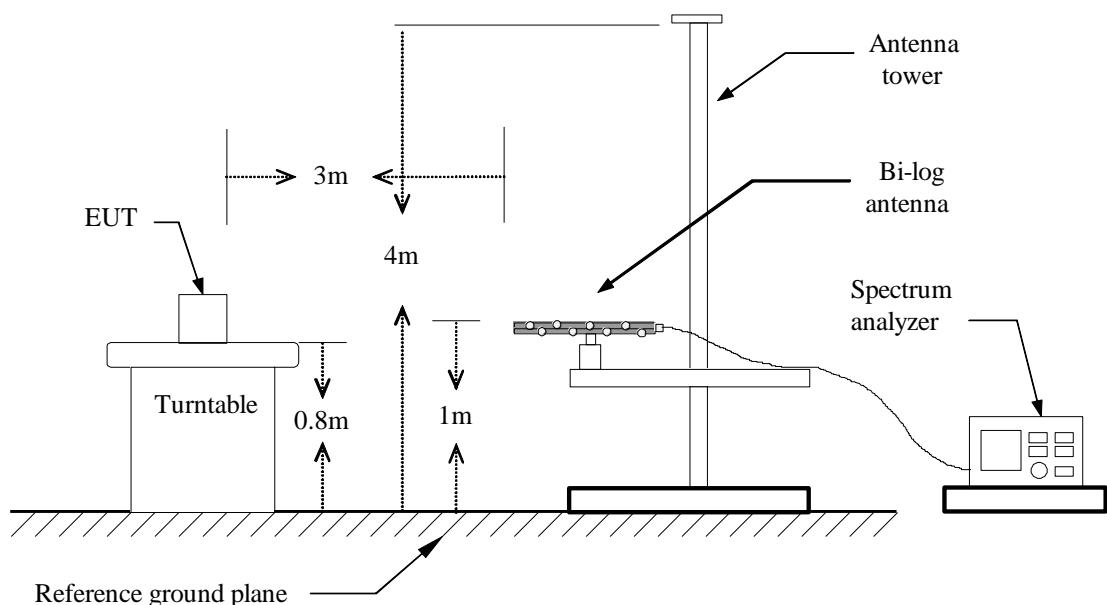


## Above 1 GHz

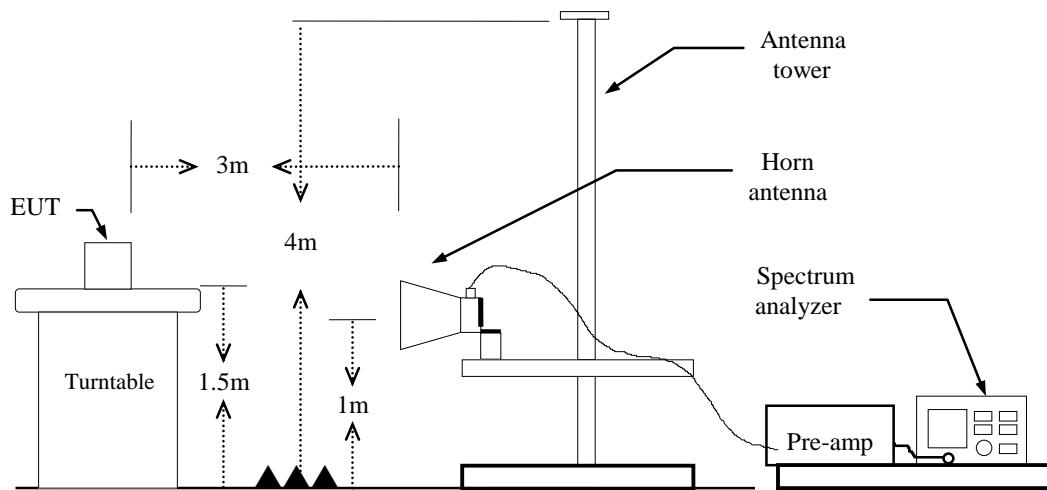


#### 4.6.4 Test Result

##### Band Edge Test Data

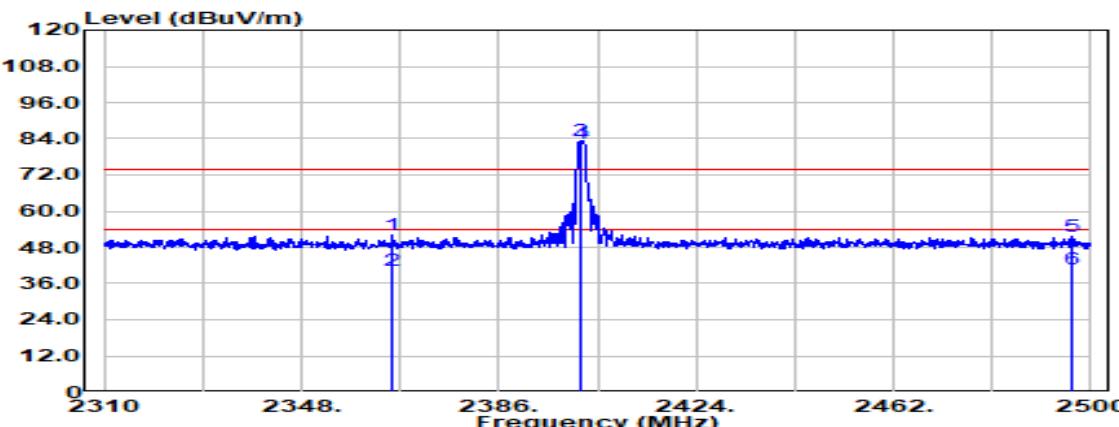
Test Mode:	BLE-1Mbps Low CH		Temp/Hum	22.5(°C) / 60%RH		
Test Item	Band Edge		Test Date	March 7, 2022		
Polarize	Vertical		Test Engineer	Ray Li		
Detector	Peak / Average					
						
Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
2365.480	Peak	39.56	12.36	51.92	74.00	-22.08
2365.480	Average	28.10	12.36	40.46	54.00	-13.54
2402.000	Peak	70.81	12.54	83.35	-	-
2402.000	Average	69.82	12.54	82.36	-	-
2496.485	Peak	38.27	13.17	51.44	74.00	-22.56
2496.485	Average	27.60	13.17	40.76	54.00	-13.24

Report No.: TMWK2202000584KR

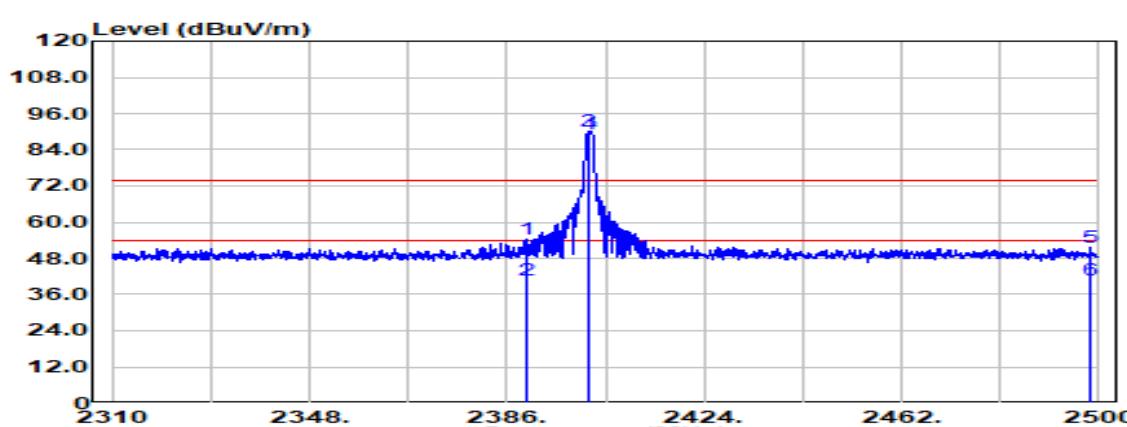Test Mode:	BLE-1Mbps Low CH		Temp/Hum	22.5(°C) / 60%RH		
Test Item	Band Edge		Test Date	March 7, 2022		
Polarize	Horizontal		Test Engineer	Ray Li		
Detector	Peak / Average					
						
Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
2389.610	Peak	41.80	12.48	54.28	74.00	-19.72
2389.610	Average	28.35	12.48	40.83	54.00	-13.17
2402.000	Peak	77.60	12.54	90.14	-	-
2402.000	Average	76.64	12.54	89.18	-	-
2498.480	Peak	38.47	13.18	51.65	74.00	-22.35
2498.480	Average	27.67	13.18	40.85	54.00	-13.15

Report No.: TMWK2202000584KR


Test Mode:	BLE-1Mbps High CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Band Edge	Test Date	March 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak / Average		

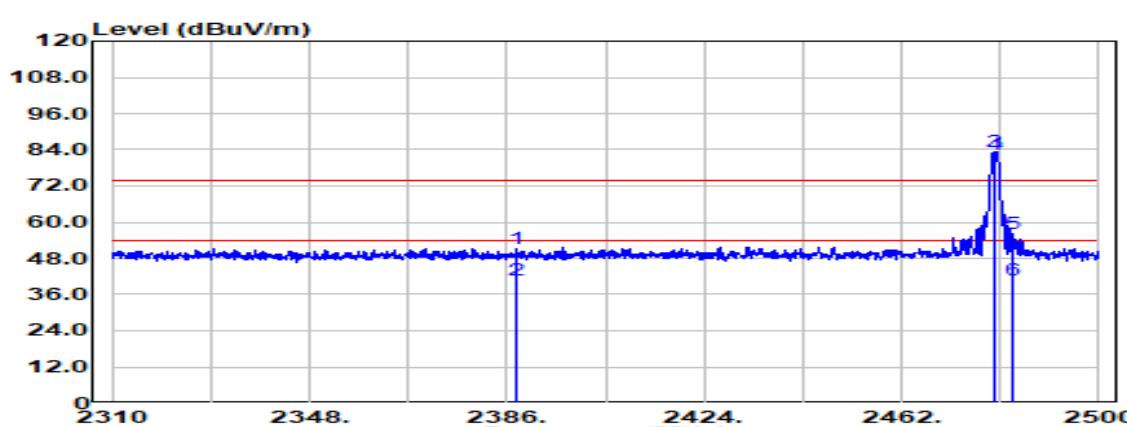
Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
2387.710	Peak	38.91	12.47	51.38	74.00	-22.62
2387.710	Average	28.24	12.47	40.71	54.00	-13.29
2480.000	Peak	70.30	13.05	83.35	-	-
2480.000	Average	69.27	13.05	82.33	-	-
2483.565	Peak	43.04	13.08	56.11	74.00	-17.89
2483.565	Average	27.64	13.08	40.72	54.00	-13.28

Report No.: TMWK2202000584KR

Test Mode:	BLE-1Mbps High CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Band Edge	Test Date	March 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak / Average		


  

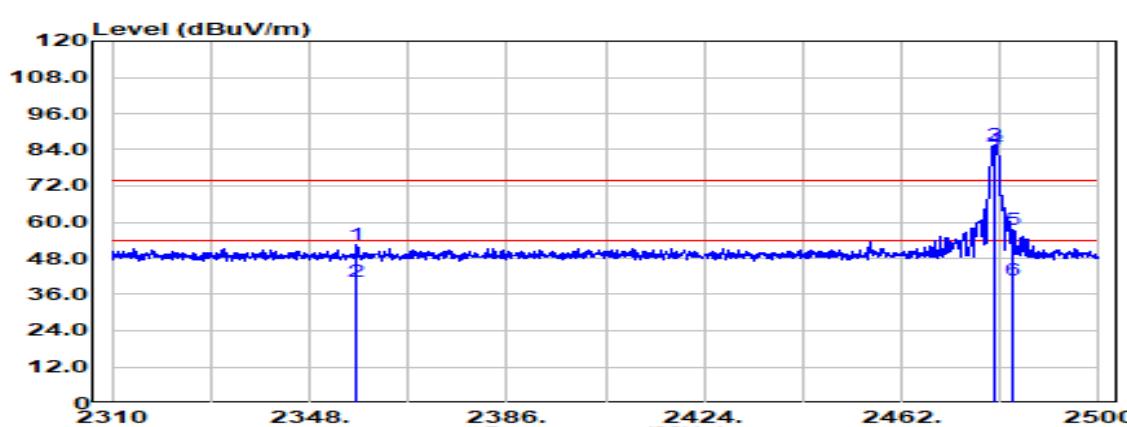  

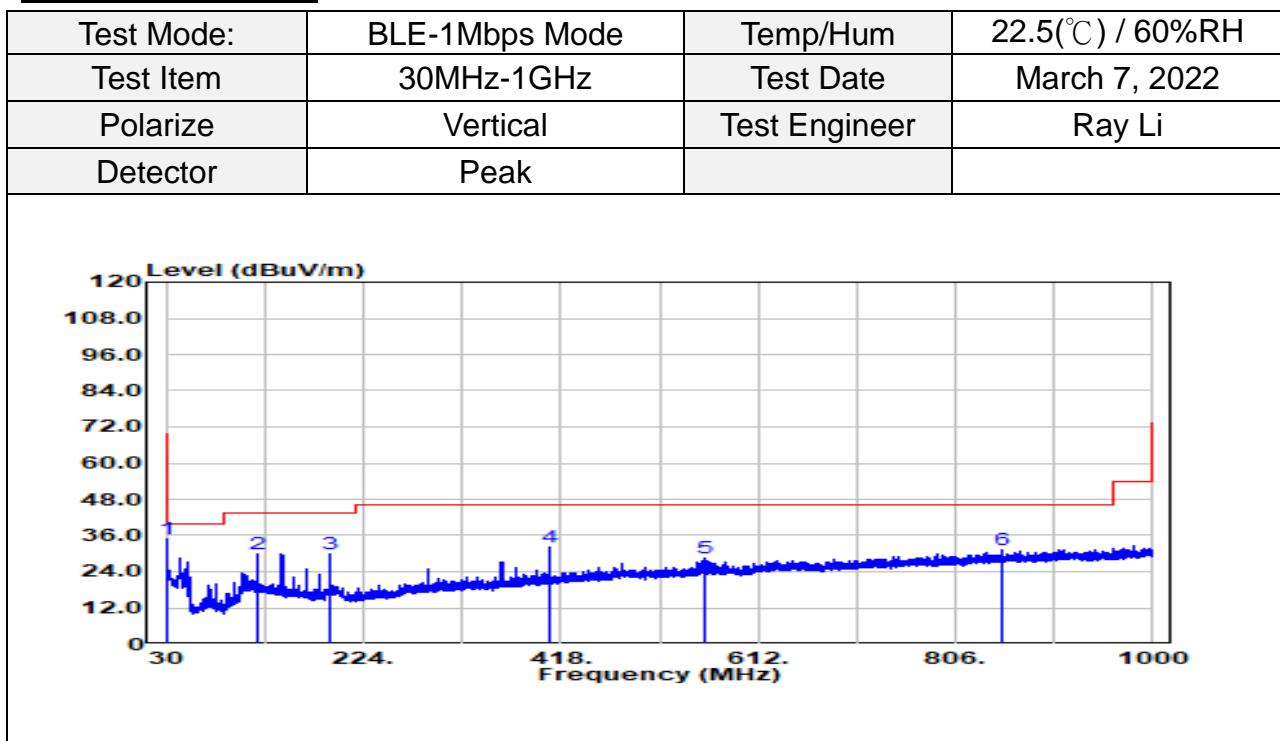Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
2357.215	Peak	40.02	12.32	52.34	74.00	-21.66
2357.215	Average	28.14	12.32	40.45	54.00	-13.55
2480.000	Peak	72.40	13.05	85.46	-	-
2480.000	Average	71.39	13.05	84.45	-	-
2483.500	Peak	44.38	13.08	57.46	74.00	-16.54
2483.500	Average	27.75	13.08	40.83	54.00	-13.17

**Below 1G Test Data**

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
31.091	Peak	38.25	-3.40	34.85	40.00	-5.15
119.968	Peak	39.46	-9.39	30.07	43.50	-13.43
191.990	Peak	41.28	-11.29	30.00	43.50	-13.50
408.058	Peak	37.91	-5.81	32.10	46.00	-13.90
560.226	Peak	31.10	-2.65	28.45	46.00	-17.55
851.833	Peak	29.23	2.08	31.31	46.00	-14.69

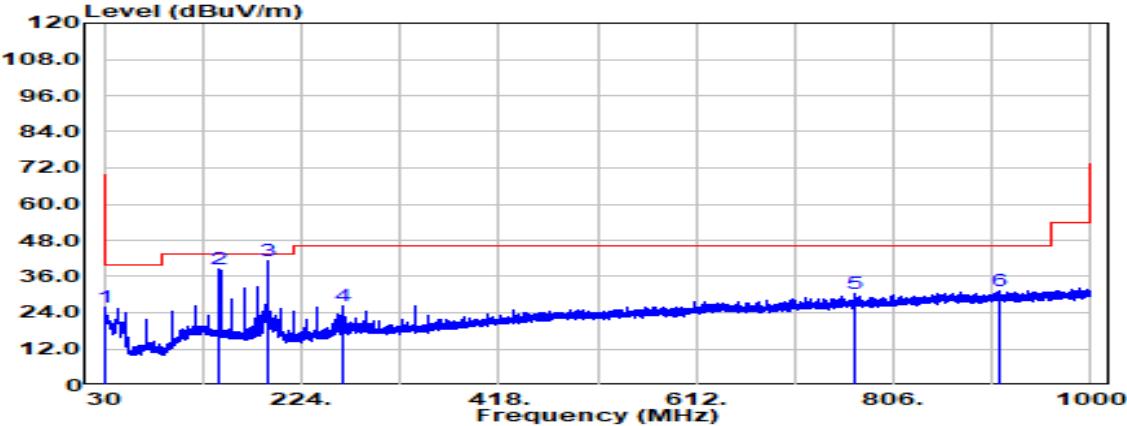
Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

Test Mode:	BLE-1Mbps Mode		Temp/Hum	22.5(°C) / 60%RH		
Test Item	30MHz-1GHz		Test Date	March 7, 2022		
Polarize	Horizontal		Test Engineer	Ray Li		
Detector	Peak					
						
Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
30.970	Peak	29.09	-3.30	25.80	40.00	-14.20
143.975	Peak	49.13	-10.41	38.72	43.50	-4.78
191.990	Peak	52.66	-11.29	41.37	43.50	-2.13
264.013	Peak	35.87	-9.56	26.31	46.00	-19.69
768.049	Peak	29.45	0.88	30.34	46.00	-15.66
909.426	Peak	28.08	3.10	31.18	46.00	-14.82

Note: No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).

**Above 1G Test Data**

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Harmonic	Test Date	March 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

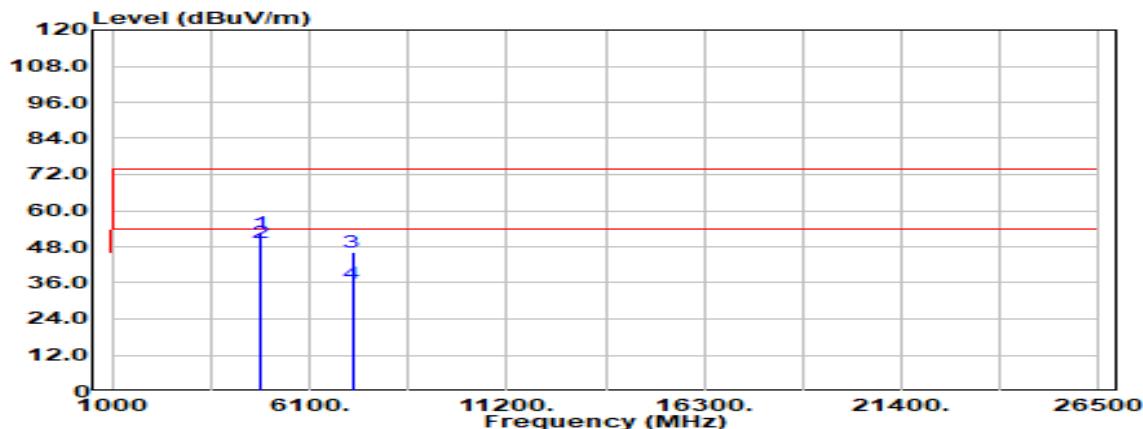


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
4804.000	Peak	43.28	9.46	52.74	74.00	-21.26
4804.000	Average	39.91	9.46	49.37	54.00	-4.63
7206.000	Peak	32.76	13.51	46.27	74.00	-27.73
7206.000	Average	22.10	13.51	35.61	54.00	-18.39
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Low CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Harmonic	Test Date	March 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

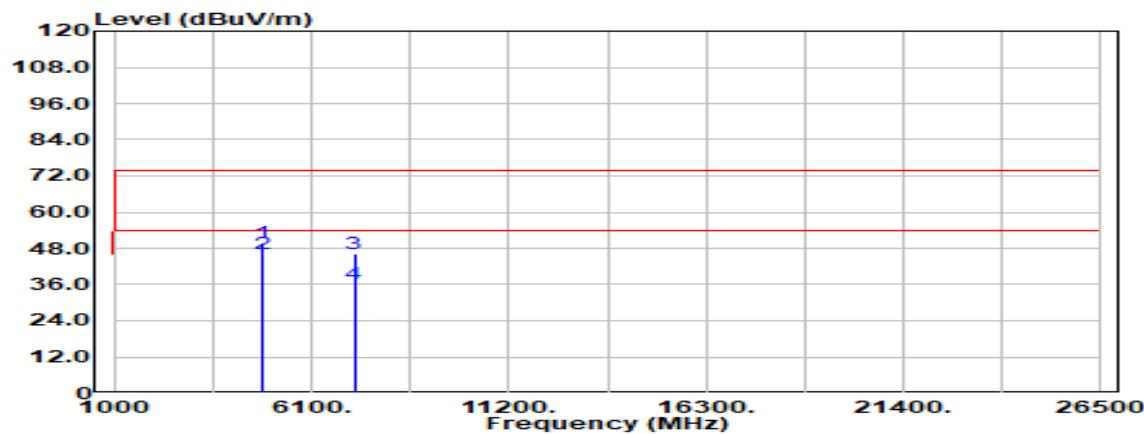


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
4804.000	Peak	40.41	9.46	49.87	74.00	-24.13
4804.000	Average	36.67	9.46	46.13	54.00	-7.87
7206.000	Peak	32.89	13.51	46.40	74.00	-27.60
7206.000	Average	22.52	13.51	36.03	54.00	-17.97
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Harmonic	Test Date	March 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

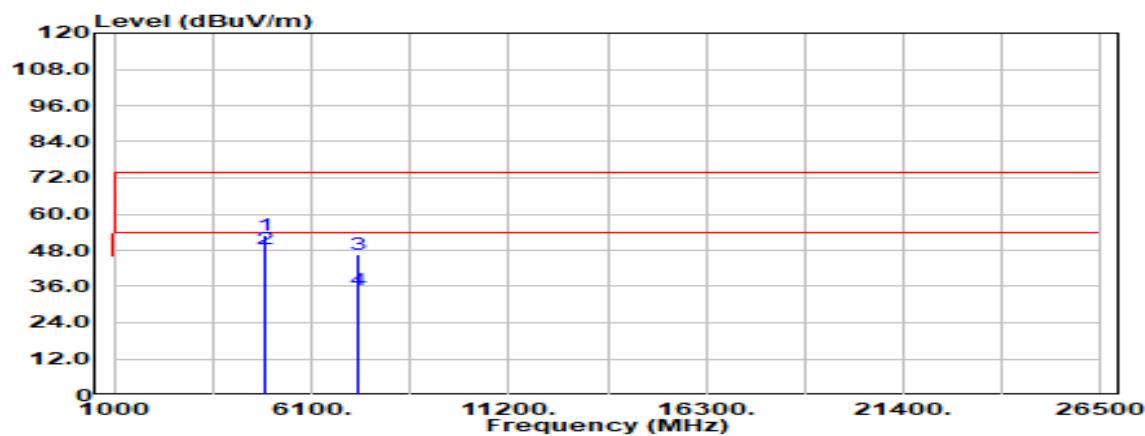


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
4884.000	Peak	43.27	9.59	52.86	74.00	-21.14
4884.000	Average	38.84	9.59	48.43	54.00	-5.57
7326.000	Peak	33.53	13.24	46.77	74.00	-27.23
7326.000	Average	21.61	13.24	34.85	54.00	-19.15
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: TMWK2202000584KR

Test Mode:	BLE-1Mbps Mid CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Harmonic	Test Date	March 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

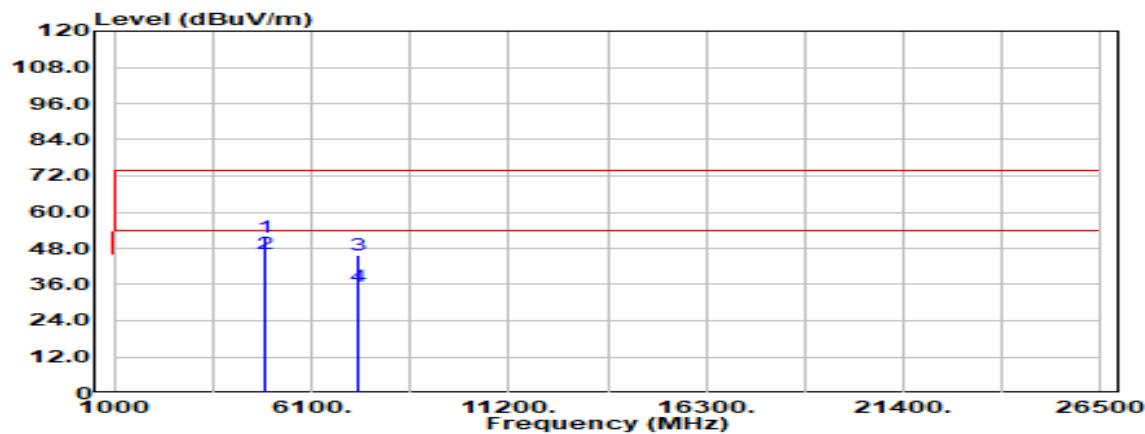


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
4884.000	Peak	41.93	9.59	51.52	74.00	-22.48
4884.000	Average	36.75	9.59	46.34	54.00	-7.66
7326.000	Peak	32.50	13.24	45.74	74.00	-28.26
7326.000	Average	21.87	13.24	35.11	54.00	-18.89
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Harmonic	Test Date	March 7, 2022
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak & Average		

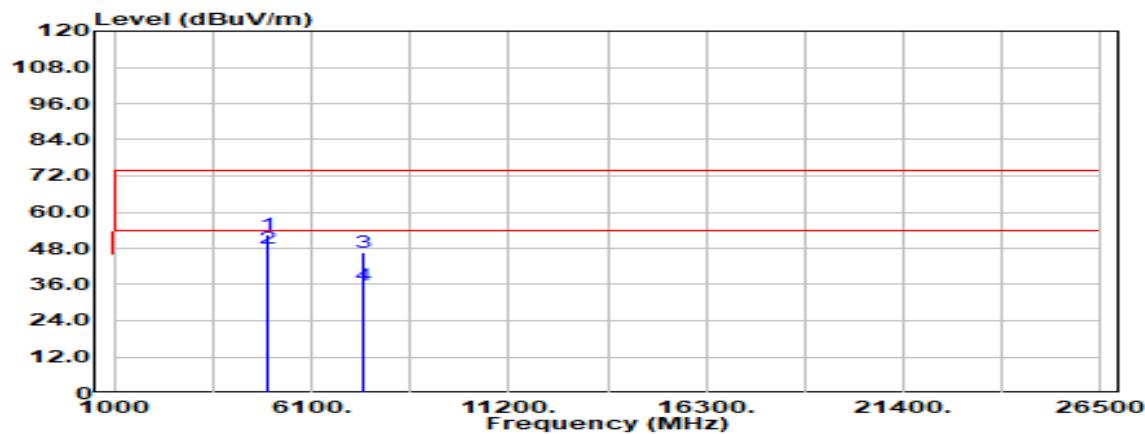


Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
4960.000	Peak	42.68	9.71	52.39	74.00	-21.61
4960.000	Average	38.07	9.71	47.78	54.00	-6.22
7440.000	Peak	33.05	13.54	46.59	74.00	-27.41
7440.000	Average	22.11	13.54	35.65	54.00	-18.35
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode:	BLE-1Mbps High CH	Temp/Hum	22.5(°C) / 60%RH
Test Item	Harmonic	Test Date	March 7, 2022
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak & Average		

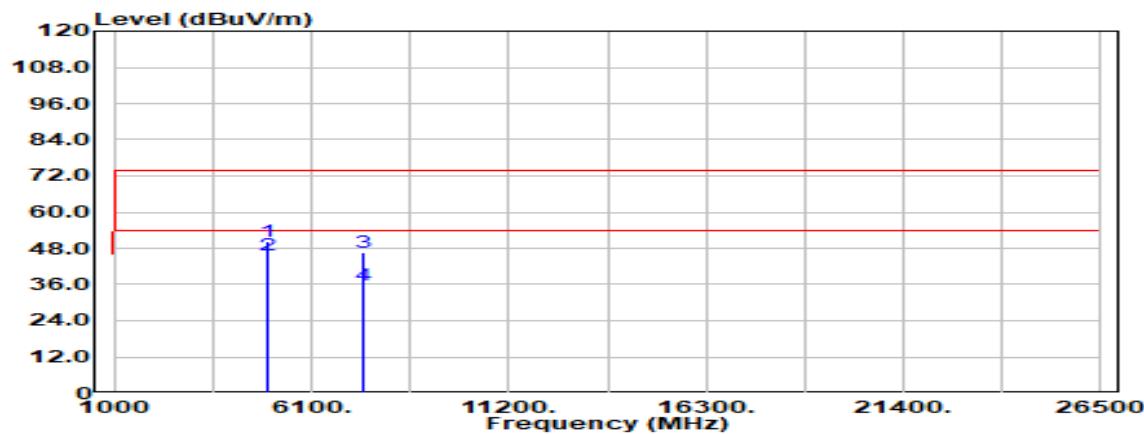

Freq. (MHz)	Detector Mode (PK/QP/AV)	Spectrum Reading Level (dB $\mu$ V)	Factor (dB)	Actual FS (dB $\mu$ V/m)	Limit @3m (dB $\mu$ V/m)	Margin (dB)
4960.000	Peak	40.45	9.71	50.16	74.00	-23.84
4960.000	Average	35.87	9.71	45.58	54.00	-8.42
7440.000	Peak	33.06	13.54	46.60	74.00	-27.40
7440.000	Average	22.13	13.54	35.67	54.00	-18.33
N/A						

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

**--End of Test Report--**