

TEST REPORT



CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2020-00484
Page (1) / (176) Pages

1. Client

- Name : KAONMEDIA Co., Ltd.
- Address : KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea
- Date of Receipt : 2019-12-10

2. Manufacturer

- Name : KAONMEDIA Co., Ltd.
- Address : KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea

3. Use of Report : For FCC Certification

4. Test Sample / Model: WiFi Extender / AR2040


5. Date of Test : 2020-01-03 to 2020-01-31

6. Test Standard(method) used : FCC 47 CFR part 15 subpart E 15.407

7. Testing Environment: Temp.: (24 ± 5) °C, Humidity: (50 ± 3) % R.H.

8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by	Technical Manager
	Ji-Hye Kim: (Signature) 	Won-Jae, Hwang: (Signature) 

2020-02-05

Republic of KOREA **CTK Co., Ltd.**



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No.:
CTK-2020-00484
Page (2) / (176) Pages

REPORT REVISION HISTORY

Date	Revision	Page No
2020-02-05	Issued (CTK-2020-00484)	all

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.

CONTENTS

1. General Product Description	4
1.1 Client Information	4
1.2 Product Information.....	4
1.3 Peripheral Devices	5
2. Facility and Accreditations.....	6
2.1 Test Facility	6
2.2 Laboratory Accreditations and Listings.....	6
2.3 Calibration Details of Equipment Used for Measurement.....	6
3. Test Specifications	7
3.1 Standards	7
3.2 Mode of operation during the test	8
3.3 Model Differences.....	9
3.4 Maximum Measurement Uncertainty	9
3.5 Test Software	9
4. Technical Characteristic Test.....	10
4.1 26 dB Bandwidth and 99% Bandwidth	10
4.2 OUTPUT POWER.....	37
4.3 Power Spectral Density	89
4.4 Frequency Stability.....	141
4.5 Unwanted Emissions	142
4.6 AC Conducted Emissions	173
APPENDIX A – Test Equipment Used For Tests	176

 CTK Co., Ltd. The Prime Leader of Global Regulatory Certification	CTK Co., Ltd. (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2020-00484 Page (4) / (176) Pages	
---	---	---	--

1. General Product Description

1.1 Client Information

Company	KAONMEDIA Co., Ltd.
Contact Point	KAONMEDIA Building, 884-3 Seongnam-daero, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea
Contact Person	Name : Kim tae-Sung E-mail : kkam@kaonmedia.com Tel : +82-31-724-8861

1.2 Product Information

FCC ID	WQT-EX5500
Product Description	WiFi Extender
Model name	AR2040
Variant Model name	EVO5500EXT
Operating Frequency	UNII 2A : 5 260 MHz – 5 320 MHz (20 MHz_BW) 5 270 MHz – 5 310 MHz (40 MHz_BW) 5 290 MHz (80 MHz_BW) UNII 2C : 5 500 MHz – 5 720 MHz (20 MHz_BW) 5 510 MHz – 5 710 MHz (40 MHz_BW) 5 530 MHz – 5 690 MHz (80 MHz_BW)
RF Output Power	CDD Mode_802.11a : 19.61 dBm (91.41 mW) CDD Mode_802.11n_HT20 : 19.49 dBm (88.92 mW) CDD Mode_802.11n_HT40 : 21.76 dBm (149.97 mW) CDD Mode_802.11ac_VHT20 : 19.49 dBm (88.92 mW) CDD Mode_802.11ac_VHT40 : 21.96 dBm (157.04 mW) CDD Mode_802.11ac_VHT80 : 21.86 dBm (153.46 mW) SDM Mode_802.11n_HT20 : 19.29 dBm (84.91 mW) SDM Mode_802.11n_HT40 : 21.10 dBm (128.82 mW) SDM Mode_802.11ac_VHT20 : 19.51 dBm (89.33 mW) SDM Mode_802.11ac_VHT40 : 21.73 dBm (148.94 mW) SDM Mode_802.11ac_VHT80 : 21.70 dBm (147.91 mW)
Antenna Specification	Type : PCB Antenna Peak Gain : 2 dBi (ANT1, ANT2, ANT3, ANT4)
Type of Modulation	OFDM
Data Rate	802.11a : 54 / 48 / 36 / 24 / 18 / 12 / 9 / 6 Mbps 802.11n : up to 600 Mbps 802.11ac : up to 1.733 Gbps
Power Source	DC 12 V (Adapter)
Hardware Rev	1.0
Software Rev	1.18.03



CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu,
Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970
Fax: +82-31-624-9501

Report No. :
CTK-2020-00484
Page (5) / (176) Pages

1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	HP	15-bs563TU	CND7253QPR
AC/DC Adapter	HP	HSTNN-LA40	-
AD/DC Adapter	SHENZHEN FRECOM ELECTRONICS CO., LTD.	F18L16- 120150SPAU	-

2. Facility and Accreditations

2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

2.2 Laboratory Accreditations and Listings

Country	Agency	Registration Number
USA	FCC	805871
CANADA	ISED	8737A-2
KOREA	NRRA	KR0025

2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

3. Test Specifications

3.1 Standards

FCC Part Section(s)	Requirement(s)	Status (Note 1)	Test Condition
15.407(e)	6 dB Bandwidth	C	Conducted
15.407(a)	26 dB Bandwidth and 99% Bandwidth	C	
15.407(a)(1)	Conducted Output Power	C	
15.407(a)(1)	Power Spectral Density	C	
15.407(g)	Frequency Stability	C	
15.407(b)	Undesirable emission	C	Radiated
15.205, 15.407(b)(5),(6)	Radiated Spurious Emission	C	
15.207	AC Conducted Emissions	C	Line Conducted
Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
Note 2: The data in this test report are traceable to the national or international standards.			
Note 3: The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013			
Note 4: The tests were performed according to the method of measurements prescribed in KDB No.789033.			

3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments.
During at testing, system components were manipulated within the confines of typical usage to maximize each emission.

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit

All modulation modes were tests. The results are only attached worst cases.

Test Frequency

- 802.11a, 802.11n_HT20, 802.11ac_VHT20

	Lowest channel	Middle channel	Highest channel
UNII 2A	5 260 MHz	5 300 MHz	5 320 MHz
UNII 2C	5 500 MHz	5 600 MHz	5 720 MHz

- 802.11n_HT40, 802.11ac_VHT40

	Lowest channel	Middle channel	Highest channel
UNII 2A	5 270 MHz	-	5 310 MHz
UNII 2C	5 510 MHz	5 590 MHz	5 710 MHz

- 802.11ac_VHT80

	Lowest channel	Middle channel	Highest channel
UNII 2A	5 290 MHz	-	-
UNII 2C	5 530 MHz	-	5 690 MHz

Test mode

- CDD mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11a	OFDM	6 Mbps	95.1 %	0.22 dB
802.11n_HT20	OFDM	MCS 0	95.3 %	0.21 dB
802.11n_HT40	OFDM	MCS 0	91.0 %	0.20 dB
802.11ac_VHT20	OFDM	MNSS 0	95.4 %	0.41 dB
802.11ac_VHT40	OFDM	MNSS 0	97.3 %	0.12 dB
802.11ac_VHT80	OFDM	MNSS 0	94.7 %	0.24 dB

- SDM mode

Test mode	Modulation	Data rate	Duty Cycle	Duty Cycle Factor
802.11n_HT20	OFDM	MCS 0	95.3 %	0.21 dB
802.11n_HT40	OFDM	MCS 0	91.0 %	0.20 dB
802.11ac_VHT20	OFDM	MNSS 0	95.4 %	0.41 dB
802.11ac_VHT40	OFDM	MNSS 0	97.3 %	0.12 dB
802.11ac_VHT80	OFDM	MNSS 0	94.7 %	0.24 dB

3.3 Model Differences

AR2040 and EVO5500EXT are no technical difference from each model only except for Model name because of marketing purposes.

3.4 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.
Coverage factor $k = 2$, Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	± 1.5 dB
Power Spectral Density	± 1.5 dB
Occupied Bandwidth	± 0.1 MHz
Unwanted Emission(conducted)	± 3.0 dB
Radiated Emissions ($f \leq 1$ GHz)	± 4.0 dB
Radiated Emissions ($f > 1$ GHz)	± 5.0 dB

3.5 Test Software

Conducted Test	Ics Pro Ver. 6.0.3
Radiated Test	TOYO EMI software EP5RE Ver. 6.0.1.0
Line Conducted Test	ESCI7, ESCI3 : EMC32 Ver. 8.50.0 ESR7 : EMC32 Ver. 8.53.0

4. Technical Characteristic Test

4.1 26 dB Bandwidth and 99 % Bandwidth

Test Procedures

KDB 789033 – Section C.1
ANSI C63.10-2013 - Section 6.9.2

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.

Test Procedures

KDB 789033 – Section C.1
ANSI C63.10-2013 - Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

Use the 99% power bandwidth function of the instrument and report the measured bandwidth.

Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = approximately 1 % of the emission bandwidth
- b) VBW $\geq$ RBW
- c) Detector = peak
- d) Trace mode = Max hold
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Minimum Standard:

NA

Test Data

ANT1

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	22.24	18.19	22.72	18.96	22.37	18.93
5 300 MHz	22.52	18.10	22.53	18.97	22.74	18.84
5 320 MHz	22.39	18.11	22.53	18.95	22.63	18.93
5 500 MHz	22.33	18.14	22.68	18.91	22.40	18.83
5 600 MHz	22.47	18.20	22.34	18.87	22.58	18.84
5 720 MHz	22.35	18.10	22.46	18.98	22.51	18.90
Measurement uncertainty	± 0.1 MHz					

	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	41.14	36.70	40.80	36.68
5 310 MHz	41.25	36.71	40.83	36.69
5 510 MHz	41.23	36.73	40.44	36.74
5 590 MHz	41.19	36.77	40.66	36.64
5 710 MHz	40.99	36.71	46.94	36.76
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	81.54	75.83
5 530 MHz	81.60	75.84
5 690 MHz	81.73	75.87
Measurement uncertainty	± 0.1 MHz	

ANT2

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	22.23	18.10	22.50	18.74	22.50	18.87
5 300 MHz	22.24	18.02	22.34	18.74	22.53	18.78
5 320 MHz	22.47	18.07	22.27	18.73	22.54	18.79
5 500 MHz	22.13	17.95	22.38	18.72	22.27	18.79
5 600 MHz	22.22	18.02	22.20	18.73	24.50	18.80
5 720 MHz	22.37	18.08	22.34	18.76	22.54	18.80
Measurement uncertainty	± 0.1 MHz					

	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	40.56	36.74	40.44	36.82
5 310 MHz	40.37	36.73	40.42	36.81
5 510 MHz	40.63	36.73	40.41	36.80
5 590 MHz	40.82	36.72	40.66	36.82
5 710 MHz	40.43	36.67	40.42	36.80
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	81.06	75.96
5 530 MHz	81.33	76.03
5 690 MHz	80.55	75.94
Measurement uncertainty	± 0.1 MHz	

ANT3

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	22.37	17.90	22.35	18.75	22.55	18.77
5 300 MHz	22.02	17.88	22.22	18.71	22.52	18.73
5 320 MHz	22.10	17.90	22.39	18.73	22.28	18.73
5 500 MHz	22.09	17.90	22.17	18.72	22.44	18.76
5 600 MHz	22.07	17.93	22.36	18.74	22.49	18.71
5 720 MHz	22.12	17.88	22.34	18.74	22.28	18.70
Measurement uncertainty	± 0.1 MHz					

	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	40.20	36.64	40.33	36.62
5 310 MHz	40.10	36.63	40.50	36.69
5 510 MHz	40.39	36.68	40.24	36.67
5 590 MHz	40.25	36.66	40.32	36.66
5 710 MHz	40.23	36.63	40.30	36.70
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	80.83	75.92
5 530 MHz	81.39	75.91
5 690 MHz	81.22	76.02
Measurement uncertainty	± 0.1 MHz	

ANT4

	26 dB Bandwidth and 99% Bandwidth (MHz)					
Mode	802.11a		802.11n_HT20		802.11ac_VHT20	
Frequency	26 dB	99%	26 dB	99%	26 dB	99%
5 260 MHz	22.22	17.87	22.21	18.72	22.60	18.69
5 300 MHz	22.17	17.84	22.17	18.76	22.29	18.76
5 320 MHz	22.10	17.85	22.34	18.73	22.16	18.75
5 500 MHz	22.25	17.87	22.38	18.73	22.21	18.72
5 600 MHz	22.06	17.83	22.26	18.74	22.49	18.76
5 720 MHz	21.85	17.74	22.51	18.76	22.51	18.79
Measurement uncertainty	± 0.1 MHz					




	26 dB Bandwidth and 99% Bandwidth (MHz)			
Mode	802.11n_HT40		802.11ac_VHT40	
Frequency	26 dB	99 %	26 dB	99 %
5 270 MHz	40.43	36.68	40.45	36.70
5 310 MHz	40.15	36.68	40.82	36.72
5 510 MHz	40.44	36.64	40.57	36.72
5 590 MHz	40.28	36.64	40.47	36.75
5 710 MHz	40.38	36.66	40.60	36.72
Measurement uncertainty	± 0.1 MHz			

	26 dB Bandwidth and 99% Bandwidth (MHz)	
Mode	802.11ac_VHT80	
Frequency	26 dB	99 %
5 290 MHz	81.37	75.93
5 530 MHz	81.73	75.90
5 690 MHz	81.28	76.02
Measurement uncertainty	± 0.1 MHz	

See next pages for actual measured spectrum plots.





ANT1_802.11a_UNII 2A

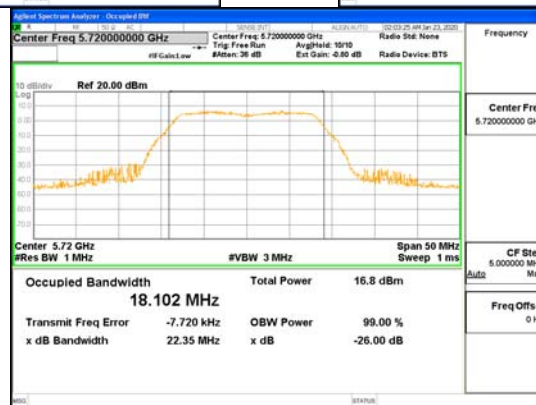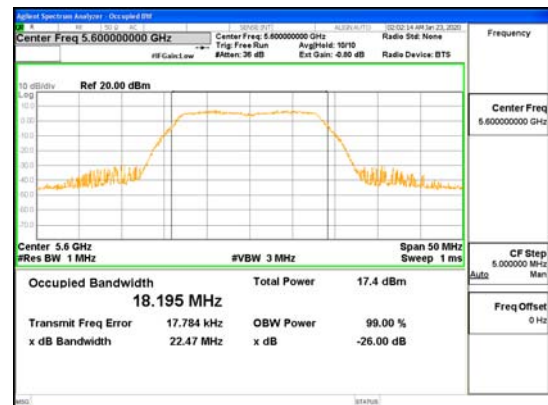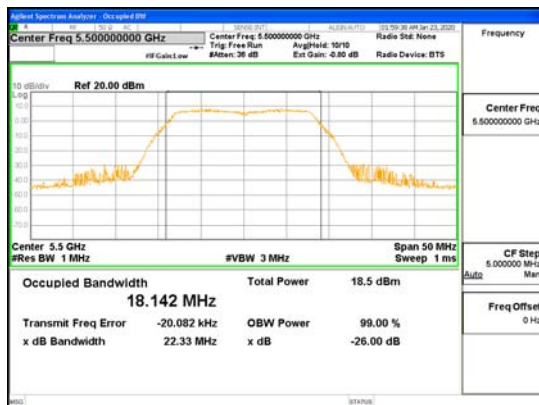


ANT1_802.11a_UNII 2C






ANT2_802.11a_UNII 2A

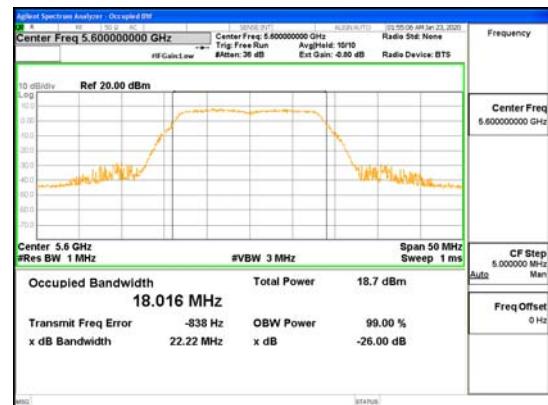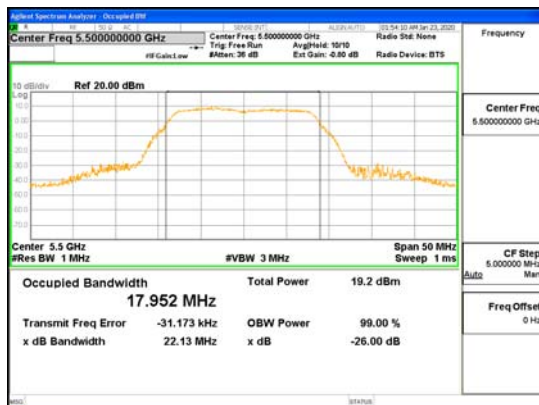


ANT2_802.11a_UNII 2C

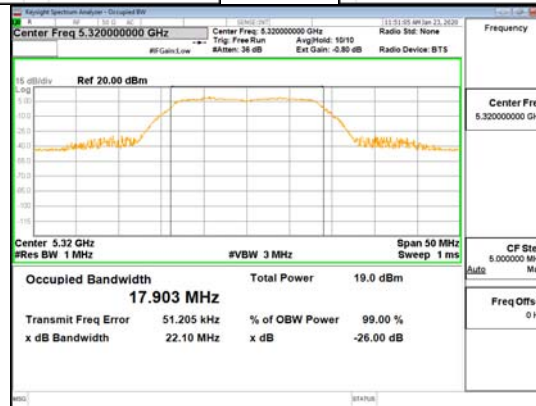




ANT3_802.11a_UNII 2A

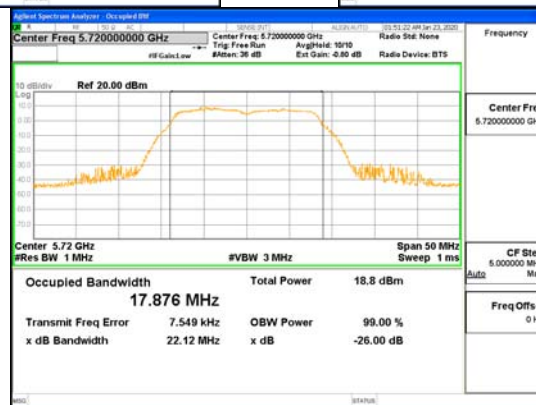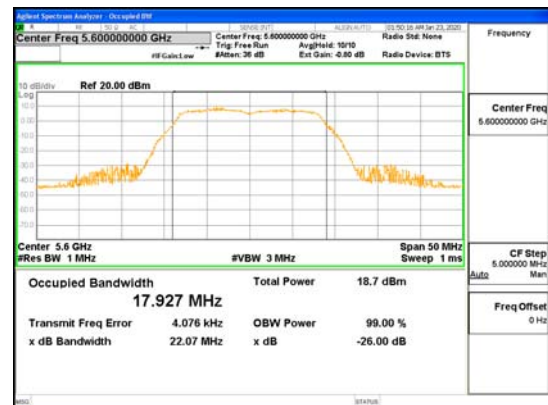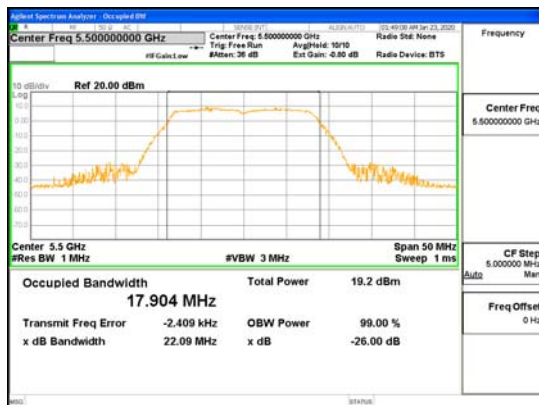



ANT3_802.11a_UNII 2C

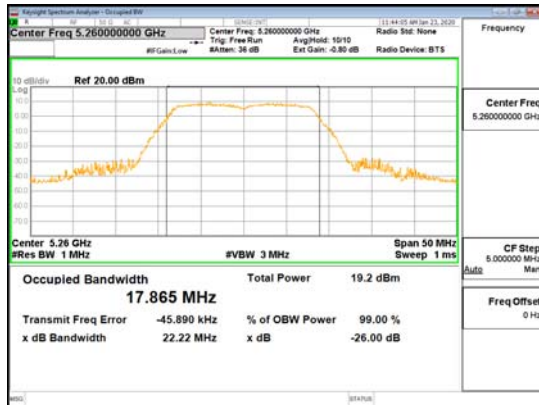



ANT4_802.11a_UNII 2A

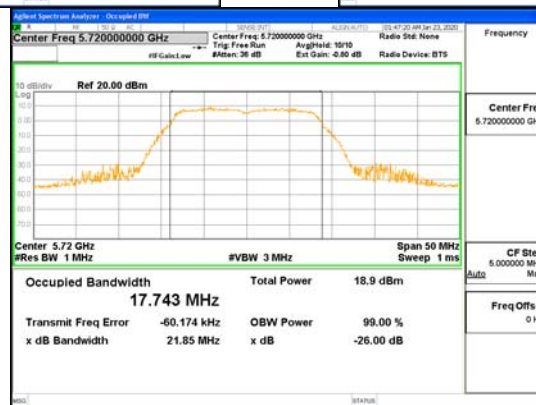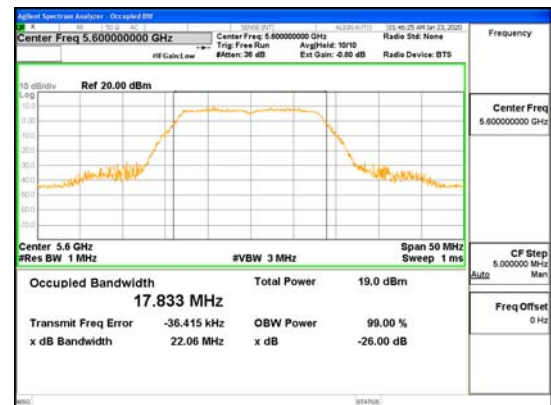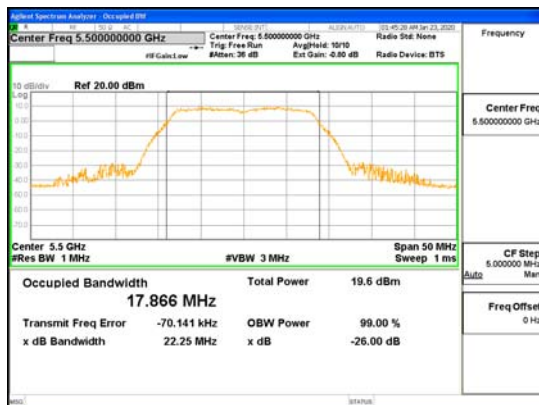


ANT4_802.11a_UNII 2C

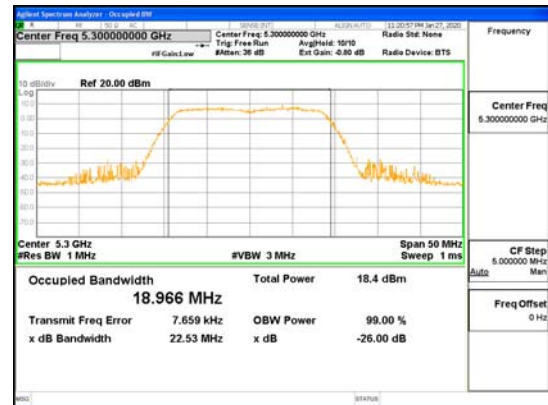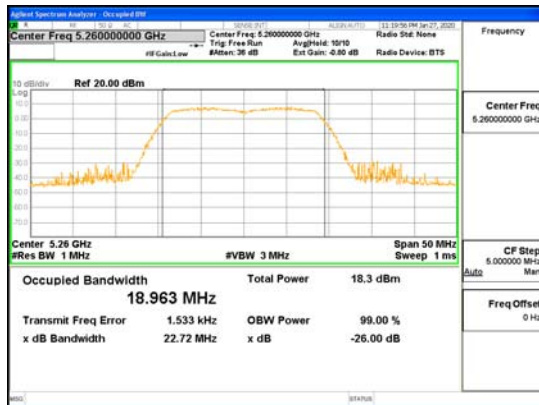



ANT1_802.11n_HT20_UNII 2A

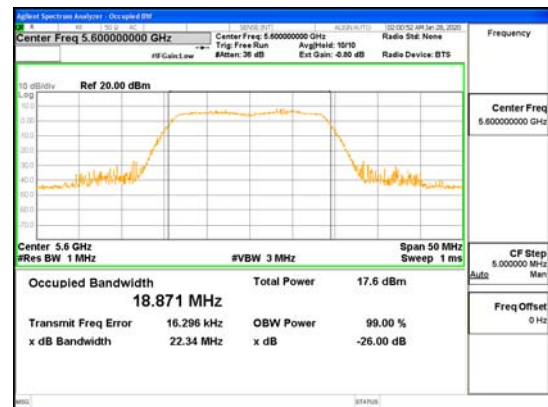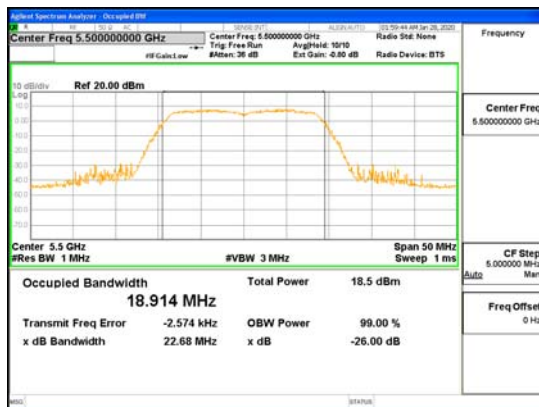


ANT1_802.11n_HT20_UNII 2C

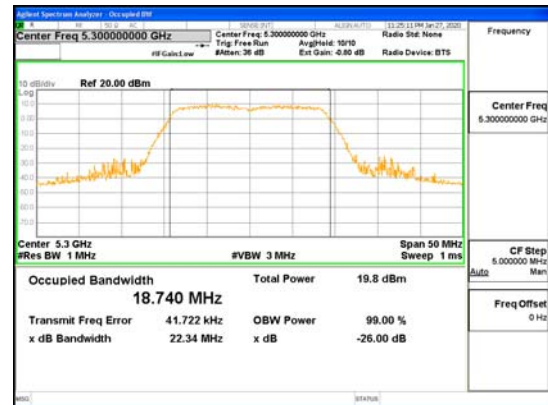



ANT2_802.11n_HT20_UNII 2A

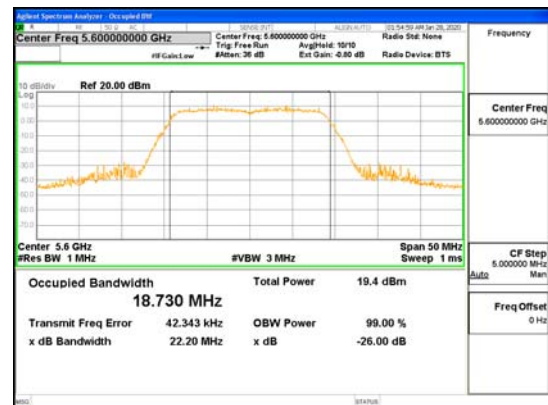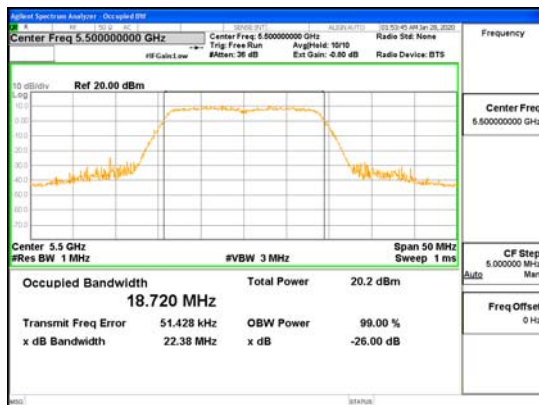


ANT2_802.11n_HT20_UNII 2C

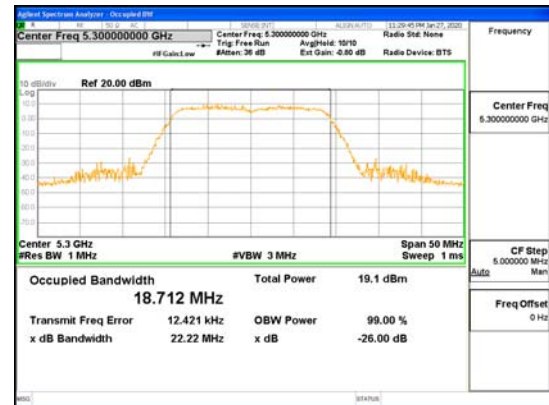



ANT3_802.11n_HT20_UNII 2A

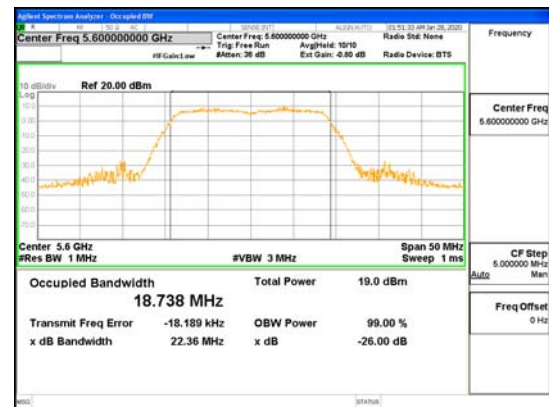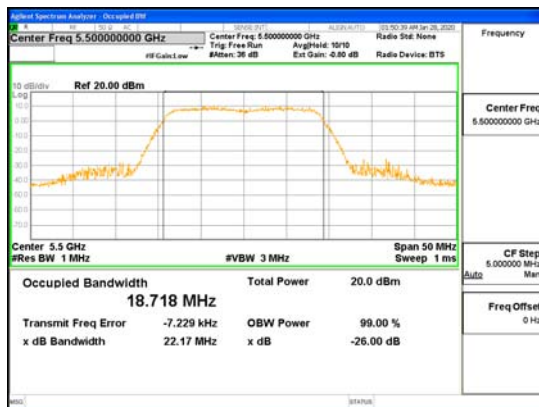




ANT3_802.11n_HT20_UNII 2C

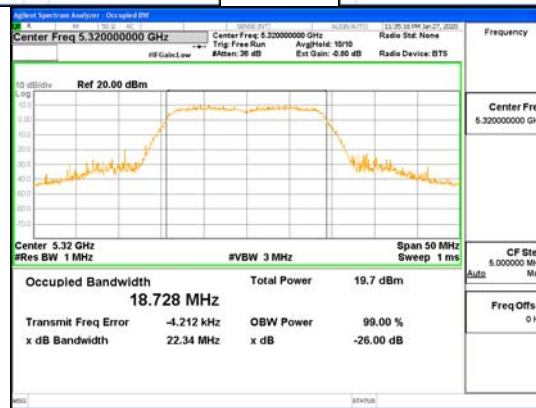



ANT4_802.11n_HT20_UNII 2A

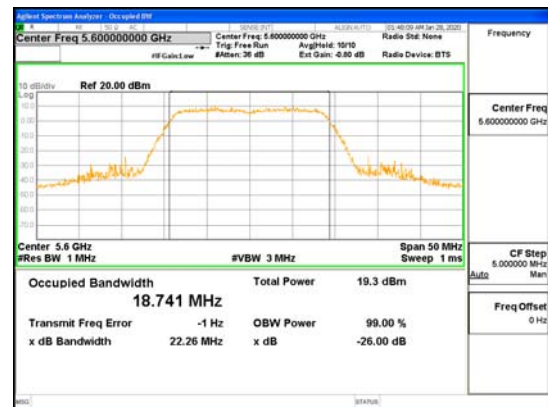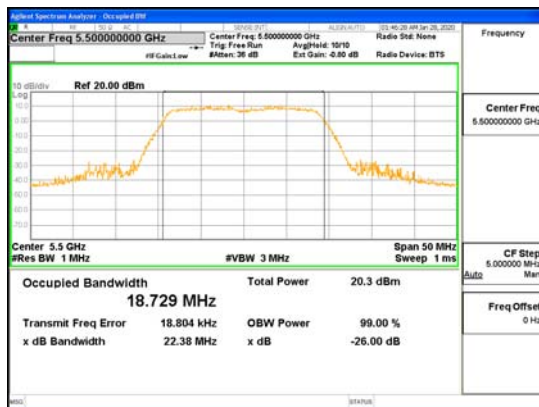




ANT4_802.11n_HT20_UNII 2C

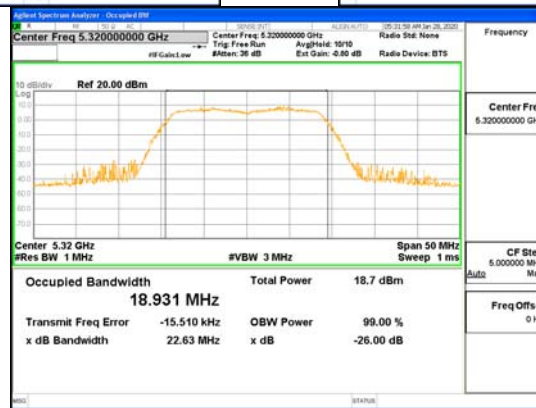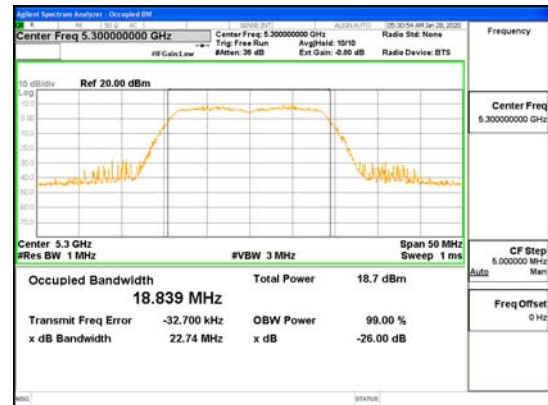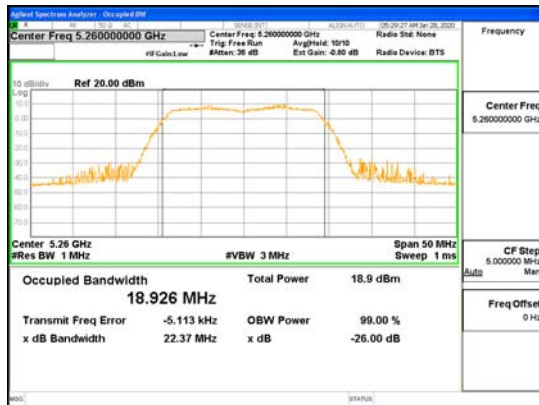




ANT1_802.11ac_VHT20_UNII 2A

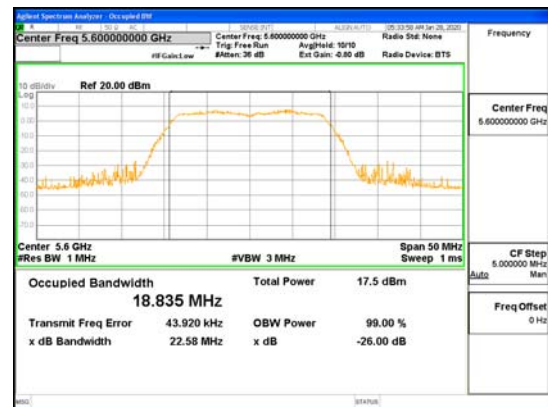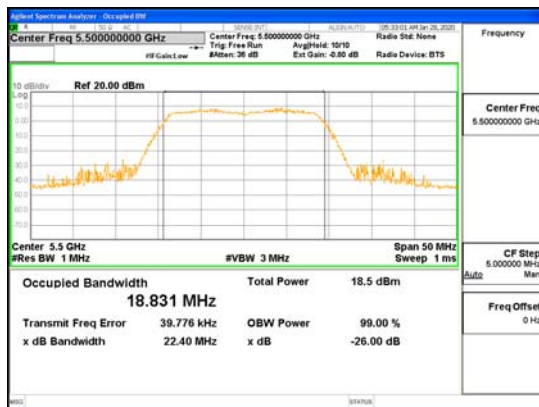



ANT1_802.11ac_VHT20_UNII 2C

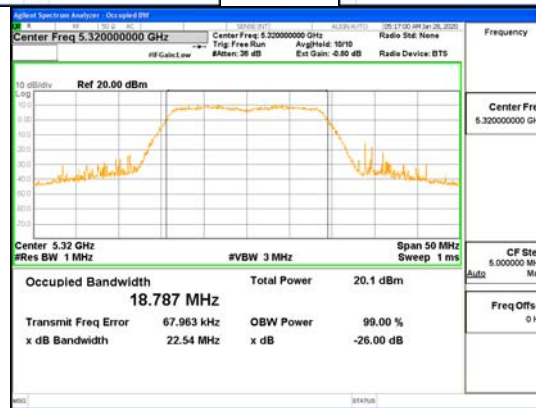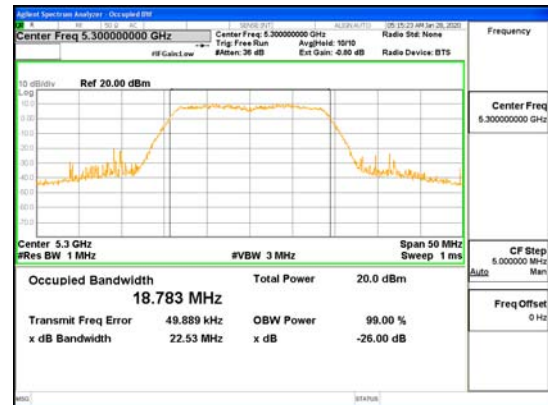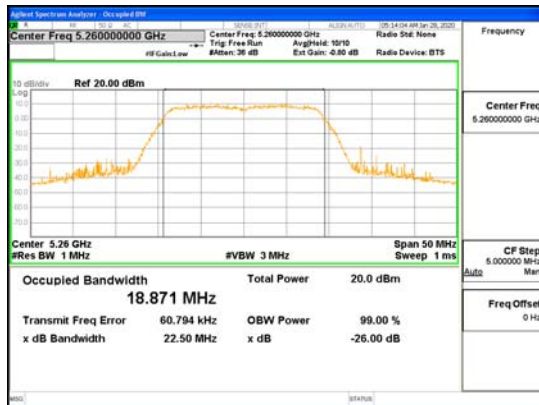




ANT2_802.11ac_VHT20_UNII 2A

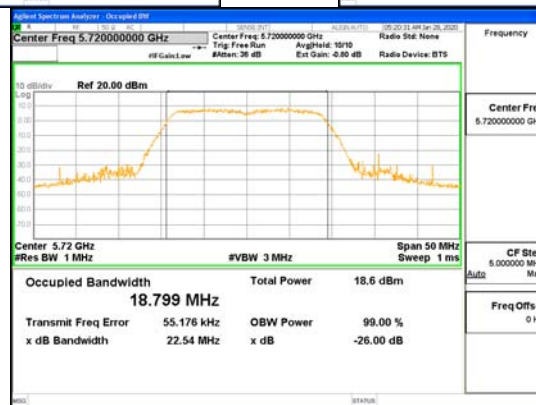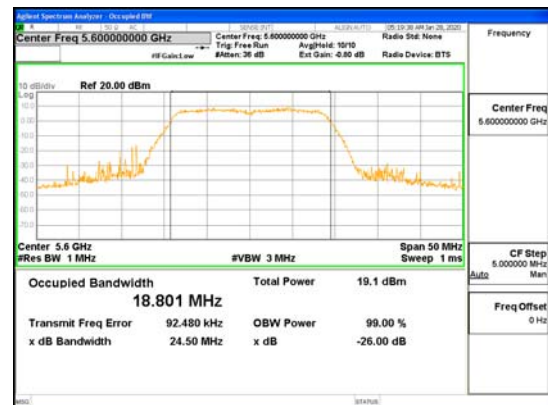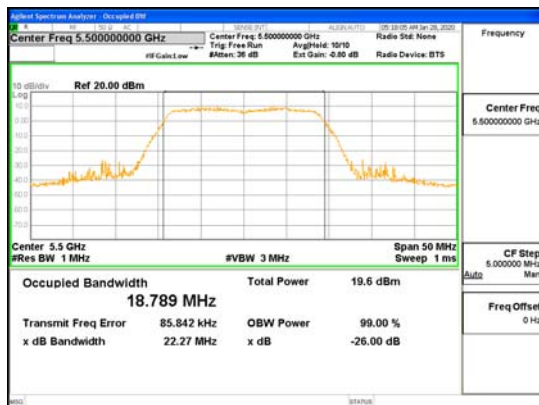

ANT2_802.11ac_VHT20_UNII 2C

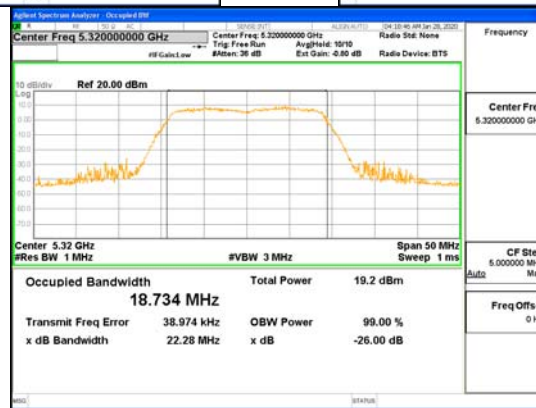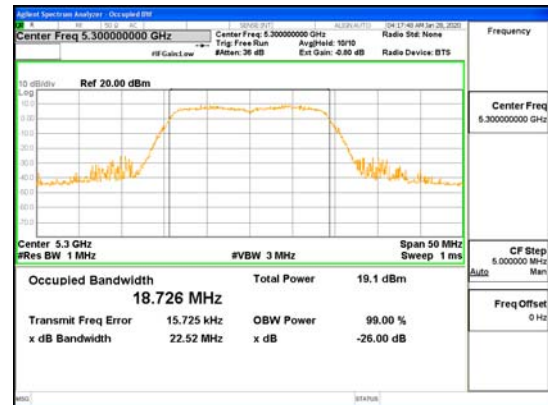



ANT3_802.11ac_VHT20_UNII 2A

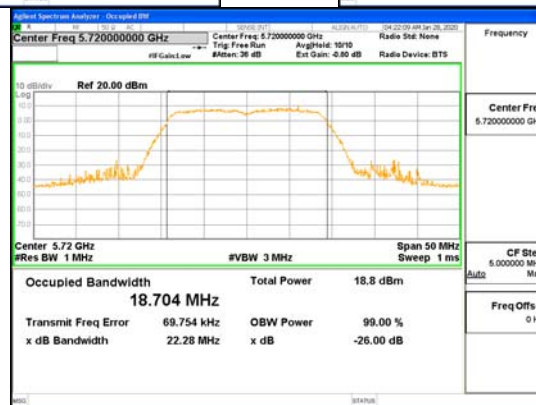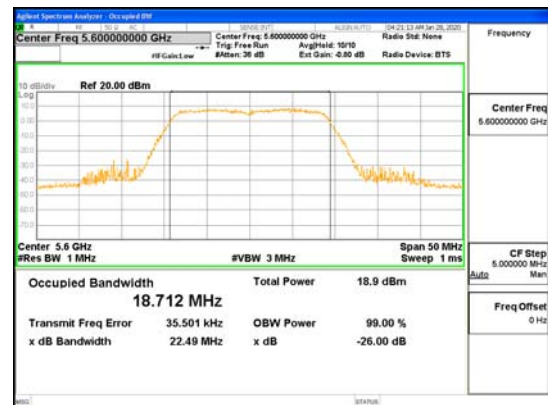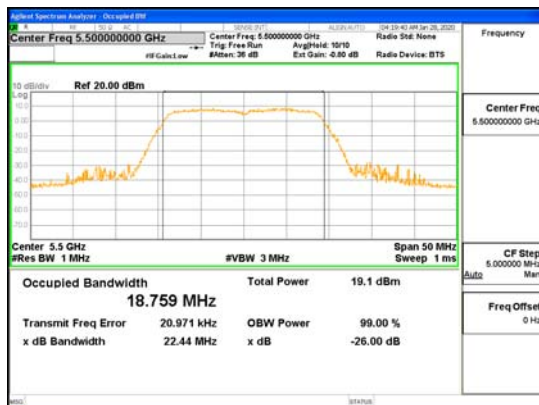

ANT3_802.11ac_VHT20_UNII 2C





ANT4_802.11ac_VHT20_UNII 2A

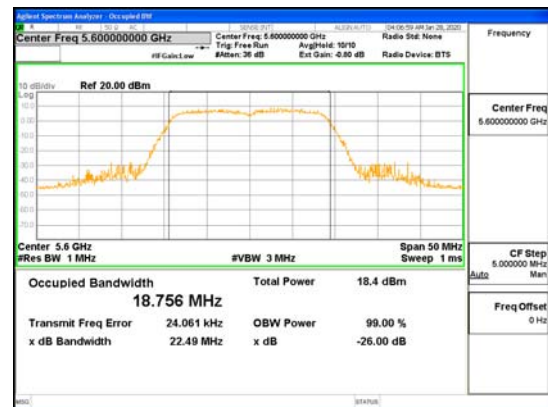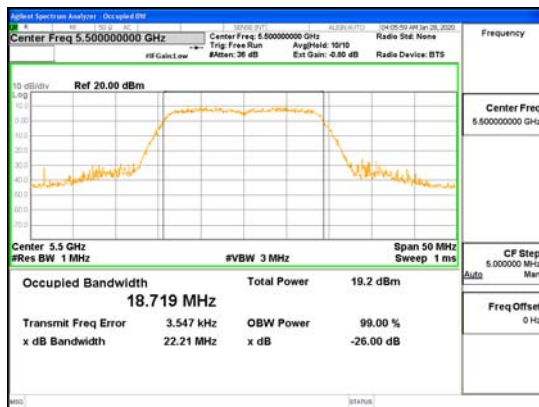

ANT4_802.11ac_VHT20_UNII 2C






ANT1_802.11n_HT40_UNII 2A

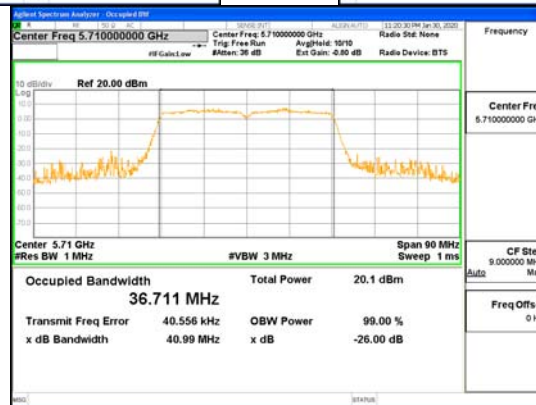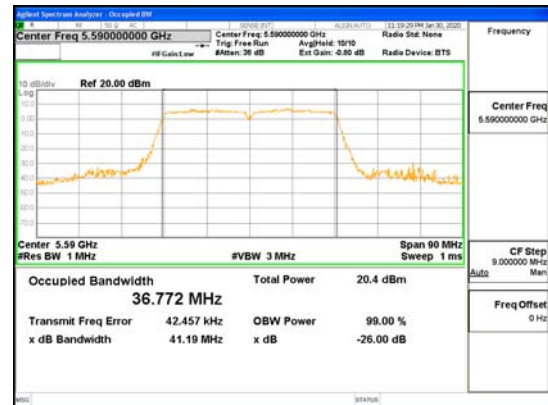

ANT1_802.11n_HT40_UNII 2C






ANT2_802.11n_HT40_UNII 2A

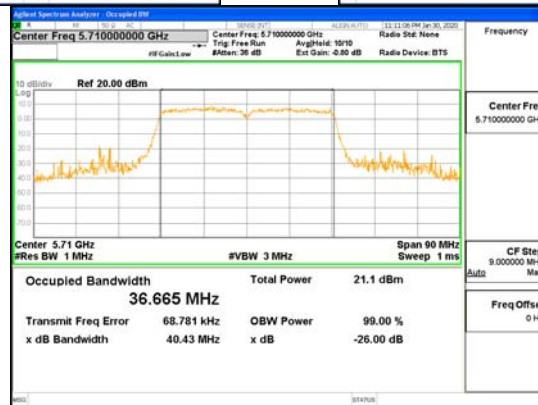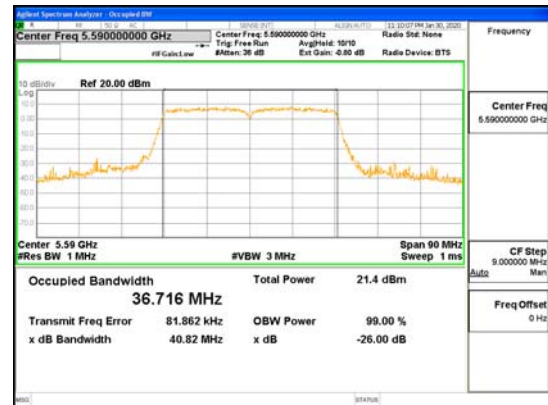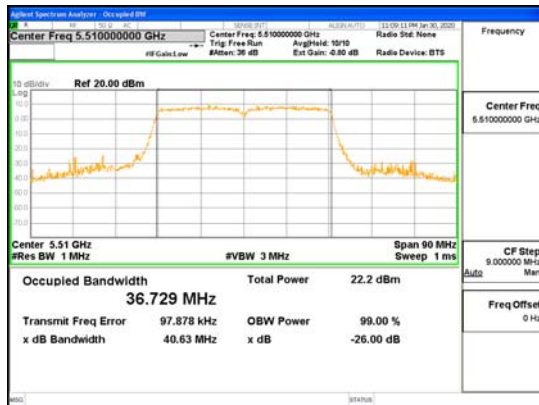

ANT2_802.11n_HT40_UNII 2C





ANT3_802.11n_HT40_UNII 2A

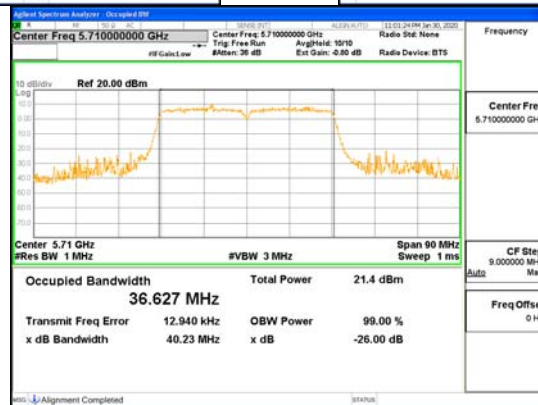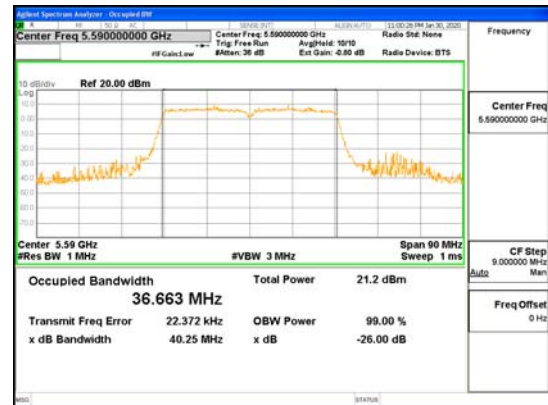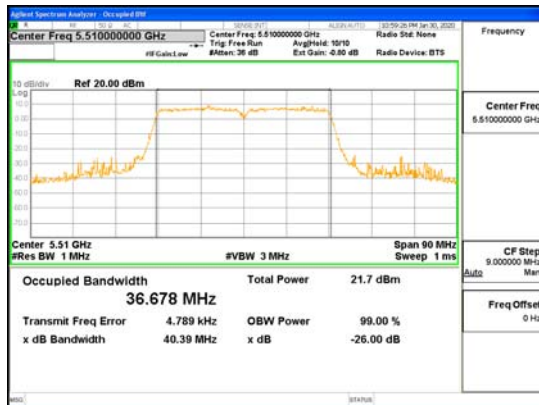

ANT3_802.11n_HT40_UNII 2C




ANT4_802.11n_HT40_UNII 2A

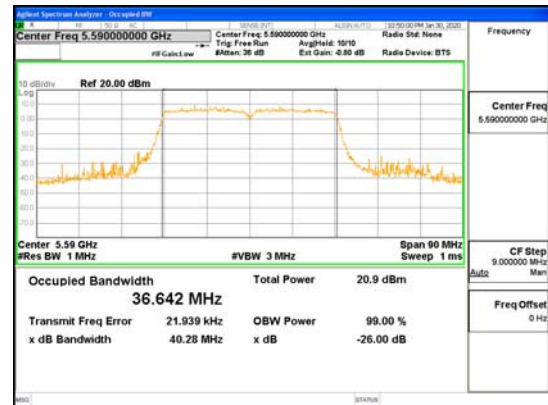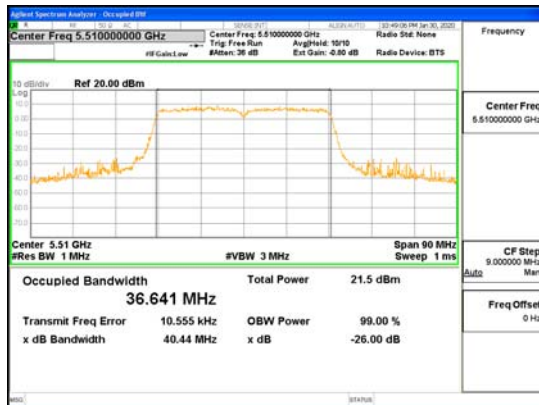


ANT4_802.11n_HT40_UNII 2C





ANT1_802.11ac_VHT40_UNII 2A

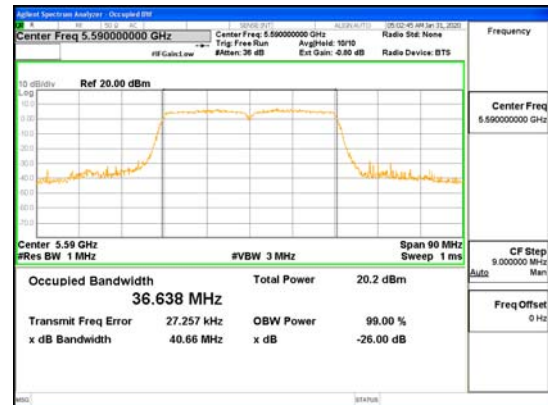


ANT1_802.11ac_VHT40_UNII 2C

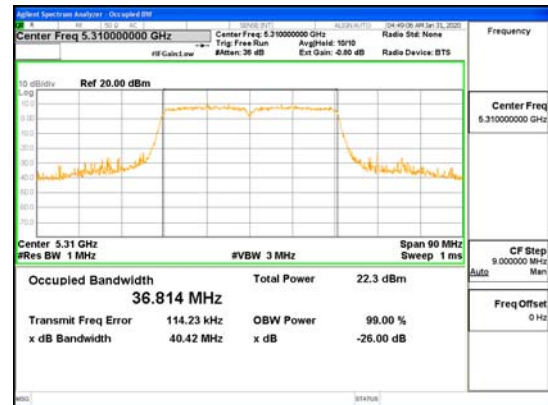



ANT2_802.11ac_VHT40_UNII 2A

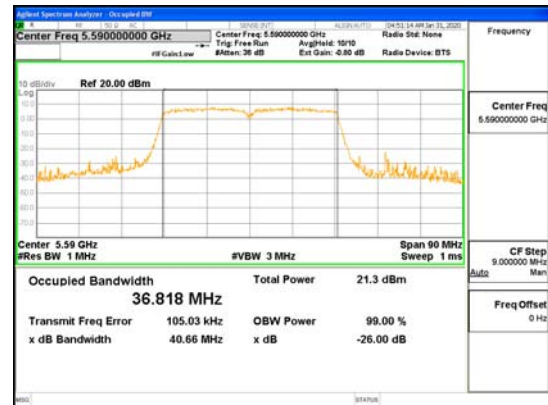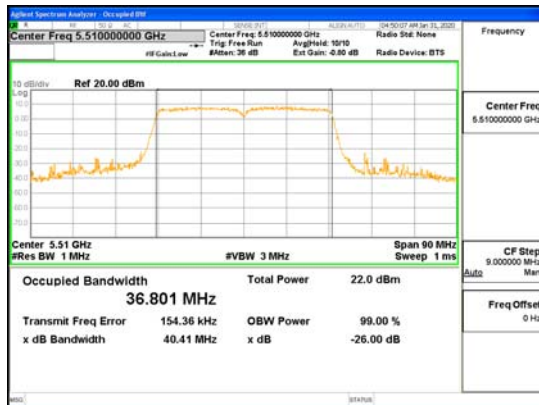


ANT2_802.11ac_VHT40_UNII 2C

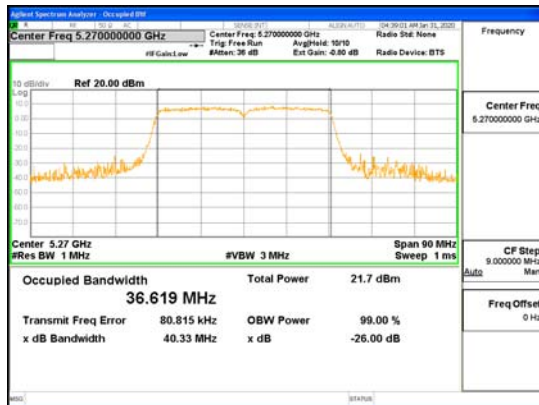



ANT3_802.11ac_VHT40_UNII 2A

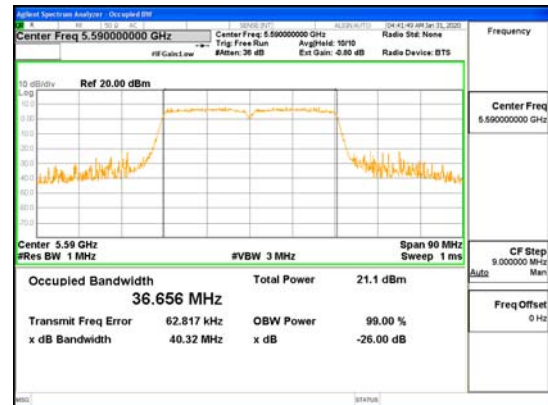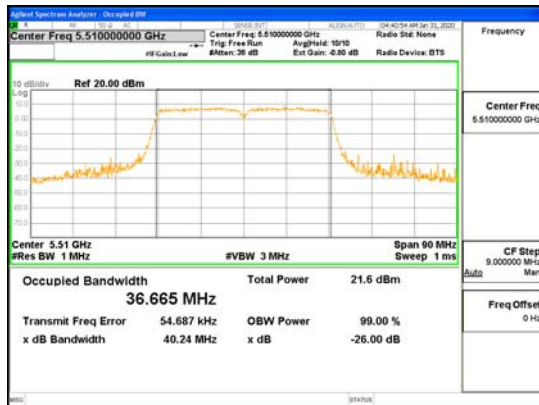

ANT3_802.11ac_VHT40_UNII 2C

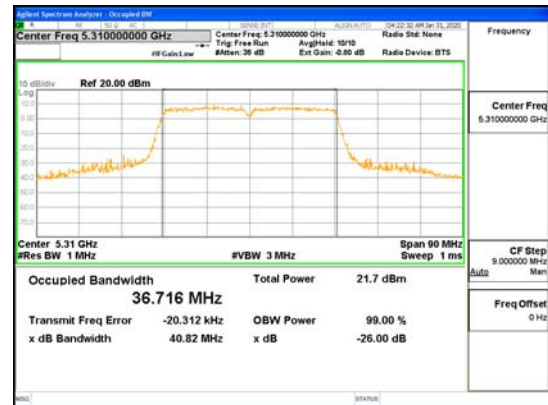


ANT4_802.11ac_VHT40_UNII 2A

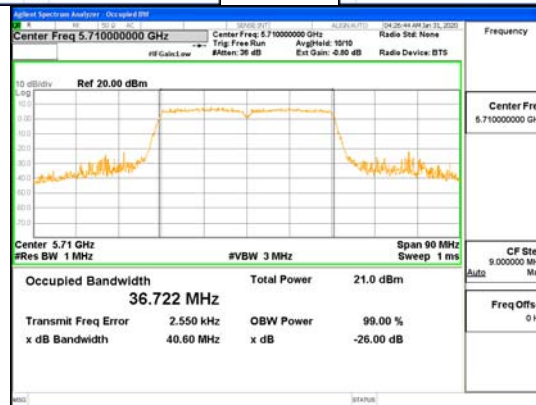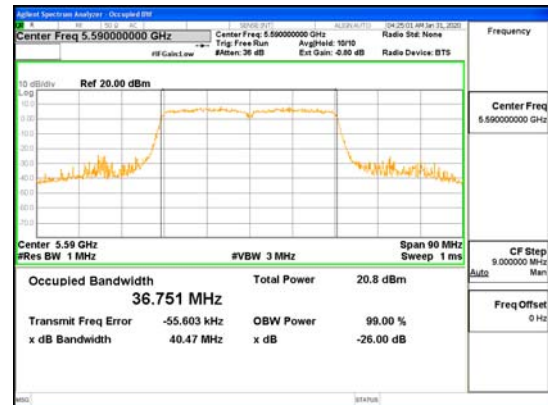

ANT4_802.11ac_VHT40_UNII 2C





ANT1_802.11ac_VHT80_UNII 2A

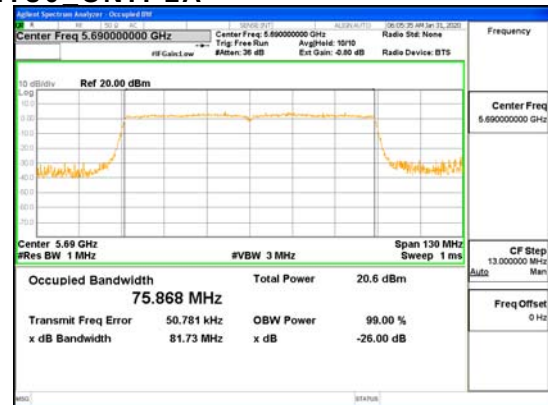


ANT1_802.11ac_VHT80_UNII 2C



ANT2_802.11ac_VHT80_UNII 2A

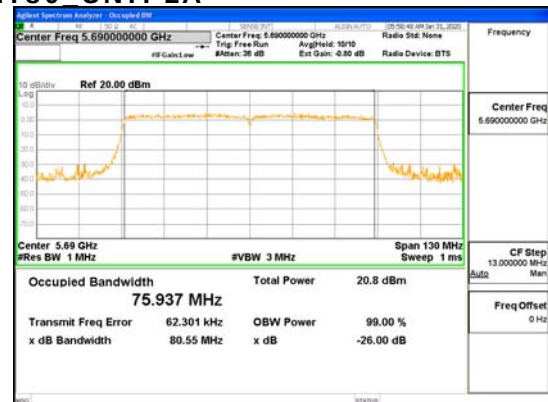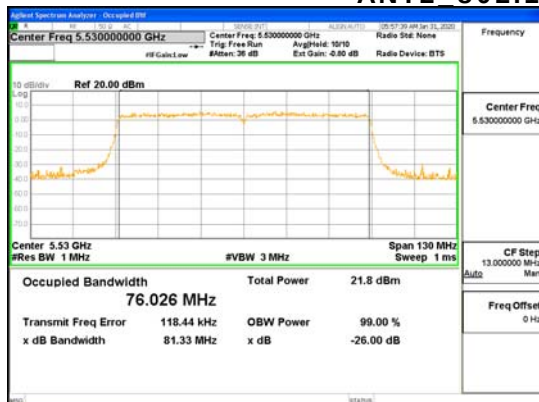

ANT2_802.11ac_VHT80_UNII 2C

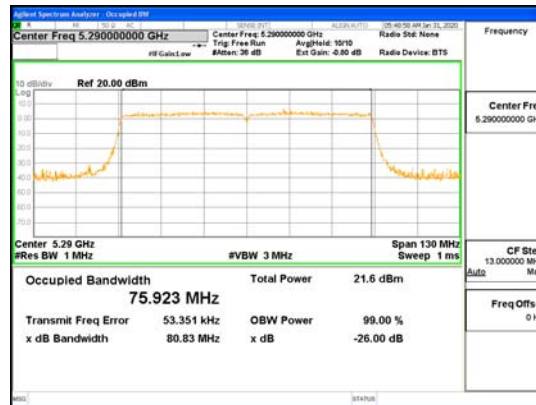



ANT3 802.11ac_VHT80_UNII 2A



ANT3 802.11ac_VHT80_UNII 2C



ANT4 802.11ac_VHT80_UNII 2A

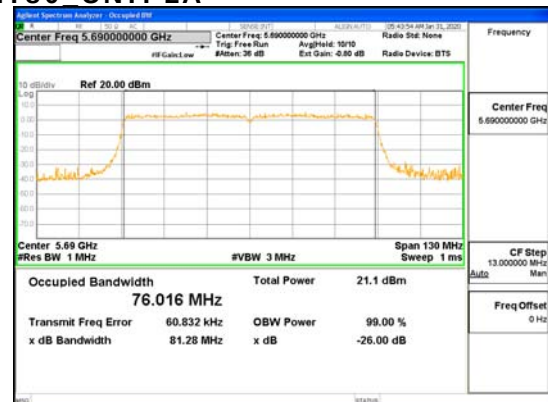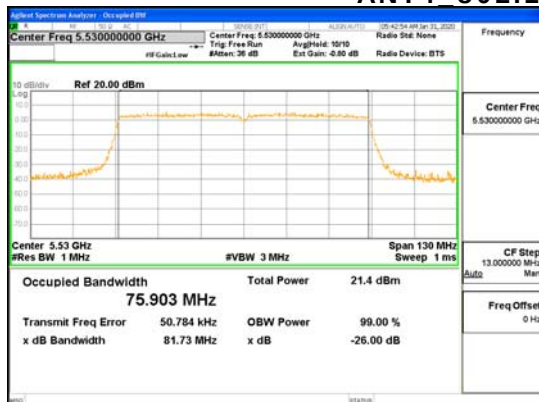


ANT4 802.11ac_VHT80_UNII 2C

4.2 OUTPUT POWER

Test Procedures

KDB 789033 – Section E.2.d (Method SA-2, Maximum Conducted Output Power)
KDB 662911 D01, D02 (Multiple Transmitter Output)

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.



Test Settings :

Center frequency = the highest, middle and the lowest channels

- a) RBW = 1 MHz
- b) VBW $\geq 3 \times$ RBW
- c) Sweep time = auto
- d) Detector = power averaging (rms)
- e) Trace mode = Average at least 100
- f) Duty cycle factor = $10\log(1/x)$

Test mode		Duty Cycle Factor (dB)
CDD Mode	802.11a	0.22
	802.11n_HT20	0.21
	802.11n_HT40	0.20
	802.11ac_VHT20	0.41
	802.11ac_VHT40	0.12
	802.11ac_VHT80	0.24
SDM Mode	802.11n_HT20	0.21
	802.11n_HT40	0.20
	802.11ac_VHT20	0.41
	802.11ac_VHT40	0.12
	802.11ac_VHT80	0.24

Limit

Operating Mode	Band	Mode	ANT Configuration	ANT Gain (dBi)	Limit (dBm)
SISO	UNII 2A	802.11a/n/ac	ANT1, ANT2, ANT3, ANT4	2.00	24.00
	UNII 2C				
MIMO	UNII 2A	802.11a/n/ac	Multiple ANT (ANT1 + ANT2 + ANT3 + ANT4)	8.02	21.98
	UNII 2C				

Test Data

CDD Mode_ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	13.33	0.22	13.55	24.00	10.45
	5 300	13.05	0.22	13.27	24.00	10.73
	5 320	13.07	0.22	13.29	24.00	10.71
	5 500	12.66	0.22	12.88	24.00	11.12
	5 600	11.71	0.22	11.93	24.00	12.07
	5 720	11.04	0.22	11.26	24.00	12.74
802.11n_HT20	5 260	12.40	0.21	12.61	24.00	11.39
	5 300	12.43	0.21	12.64	24.00	11.36
	5 320	12.76	0.21	12.97	24.00	11.03
	5 500	12.94	0.21	13.15	24.00	10.85
	5 600	11.86	0.21	12.07	24.00	11.93
	5 720	11.17	0.21	11.38	24.00	12.62
802.11ac_VHT20	5 260	12.63	0.41	13.04	24.00	10.96
	5 300	12.85	0.41	13.26	24.00	10.74
	5 320	12.83	0.41	13.24	24.00	10.76
	5 500	12.85	0.41	13.26	24.00	10.74
	5 600	11.76	0.41	12.17	24.00	11.83
	5 720	11.24	0.41	11.65	24.00	12.35
802.11n_HT40	5 270	15.54	0.20	15.74	24.00	8.26
	5 310	15.50	0.20	15.70	24.00	8.30
	5 510	15.37	0.20	15.57	24.00	8.43
	5 590	14.53	0.20	14.73	24.00	9.27
	5 710	14.07	0.20	14.27	24.00	9.73
802.11ac_VHT40	5 270	15.51	0.12	15.63	24.00	8.37
	5 310	15.60	0.12	15.72	24.00	8.28
	5 510	15.27	0.12	15.39	24.00	8.61
	5 590	14.46	0.12	14.58	24.00	9.42
	5 710	14.13	0.12	14.25	24.00	9.75
802.11ac_VHT80	5 290	15.78	0.24	16.02	24.00	7.98
	5 530	15.96	0.24	16.20	24.00	7.80
	5 690	15.00	0.24	15.24	24.00	8.76
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	13.69	0.22	13.91	24.00	10.09
	5 300	13.57	0.22	13.79	24.00	10.21
	5 320	13.93	0.22	14.15	24.00	9.85
	5 500	13.64	0.22	13.86	24.00	10.14
	5 600	12.95	0.22	13.17	24.00	10.83
	5 720	12.37	0.22	12.59	24.00	11.41
802.11n_HT20	5 260	13.13	0.21	13.34	24.00	10.66
	5 300	13.29	0.21	13.50	24.00	10.50
	5 320	13.36	0.21	13.57	24.00	10.43
	5 500	13.28	0.21	13.49	24.00	10.51
	5 600	12.77	0.21	12.98	24.00	11.02
	5 720	12.16	0.21	12.37	24.00	11.63
802.11ac_VHT20	5 260	13.69	0.41	14.10	24.00	9.90
	5 300	13.52	0.41	13.93	24.00	10.07
	5 320	13.59	0.41	14.00	24.00	10.00
	5 500	13.42	0.41	13.83	24.00	10.17
	5 600	12.73	0.41	13.14	24.00	10.86
	5 720	12.37	0.41	12.78	24.00	11.22
802.11n_HT40	5 270	15.26	0.20	15.46	24.00	8.54
	5 310	16.00	0.20	16.20	24.00	7.80
	5 510	15.69	0.20	15.89	24.00	8.11
	5 590	14.89	0.20	15.09	24.00	8.91
	5 710	14.37	0.20	14.57	24.00	9.43
802.11ac_VHT40	5 270	16.08	0.12	16.20	24.00	7.80
	5 310	16.30	0.12	16.42	24.00	7.58
	5 510	16.01	0.12	16.13	24.00	7.87
	5 590	15.23	0.12	15.35	24.00	8.65
	5 710	14.67	0.12	14.79	24.00	9.21
802.11ac_VHT80	5 290	15.57	0.24	15.81	24.00	8.19
	5 530	15.01	0.24	15.25	24.00	8.75
	5 690	14.16	0.24	14.40	24.00	9.60
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT3

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	13.01	0.22	13.23	24.00	10.77
	5 300	12.72	0.22	12.94	24.00	11.06
	5 320	12.93	0.22	13.15	24.00	10.85
	5 500	13.39	0.22	13.61	24.00	10.39
	5 600	12.81	0.22	13.03	24.00	10.97
	5 720	12.79	0.22	13.01	24.00	10.99
802.11n_HT20	5 260	12.65	0.21	12.86	24.00	11.14
	5 300	12.70	0.21	12.91	24.00	11.09
	5 320	12.82	0.21	13.03	24.00	10.97
	5 500	13.80	0.21	14.01	24.00	9.99
	5 600	13.17	0.21	13.38	24.00	10.62
	5 720	12.69	0.21	12.90	24.00	11.10
802.11ac_VHT20	5 260	12.81	0.41	13.22	24.00	10.78
	5 300	12.72	0.41	13.13	24.00	10.87
	5 320	12.78	0.41	13.19	24.00	10.81
	5 500	12.93	0.41	13.34	24.00	10.66
	5 600	12.43	0.41	12.84	24.00	11.16
	5 720	12.59	0.41	13.00	24.00	11.00
802.11n_HT40	5 270	15.30	0.20	15.50	24.00	8.50
	5 310	15.30	0.20	15.50	24.00	8.50
	5 510	15.11	0.20	15.31	24.00	8.69
	5 590	14.69	0.20	14.89	24.00	9.11
	5 710	14.92	0.20	15.12	24.00	8.88
802.11ac_VHT40	5 270	15.65	0.12	15.77	24.00	8.23
	5 310	15.71	0.12	15.83	24.00	8.17
	5 510	15.38	0.12	15.50	24.00	8.50
	5 590	15.02	0.12	15.14	24.00	8.86
	5 710	15.20	0.12	15.32	24.00	8.68
802.11ac_VHT80	5 290	15.52	0.24	15.76	24.00	8.24
	5 530	15.29	0.24	15.53	24.00	8.47
	5 690	14.96	0.24	15.20	24.00	8.80
Measurement uncertainty		± 1.5 dB				

CDD Mode_ANT4

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	13.15	0.22	13.37	24.00	10.63
	5 300	13.18	0.22	13.40	24.00	10.60
	5 320	13.42	0.22	13.64	24.00	10.36
	5 500	13.70	0.22	13.92	24.00	10.08
	5 600	12.99	0.22	13.21	24.00	10.79
	5 720	12.93	0.22	13.15	24.00	10.85
802.11n_HT20	5 260	13.29	0.21	13.50	24.00	10.50
	5 300	12.79	0.21	13.00	24.00	11.00
	5 320	13.19	0.21	13.40	24.00	10.60
	5 500	12.94	0.21	13.15	24.00	10.85
	5 600	12.45	0.21	12.66	24.00	11.34
	5 720	12.56	0.21	12.77	24.00	11.23
802.11ac_VHT20	5 260	12.58	0.41	12.99	24.00	11.01
	5 300	12.69	0.41	13.10	24.00	10.90
	5 320	12.97	0.41	13.38	24.00	10.62
	5 500	12.78	0.41	13.19	24.00	10.81
	5 600	12.28	0.41	12.69	24.00	11.31
	5 720	12.29	0.41	12.70	24.00	11.30
802.11n_HT40	5 270	15.19	0.20	15.39	24.00	8.61
	5 310	15.32	0.20	15.52	24.00	8.48
	5 510	14.97	0.20	15.17	24.00	8.83
	5 590	14.45	0.20	14.65	24.00	9.35
	5 710	14.65	0.20	14.85	24.00	9.15
802.11ac_VHT40	5 270	15.44	0.12	15.56	24.00	8.44
	5 310	15.64	0.12	15.76	24.00	8.24
	5 510	15.46	0.12	15.58	24.00	8.42
	5 590	15.03	0.12	15.15	24.00	8.85
	5 710	14.92	0.12	15.04	24.00	8.96
802.11ac_VHT80	5 290	15.51	0.24	15.75	24.00	8.25
	5 530	15.60	0.24	15.84	24.00	8.16
	5 690	15.11	0.24	15.35	24.00	8.65
Measurement uncertainty		± 1.5 dB				

CDD Mode_Multiple ANT

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11a	5 260	19.32	0.22	19.54	21.98	2.44
	5 300	19.16	0.22	19.38	21.98	2.60
	5 320	19.38	0.22	19.60	21.98	2.38
	5 500	19.39	0.22	19.61	21.98	2.37
	5 600	18.67	0.22	18.89	21.98	3.09
	5 720	18.36	0.22	18.58	21.98	3.40
802.11n_HT20	5 260	18.90	0.21	19.11	21.98	2.87
	5 300	18.83	0.21	19.04	21.98	2.94
	5 320	19.06	0.21	19.27	21.98	2.71
	5 500	19.28	0.21	19.49	21.98	2.49
	5 600	18.61	0.21	18.82	21.98	3.16
	5 720	18.20	0.21	18.41	21.98	3.57
802.11ac_VHT20	5 260	18.97	0.41	19.38	21.98	2.60
	5 300	18.98	0.41	19.39	21.98	2.59
	5 320	19.08	0.41	19.49	21.98	2.49
	5 500	19.02	0.41	19.43	21.98	2.55
	5 600	18.33	0.41	18.74	21.98	3.24
	5 720	18.17	0.41	18.58	21.98	3.40
802.11n_HT40	5 270	21.35	0.20	21.55	21.98	0.43
	5 310	21.56	0.20	21.76	21.98	0.22
	5 510	21.31	0.20	21.51	21.98	0.47
	5 590	20.66	0.20	20.86	21.98	1.12
	5 710	20.53	0.20	20.73	21.98	1.25
802.11ac_VHT40	5 270	21.70	0.12	21.82	21.98	0.16
	5 310	21.84	0.12	21.96	21.98	0.02
	5 510	21.56	0.12	21.68	21.98	0.30
	5 590	20.96	0.12	21.08	21.98	0.90
	5 710	20.77	0.12	20.89	21.98	1.09
802.11ac_VHT80	5 290	21.62	0.24	21.86	21.98	0.12
	5 530	21.50	0.24	21.74	21.98	0.24
	5 690	20.84	0.24	21.08	21.98	0.90
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT1

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	12.01	0.21	12.22	24.00	11.78
	5 300	11.97	0.21	12.18	24.00	11.82
	5 320	12.32	0.21	12.53	24.00	11.47
	5 500	12.22	0.21	12.43	24.00	11.57
	5 600	11.40	0.21	11.61	24.00	12.39
	5 720	10.55	0.21	10.76	24.00	13.24
802.11ac_VHT20	5 260	12.70	0.41	13.11	24.00	10.89
	5 300	12.86	0.41	13.27	24.00	10.73
	5 320	12.79	0.41	13.20	24.00	10.80
	5 500	12.49	0.41	12.90	24.00	11.10
	5 600	11.68	0.41	12.09	24.00	11.91
	5 720	11.29	0.41	11.70	24.00	12.30
802.11n_HT40	5 270	14.56	0.20	14.76	24.00	9.24
	5 310	14.76	0.20	14.96	24.00	9.04
	5 510	14.61	0.20	14.81	24.00	9.19
	5 590	13.71	0.20	13.91	24.00	10.09
	5 710	13.44	0.20	13.64	24.00	10.36
802.11ac_VHT40	5 270	15.23	0.12	15.35	24.00	8.65
	5 310	15.60	0.12	15.72	24.00	8.28
	5 510	15.26	0.12	15.38	24.00	8.62
	5 590	14.43	0.12	14.55	24.00	9.45
	5 710	13.96	0.12	14.08	24.00	9.92
802.11ac_VHT80	5 290	15.83	0.24	16.07	24.00	7.93
	5 530	15.51	0.24	15.75	24.00	8.25
	5 690	14.60	0.24	14.84	24.00	9.16
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT2

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	12.85	0.21	13.06	24.00	10.94
	5 300	13.11	0.21	13.32	24.00	10.68
	5 320	13.06	0.21	13.27	24.00	10.73
	5 500	13.39	0.21	13.60	24.00	10.40
	5 600	12.77	0.21	12.98	24.00	11.02
	5 720	12.23	0.21	12.44	24.00	11.56
802.11ac_VHT20	5 260	13.52	0.41	13.93	24.00	10.07
	5 300	13.45	0.41	13.86	24.00	10.14
	5 320	13.58	0.41	13.99	24.00	10.01
	5 500	13.26	0.41	13.67	24.00	10.33
	5 600	12.72	0.41	13.13	24.00	10.87
	5 720	12.22	0.41	12.63	24.00	11.37
802.11n_HT40	5 270	14.88	0.20	15.08	24.00	8.92
	5 310	15.19	0.20	15.39	24.00	8.61
	5 510	14.97	0.20	15.17	24.00	8.83
	5 590	14.25	0.20	14.45	24.00	9.55
	5 710	13.69	0.20	13.89	24.00	10.11
802.11ac_VHT40	5 270	15.54	0.12	15.66	24.00	8.34
	5 310	15.80	0.12	15.92	24.00	8.08
	5 510	15.51	0.12	15.63	24.00	8.37
	5 590	14.96	0.12	15.08	24.00	8.92
	5 710	14.10	0.12	14.22	24.00	9.78
802.11ac_VHT80	5 290	15.68	0.24	15.92	24.00	8.08
	5 530	15.23	0.24	15.47	24.00	8.53
	5 690	14.12	0.24	14.36	24.00	9.64
Measurement uncertainty		± 1.5 dB				

SDM Mode_ANT3

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	12.26	0.21	12.47	24.00	11.53
	5 300	12.52	0.21	12.73	24.00	11.27
	5 320	12.58	0.21	12.79	24.00	11.21
	5 500	13.04	0.21	13.25	24.00	10.75
	5 600	12.46	0.21	12.67	24.00	11.33
	5 720	12.29	0.21	12.50	24.00	11.50
802.11ac_VHT20	5 260	13.12	0.41	13.53	24.00	10.47
	5 300	12.78	0.41	13.19	24.00	10.81
	5 320	12.86	0.41	13.27	24.00	10.73
	5 500	12.99	0.41	13.40	24.00	10.60
	5 600	12.53	0.41	12.94	24.00	11.06
	5 720	12.58	0.41	12.99	24.00	11.01
802.11n_HT40	5 270	14.81	0.20	15.01	24.00	8.99
	5 310	14.96	0.20	15.16	24.00	8.84
	5 510	14.45	0.20	14.65	24.00	9.35
	5 590	14.07	0.20	14.27	24.00	9.73
	5 710	14.24	0.20	14.44	24.00	9.56
802.11ac_VHT40	5 270	15.41	0.12	15.53	24.00	8.47
	5 310	15.49	0.12	15.61	24.00	8.39
	5 510	15.19	0.12	15.31	24.00	8.69
	5 590	14.87	0.12	14.99	24.00	9.01
	5 710	14.95	0.12	15.07	24.00	8.93
802.11ac_VHT80	5 290	15.19	0.24	15.43	24.00	8.57
	5 530	14.86	0.24	15.10	24.00	8.90
	5 690	14.48	0.24	14.72	24.00	9.28
Measurement uncertainty		± 1.5 dB				


SDM Mode_ANT4

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	12.43	0.21	12.64	24.00	11.36
	5 300	12.54	0.21	12.75	24.00	11.25
	5 320	12.52	0.21	12.73	24.00	11.27
	5 500	13.47	0.21	13.68	24.00	10.32
	5 600	12.39	0.21	12.60	24.00	11.40
	5 720	12.35	0.21	12.56	24.00	11.44
802.11ac_VHT20	5 260	12.64	0.41	13.05	24.00	10.95
	5 300	12.84	0.41	13.25	24.00	10.75
	5 320	13.04	0.41	13.45	24.00	10.55
	5 500	12.70	0.41	13.11	24.00	10.89
	5 600	12.15	0.41	12.56	24.00	11.44
	5 720	12.34	0.41	12.75	24.00	11.25
802.11n_HT40	5 270	14.44	0.20	14.64	24.00	9.36
	5 310	14.59	0.20	14.79	24.00	9.21
	5 510	14.22	0.20	14.42	24.00	9.58
	5 590	13.89	0.20	14.09	24.00	9.91
	5 710	13.83	0.20	14.03	24.00	9.97
802.11ac_VHT40	5 270	15.39	0.12	15.51	24.00	8.49
	5 310	15.46	0.12	15.58	24.00	8.42
	5 510	15.09	0.12	15.21	24.00	8.79
	5 590	14.79	0.12	14.91	24.00	9.09
	5 710	14.75	0.12	14.87	24.00	9.13
802.11ac_VHT80	5 290	15.00	0.24	15.24	24.00	8.76
	5 530	14.98	0.24	15.22	24.00	8.78
	5 690	14.61	0.24	14.85	24.00	9.15
Measurement uncertainty		± 1.5 dB				


SDM Mode_Multiple ANT

Test Mode	Frequency (MHz)	Measured Output Power (dBm)	Duty cycle Factor (dB)	Result Output Power (dBm)	Limit (dBm)	Margin (dB)
802.11n_HT20	5 260	18.42	0.21	18.63	21.98	3.35
	5 300	18.57	0.21	18.78	21.98	3.20
	5 320	18.65	0.21	18.86	21.98	3.12
	5 500	19.08	0.21	19.29	21.98	2.69
	5 600	18.30	0.21	18.51	21.98	3.47
	5 720	17.94	0.21	18.15	21.98	3.83
802.11ac_VHT20	5 260	19.03	0.41	19.44	21.98	2.54
	5 300	19.01	0.41	19.42	21.98	2.56
	5 320	19.10	0.41	19.51	21.98	2.47
	5 500	18.89	0.41	19.30	21.98	2.68
	5 600	18.31	0.41	18.72	21.98	3.26
	5 720	18.15	0.41	18.56	21.98	3.42
802.11n_HT40	5 270	20.70	0.20	20.90	21.98	1.08
	5 310	20.90	0.20	21.10	21.98	0.88
	5 510	20.59	0.20	20.79	21.98	1.19
	5 590	20.01	0.20	20.21	21.98	1.77
	5 710	19.83	0.20	20.03	21.98	1.95
802.11ac_VHT40	5 270	21.41	0.12	21.53	21.98	0.45
	5 310	21.61	0.12	21.73	21.98	0.25
	5 510	21.29	0.12	21.41	21.98	0.57
	5 590	20.79	0.12	20.91	21.98	1.07
	5 710	20.48	0.12	20.60	21.98	1.38
802.11ac_VHT80	5 290	21.46	0.24	21.70	21.98	0.28
	5 530	21.17	0.24	21.41	21.98	0.57
	5 690	20.48	0.24	20.72	21.98	1.26
Measurement uncertainty		± 1.5 dB				

See next pages for actual measured spectrum plots.

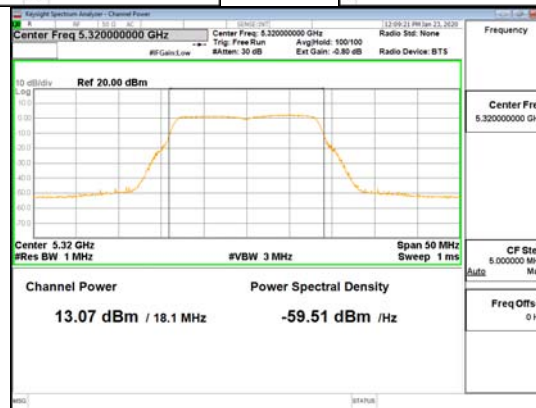




CDD Mode_ANT1_802.11a_UNII 2A

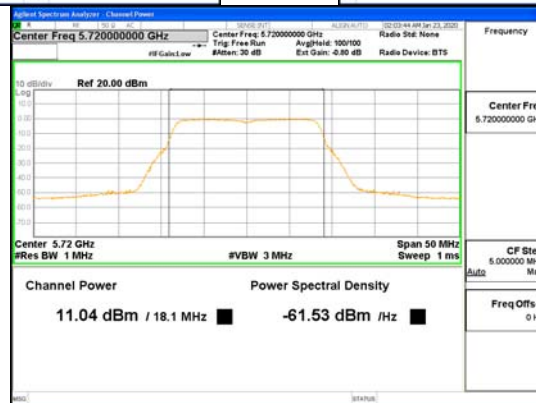




CDD Mode_ANT1_802.11a_UNII 2C





CDD Mode_ANT2_802.11a_UNII 2A

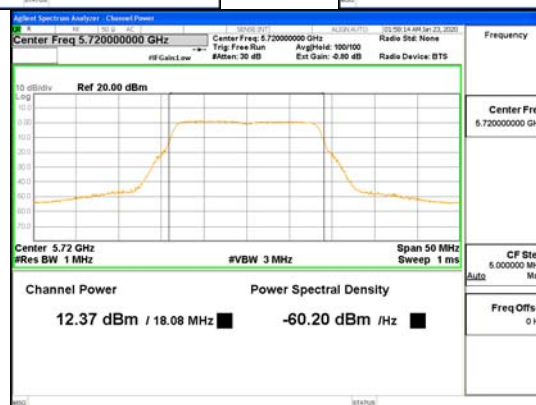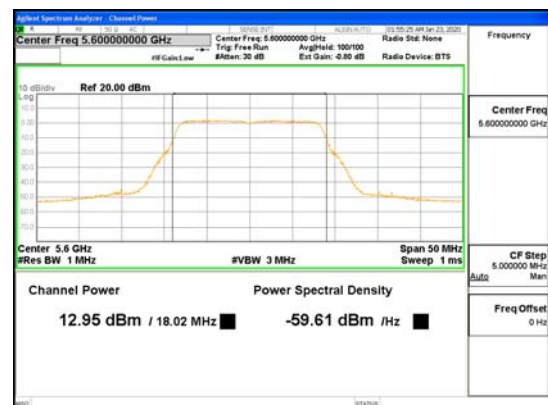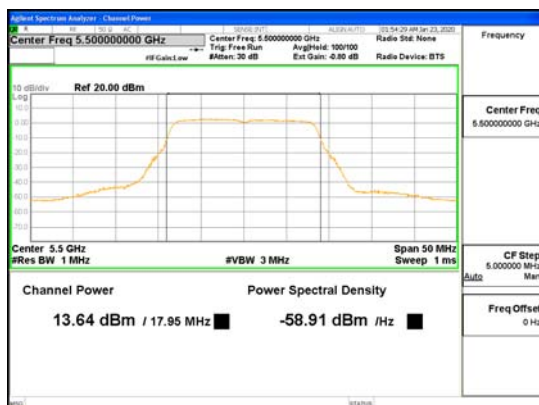




CDD Mode_ANT2_802.11a_UNII 2C

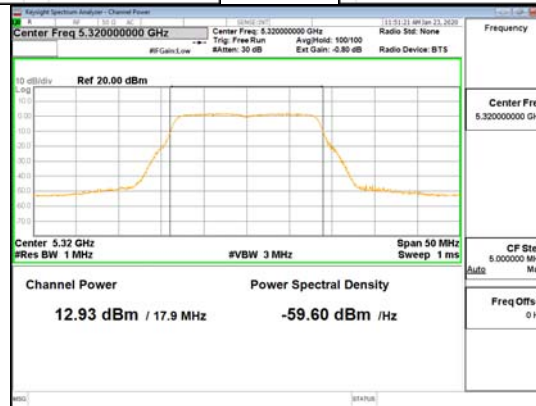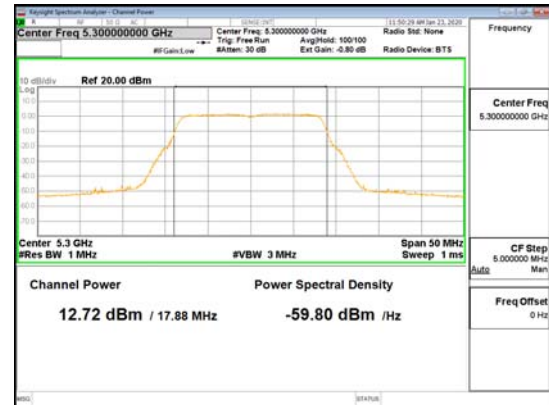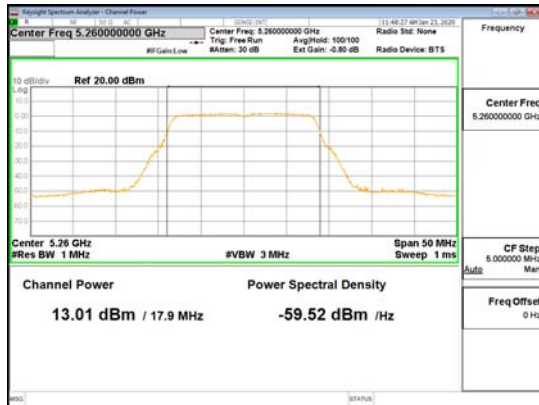




CDD Mode_ANT3_802.11a_UNII 2A

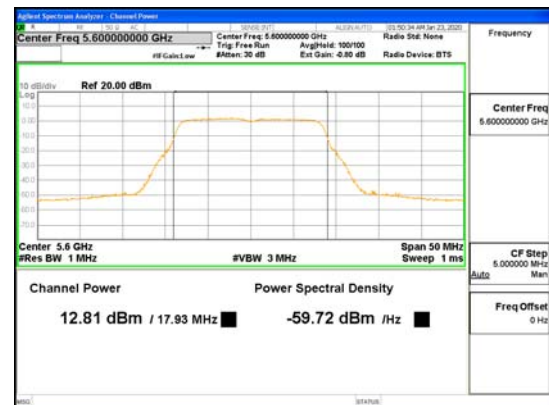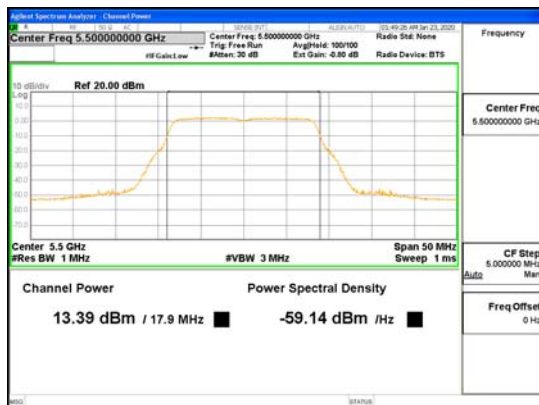


CDD Mode_ANT3_802.11a_UNII 2C

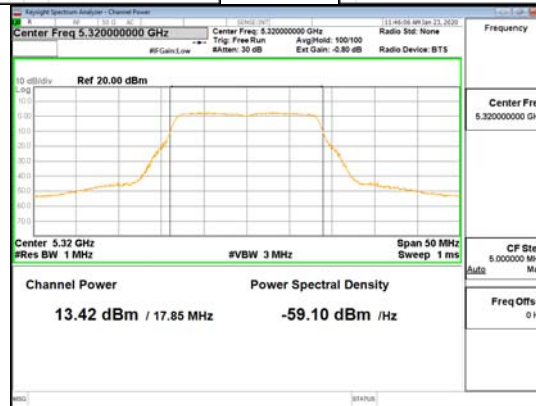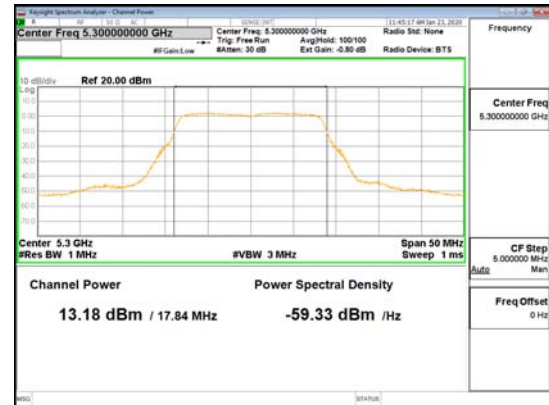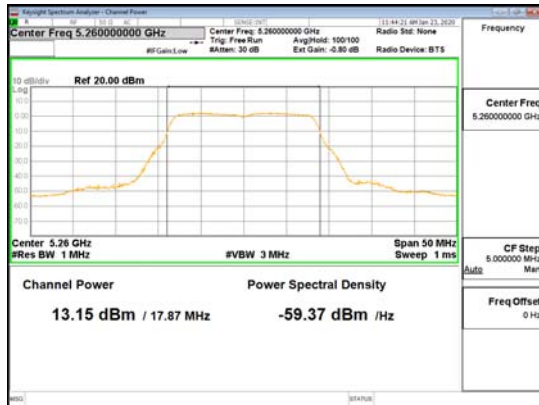



CDD Mode_ANT4_802.11a_UNII 2A

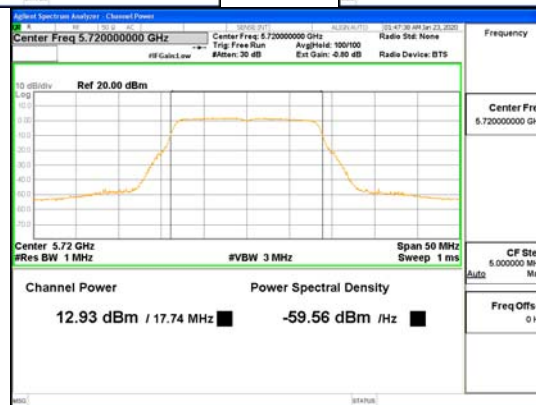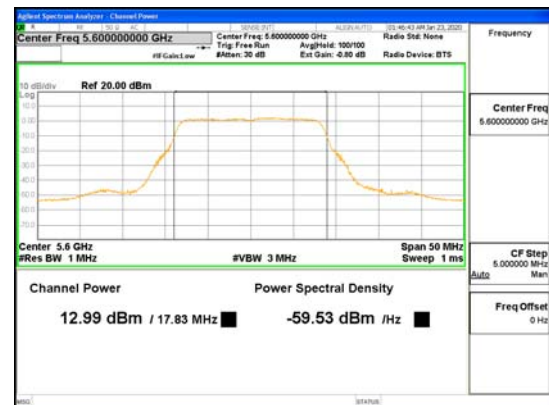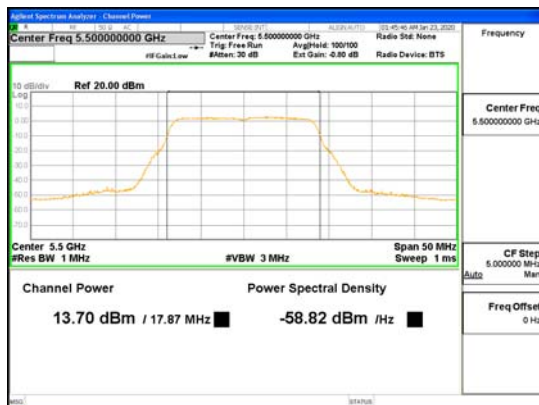


CDD Mode_ANT4_802.11a_UNII 2C

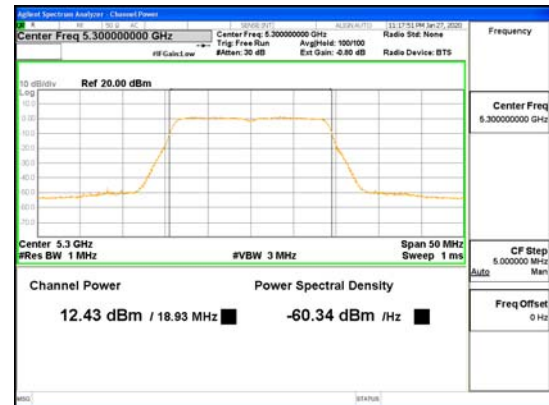



CDD Mode_ANT1_802.11n_HT20_UNII 2A

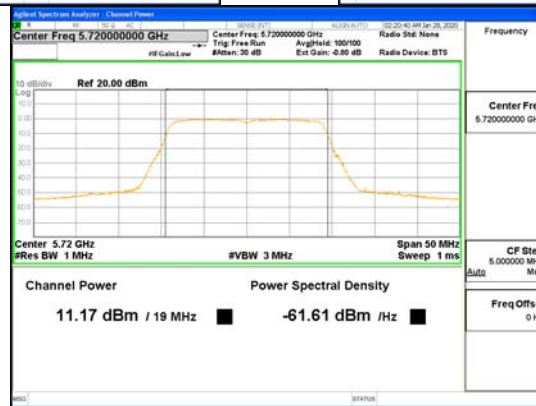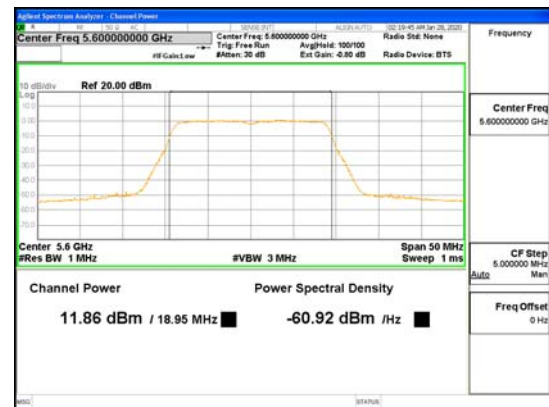



CDD Mode_ANT1_802.11n_HT20_UNII 2C

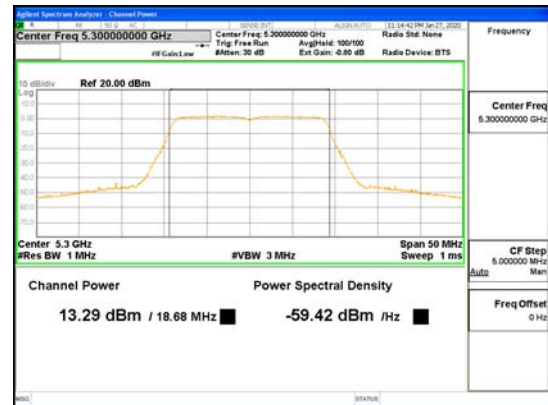



CDD Mode_ANT2_802.11n_HT20_UNII 2A

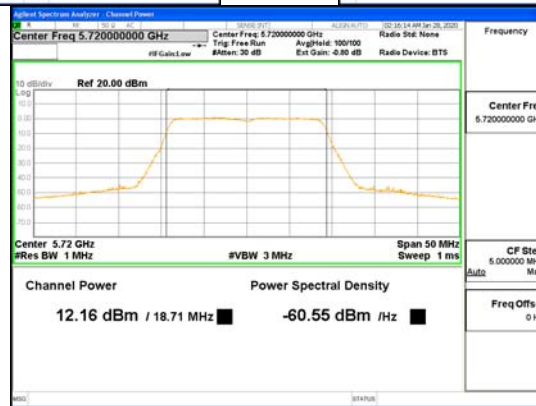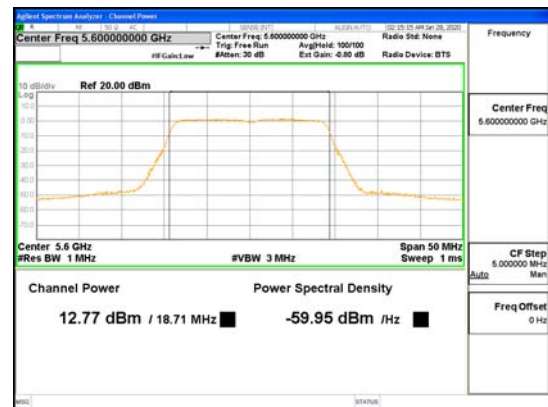



CDD Mode_ANT2_802.11n_HT20_UNII 2C

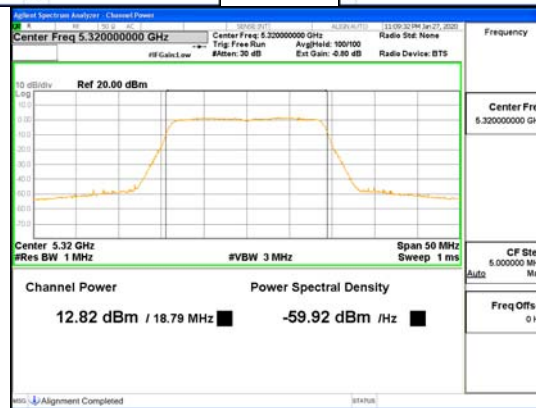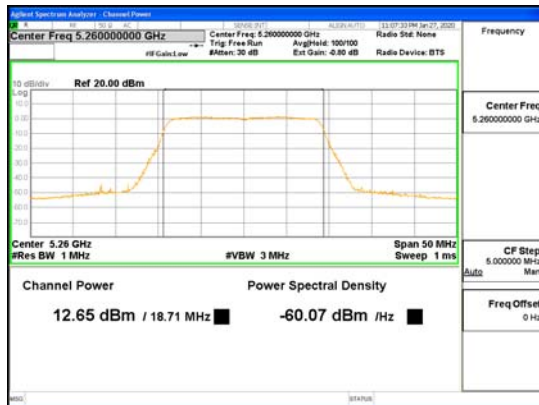


CDD Mode_ANT3_802.11n_HT20_UNII 2A

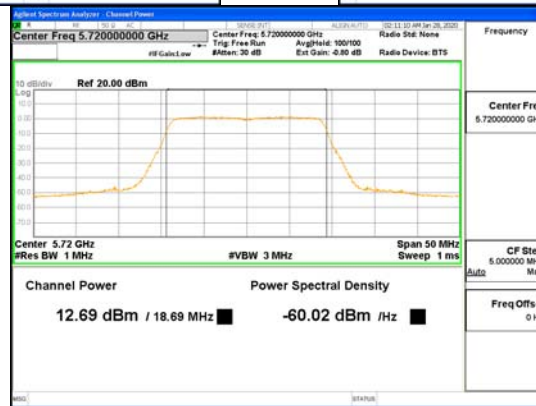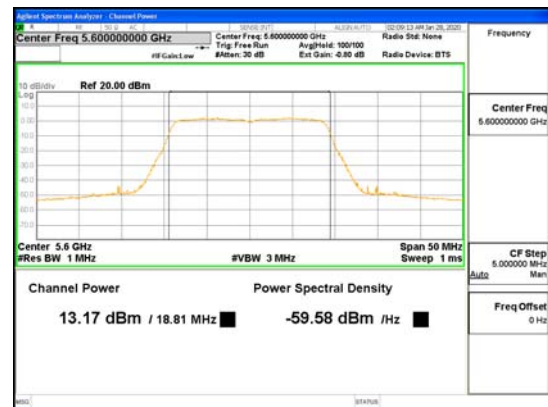




CDD Mode_ANT3_802.11n_HT20_UNII 2C

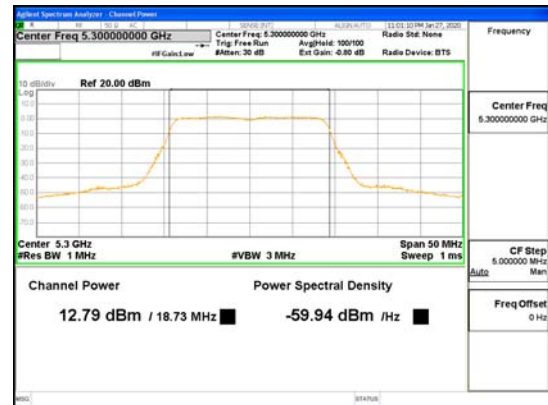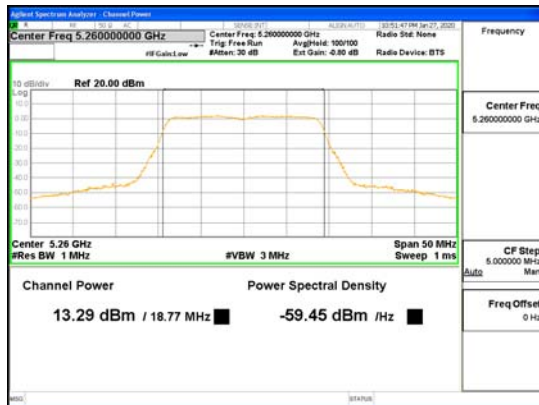



CDD Mode_ANT4_802.11n_HT20_UNII 2A

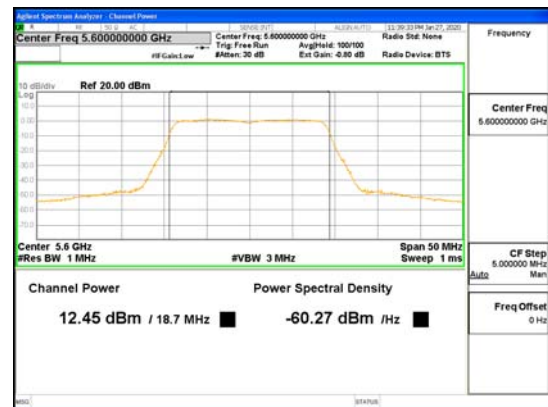



CDD Mode_ANT4_802.11n_HT20_UNII 2C

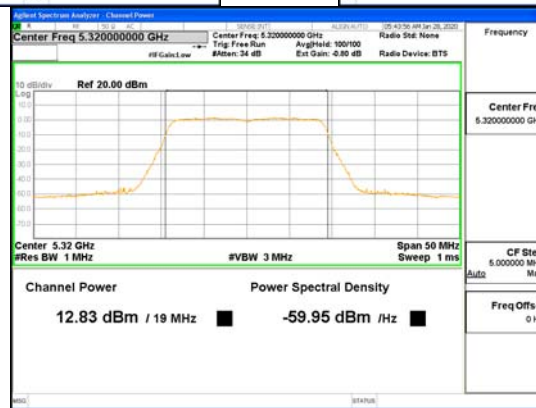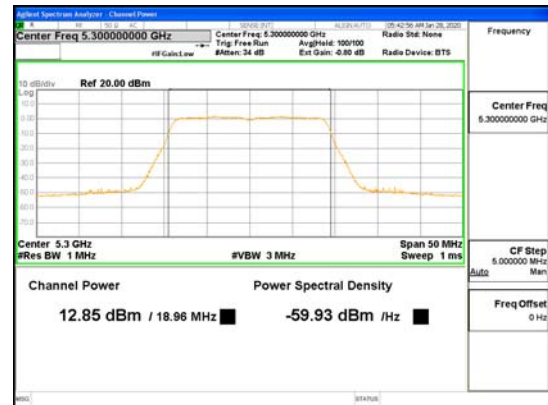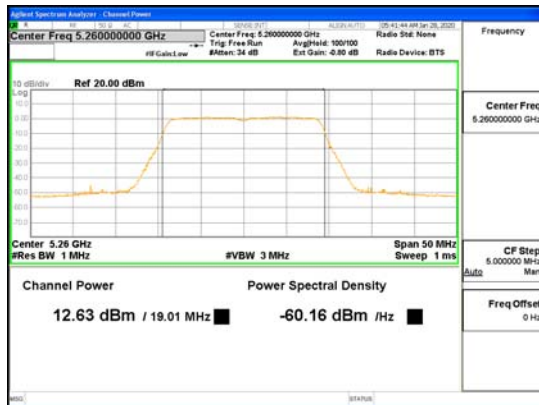




CDD Mode_ANT1_802.11ac_VHT20_UNII 2A

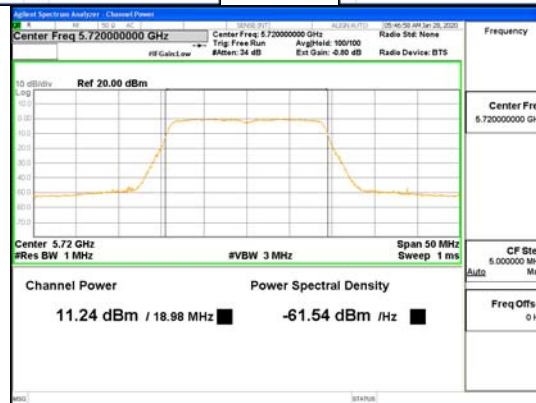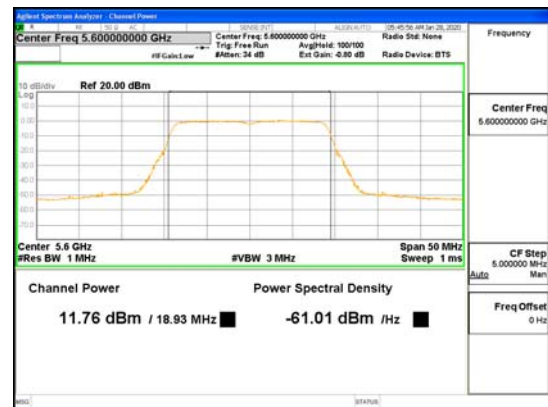




CDD Mode_ANT1_802.11ac_VHT20_UNII 2C

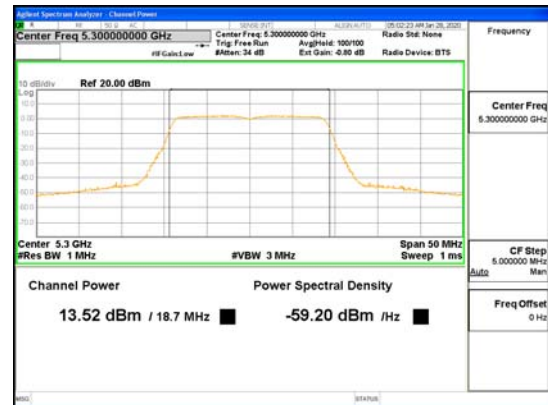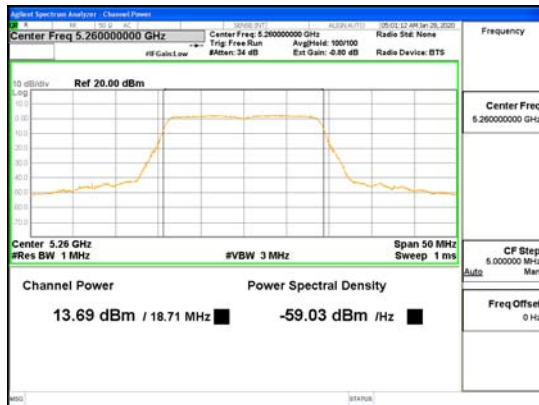



CDD Mode_ANT2_802.11ac_VHT20_UNII 2A

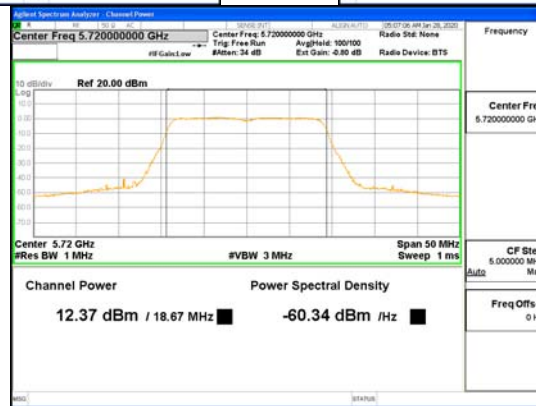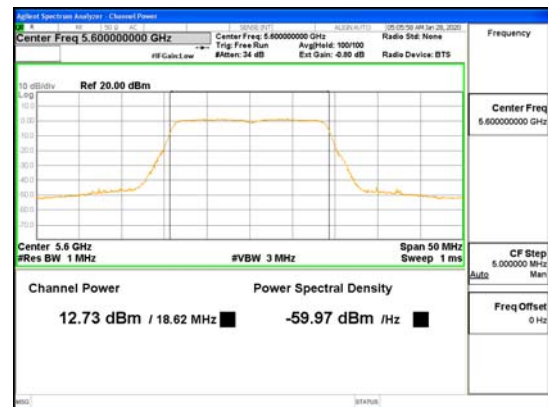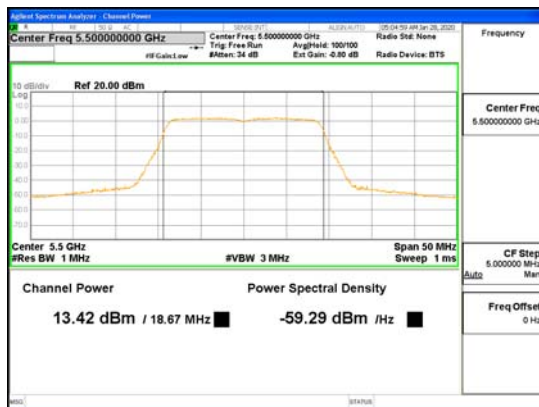


CDD Mode_ANT2_802.11ac_VHT20_UNII 2C

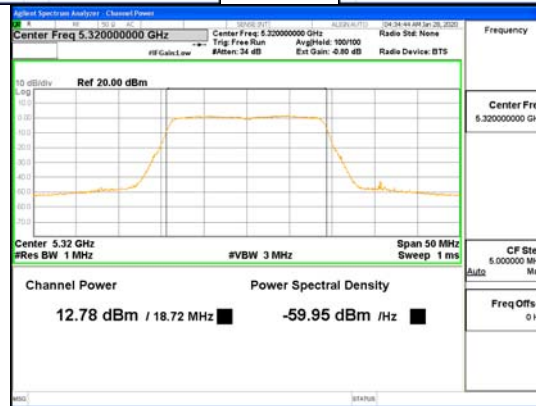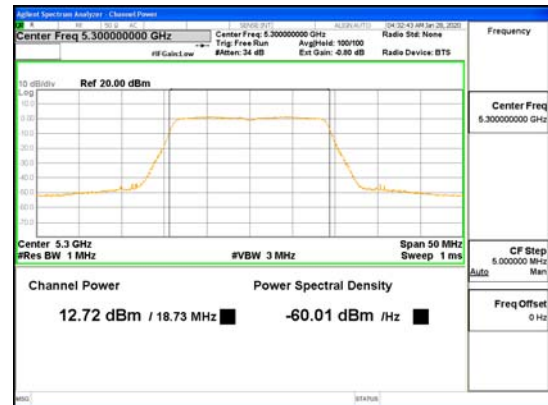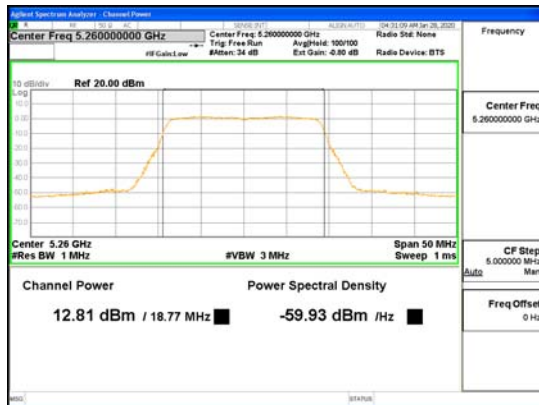



CDD Mode_ANT3_802.11ac_VHT20_UNII 2A

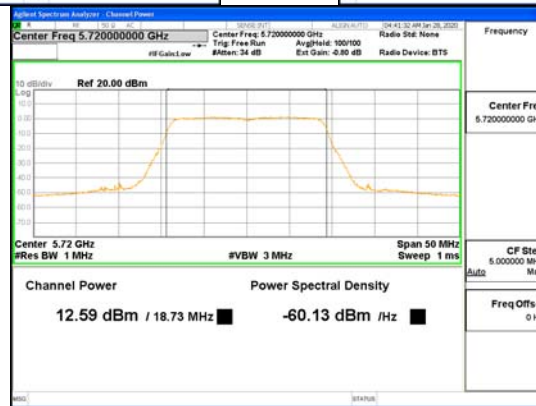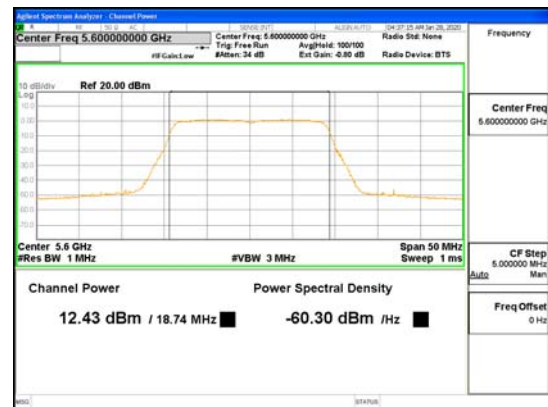


CDD Mode_ANT3_802.11ac_VHT20_UNII 2C

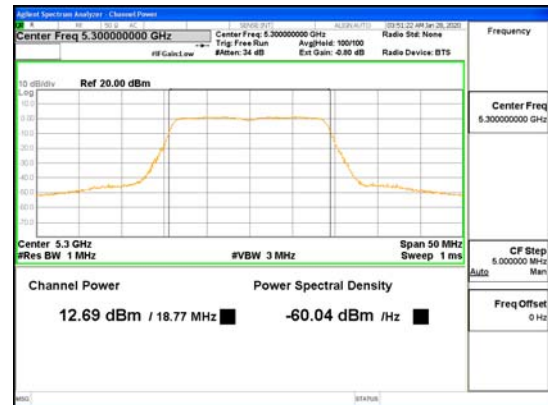


CDD Mode_ANT4_802.11ac_VHT20_UNII 2A

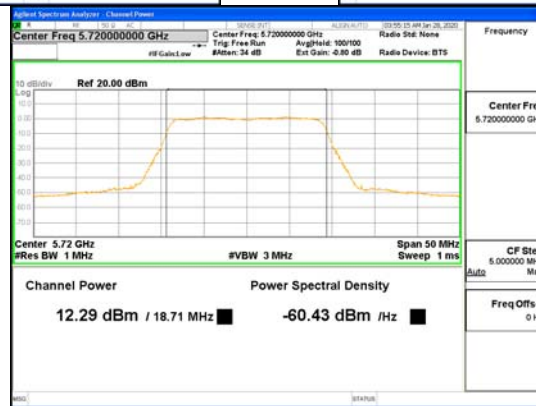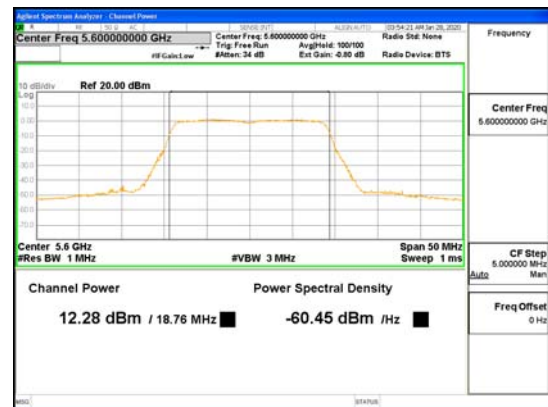

CDD Mode_ANT4_802.11ac_VHT20_UNII 2C

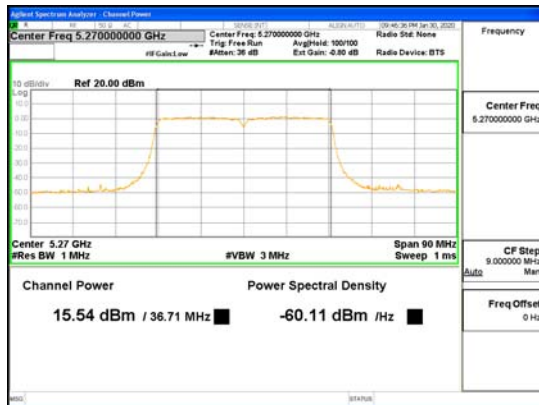

CDD Mode_ANT1_802.11n_HT40_UNII 2A

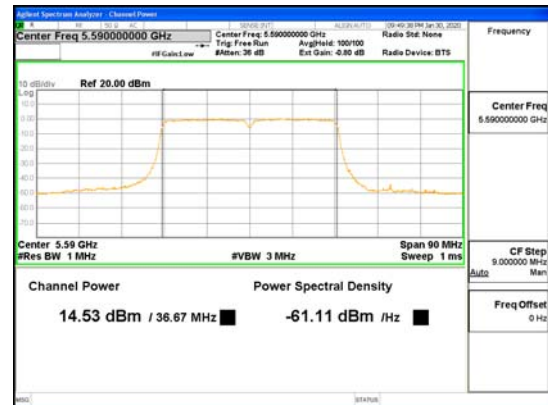

CDD Mode_ANT1_802.11n_HT40_UNII 2C

