

# Test Report

## Customer:

GiS - Gesellschaft für Informatik und  
Steuerungstechnik mbH

Höllochstrasse 1  
73252 Lenningen  
Tel.: +49 7026 606-22  
Fax: +49 7026 606-66

## RF test report

110133-AU01+W03



GiS mbH

134,2 kHz Read / Write System

TS-RW38AC



The test result refers exclusively  
to the model tested.

This report must not be copied without  
the written authorization by the lab.  
Revision: 1.0



DGA-PL-224/95-03 / BNetzA-CAB-02/21-02/2

# EMV **TESTHAUS** GmbH

Gustav-Hertz-Straße 35  
94315 Straubing  
Tel.: +49 9421 56868-0  
Fax: +49 9421 56868-100  
Email: [company@emv-testhaus.com](mailto:company@emv-testhaus.com)

## Accreditation:



Registration number: DGA-PL-224/95-03  
CAB (EMC) registration number: BNetzA-CAB-02/21-02/3  
FCC facility registration number: 221458  
MRA US-EU, FCC designation number: DE0010

## Test Laboratory:

EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany

The technical accuracy is guaranteed through the quality management of the  
EMV **TESTHAUS** GmbH



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# Table of contents

1	Test regulations .....	5
2	Equipment under Test (EUT) .....	6
3	AC power line conducted emissions .....	8
4	Radiated emission measurement (<1 GHz) .....	14
5	Equipment calibration status.....	21
6	Measurement uncertainty .....	22
7	Summary .....	23



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# List of pictures

Picture 1: Outline of conducted emission test setup .....	9
Picture 2: Conducted emission on mains, phase, read mode (Chart) .....	10
Picture 3: Conducted emission on mains, neutral, read mode (Chart) .....	11
Picture 4: Conducted emission on mains, phase, write mode (Chart) .....	12
Picture 5: Conducted emission on mains, neutral, write mode (Chart).....	13
Picture 6: Test setup for radiated emission measurement (< 30 MHz).....	16
Picture 7: Test setup for radiated emission measurement (< 1 GHz).....	16
Picture 8: Radiated emission 9 kHz – 30 MHz read mode (@ 3m distance) .....	18
Picture 9: Radiated emission 9 kHz – 30 MHz write mode (@ 3m distance).....	18
Picture 10: Radiated emission 30 MHz – 1000MHz read mode (Vertical/ Horizontal) .....	20
Picture 11: Radiated emission 30 MHz – 1000MHz write mode (Vertical/ Horizontal).....	20

# List of tables

Table 1: Equipment Calibration status .....	21
Table 2: Measurement uncertainty .....	22

# 1 Test regulations

CFR 47 Part 2: 10-2011	Code of Federal Regulations Part 2 (Frequency allocation and radio treaty matters; General rules and regulations) of the Federal Communication Commission (FCC)
CFR 47 Part 15: 10-2011	Code of Federal Regulations Part 15 (Radio Frequency Devices) of the Federal Communication Commission (FCC)
ANSI C63.4: September 2009	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## 1.1 Summary of test results

Standard	Test result
FCC CFR 47 Part 15	Passed



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

## 2 Equipment under Test (EUT)

Product type:	134,2kHz Read / Write System
Model Name:	TS-RW38AC
Manufacturer:	GiS mbH
Serial number:	1655-244V1.17 #0195
FCC ID:	WR5TSRW38AC
Application freq. band:	N/A
Frequency range:	134,2kHz
Operating frequency:	134,2kHz
Number of RF-channels:	1
Modulation:	AM (write operation) AM/PM (read operation)
Antenna type:	PCB antenna
	<input type="checkbox"/> detachable <input checked="" type="checkbox"/> not detachable
Power supply:	5V USB
Temperature range:	-10°C to +55°C



## 2.1 Photo documentation

For photos of the EUT, see annex B.

For photos taken during testing, see annex A.

## 2.2 Short description of the EUT

125kHz Read / Write system for RFID tags

## 2.3 Operation mode

The EUT was tested in the following operation modes:

- Continuous reading data from RF ID tag
- Continuous writing data on RF ID tag

## 2.4 Configuration

The following peripheral devices and interface cables were connected during the tests:

Device	Model:	S/N
134,2kHz Read / Write System	TS-RW38AC	1655-244V1.17 #0195
Notebook	Fujitsu Lifebook	N/A

## Used cables

Numbers:	Description: (type / lengths / remarks)	Serial No
1	Data & power cable / 2,0/ shielded	N/A
1	AC cable, unshielded, 1.5m	N/A



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# 3 AC power line conducted emissions

according to CFR 47 Part 15, section 15.207

## 3.1 Test location

Description	Manufacturer	Inventory No.
Shielded chamber	Siemens - Matsushita	E00107

## 3.2 Test instruments

	Description	Manufacturer	Inventory No.
<input type="checkbox"/>	ESCS 30	Rohde & Schwarz	E00003
<input checked="" type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input type="checkbox"/>	ESCI	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/>	ESH3 Z2	Rohde & Schwarz	E00028
<input checked="" type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	E00004
<input checked="" type="checkbox"/>	ESH 2-Z5	Rohde & Schwarz	E00005

## 3.3 Limits

Frequency [MHz]	Quasi-peak [dB $\mu$ V]	Avarage [dB $\mu$ V]
0.15 – 0.5	66 - 56	56 – 46
0.5 – 5.0	56	46
5 – 30	60	50

The test of conducted emission at AC line was performed with 120V AC / 60Hz.




### 3.4 Test procedure

1. The tests of conducted emission were carried out in a shielded room using a line impedance stabilization network (LISN) 50  $\mu$ H/50 Ohms and an EMI test receiver.
2. The EMI test receiver was connected to the LISN and set to a measurement bandwidth of 9 kHz in the frequency range from 0.15 MHz to 30 MHz.
3. The EUT was placed on a wooden table and connected to the LISN.
4. To accelerate the measurement the detector of the EMI test receiver was set to peak and the whole frequency range from 0.15 MHz to 30 MHz were scanned.
5. After that all peaks values with fewer margins than 10 dB to quasi-peak limit or exceeding the limit were marked and re-measured with quasi-peak detector.
6. If after that all values are under the average limit no addition measurement is necessary. In case there are still values between quasi-peak and average limit than these values were re-measured again with an average detector.
7. These measurements were done on all current carrying conductors.

According to ANSI C63.4, section 13.1.3.1 testing of intentional radiators with detachable antennas shall be done with a dummy load otherwise the tests should be done with connected antenna and if adjustable fully extended.

### 3.5 Test setup

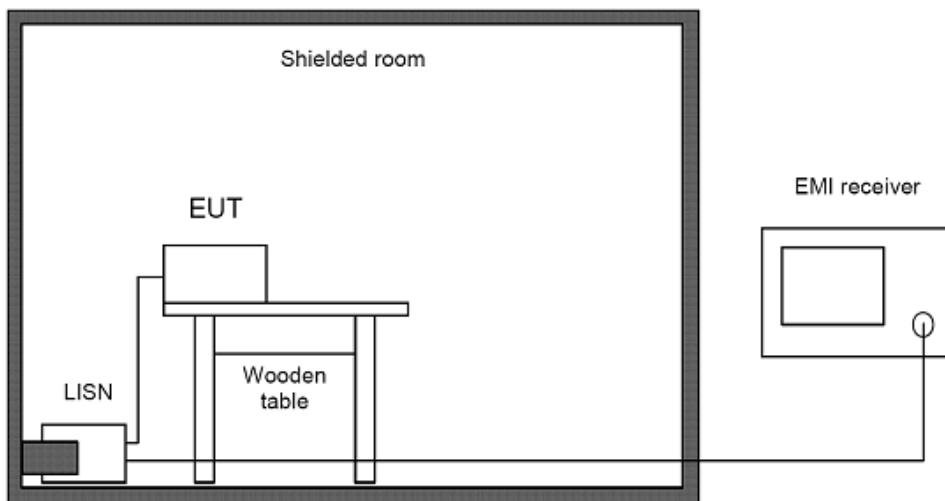


Picture 1: Outline of conducted emission test setup

Comments: All peripheral devices were additionally decoupled by means of a line stabilization network.

### 3.6 Test results

Temperature:	22°C	Humidity:	44%
Tested by:	Ch.Kiermeier	Test date:	2010-11-17

# Interference Voltage Test

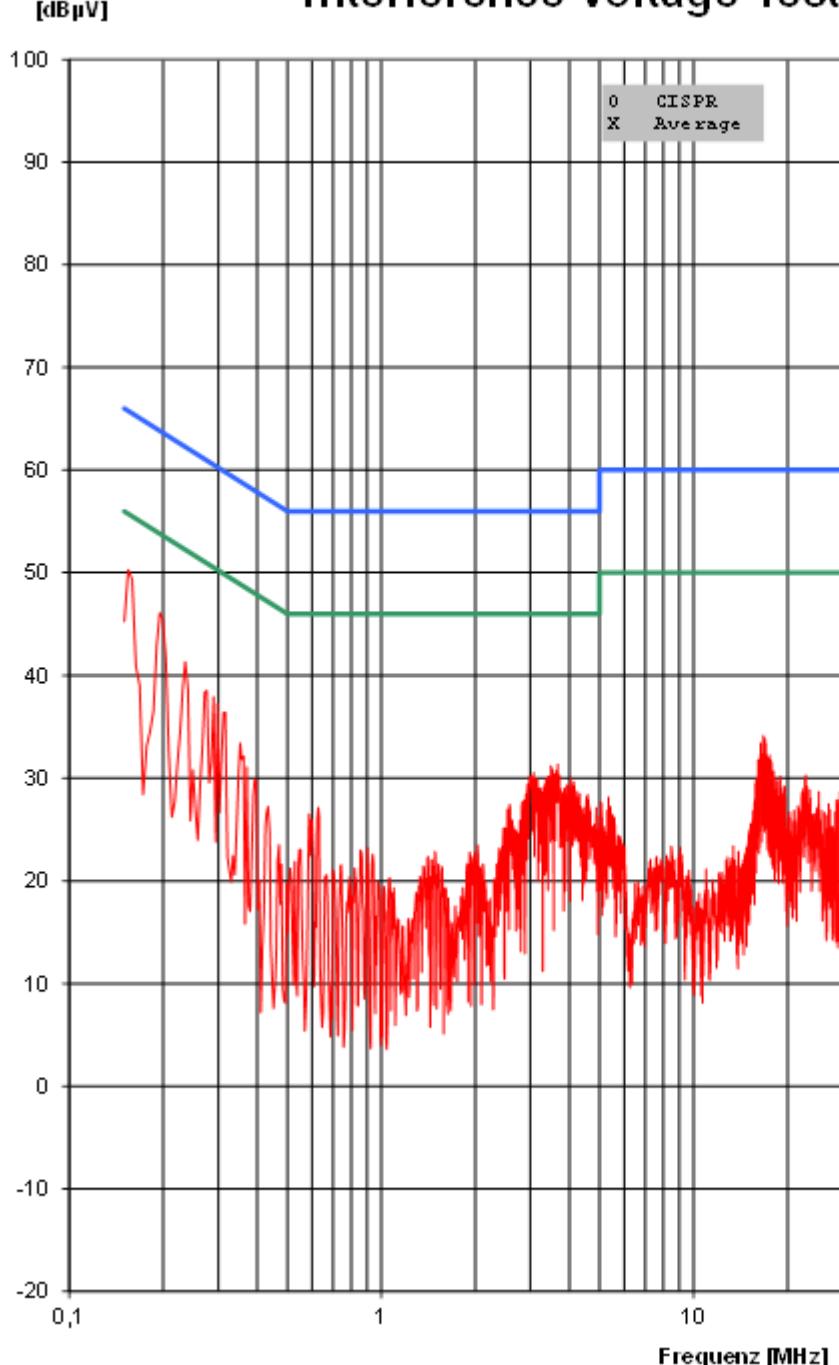

REGULATIONS:  
EN 55022 Class B  
PEAK / CISPR / AV

TEST EQUIPMENT:  
R&S ESCS30 (E00003)  
R&S ESH2-Z5 (E00004)

ORDER NO.:  
110133-AU01+W03

EUT:  
GiS - Gesellschaft für Informatik  
und Steuerungstechnik mbH  
134,2 kHz Animal Code  
Programmer  
TS-RW38 AC  
1655-244V1.17 #0195

OPERATION MODE:  
134,2kHz  
continuous read

Mains 120V AC /60Hz  
Phase

TEST FACILITY:  
EMV TEST HAUS GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing

DATE / TIME:  
2012-03-30 14:19:47  
20 °C 41%H 99 kPa

TEST ENGINEER:  
Christian Kiermeier

ss\_L1\_04\_120V\_E10

Picture 2: Conducted emission on mains, phase, read mode (Chart)


Note: There was no measurement in QPK because all PK values are below the average limit line



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# Interference Voltage Test

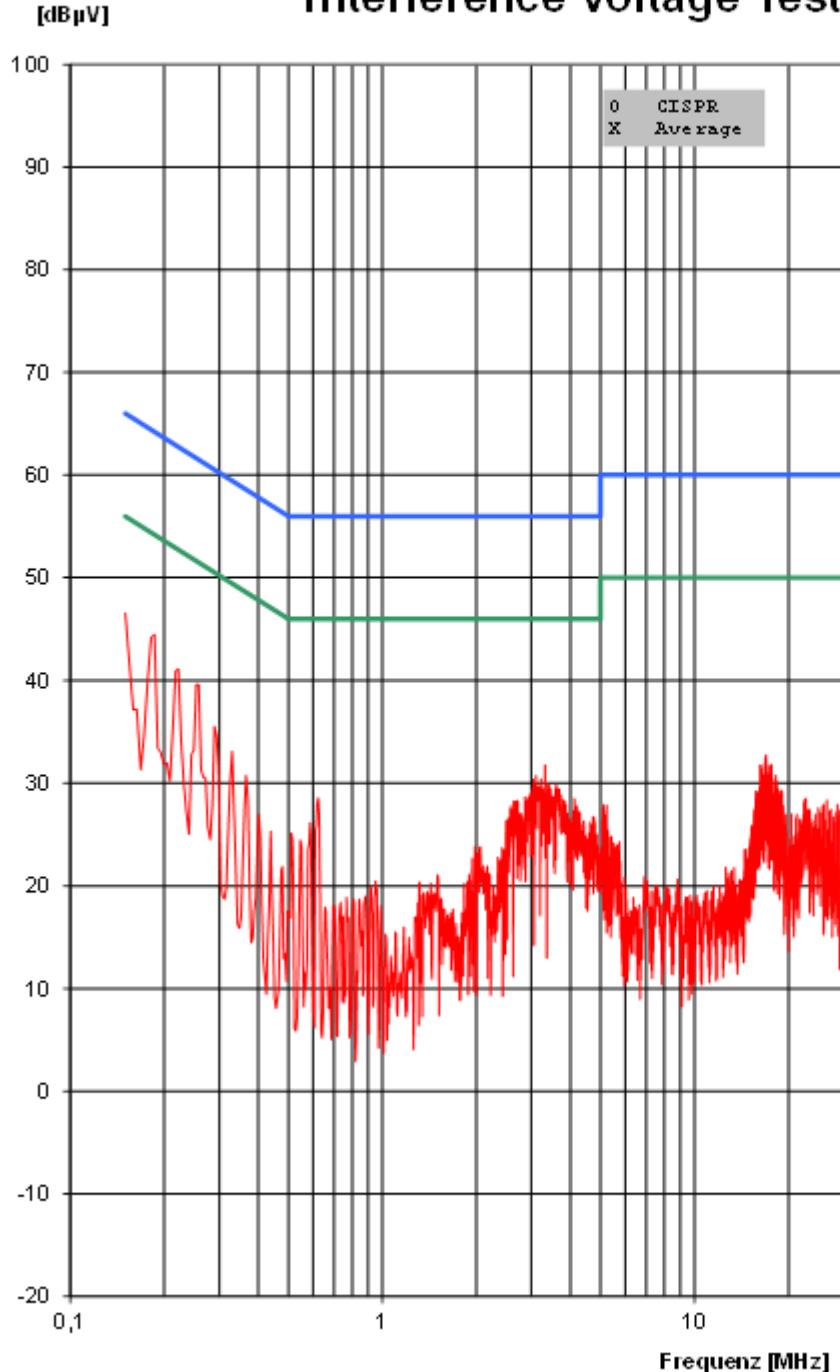

Picture 3: Conducted emission on mains, neutral, read mode (Chart)


Note: There was no measurement in QPK because all PK values are below the average limit line



EMV TESTHAUS GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# Interference Voltage Test

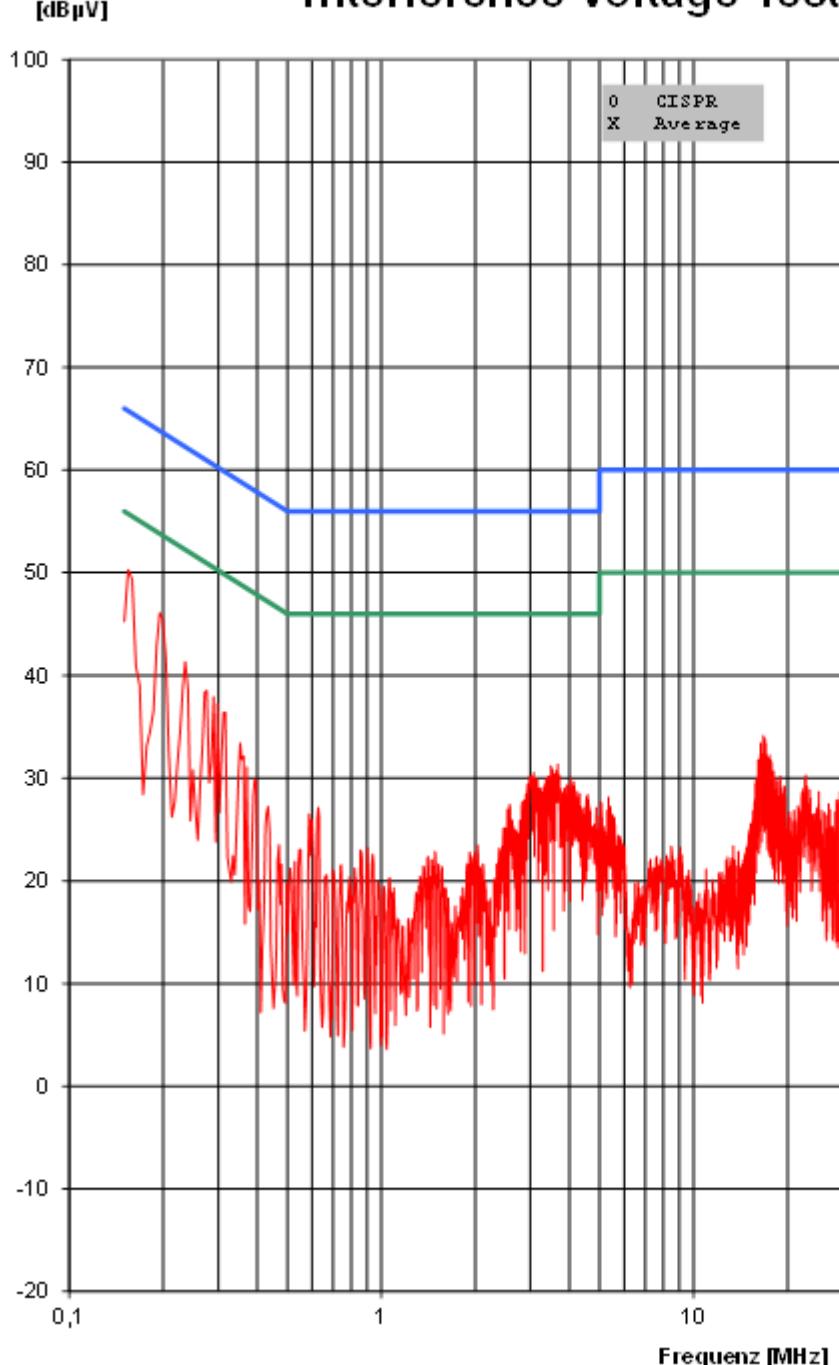

REGULATIONS:  
EN 55022 Class B  
PEAK / CISPR / AV

TEST EQUIPMENT:  
R&S ESCS30 (E00003)  
R&S ESH2-Z5 (E00004)

ORDER NO.:  
110133-AU01+W03

EUT:  
GiS - Gesellschaft für Informatik  
und Steuerungstechnik mbH  
134,2 kHz Animal Code  
Programmer  
TS-RW38 AC  
1655-244V1.17 #0195

OPERATION MODE:  
134,2kHz  
continuous write

Mains 120V AC / 60Hz  
Phase

TEST FACILITY:  
EMV TEST HAUS GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing

DATE / TIME:  
2012-03-30 14:19:26  
20 °C 41%H 99 kPa

TEST ENGINEER:  
Christian Kiermeier

ss\_L1\_03\_120V\_E10

Picture 4: Conducted emission on mains, phase, write mode (Chart)


Note: There was no measurement in QPK because all PK values are below the average limit line



EMV TEST HAUS GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# Interference Voltage Test

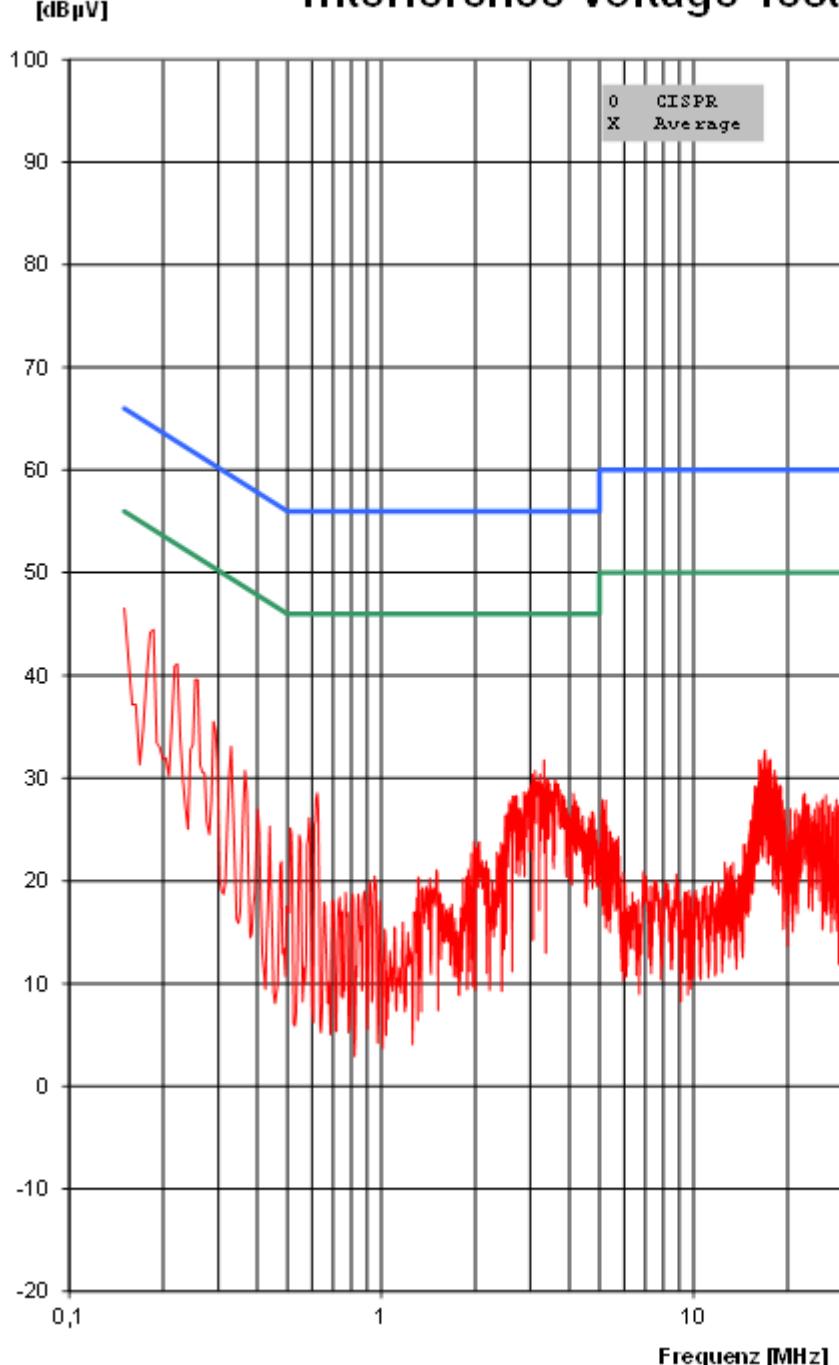

Picture 5: Conducted emission on mains, neutral, write mode (Chart)

Note: There was no measurement in QPK because all PK values are below the average limit line



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

# 4 Radiated emission measurement (<1 GHz)

according to CFR 47 Part 15, section 15.205(a), 15.209(a), 15.247(d)

## 4.1 Test Location

- Scan with peak detector in 3 m CDC.
- Final CISPR measurement with quasi peak detector on 3 m open area test site.

Description	Manufacturer	Inventory No.
CDC	Albatross Projects	E00026
Open site area	EMV <b>TESTHAUS</b> GmbH	E00354

## 4.2 Test instruments

	Description	Manufacturer	Inventory No.
<input checked="" type="checkbox"/>	ESCS 30 (FF)	Rohde & Schwarz	E00003
<input type="checkbox"/>	ESU 26	Rohde & Schwarz	W00002
<input checked="" type="checkbox"/>	ESCI (CDC)	Rohde & Schwarz	E00001
<input checked="" type="checkbox"/>	VULB 9163 (FF)	Schwarzbeck	E00013
<input checked="" type="checkbox"/>	VULB 9160 (CDC)	Schwarzbeck	E00011
<input type="checkbox"/>	HFH2-Z2	Rohde & Schwarz	E00060
<input checked="" type="checkbox"/>	Feedline OATS	Huber & Suhner	200024



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

## 4.3 Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.


Frequency [MHz]	Field strength $F_s$ [ $\mu$ V/m]	Field strength [dB $\mu$ V/m]	Measurement distance $d$ [m]
0.009 – 0.490	266.6 – 4.9	48.5 – 13.8	300
0.490 – 1.705	48.98 – 14.08	33.8 – 22.97	30
1.705 – 30.0	30	29.54	30
30 – 88	100	40	3
88 – 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

## 4.4 Test procedure


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The receiving antenna was placed 3 meters from the turntable. The test setup was placed inside a compact diagnostic chamber.
2. Power on the EUT and all peripherals.
3. The broadband antenna was set to vertical polarization.
4. The EMI receiver performed a scan from 30MHz to 1000MHz with the detector set to peak and the measurement bandwidth to 120 kHz.
5. The turn table was rotated to 6 different positions (360° / 6) and the antenna polarization was changed to horizontal.
6. Repeat the test procedure at step 4 and 5.
7. The test setup was then placed in an OATS at 3 m distance and all peak values over or with less distance to limit then 6dB were marked and re-measured with a quasi-peak detector.
8. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
9. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization. The highest value was recorded.
10. For emissions below 30MHz, measurement were done with a loop antenna. The recorded data were measured in QP mode of the receiver. Antenna height was not changed during this test.



## 4.5 Test setup

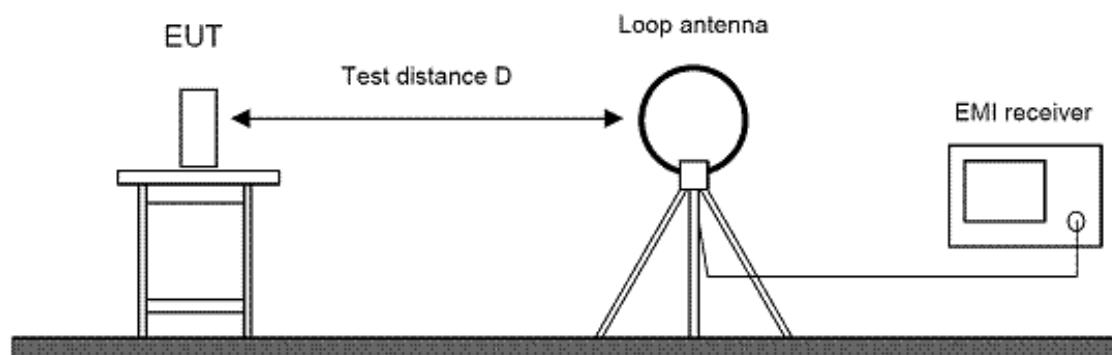

Picture 6: Test setup for radiated emission measurement (< 30 MHz)

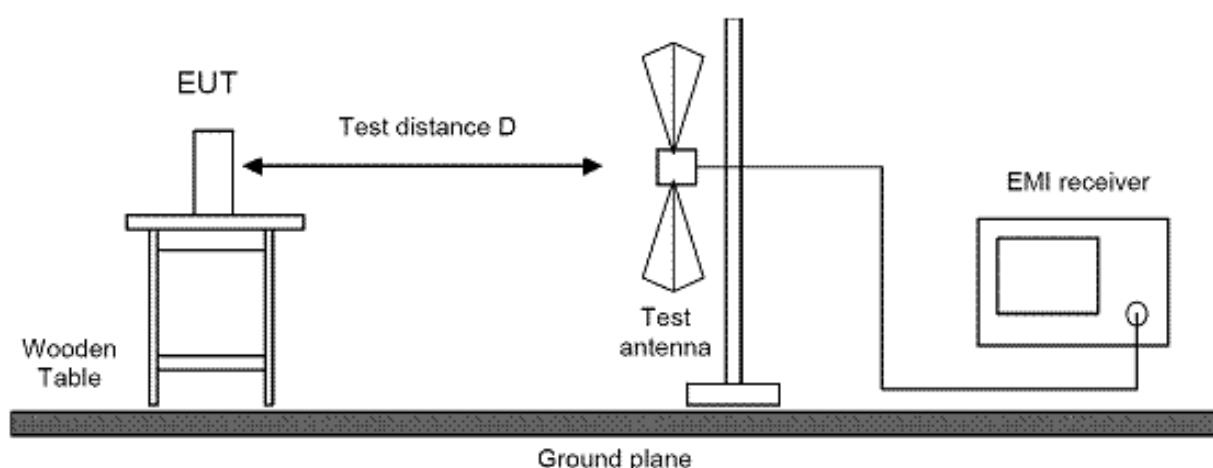

Picture 7: Test setup for radiated emission measurement (< 1 GHz)

## 4.6 Test deviation

There is no deviation with the original standard.

## 4.7 EUT operation during test

The EUT was programmed to be in continuously transmitting mode.

## 4.8 Test results

### Transmit mode

Temperature:	22°C	Humidity:	44%
Tested by:	Ch.Kiermeier	Test date:	2012-14-03

### Radiated Emission Measurement 9 kHz – 30 MHz

Frequency (MHz)	Reading (dB $\mu$ V/m)	Detector	Recalculation factor (dB/decade)	Field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin	Result
0.135	19,64	QP	80	<b>-60,36</b>	25,66	-86,02	PASS
0.135	16,4	AV	80	<b>-63,60</b>	25,66	-89,26	PASS
0.135	26,64	QP	80	<b>-53,36</b>	25,66	-79,02	PASS
0.135	24,6	AV	80	<b>-55,40</b>	25,66	-81,06	PASS

Note:

Measured value = 19,64 dB $\mu$ V/m @ 3 m


Recalculation factor = 80 dB / decade

Recalculated value = 19,64 dB $\mu$ V/m @ 3 m - 80 dB = **-60,36 dB $\mu$ V/m @ 300 m**




EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

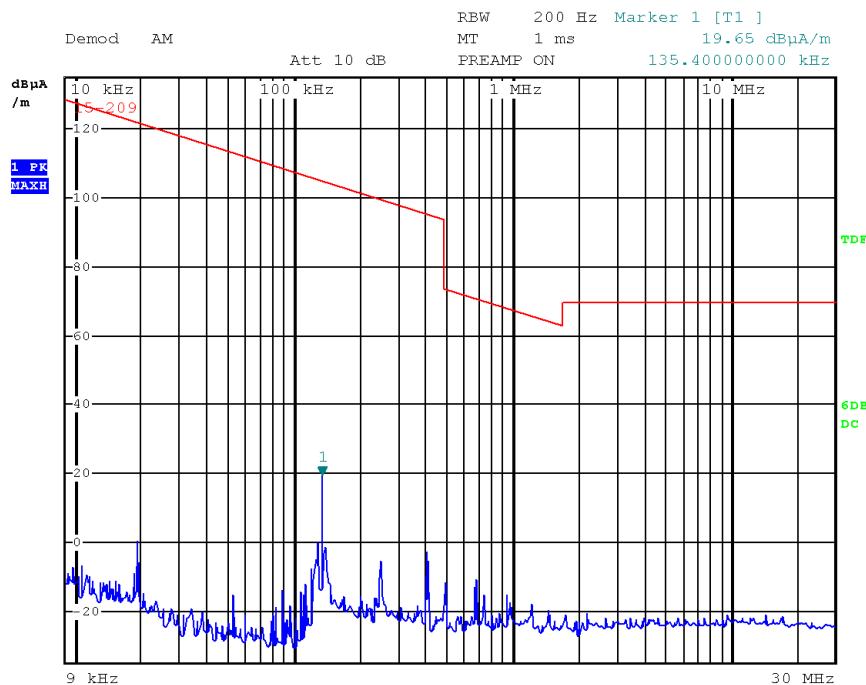

Picture 8: Radiated emission 9 kHz – 30 MHz read mode (@ 3m distance)

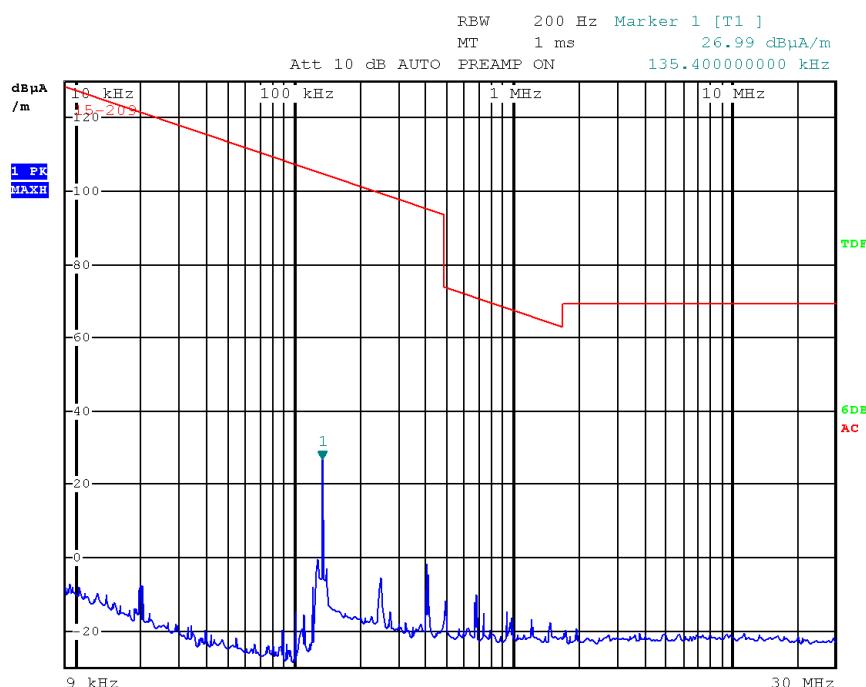

Picture 9: Radiated emission 9 kHz – 30 MHz write mode (@ 3m distance)


## Radiated Emission Measurement 30 MHz – 1000 MHz

Frequency (MHz)	Detector	Average field strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin	Polarization	Result
349,92	QPK	14,60	43.5	-27,57	V	PASS
349,92	AV	7,20	43.5	--	V	PASS
138,76	QPK	37,70	46.0	-15,21	V	PASS
138,76	AV	30,50	46.0	--	V	PASS




EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC

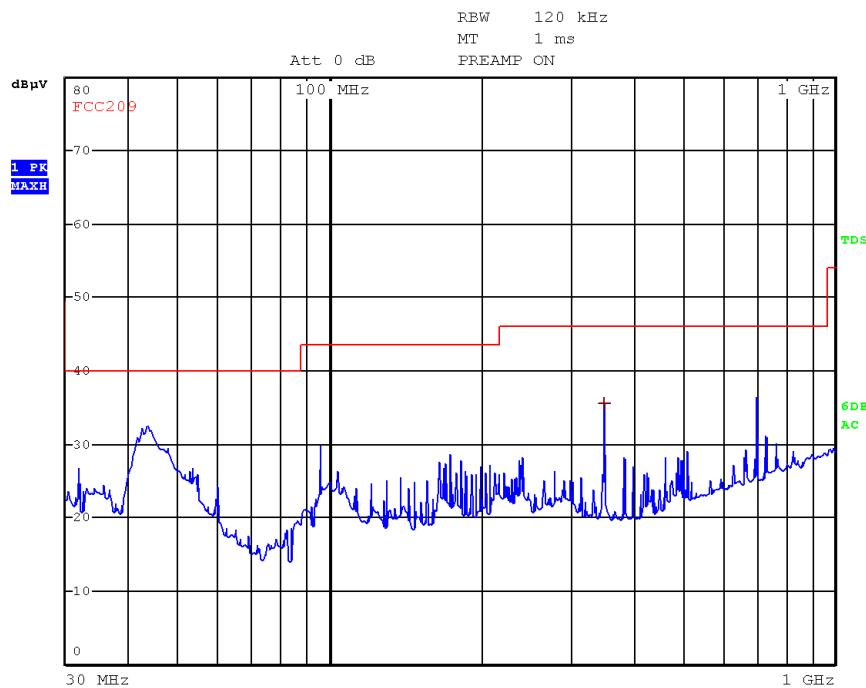

Picture 10: Radiated emission 30 MHz – 1000MHz read mode (Vertical/ Horizontal)

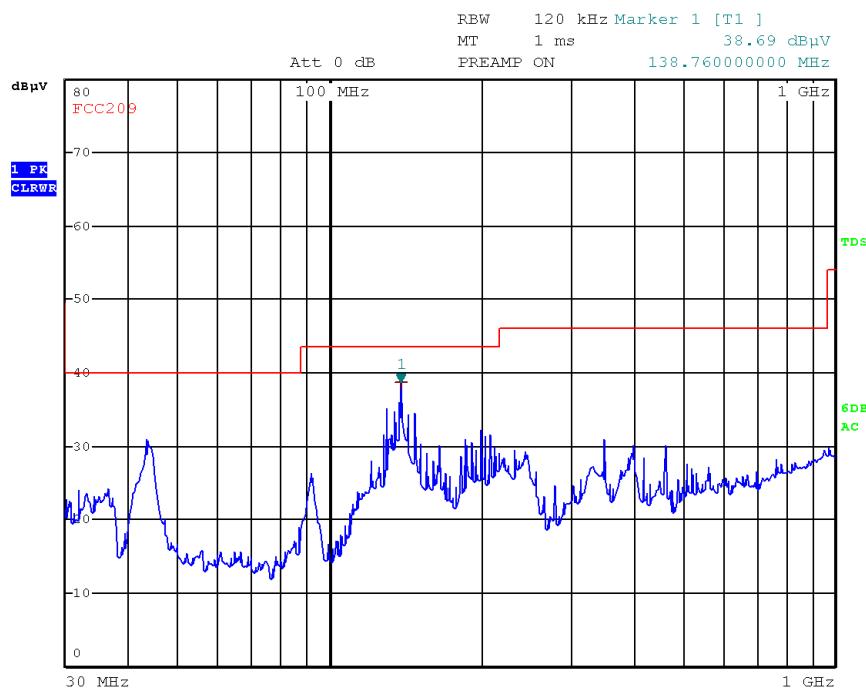

Picture 11: Radiated emission 30 MHz – 1000MHz write mode (Vertical/ Horizontal)

## 5 Equipment calibration status

Inventory Number	Model Number	Manufacturer	Last calibration	Next calibration	Cycle of calibration
W00002	ESU26	Rohde & Schwarz	Dec 11	Dec 12	2 Years
E00001	ESCI	Rohde & Schwarz	Jul 11	Jul 12	2 Years
E00003	ESCS 30	Rohde & Schwarz	Dec 11	Dec 12	1 Year
E00004	ESH 2-Z5	Rohde & Schwarz	Jan. 11	Oct. 13	2 Years
E00005	ESH 2-Z5	Rohde & Schwarz	Dec 11	Dec 13	2 Years
E00060	HFH2-Z2	Rohde & Schwarz	Dec 11	Dec 13	2 Years
E00012	VULB 9163	Schwarzbeck	Mar. 11	Apr. 12	1 Years

Table 1: Equipment Calibration status

## 6 Measurement uncertainty

Description	Max. deviation	k=
Conducted emission AMN (9kHz to 30 MHz)	± 4,0 dB	2
Radiated emission open field (30 MHz to 1 GHz)	± 4,5 dB	2
Radiated emission absorber chamber <td>± 5,4 dB</td> <td>2</td>	± 5,4 dB	2

Table 2: Measurement uncertainty

Comment: The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k. If k=2 the value of the measurements lies within the assigned range of values with a probability of 95 %.

## 7 Summary

The EMC Regulations according to the marked specifications are

**KEPT**

The EUT does fulfill the general approval requirements mentioned.

**NOT KEPT**

The EUT does not fulfill the general approval requirements mentioned.

Place, Date: Straubing, March 30, 2012

*Christian Kiermeier*

---

Christian Kiermeier  
EMI / EMC Test Engineer

*Markus Biberger*

---

Markus Biberger  
Technical Executive / EMV **TESTHAUS**  
GmbH



EMV **TESTHAUS** GmbH  
Gustav-Hertz-Straße 35  
94315 Straubing  
Germany  
Revision: 1.0

GiS mbH  
134,2 kHz Read / Write System  
TS-RW38AC