



Canada

EMC & RF Test Report

As per

RSS-247 Issue 2:2017 & FCC Part 15 Subpart 15.247

Unlicensed Intentional Radiators
DTS System

on the

ECB601/ECB501

Issued by:

TÜV SÜD Canada Inc.
11 Gordon Collins Dr,
Gormley, ON, L0H 1G0
Canada
Ph: (905) 883-7255

Testing produced for

ecobee

Prepared by:

Min Xie,
Sr. Project Engineer

See Appendix A for full client &
EUT details.

Reviewed by:

Amir Emami,
Project Engineer



Innovation, Science and
Economic Development Canada

Registration #
6844A-3



Testing Laboratory
Certificate #2955.02



R-14023, G-20072
C-14498, T-20060



Registration #
CA6844

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Table of Contents

Table of Contents	2
Report Scope.....	3
Summary	4
Test Results Summary	5
Notes, Justifications, or Deviations	6
Sample Calculation(s)	7
Applicable Standards, Specifications and Methods.....	8
Document Revision Status	9
Definitions and Acronyms	10
Testing Facility	11
Calibrations and Accreditations.....	11
Testing Environmental Conditions and Dates	12
Detailed Test Results Section	13
6dB Bandwidth of Digitally Modulated Systems	14
Maximum Peak Envelope Conducted Power	18
Power Spectral Density	24
Antenna Spurious Conducted Emissions (-30 dBc Requirement)	29
Transmitter Spurious Radiated Emissions	35
Power Line Conducted Emissions	82
Appendix A – EUT Summary.....	88
Appendix B – EUT and Test Setup Photos.....	91

Client	Ecobee Inc.
Product	ECB601/ECB501
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Report Scope

This report addresses the EMC verification testing and test results of the **Ecobee Inc.**'s Model: **ECB601/ECB501** (2.4 GHz DTS) and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-247 Issue 2:2017

FCC Part 15 Subpart C 15.247

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Summary

The results contained in this report relate only to the item(s) tested.

EUT:	ECB601/ECB501
FCC Certification #, FCC ID:	WR955470766937
Industry Canada Certification #, IC:	7981A-55470766937
EUT passed all tests performed	Yes
Tests conducted by	Min Xie
Report reviewed by	Amir Emami

For testing dates, see "Testing Environmental Conditions and Dates".

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS-GEN (Table 6)	Restricted Bands for Intentional Operation	QuasiPeak Average	Pass
FCC 15.207 RSS-GEN (Table 3)	Power Line Conducted Emissions	QuasiPeak Average	Pass
FCC 15.209 RSS-GEN (Table 4)	Spurious Radiated Emissions	QuasiPeak Average	Pass
FCC 15.247(a)2 RSS-247 5.2(a)	6 dB Bandwidth	> 500 kHz	Pass
FCC 15.247(b)2 RSS-247 5.4(d)	Max Output Power	< 1 Watt	Pass
FCC 15.247(b)4 RSS-247 5.4(d)	Antenna Gain	< 6 dBi	Pass See Justifications
FCC 15.247(d) RSS-247 5.5	Antenna Conducted Spurious	< 30 dBc	Pass
FCC 15.247(e) RSS-247 5.2(b)	Spectral Density	< 8 dBm (3 kHz BW)	Pass
Overall Result			Pass

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Notes, Justifications, or Deviations

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.4(d)), the unit uses 3.0 dBi gain flexible PCB antenna which is less than 6 dBi gain.

For the Restricted Bands of operation, the EUT is designed to only operate between 2400 – 2483.5 MHz.

The EUT is not a hybrid system and FCC 15.247 (f) does not apply to it.

The EUT contains a 902 – 928 MHz FHSS/Hybrid transmitter, a 2400 – 2483.5 MHz FHSS transmitter, three 2400 – 2483.5 DTS MHz transmitter, and UNII-1 and UNII-3 transmitters. Antenna co-location testing is applicable and documented in a test report.

For maximum permissible exposure, this device operates at less than 1 Watt at 2400 – 2483.5 MHz and is designed to operate greater than 20 cm from any personnel during normal operation. No testing is required, however worst-case calculated exposure compliance was shown in the RF Exposure exhibits.

This DTS report documents the 2.4 GHz 802.15.4 complaint transceiver.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Sample Calculation(s)

Radiated Emission Test

E-Field Level = Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain

E-Field Level = 50dB μ V + 10dB/m + 2dB – 20dB

E-Field Level = 42dB μ V/m

Margin = Limit – E-Field Level

Margin = 50dB μ V/m – 42dB μ V/m

Margin = 8.0 dB (pass)

Power Line Conducted Emission Test

E-Field Level = Received Signal + Attenuation Factor + Cable Loss + LISN Factor

E-Field Level = 50dB μ V + 10dB + 2.5dB + 0.5dB

E-Field Level = 63dB μ V

Margin = Limit – E-Field Level

Margin = 73dB μ V – 63dB μ V

Margin = 10.0 dB (pass)

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Applicable Standards, Specifications and Methods

ANSI C63.4:2014 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10:2013 American National Standard For Testing Unlicensed Wireless Devices

CFR 47 FCC 15 Subpart C Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators

CISPR 32:2012 Electromagnetic Compatibility of Multimedia Equipment – Emission Requirements

FCC KDB 558074: FCC KDB 558074 Digital Transmission Systems, 2019 measurements and procedures

FCC KDB 447498: RF exposure procedures and equipment authorization policies for mobile and portable devices 2015

ICES-003 Issue 7 Digital Apparatus - Spectrum Management and 2020 Telecommunications Policy Interference-Causing Equipment Standard

RSS-GEN Issue 5: General Requirements and Information for the 2018+A1:2019+A2:2021 Certification of Radio Apparatus

RSS-247 Issue 2:2017 Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

ISO 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Document Revision Status

Revision	Date	Description	Initials
000	2022-04-25	Initial Release	
001	2022-05-03	Updated Appendix A and added antenna gain.	MX

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

DTS – Digital Transmission System

LISN – Line Impedance Stabilization Network

NCR – No Calibration Required

NSA – Normalized Site Attenuation

N/A – Not Applicable

RF – Radio Frequency

AE – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

Antenna Port – Port, other than a broadcast receiver tuner port, for connection of an antenna used for intentional transmission and/or reception of radiated RF energy.

BW – Bandwidth. Unless otherwise stated, this refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

EMI – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

EUT – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

ITE – Information Technology Equipment. Has a primary function of entry, storage, display, retrieval, transmission, processing, switching, or control of data and/or telecommunication messages and which may be equipped with one or more ports typically for information transfer.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada testing lab near Toronto, Ontario. The testing lab has calibrated 3m semi-anechoic chambers which allow measurements on a EUT that has a maximum width or length of up to 2m and a height of up to 3m. The testing lab also has a calibrated 10m Open Area Test Site (OATS). The chambers are equipped with a turntable that is capable of testing devices up to 5000lb in weight and are equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. This facility is capable of testing products that are rated for single phase or 3-phase AC input and DC capability is also available. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the vertical ground plane if applicable.

Calibrations and Accreditations

The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Innovation, Science and Economic Development Canada (ISED, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-14023, G-20072, C-14498, and T-20060). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc. is accredited to ISO 17025 by A2LA with Testing Certificate #2955.02. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or biennial basis as listed for each respective test.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Testing Environmental Conditions and Dates

Following environmental conditions were recorded in the facility during time of testing

Date	Test	Initials	Temperature (°C)	Humidity (%)	Pressure (kPa)
2021-09-22	Radiated Emissions	MX	22.7	61.1	101.1
2021-09-29	Radiated Emissions	MX	22.5	38.1	101.5
2021-09-30	Radiated Emissions	MX	22.2	37.0	102.2
2021-10-14	Antenna Conducted Emissions	MX	24.0	55.5	101.3
2021-10-01	Power Line Conducted Emissions	MX	23.2	39.8	102.2

Client	Ecobee Inc.
Product	ECB601/ECB501
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247


Canada

Detailed Test Results Section

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

6dB Bandwidth of Digitally Modulated Systems

Purpose

The purpose of this test is to ensure that the bandwidth occupied exceeds a stated minimum. This helps ensure the utilization of the frequency allocation is sufficiently wide. This also helps prevent corruption of data by ensuring adequate data separation to distinguish the reception of the intended information.

Limits and Method

The limit is as specified in FCC Part 15.247(a)2 and RSS-247 5.2(a).

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz. This should be measured with a 100 kHz RBW and a 300 kHz VBW.

The method is given in FCC KDB 558074 Section 8.1 and ANSI C63.10.

Results

The EUT passed. The minimum measured 6 dB BW was of all modulations were greater than 500 kHz. Additional 99% bandwidth were measured for information purpose. There is no requirement on 99% bandwidth

The minimum 6 dB Bandwidth measured was 1.085 MHz


The maximum 99% Occupied Bandwidth was 1.872 MHz.

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	6 dB BW Limit (kHz)	Pass/Fail
Low	2401.6	1.085	1.872	500	Pass
Mid	2440.0	1.178	1.868	500	Pass
High	2478.4	1.178	1.868	500	Pass


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Graphs

The graphs shown below show the DTS Bandwidth and OBW of the device during antenna conducted measurement operation of the EUT. This is measured by a max hold on the spectrum analyzer.

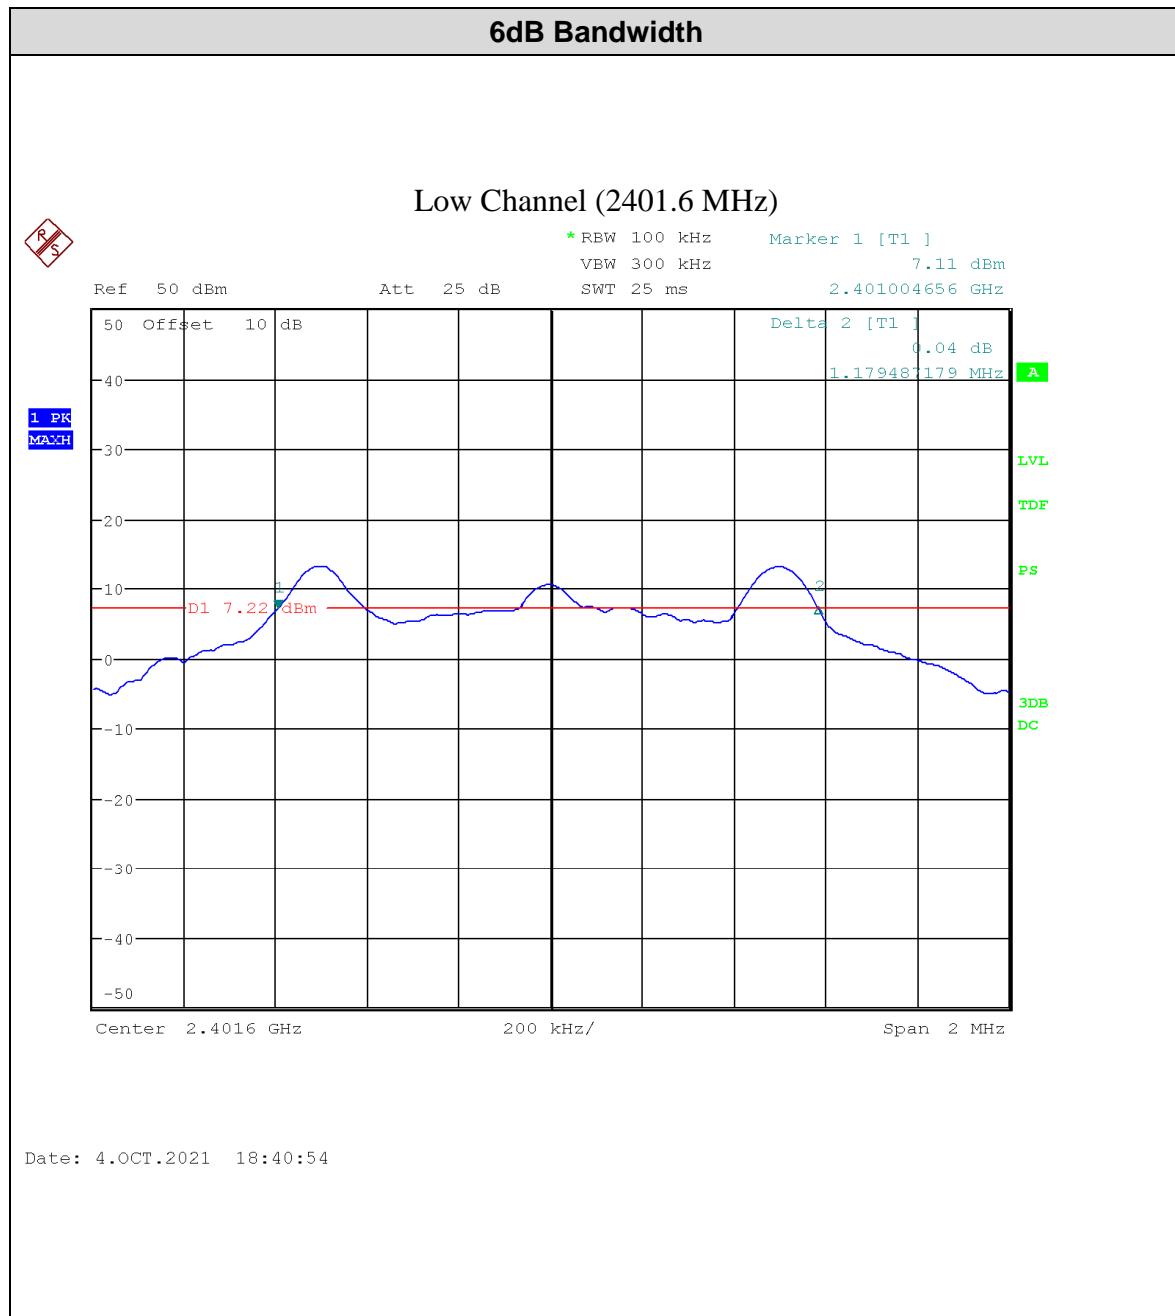

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

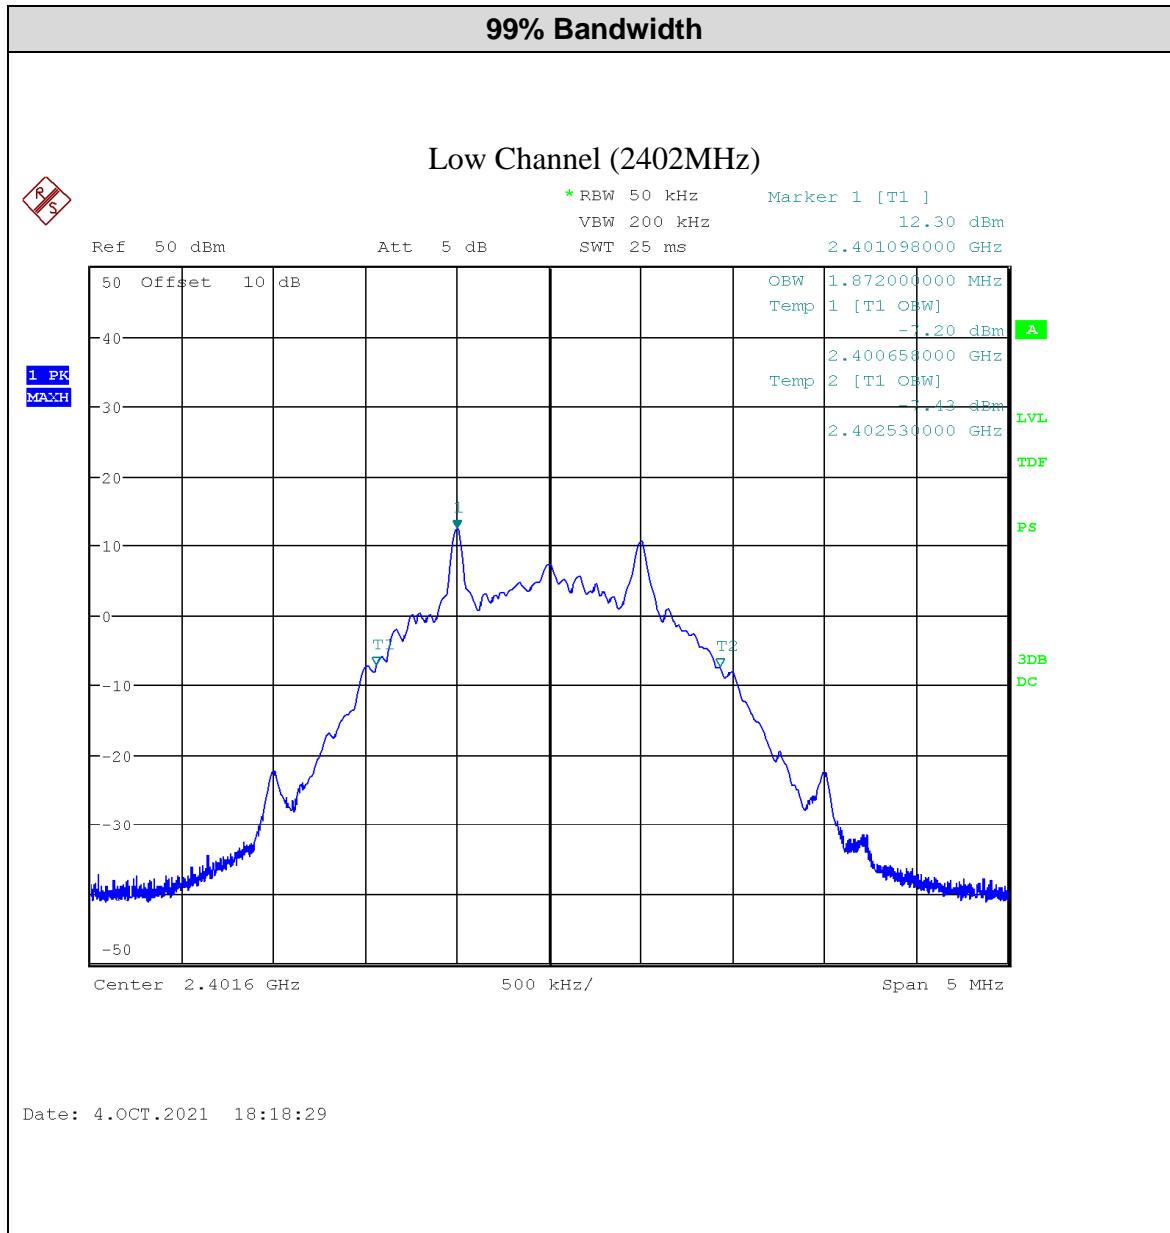

Note: See 'Appendix B – EUT & Test Setup Photos' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 15, 2020	Jan. 15, 2022	GEMC 233
Attenuator 10 dB	8493B	Agilent	Oct 4, 2021	Oct 4, 2022	GEMC133
Attenuator 10 dB	3M-10	Weinschel	Oct 4, 2021	Oct 4, 2022	GEMC 279

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Maximum Peak Envelope Conducted Power

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified. This ensures that if the end-user replaces the antenna, the maximum power does not exceed an amount which may create an excessive power level.

Limits and Method

The limits are defined in FCC Part 15.247(b) and RSS-247 5.4(d).

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands, the peak limit is 1 watt (30 dBm).

The method is given in FCC KDB 558074 and ANSI C63.10 section 11.9.2.2.2 (AVGSA-1).

Results

The EUT passed. The EUT was set to transmit at pre-set power. Three Channels were measured. The following tables show the maximum conducted (Average) power. The external attenuators and cable loss were accounted for as transducer factor (TDF) and additional attenuator as reference offset in the spectrum analyzer.

Channel	Frequency (MHz)	Avg Power (dBm)	Avg Power (mW)	Limit (mW)	Pass/Fail
Low	2401.6	12.55	17.99	1000	Pass
Mid	2440.0	12.64	18.37	1000	Pass
High	2478.4	10.11	10.26	1000	Pass

Client	Ecobee Inc.	
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	




Graphs


The graphs shown below show the average power output of the device during the conducted measurement operation of the EUT. The integrated band power measurement method was used.

The external attenuator and cable loss are accounted for as Transducer Factor (TDF) and an additional 10 dB attenuator was accounted for as reference offset in the spectrum analyzer.


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

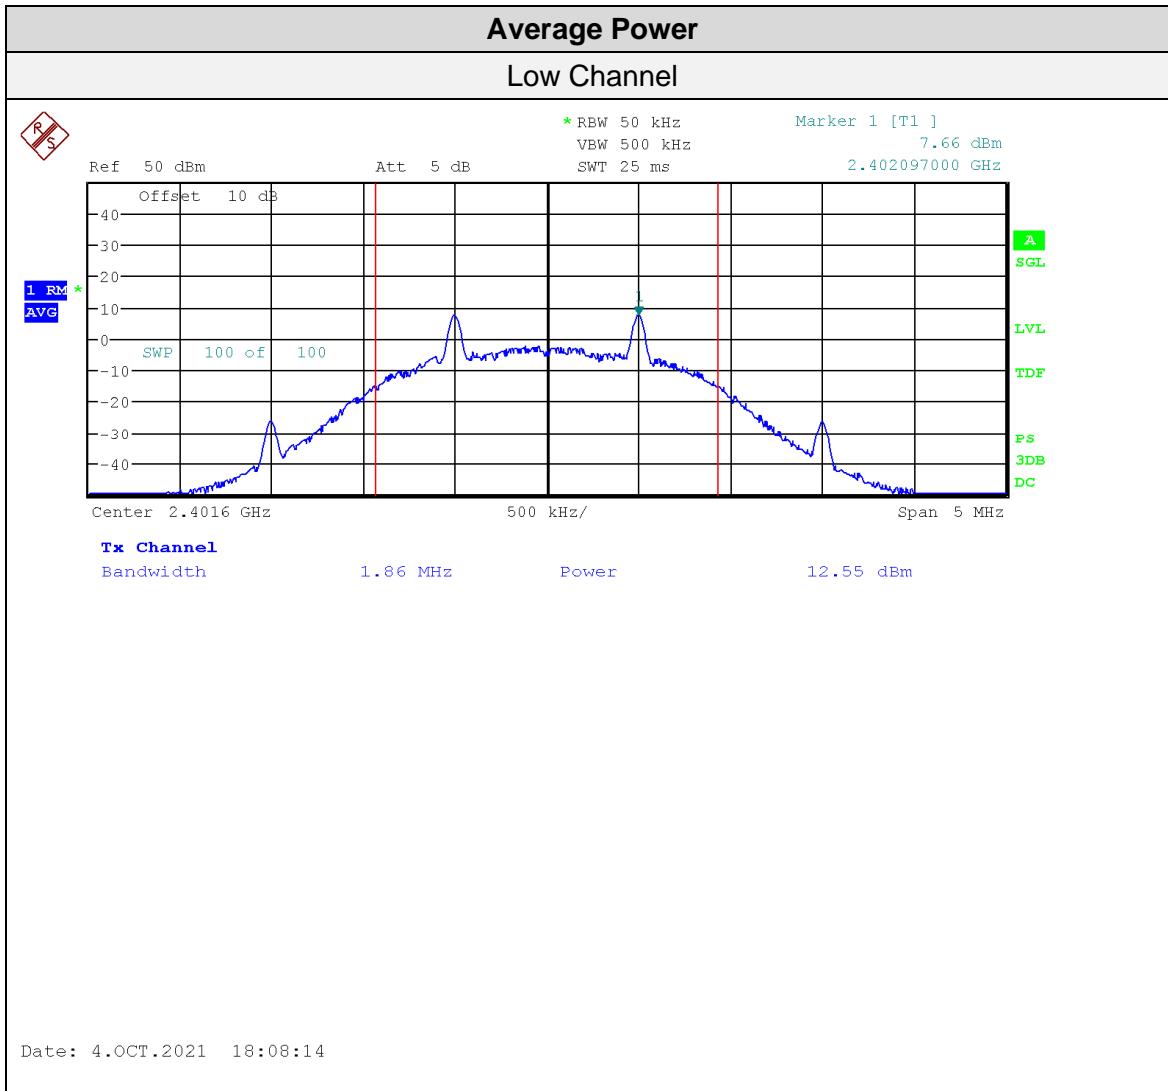

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

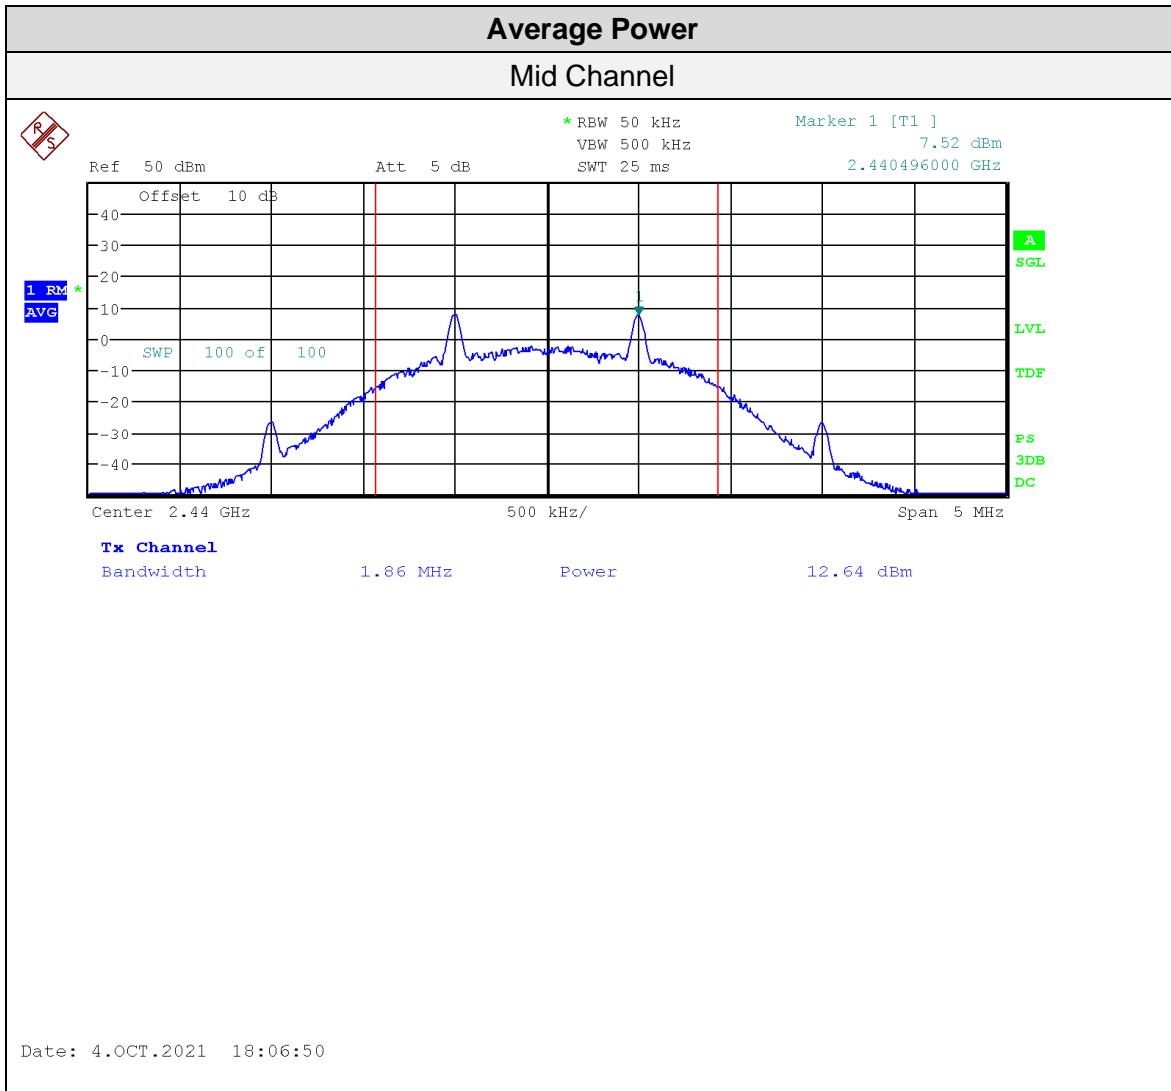

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

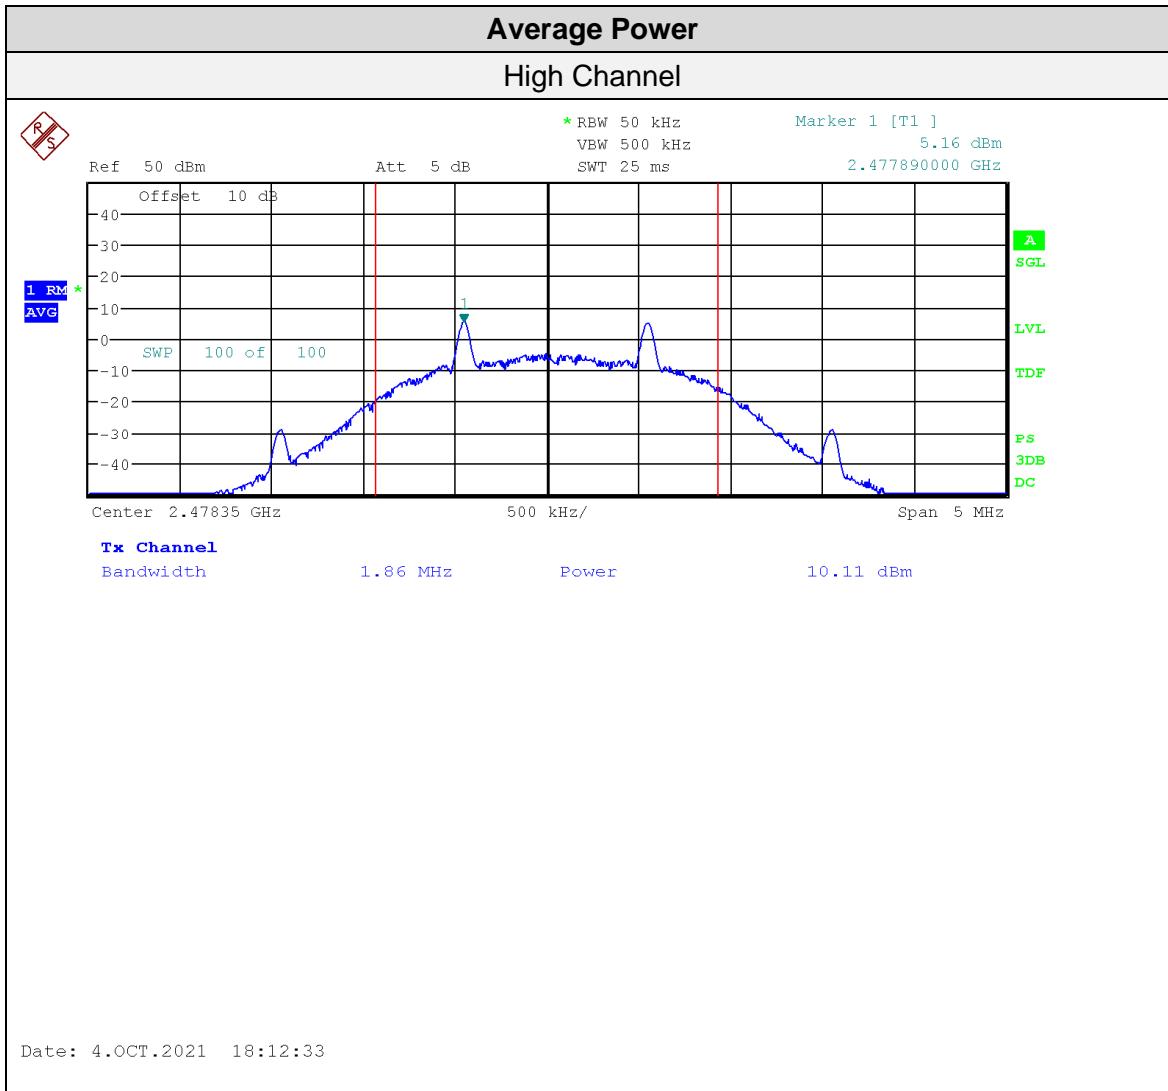

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 15, 2020	Jan. 15, 2022	GEMC 233
Attenuator 10 dB	8493B	Agilent	Oct 4, 2021	Oct 4, 2022	GEMC133
Attenuator 10 dB	3M-10	Weinschel	Oct 4, 2021	Oct 4, 2022	GEMC 279

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Power Spectral Density

Purpose

The purpose of this test is to ensure that the maximum power spectral density to the radiating element does not exceed the limits specified. This ensures that the modulation is significantly wide enough, or low enough in power that it will allow for co-operation of other wireless devices operating within this frequency allocation.

Limits and Method

The limits are defined in 15.247(e) and RSS-247 5.2(b).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

The method is given in FCC KDB 558074 and ANSI C63.10 Section 11.10.3 (AVG PSD-1).

Results


The EUT passed. The EUT was set to transmit at pre-set power. Low, middle, and high bands were measured. The following table shows the average power spectral density. External attenuators and cable loss were accounted for as transducer factor (TDF) and as reference offset in the spectrum analyzer.

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm/3kHz)	Pass/Fail
Low	2401.6	7.55	8	Pass
Mid	2440.0	7.84	8	Pass
High	2478.4	4.73	8	Pass


Graphs

The graphs shown below show the average power spectral density of the device during the conducted measurement operation of the EUT. Low, middle, and high channels were investigated. The external attenuator and cable loss are accounted for as Transducer Factor (TDF) and an additional 10 dB attenuator was accounted for as reference offset in the spectrum analyzer.


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

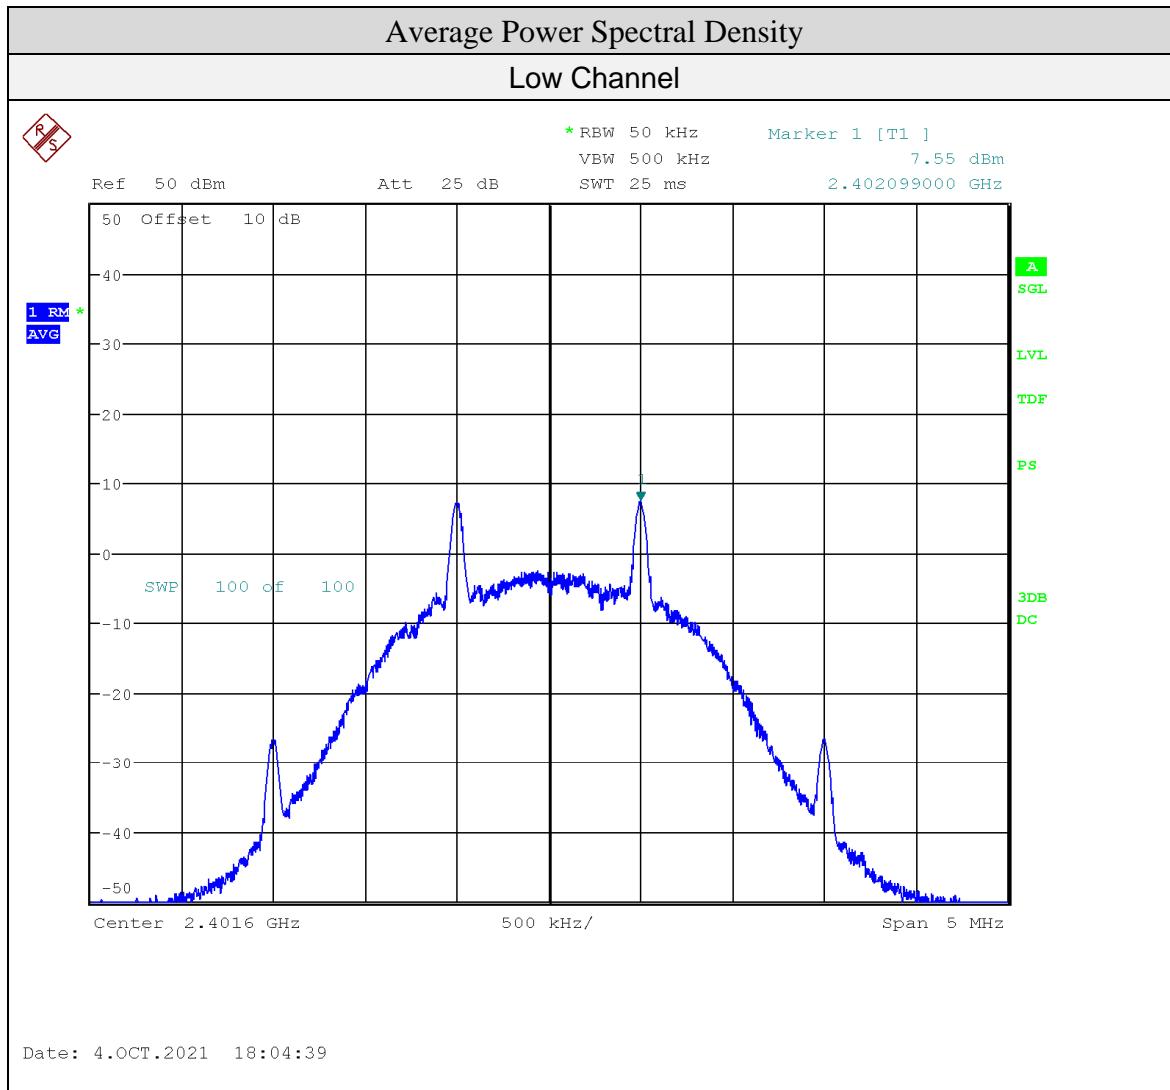

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

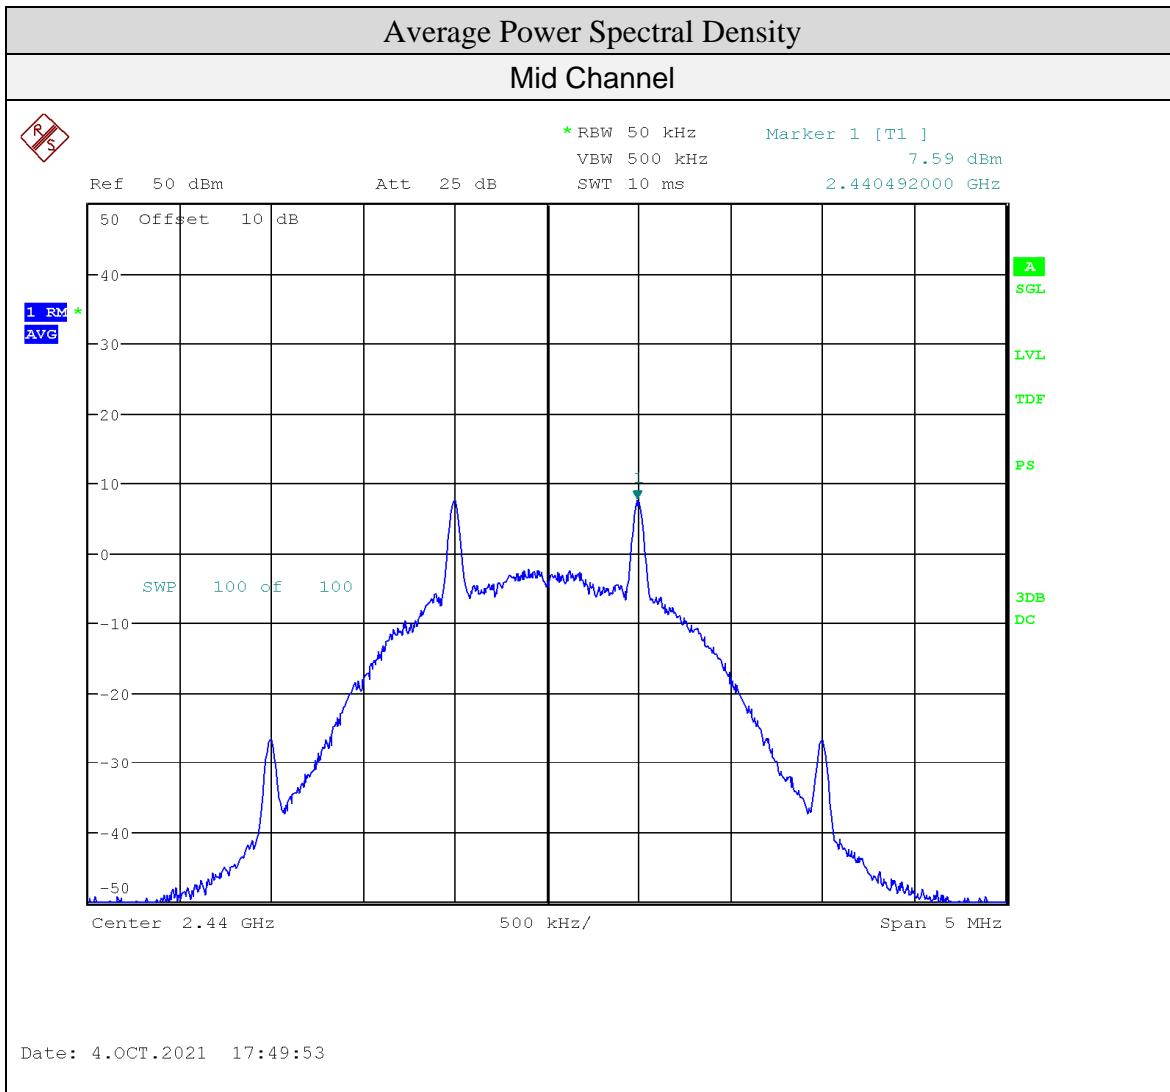

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

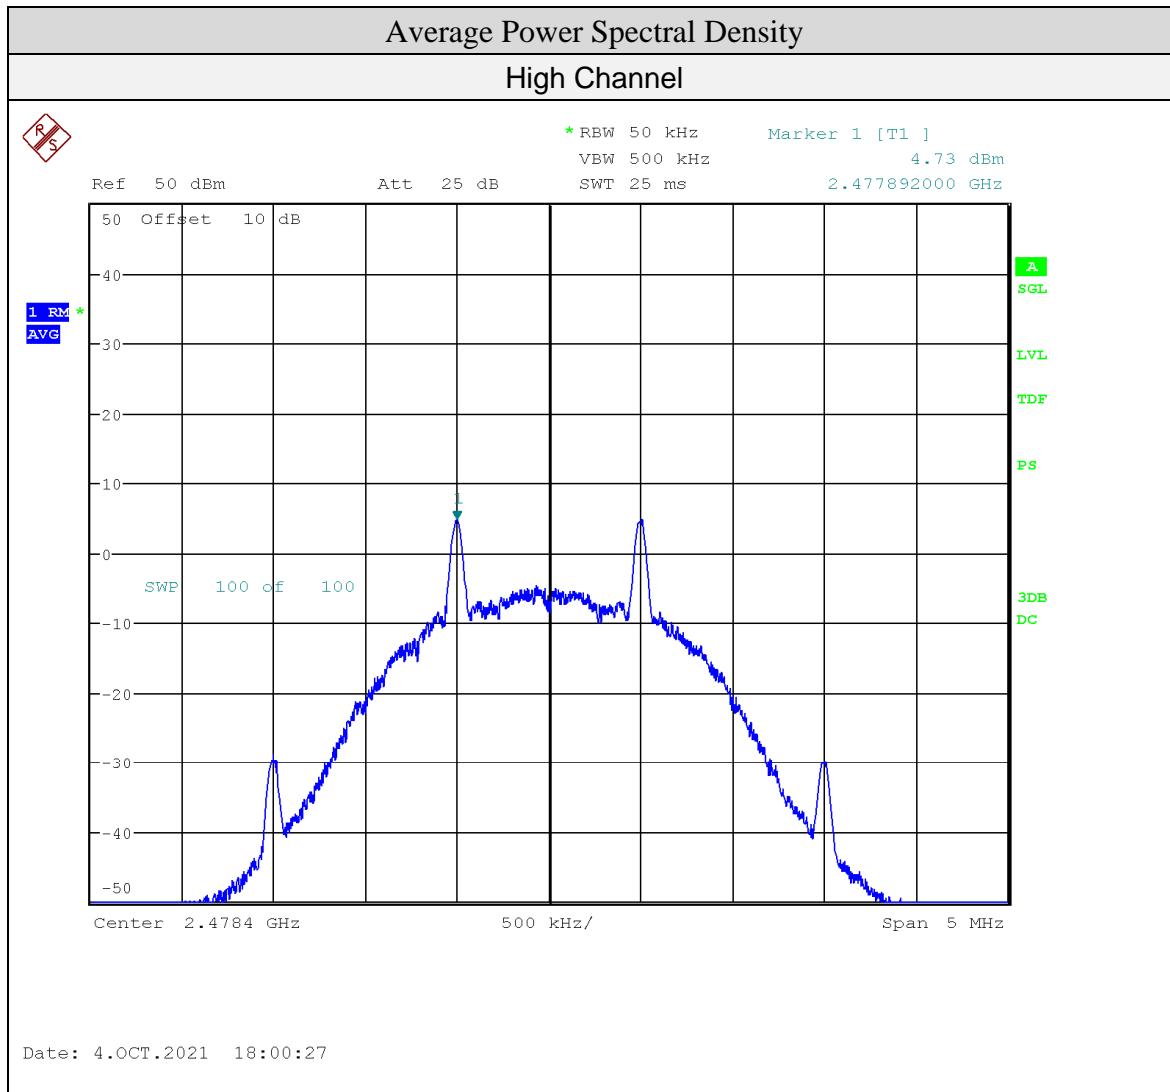

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 15, 2020	Jan. 15, 2022	GEMC 233
Attenuator 10 dB	8493B	Agilent	Oct 4, 2021	Oct 4, 2022	GEMC133
Attenuator 10 dB	3M-10	Weinschel	Oct 4, 2021	Oct 4, 2022	GEMC 279

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Antenna Spurious Conducted Emissions (-30 dBc Requirement)

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

Limits and Method

The limits are defined in 15.247(d) and RSS-247 5.5. In any 100 kHz band, as the maximum conducted power was measured using RMS averaging, the peak spurious harmonics emissions must be at least 30 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10th harmonic. This -30 dBc requirement also applies at the 'band edge' or 2.4 GHz and 2.4835 GHz.

The method is given in FCC KDB 558074 Section 11 and ANSI C63.10


Results

The EUT passed. Low, middle, and high bands were measured. The -30 dBc requirement is shown for the lower band edge at 2.4 GHz in the low band and for the higher band edge at 2.4835 GHz in the high band.


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Graphs


The graphs shown below show the power output of the device during the conducted measurement operation of the EUT.

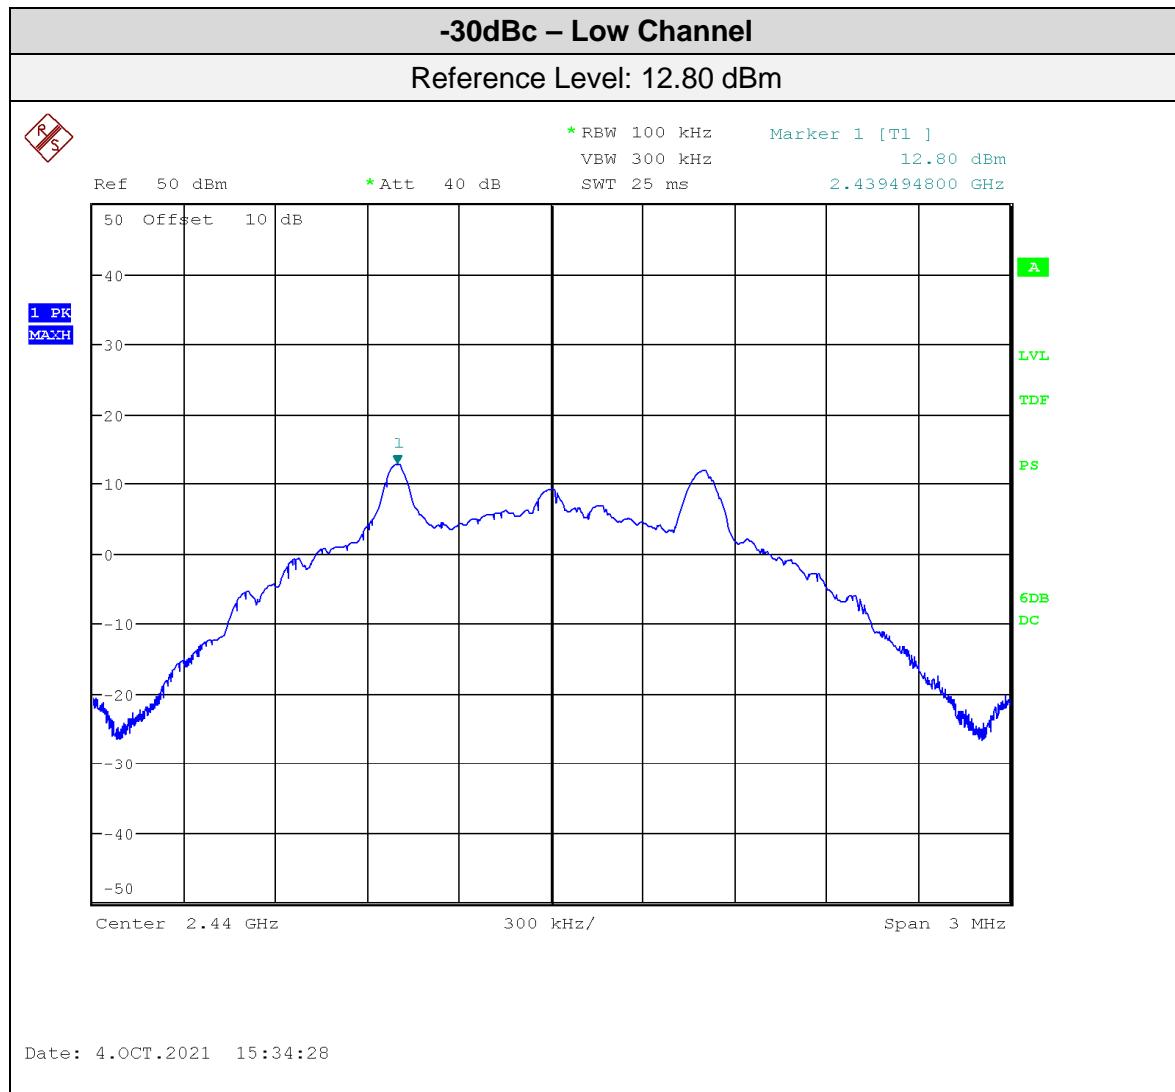


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

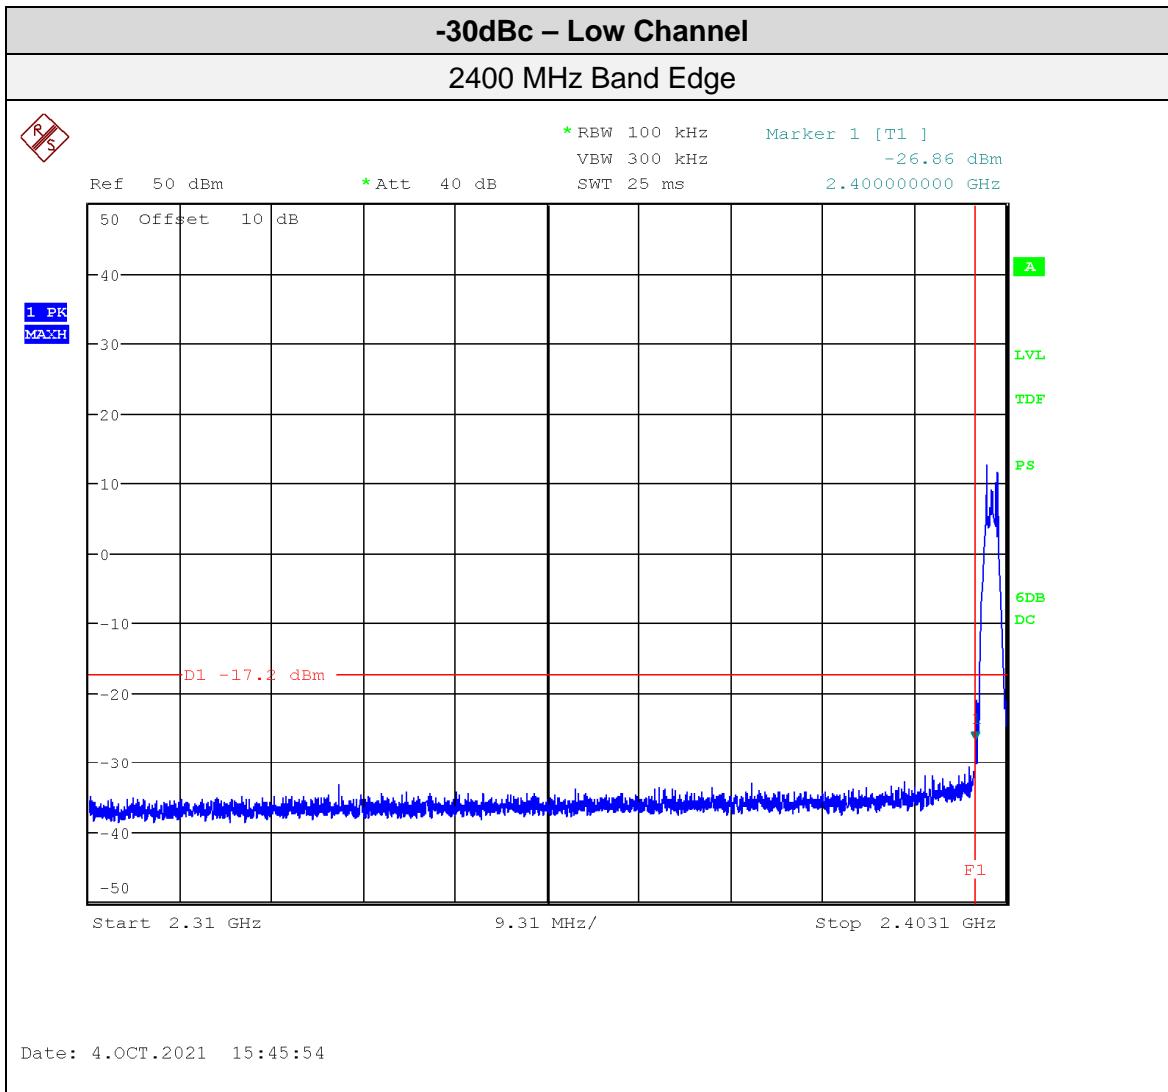

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

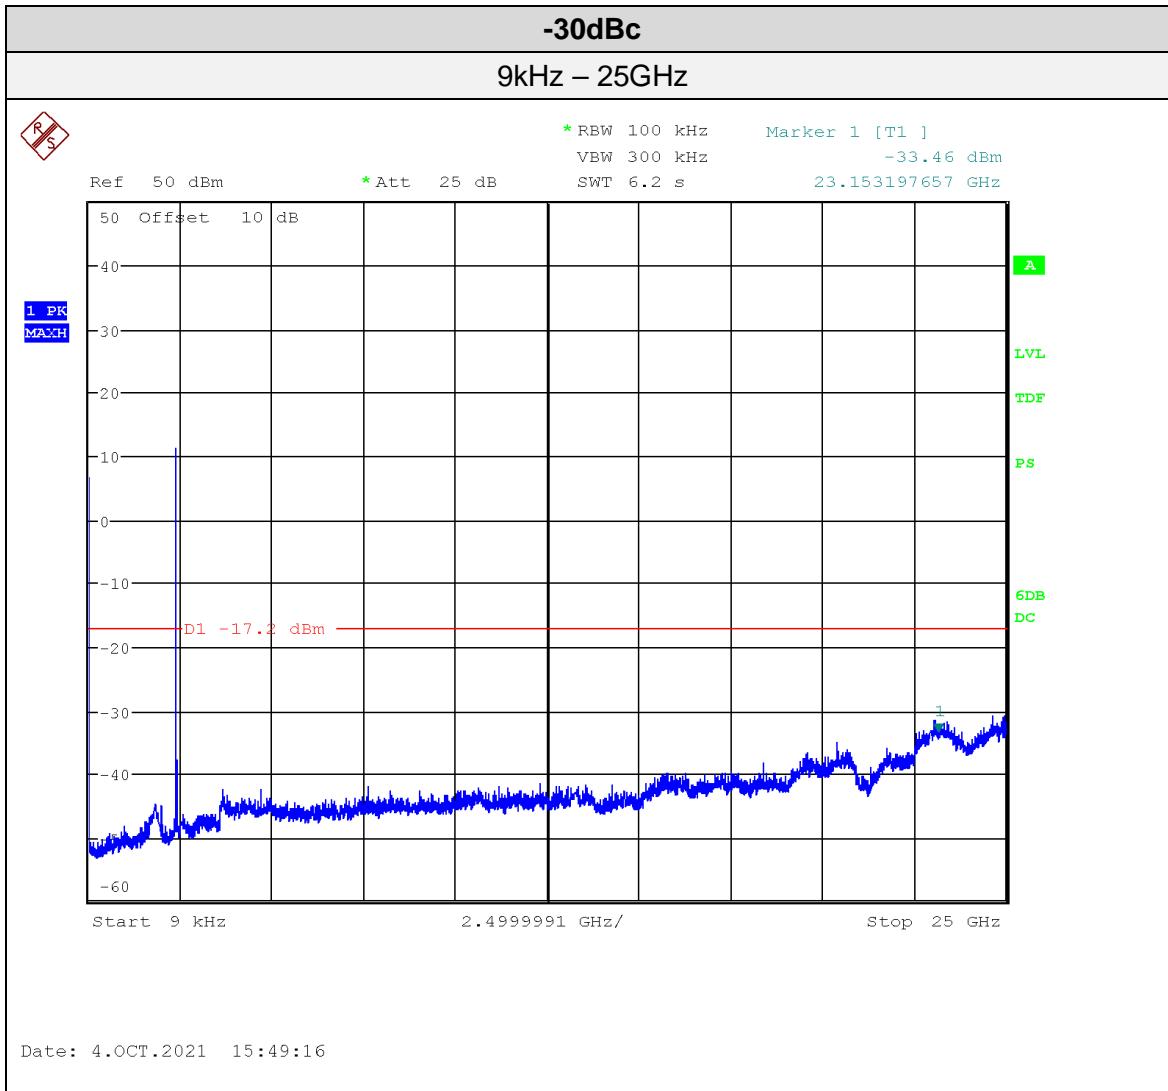

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

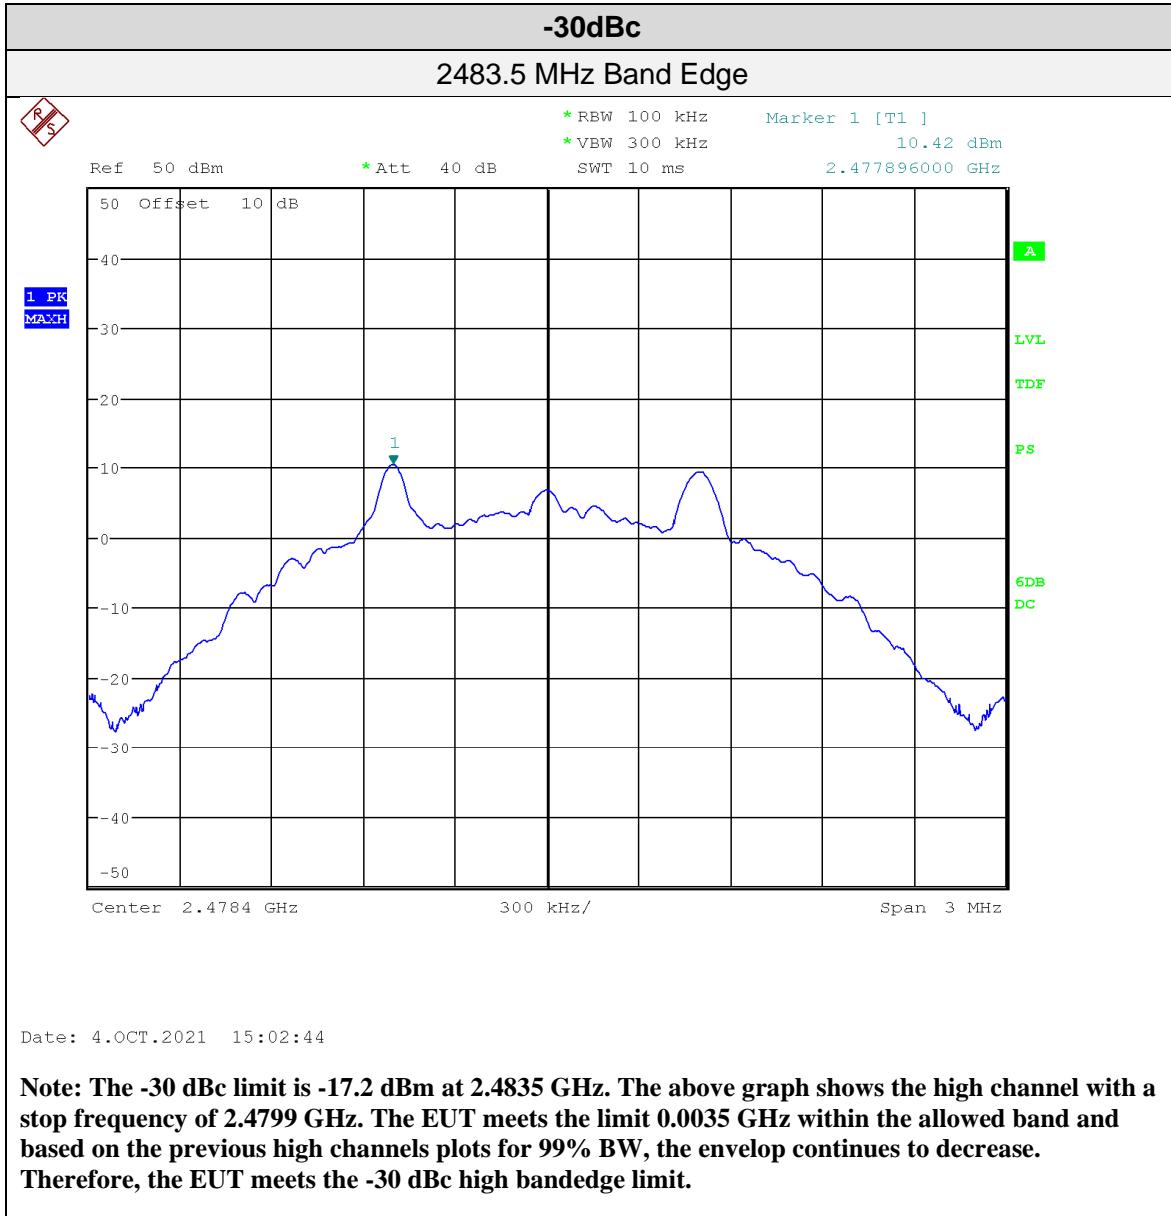

See 'Appendix B – EUT and Test Setup Photos' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 15, 2020	Jan. 15, 2022	GEMC 233
Attenuator 10 dB	8493B	Agilent	Oct 4, 2021	Oct 4, 2022	GEMC133
Attenuator 10 dB	3M-10	Weinschel	Oct 4, 2021	Oct 4, 2022	GEMC 279

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Transmitter Spurious Radiated Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limits and Method

The method is as defined in FCC KDB 558074 Section 12.2 and ANSI C63.10.

The limits, as defined in 15.247(d) for unintentional radiated emissions, apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the ‘Spurious Conducted Emissions’ requirements of -30 dBc or greater. See also ‘Antenna Spurious Conducted Emissions’ for further details.

Frequency	Field Strength Limit (μ V/m)	Field Strength at 3m (dB μ V/m)
0.009 MHz – 0.490 MHz	2400/F(kHz) ^a (at 300m)	128.5 to 93.8 ^a
0.490 MHz – 1.705 MHz	24000/F(kHz) ^a (at 30m)	73.8 to 63.0 ^a
1.705 MHz – 30 MHz	30 ^a (at 30m)	69.5 ^a
30 MHz – 88 MHz	100 ^a (at 3m)	40.0 ^a
88 MHz – 216 MHz	150 ^a (at 3m)	43.5 ^a
216 MHz – 960 MHz	200 ^a (at 3m)	46.0 ^a
Above 960 MHz	500 ^a (at 3m)	54.0 ^a
Above 1000 MHz	500 ^b (at 3m)	54.0 ^b
Above 1000 MHz	5 mV/m ^c (at 3m)	74.0 ^c

^aLimit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1


^bLimit is with 1 MHz measurement bandwidth and using an Average detector

^cLimit is with 1 MHz measurement bandwidth and using a Peak detector

Based on ANSI C63.4 Section 4.2, if the Peak detector measurements do not exceed the Quasi-Peak limits, where defined, then the EUT is deemed to have passed the requirements.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Typical Radiated Emissions Setup

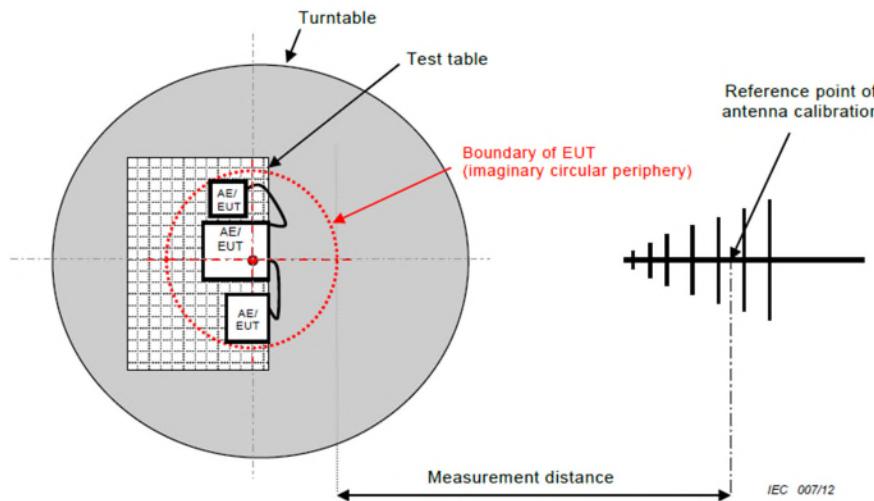

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is $\pm 5.67\text{dB}$ for 30MHz – 1GHz and $\pm 4.58\text{dB}$ for 1GHz – 18GHz with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector over a full 0-360°. This peaking process is done as a worst-case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10th harmonic (a minimum of 24.835 GHz).

Devices scanned may be scanned at alternate test distances and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example, for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.


Peak output power for low, middle, and high channels were checked. The worst case was used for the spurious emissions.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band-edge measurement graphs are shown for illustration purposes. See final measurement section for all measurements.


Spurious Emissions

Mid Channel
9 kHz – 150 kHz
Peak Emission Graph

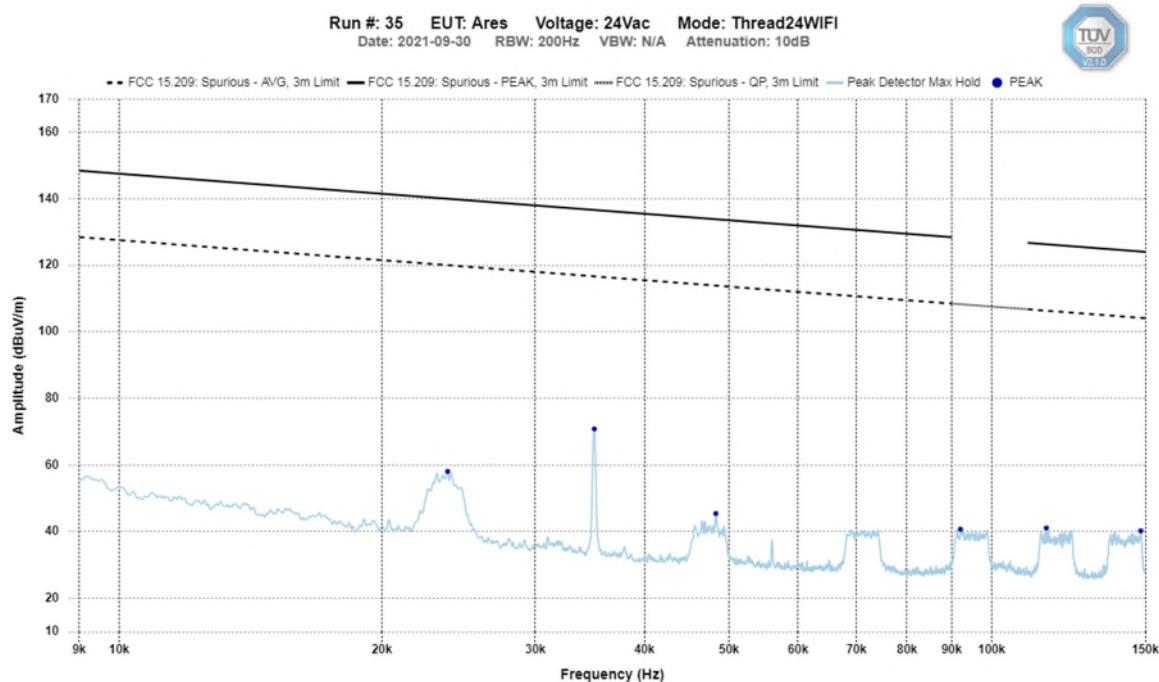


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel
150 kHz – 30 MHz
Peak Emission Graph

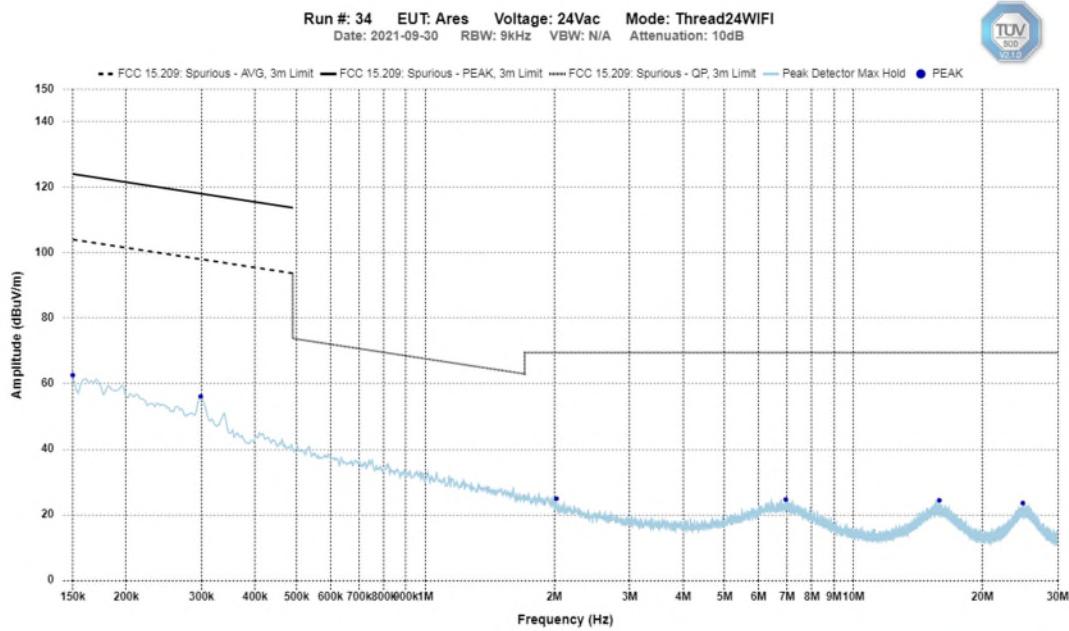


Mid Channel – 30 MHz – 1 GHz
Horizontal - Peak Emission Graph

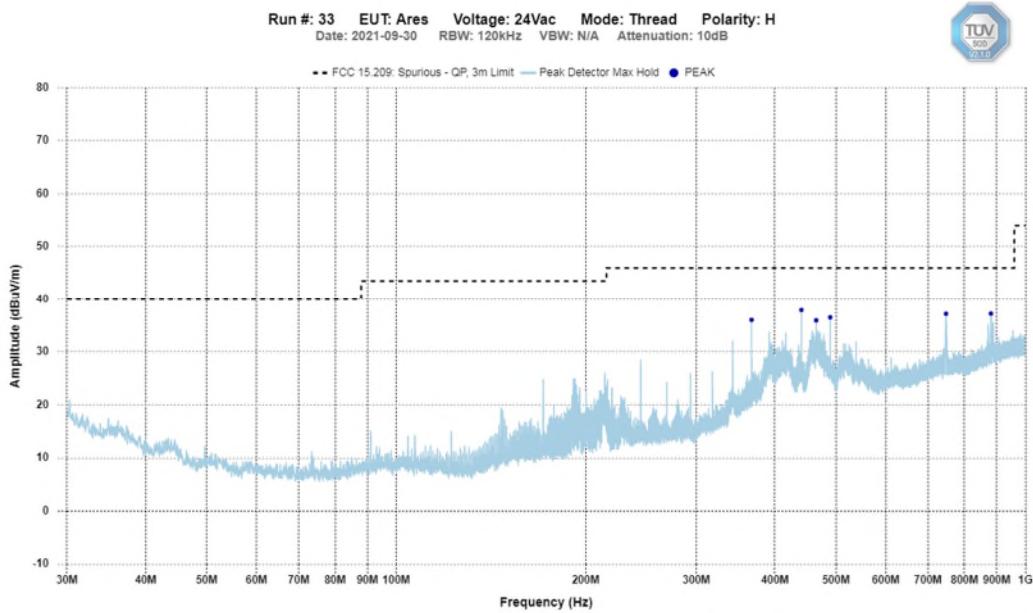


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 1 GHz – 6 GHz Horizontal - Peak Emission Graph

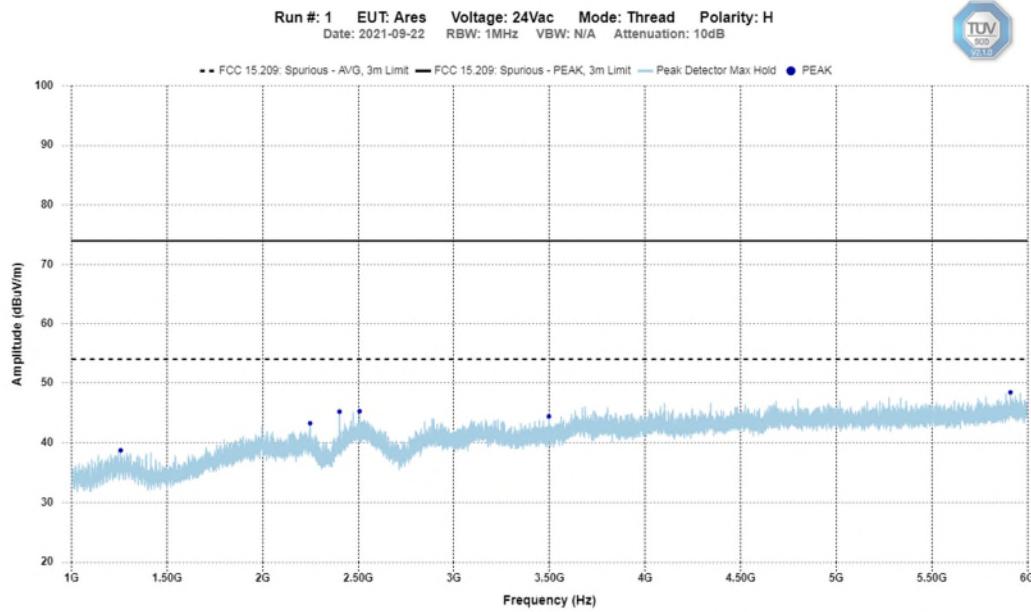


Mid Channel – 6 GHz – 12 GHz Horizontal - Peak Emission Graph

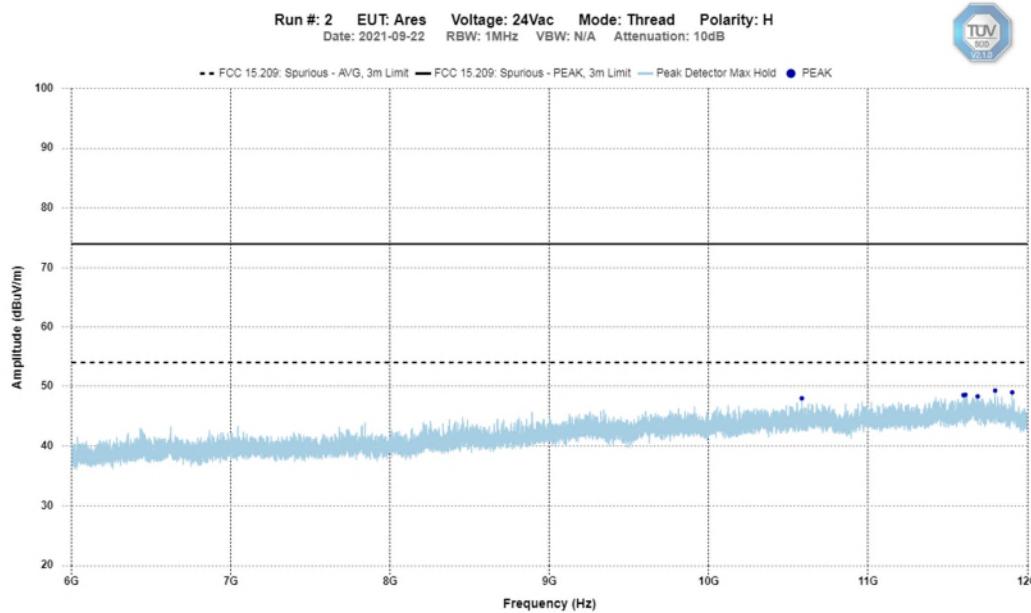


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 12 GHz – 18 GHz Horizontal - Peak Emission Graph

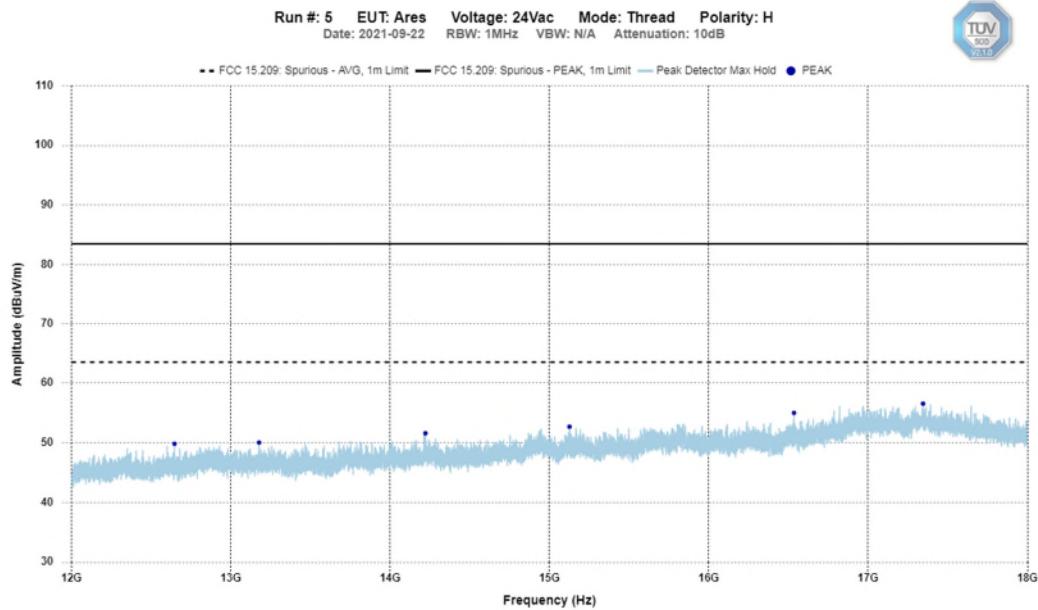


Mid Channel – 18 GHz – 26 GHz Horizontal - Peak Emission Graph

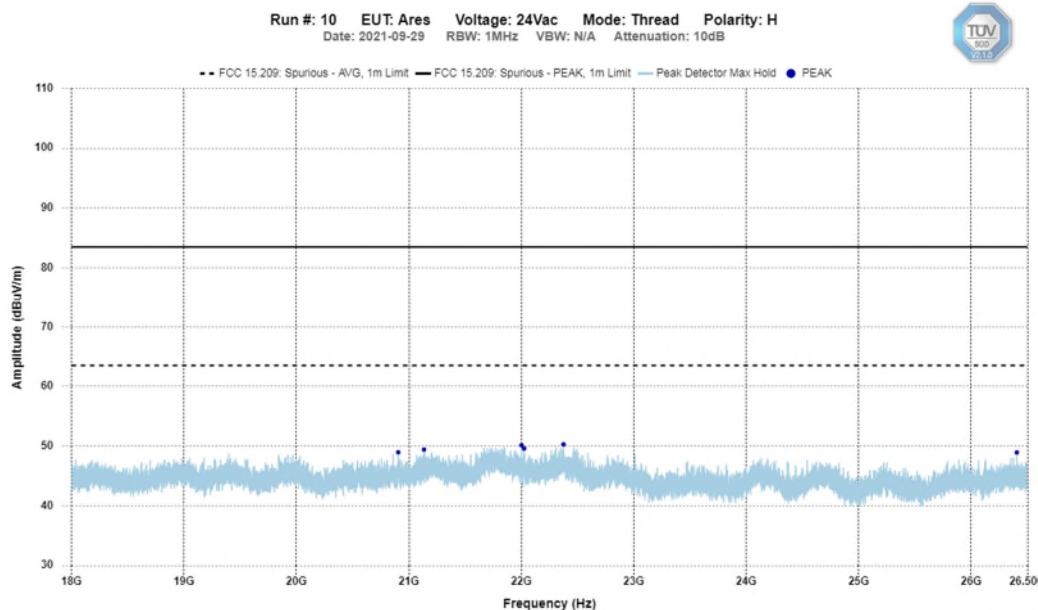


Note: 12 GHz – 26 GHz plots were taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 30 MHz – 1 GHz Vertical - Peak Emission Graph

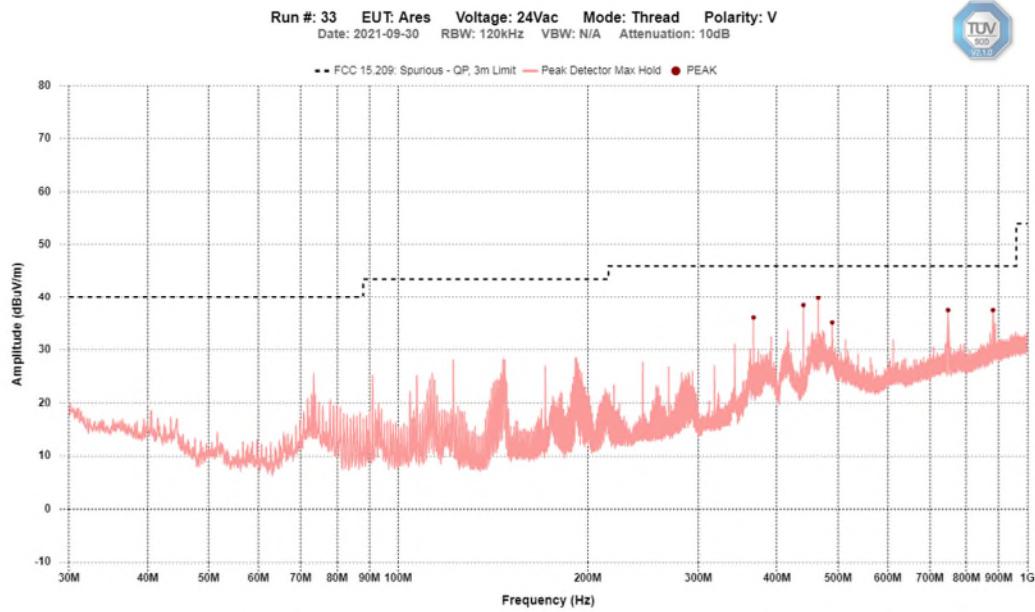


Mid Channel – 1 GHz – 6 GHz Vertical - Peak Emission Graph

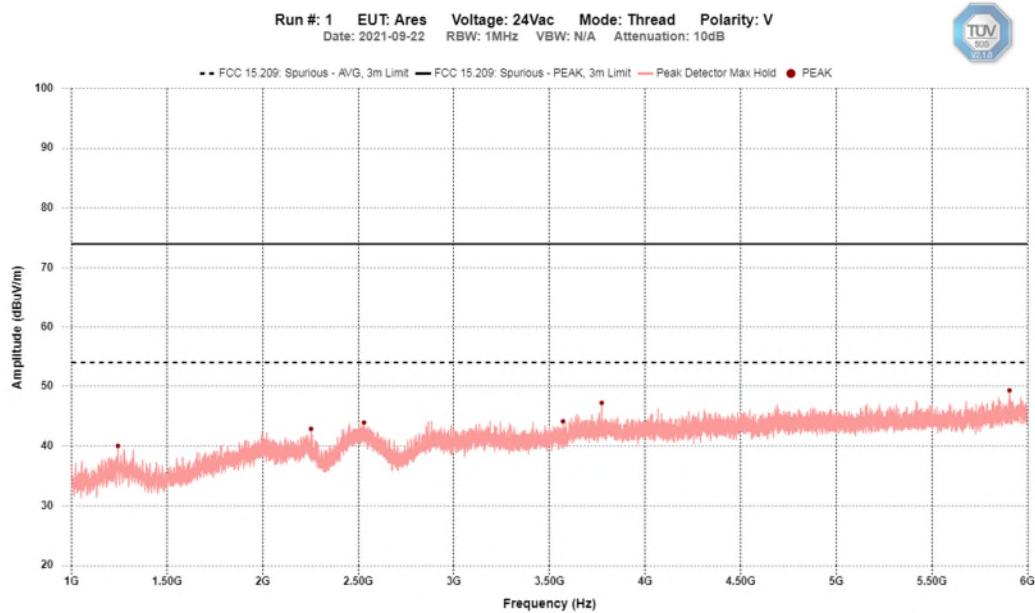


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 6 GHz – 12 GHz Vertical - Peak Emission Graph

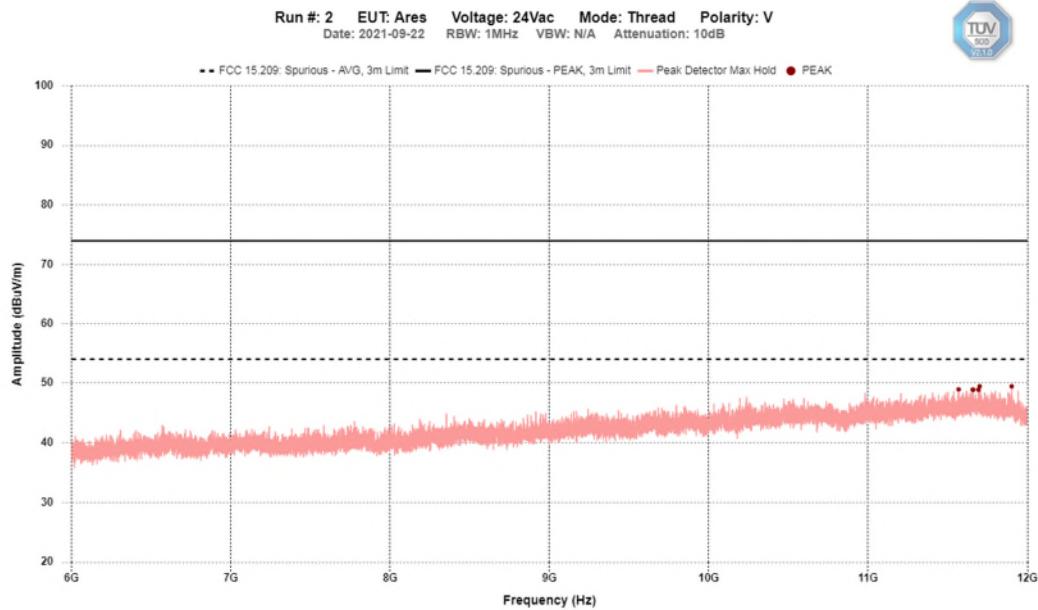


Mid Channel – 12 GHz – 18 GHz Vertical - Peak Emission Graph

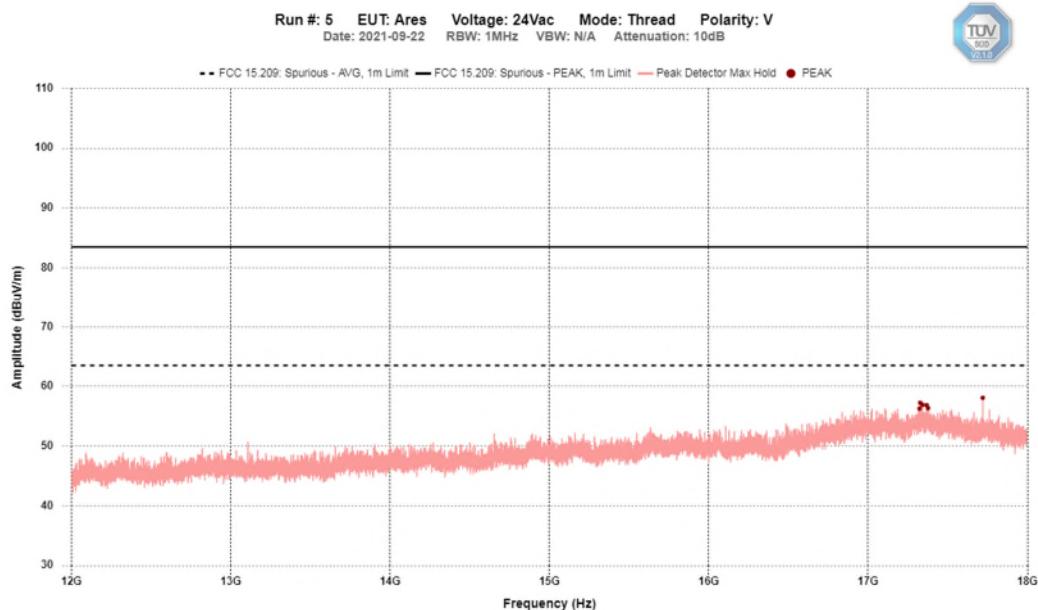

Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Mid Channel – 18 GHz – 25 GHz
Vertical - Peak Emission Graph

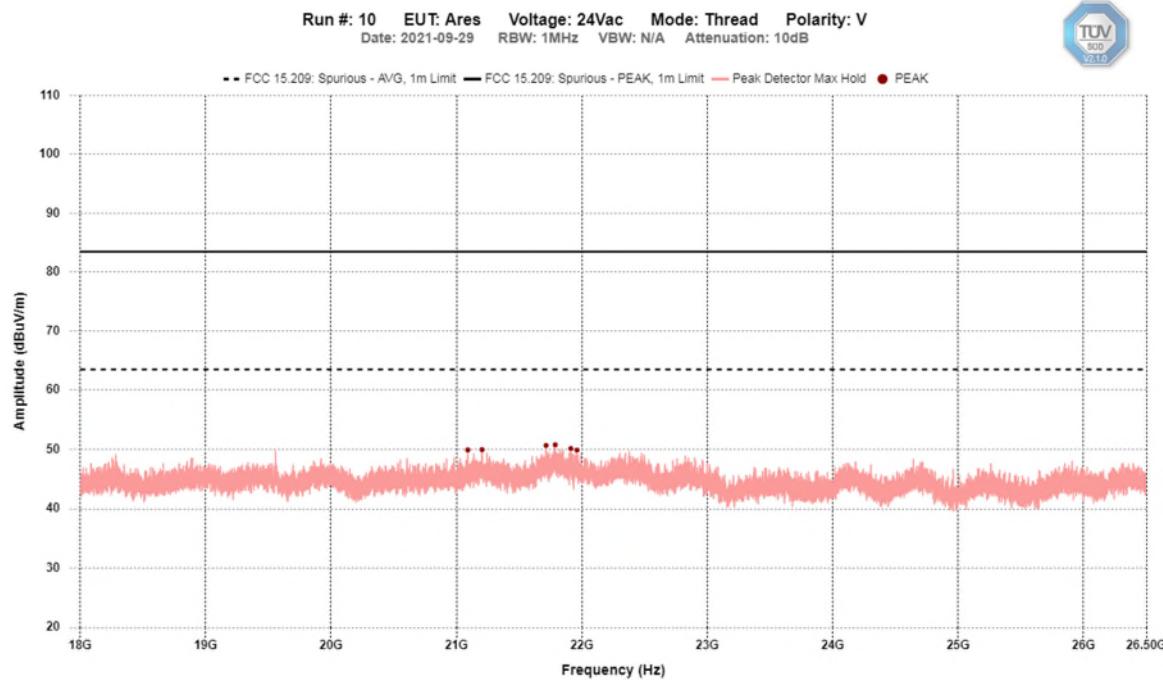


Plot was taken at a 1 meter distance. All emissions were noise floor of measurement instrument. No emissions were found in this frequency range.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edges – ECB601

Band Edge – Low Channel
Horizontal - Peak Emission

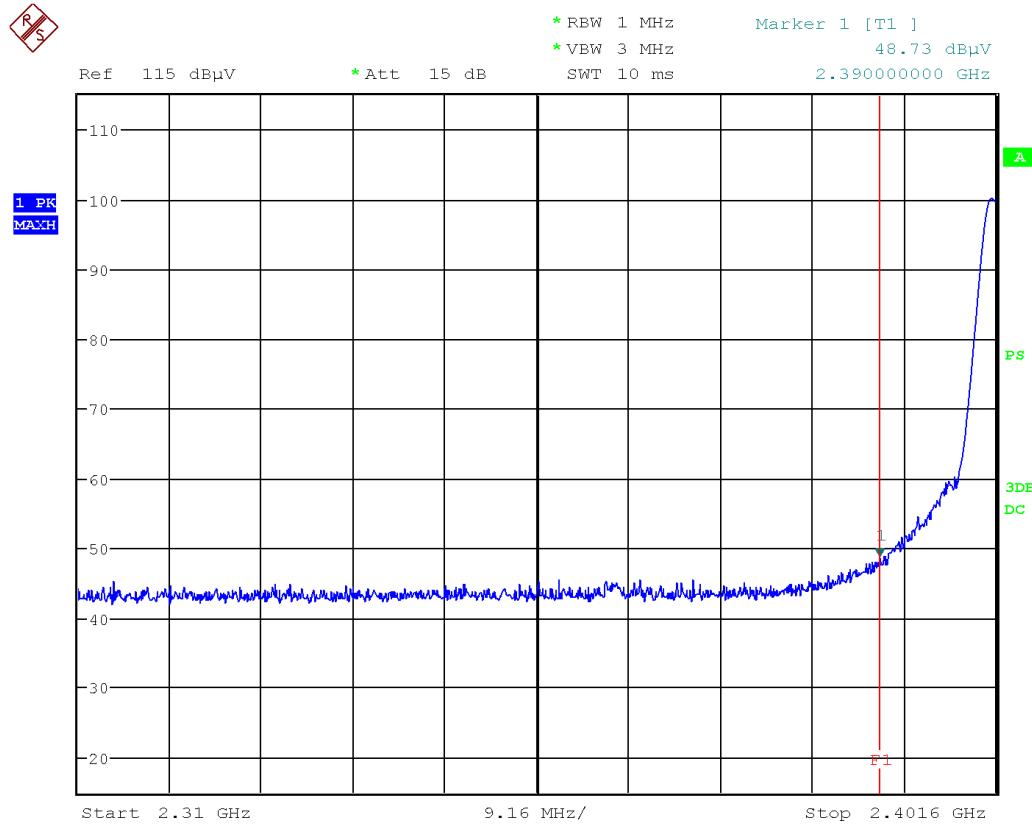

Date: 22.SEP.2021 12:25:45


Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247
Product	ECB601/ECB501	
Standard(s)		



Band Edge – Low Channel Vertical - Peak Emission

RS

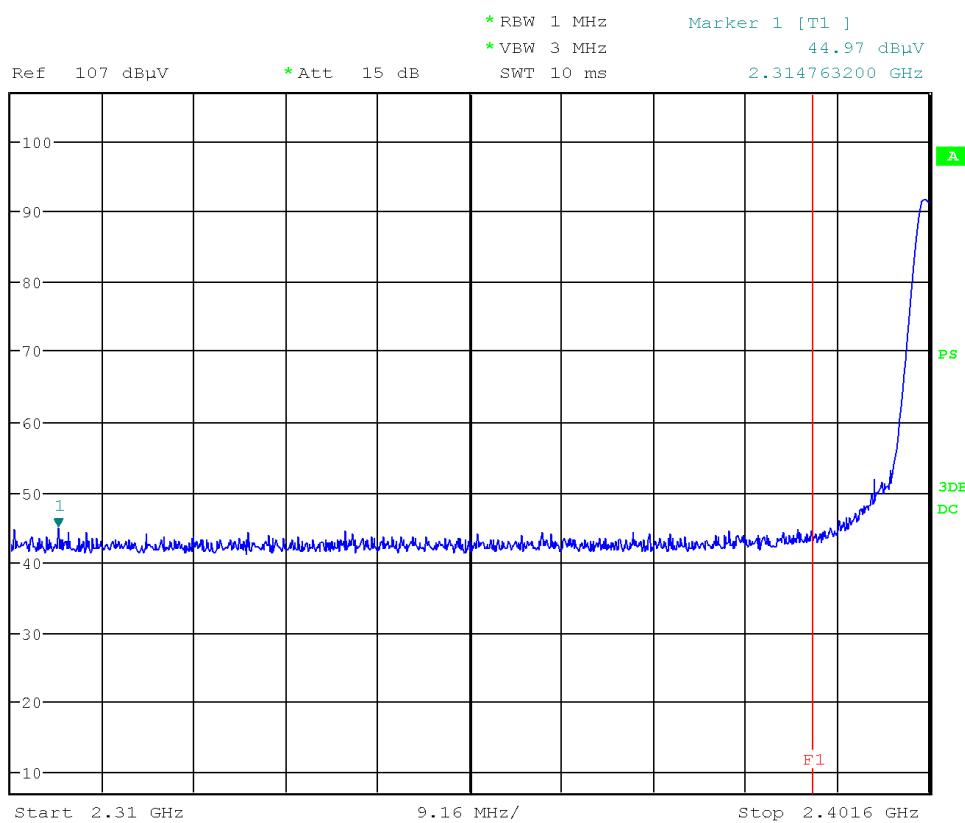


Date: 22.SEP.2021 12:30:42

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Low Channel Horizontal - Average Emission

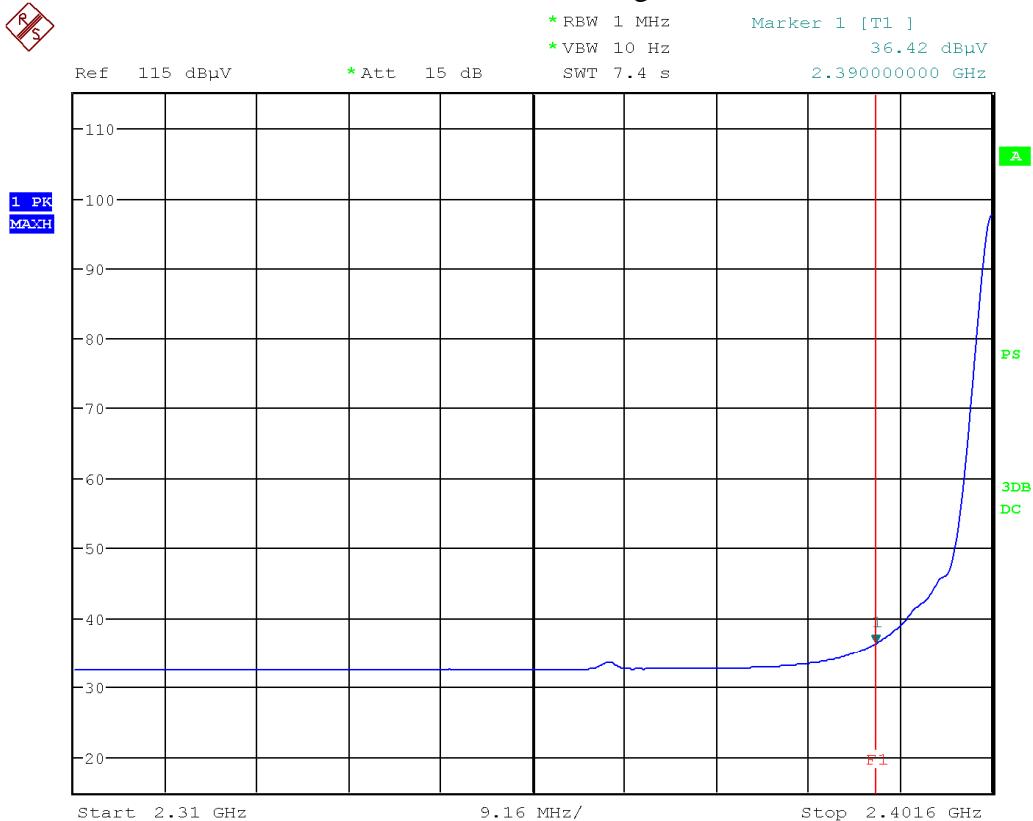

Date: 22.SEP.2021 12:26:15


Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247
Product	ECB601/ECB501	
Standard(s)		



Band Edge – Low Channel Vertical – Average Emission

RS

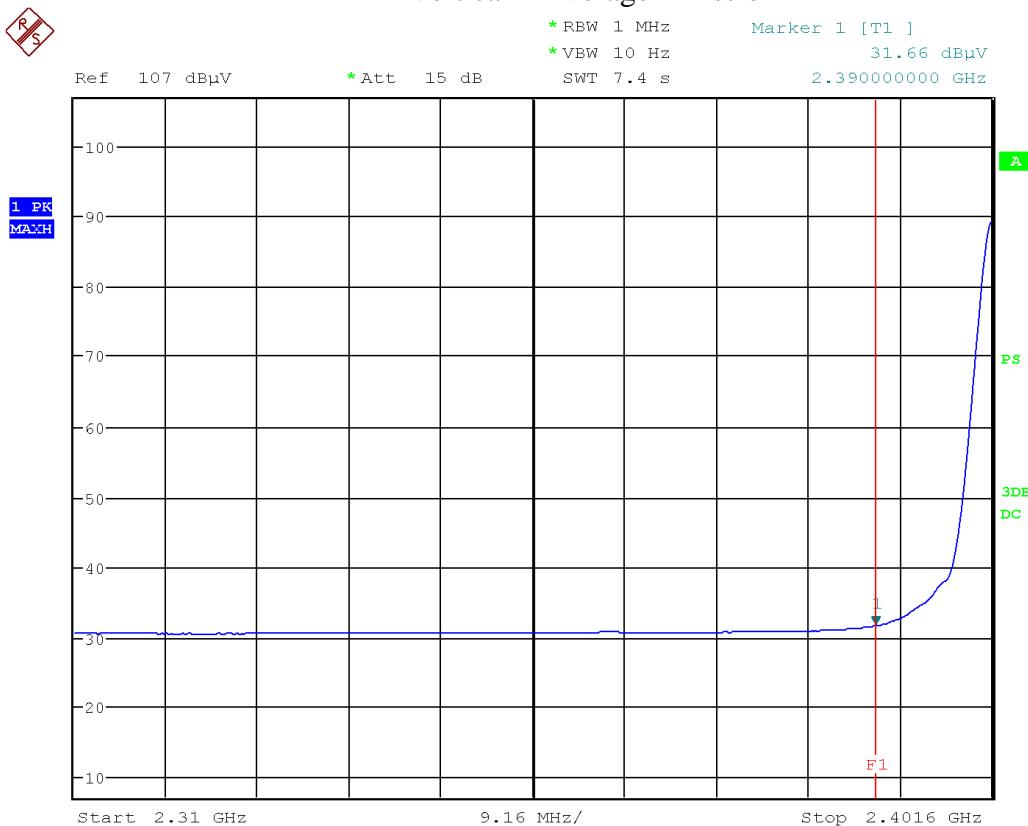


Date: 22.SEP.2021 12:31:12

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	TÜV SÜD Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 47 Horizontal - Peak Emission

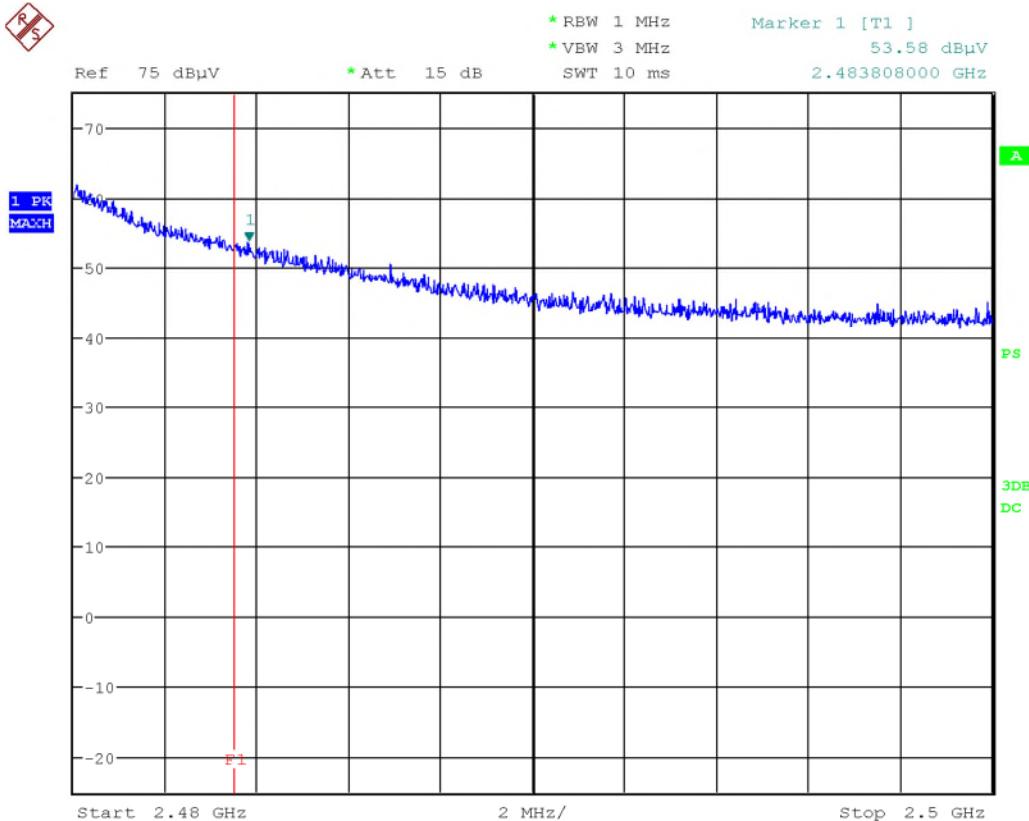


Date: 22.SEP.2021 11:18:16

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 48 Horizontal - Peak Emission

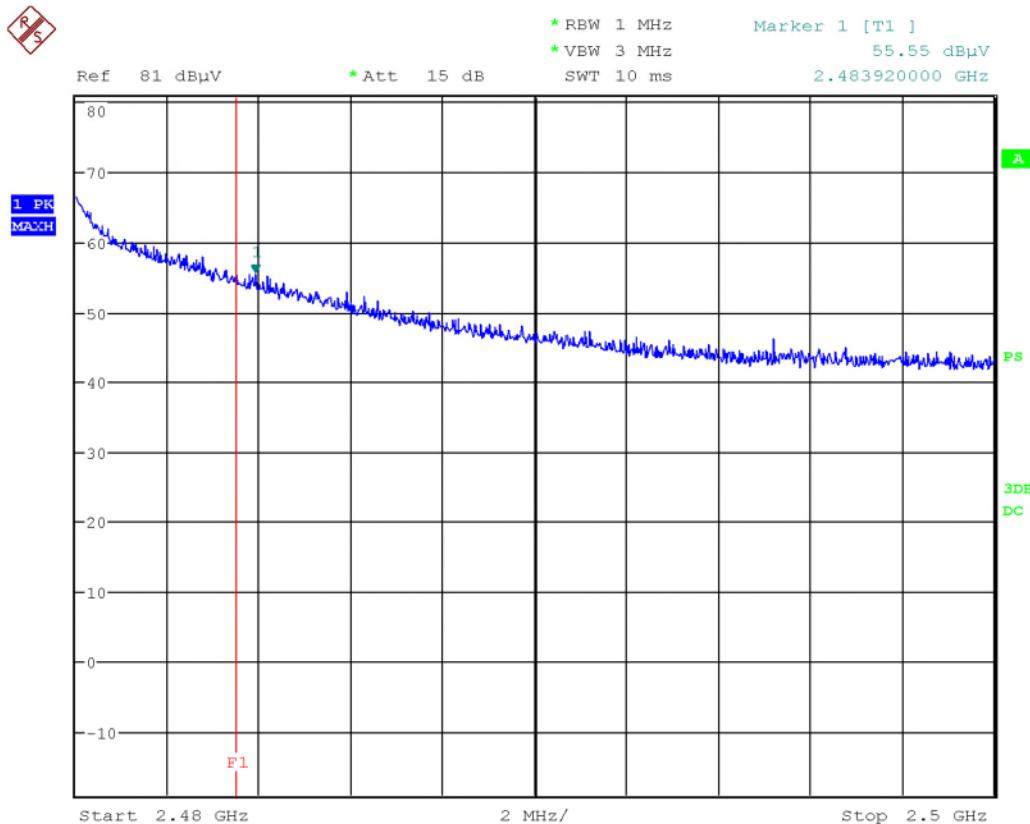


Date: 22.SEP.2021 11:05:25

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 49 Horizontal - Peak Emission

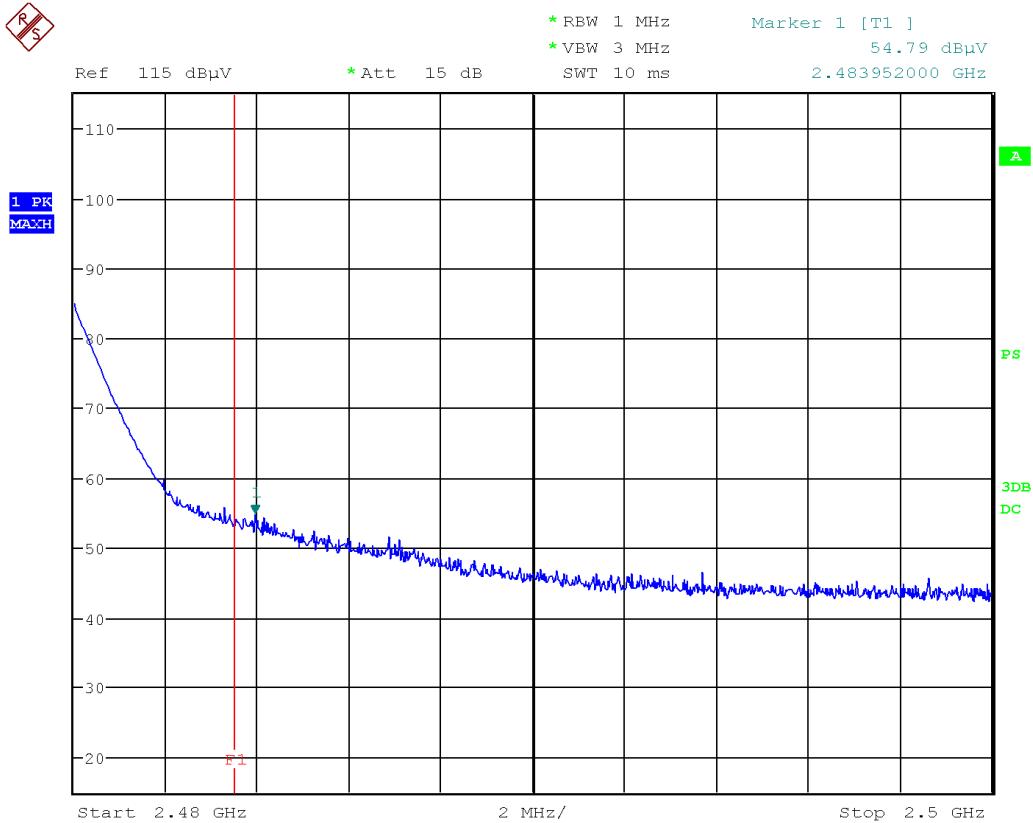


Date: 22.SEP.2021 10:47:41

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 47 Vertical - Peak Emission

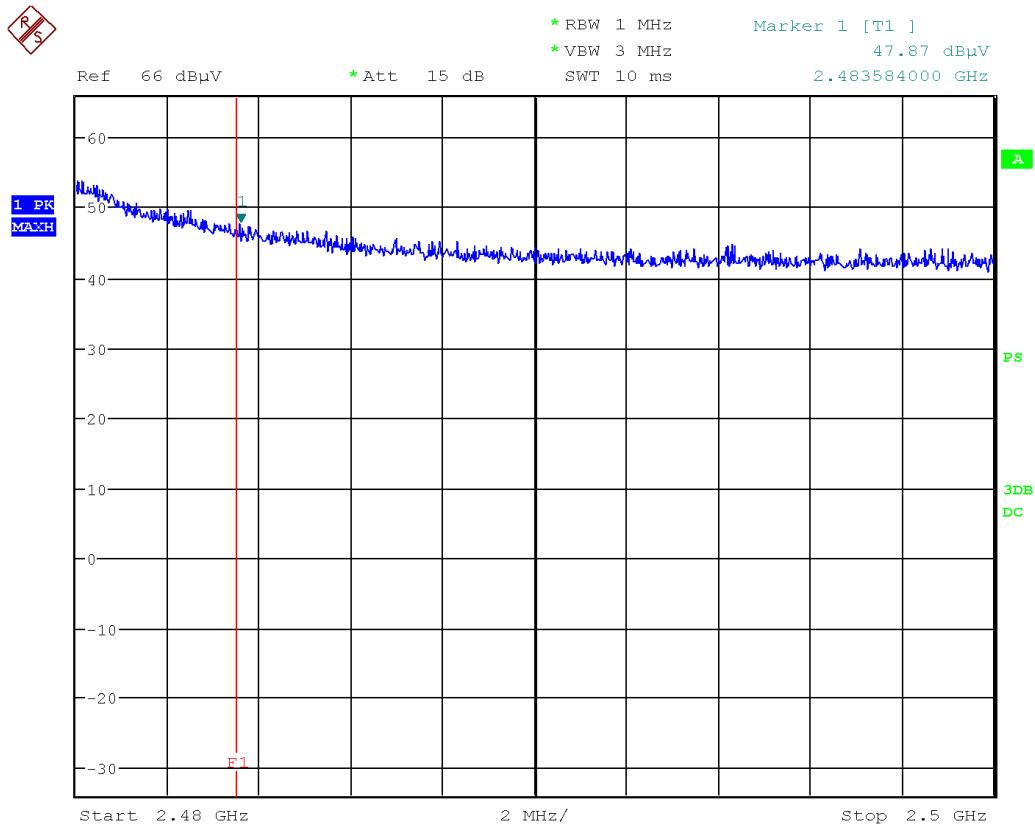


Date: 22.SEP.2021 11:15:58

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 48 Vertical - Peak Emission

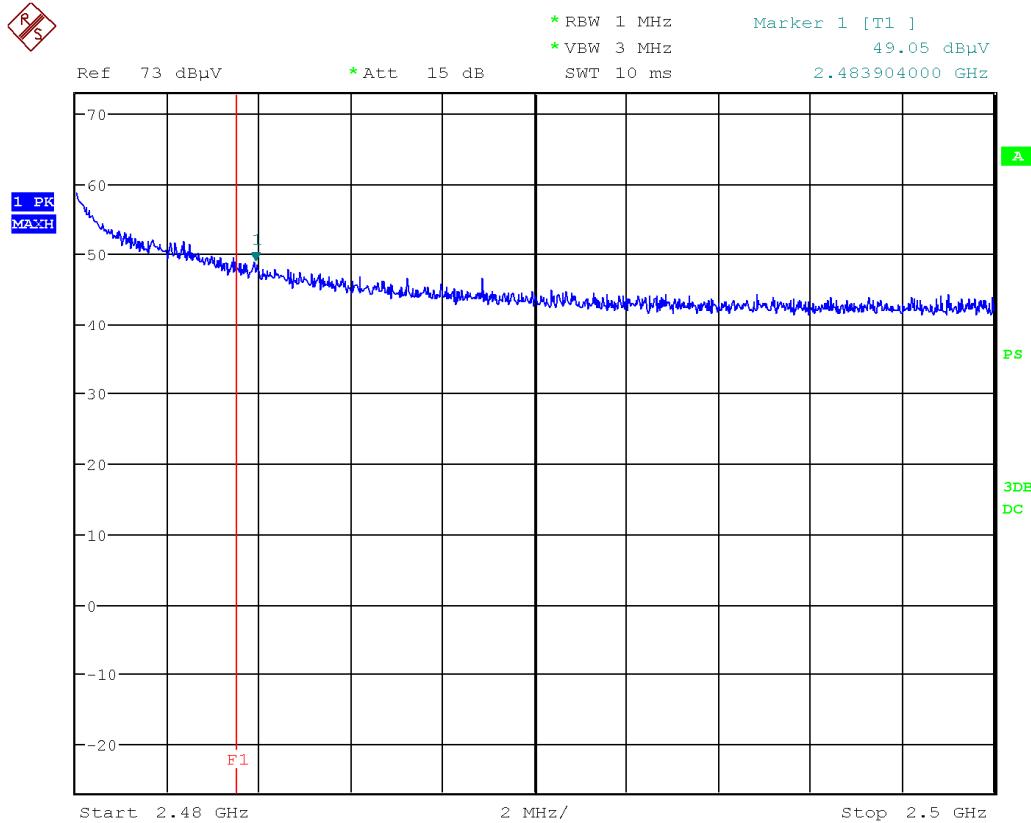


Date: 22.SEP.2021 11:09:47

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 49 Vertical - Peak Emission

RS

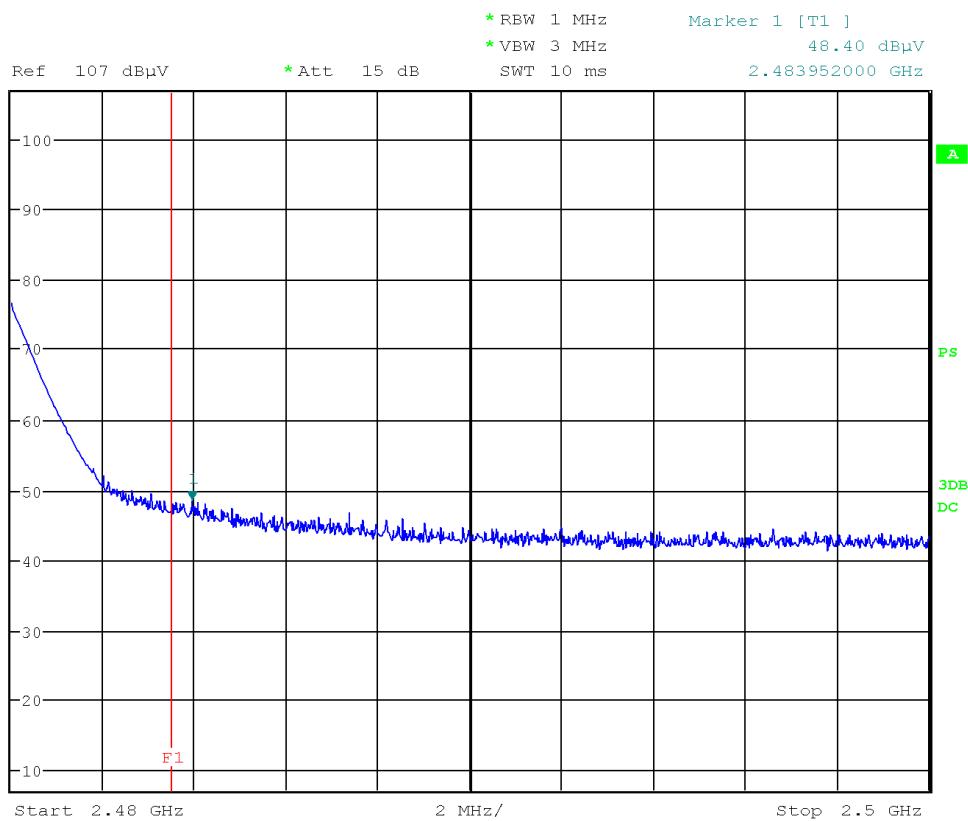


Date: 22.SEP.2021 10:50:06

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 47 Horizontal - Average Emission

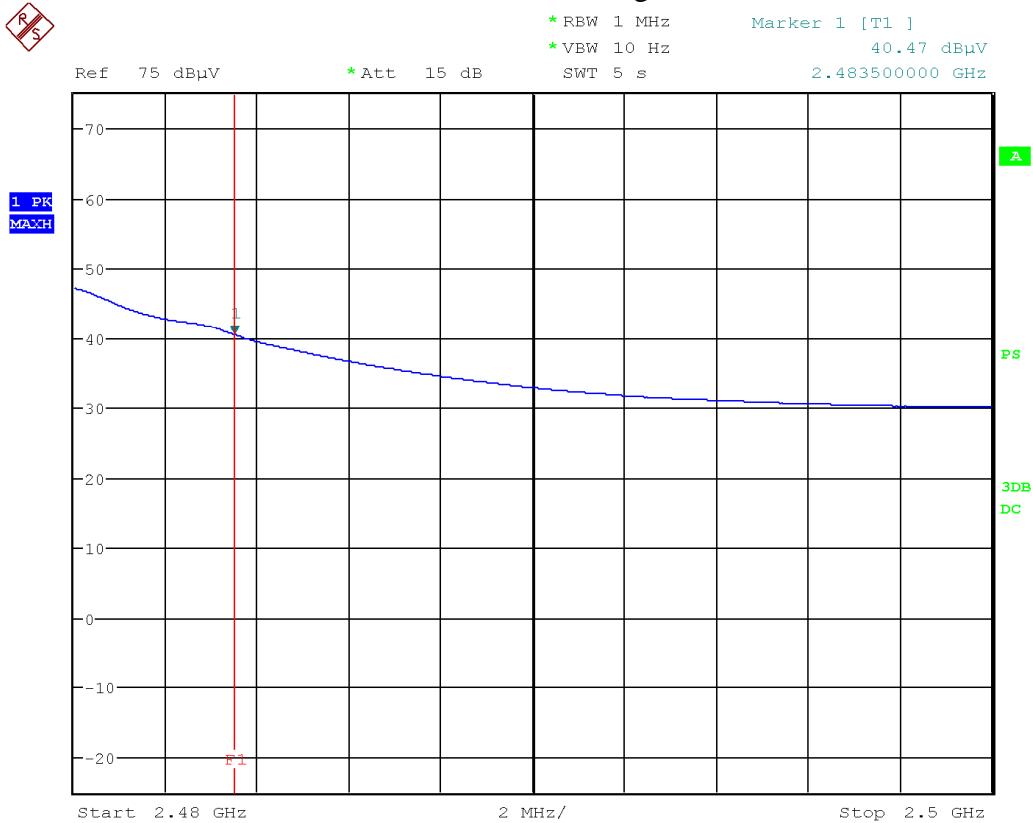


Date: 22.SEP.2021 11:18:38

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 48
Horizontal - Average Emission

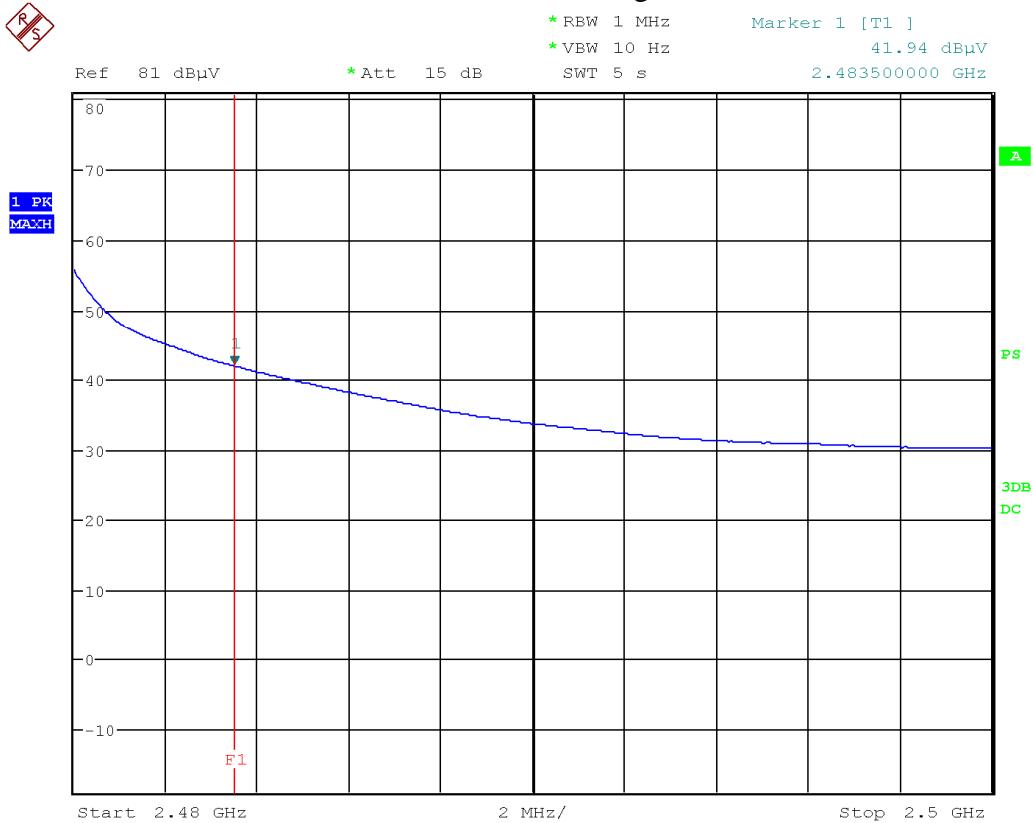


Date: 22.SEP.2021 11:05:47

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 49
Horizontal - Average Emission

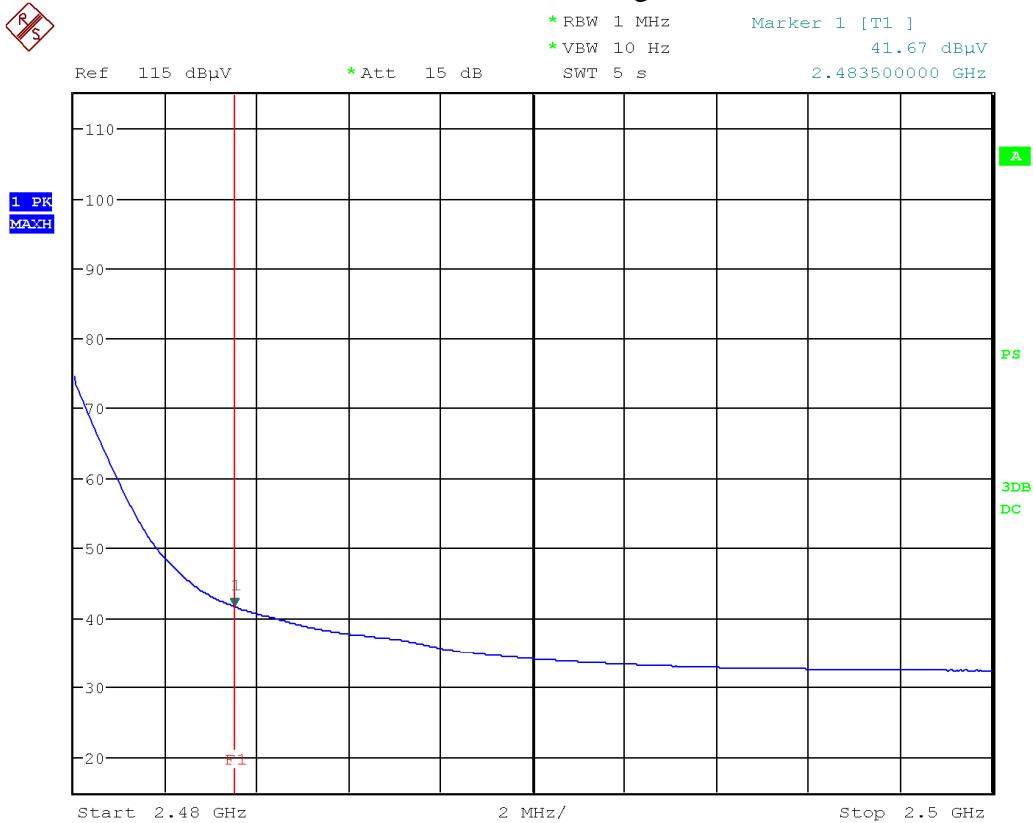

Date: 22.SEP.2021 10:48:03


Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 47 Vertical – Average Emission

RS

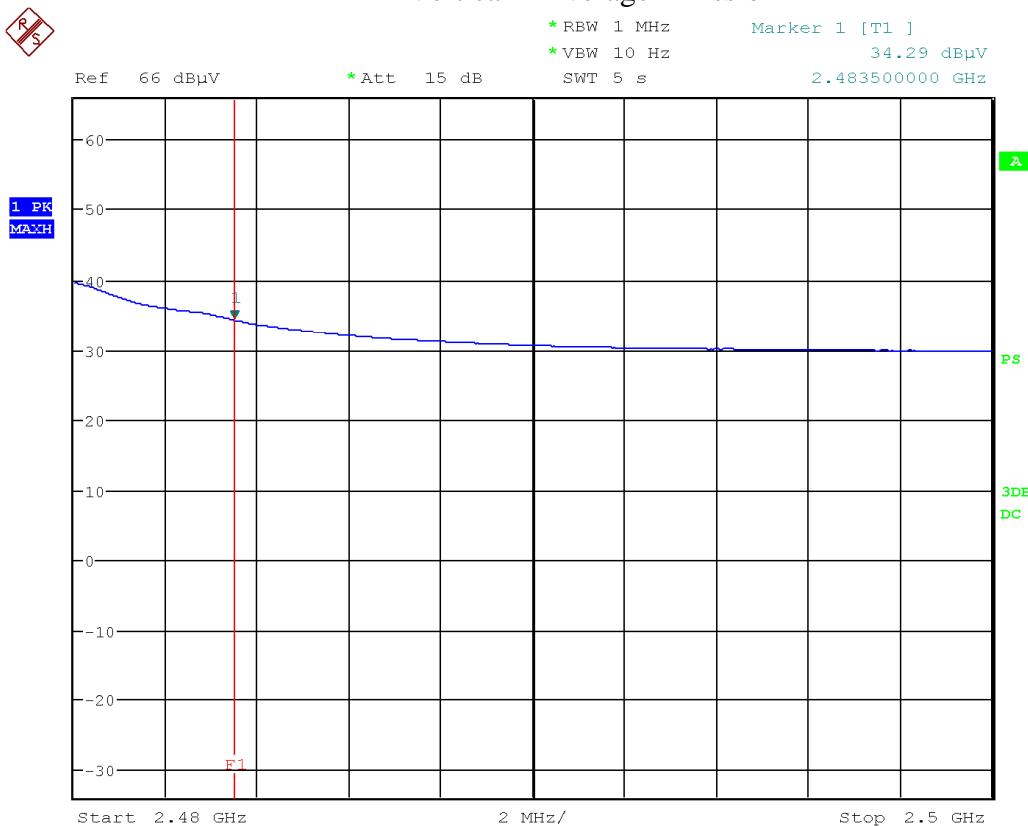


Date: 22.SEP.2021 11:16:20

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247
Product	ECB601/ECB501	
Standard(s)		



Band Edge – Channel 48 Vertical – Average Emission

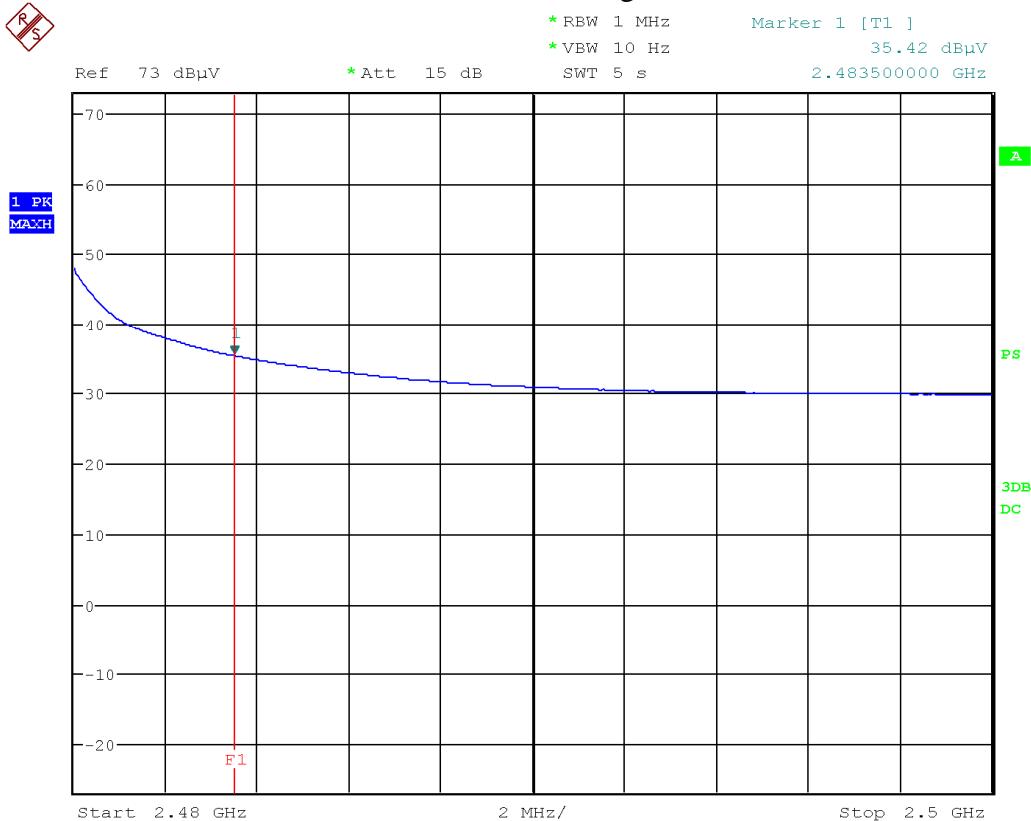


Date: 22.SEP.2021 11:10:09

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	TÜV SÜD Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 49 Vertical – Average Emission

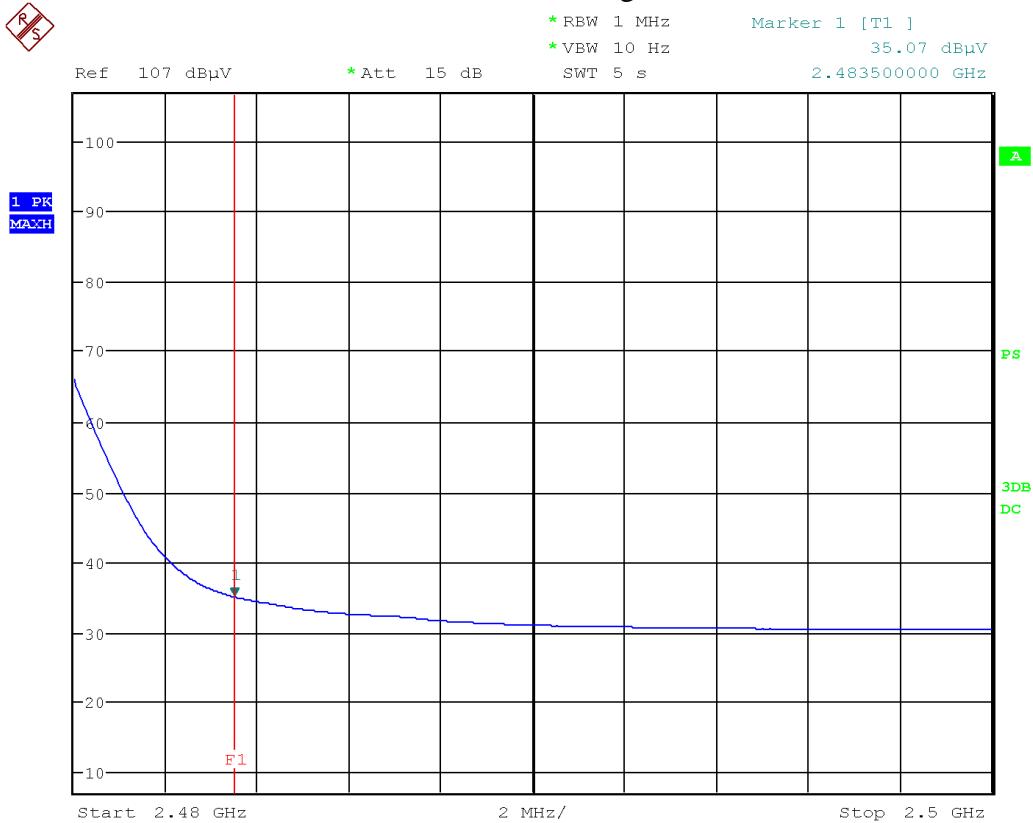


Date: 22.SEP.2021 10:50:27

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edges – ECB501

Band Edge – Low Channel Horizontal - Peak Emission

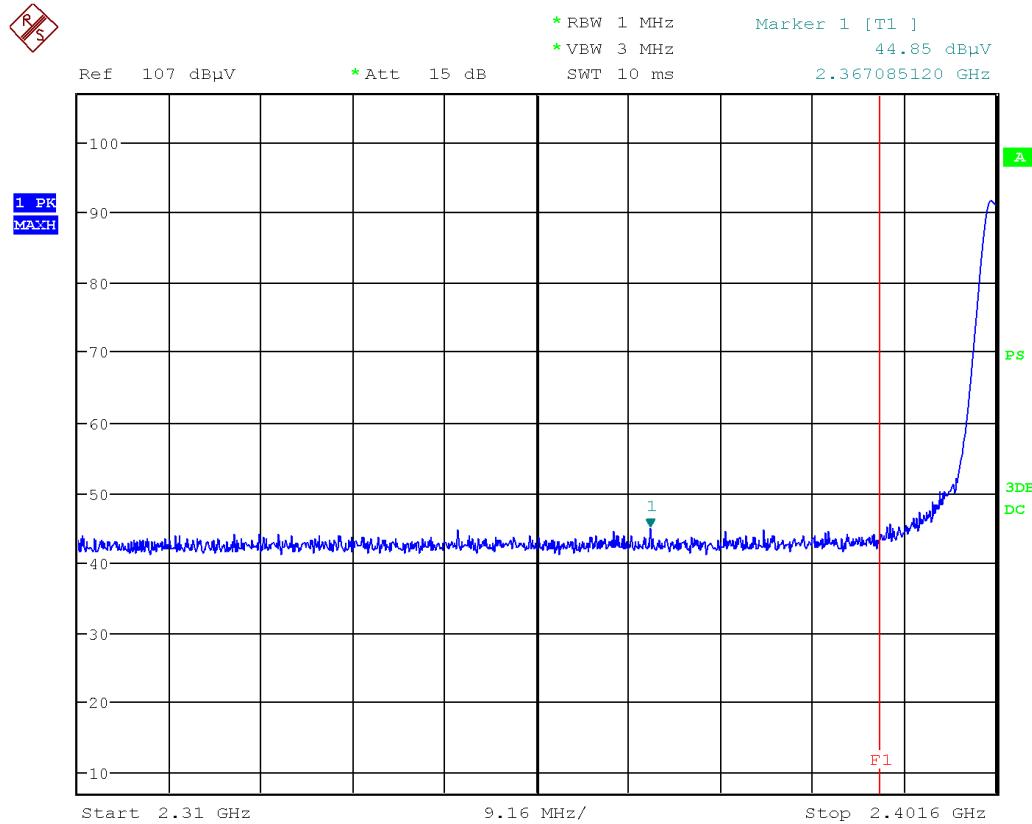


Date: 22.SEP.2021 17:03:43

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Low Channel Vertical - Peak Emission

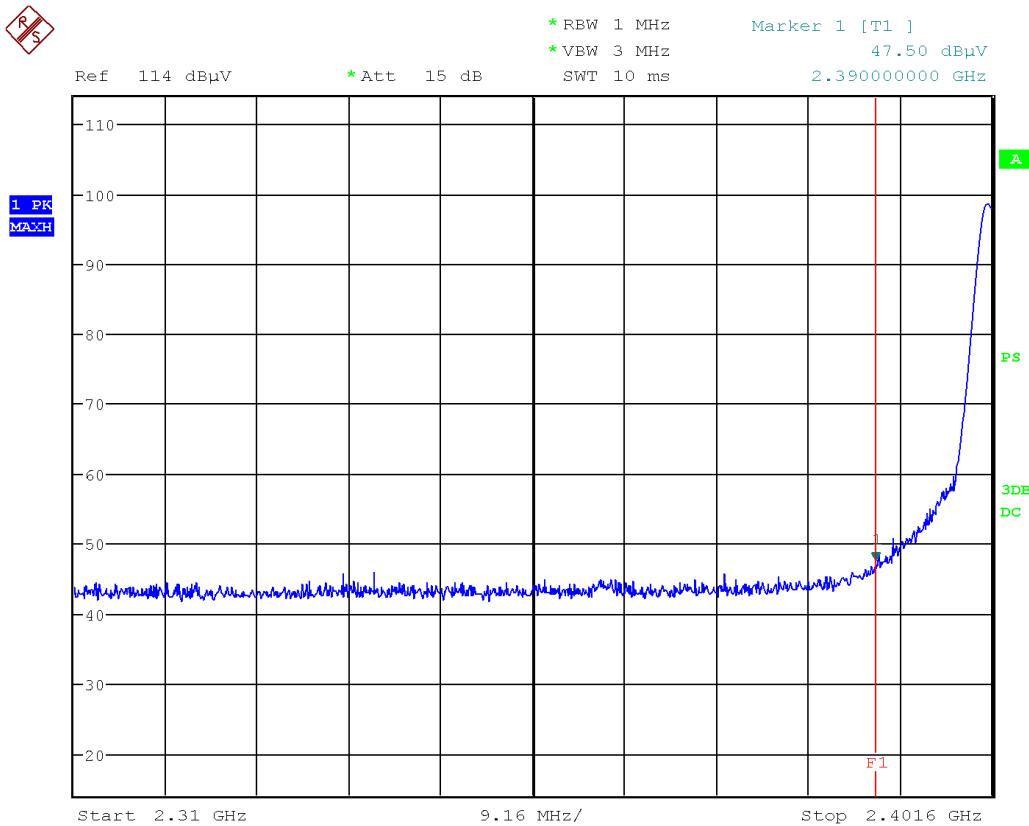


Date: 22.SEP.2021 16:53:26

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Low Channel Horizontal - Average Emission

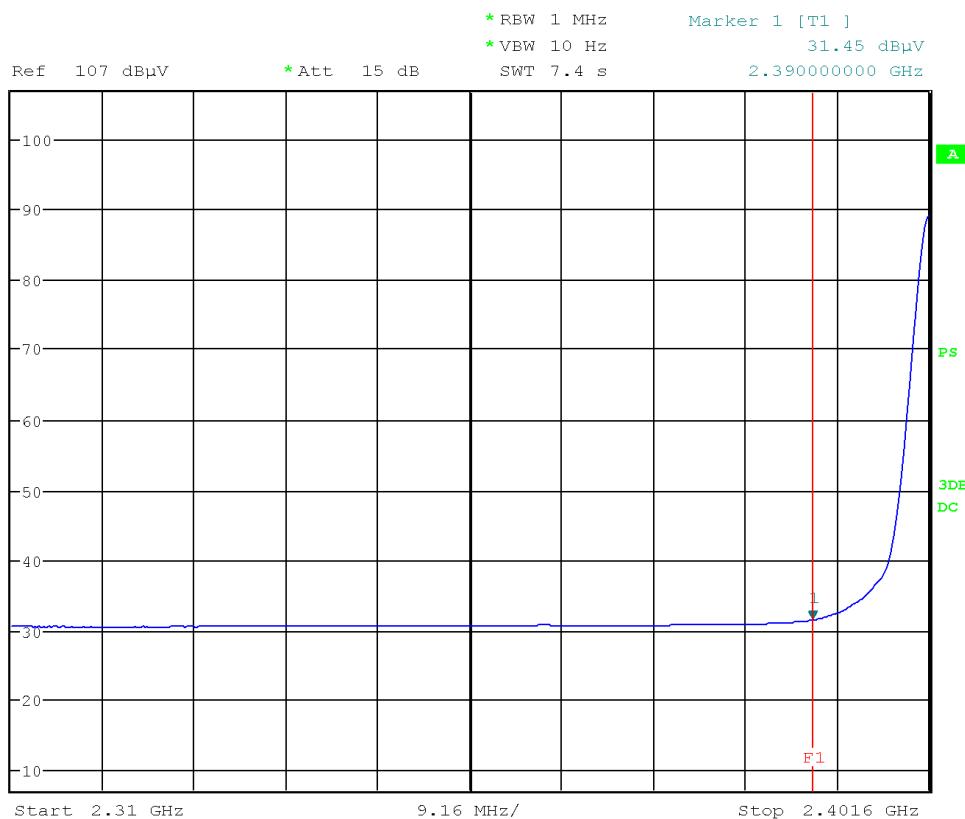


Date: 22.SEP.2021 17:04:13

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Low Channel Vertical – Average Emission

RS

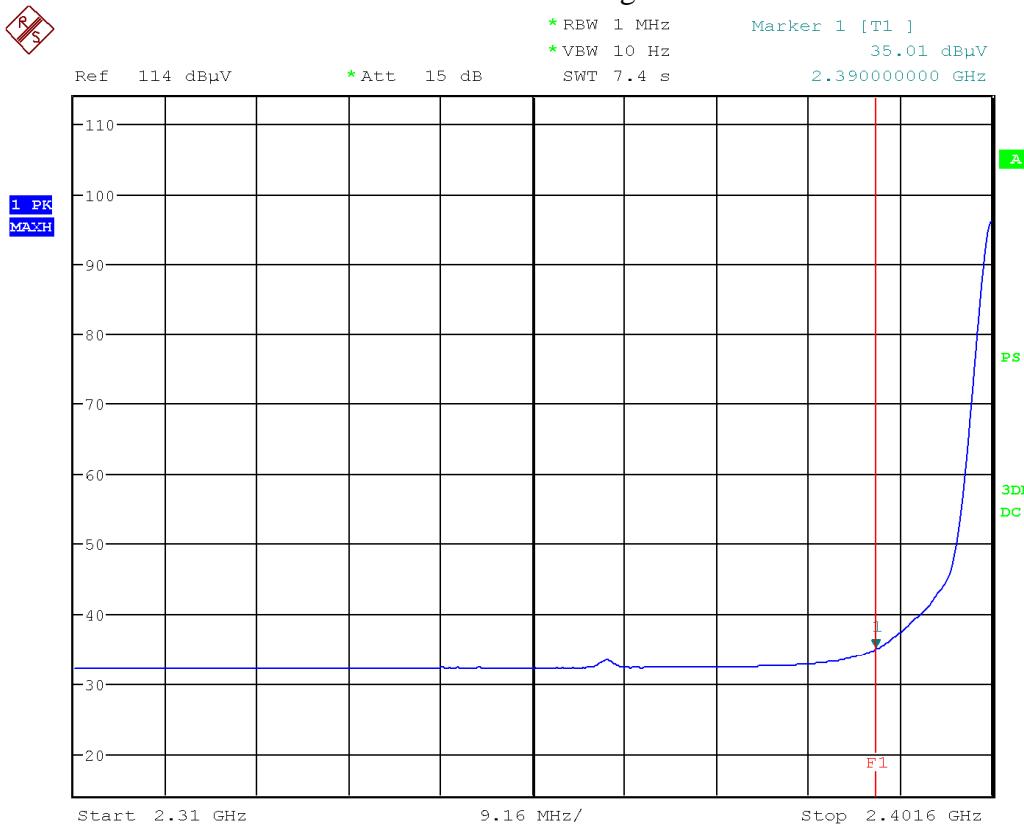


Date: 22.SEP.2021 16:53:56

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 47 Horizontal - Peak Emission

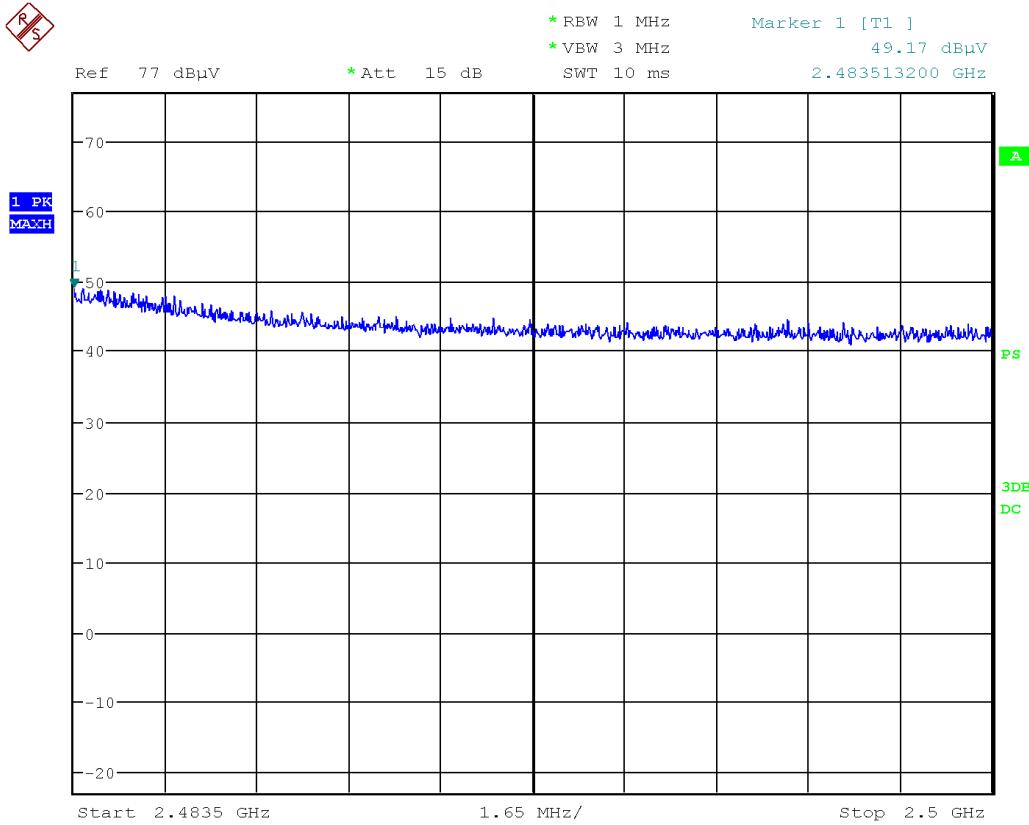


Date: 22.SEP.2021 16:10:11

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 48 Horizontal - Peak Emission

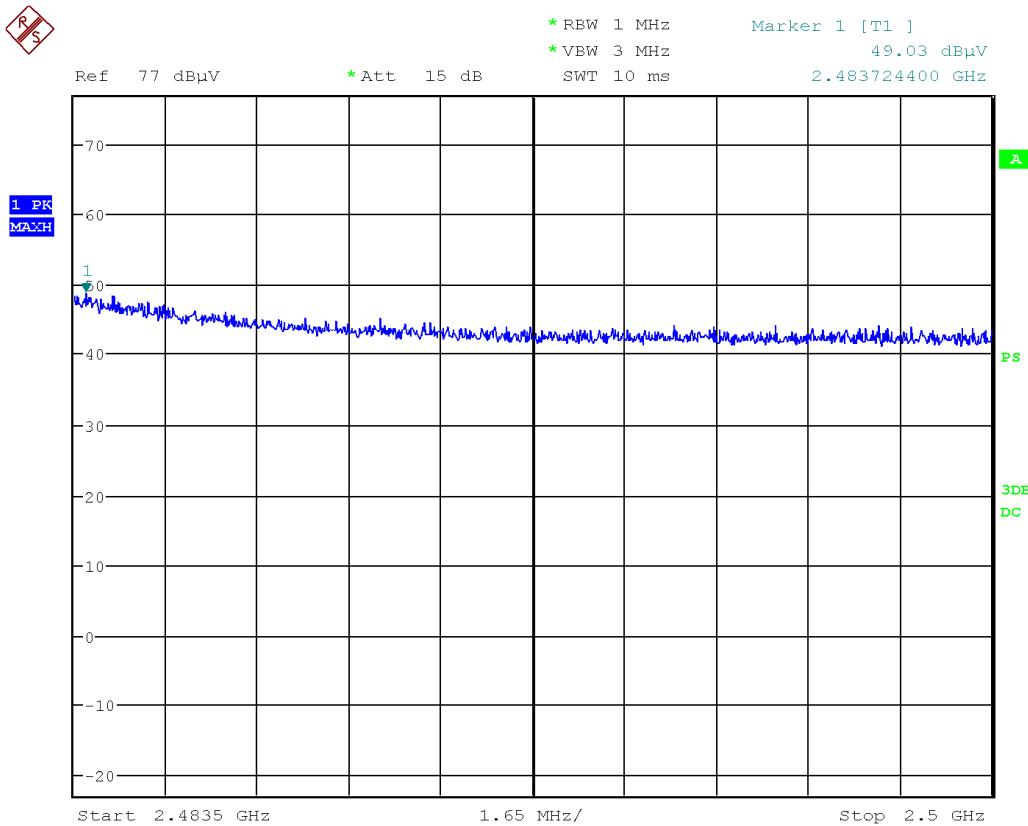


Date: 22.SEP.2021 16:31:05

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 49 Horizontal - Peak Emission

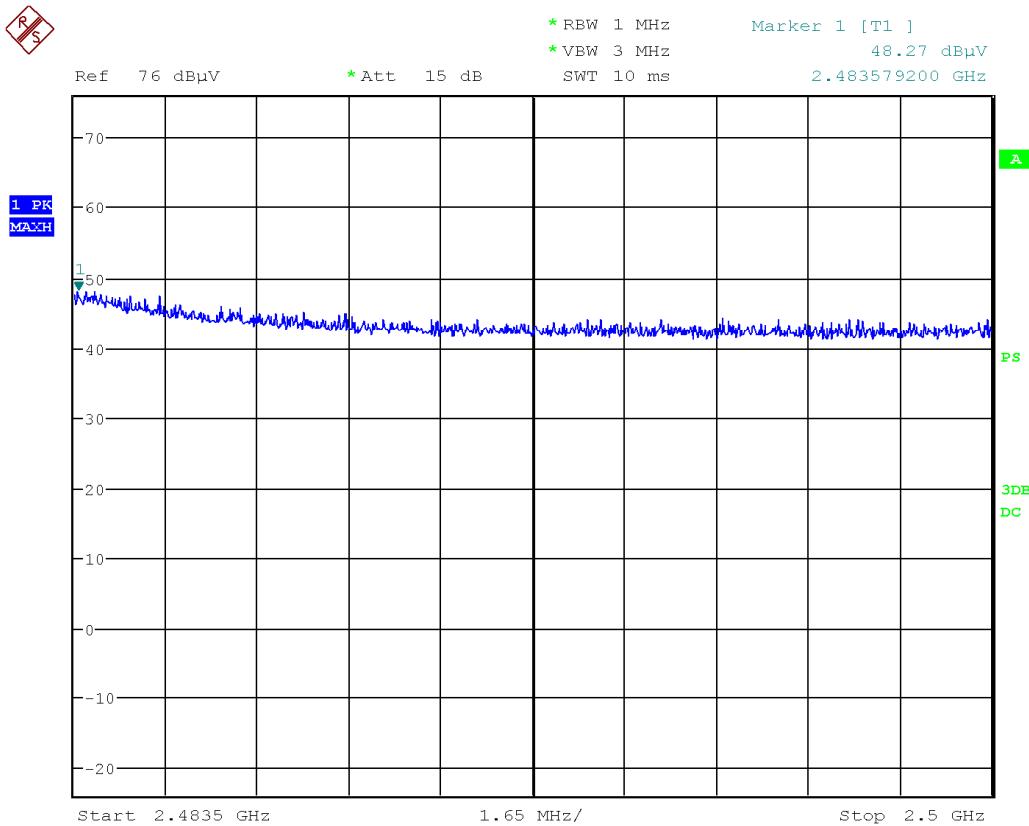


Date: 22.SEP.2021 16:34:03

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	 Canada
Product	ECB601/ECB501		
Standard(s)			

Band Edge – Channel 47
Vertical - Peak Emission

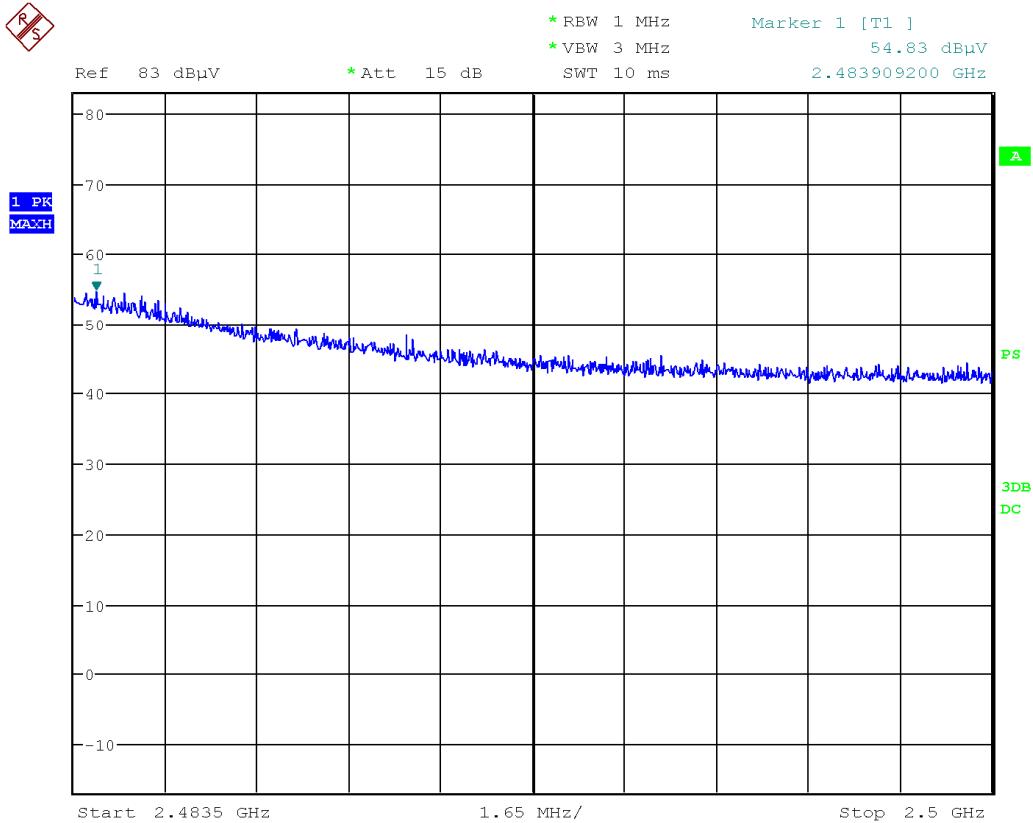


Date: 22.SEP.2021 16:00:06

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	 Canada
Product	ECB601/ECB501		
Standard(s)			

Band Edge – Channel 48
Vertical - Peak Emission

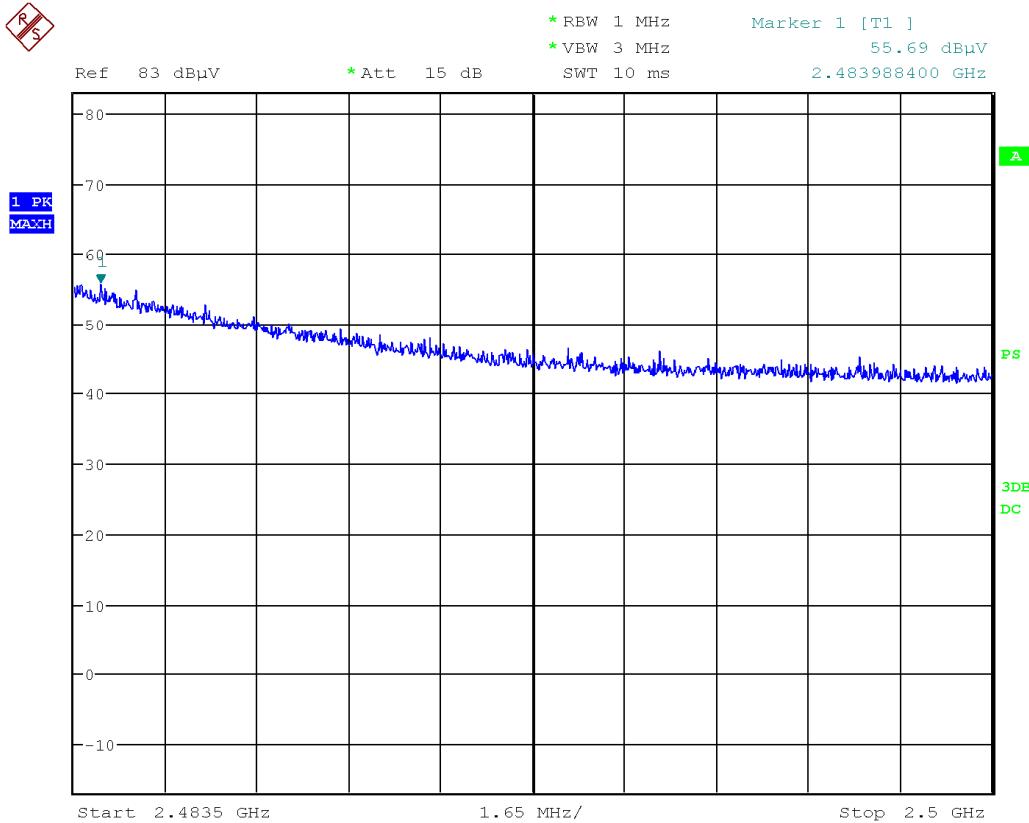


Date: 22.SEP.2021 16:22:55

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 49 Vertical - Peak Emission

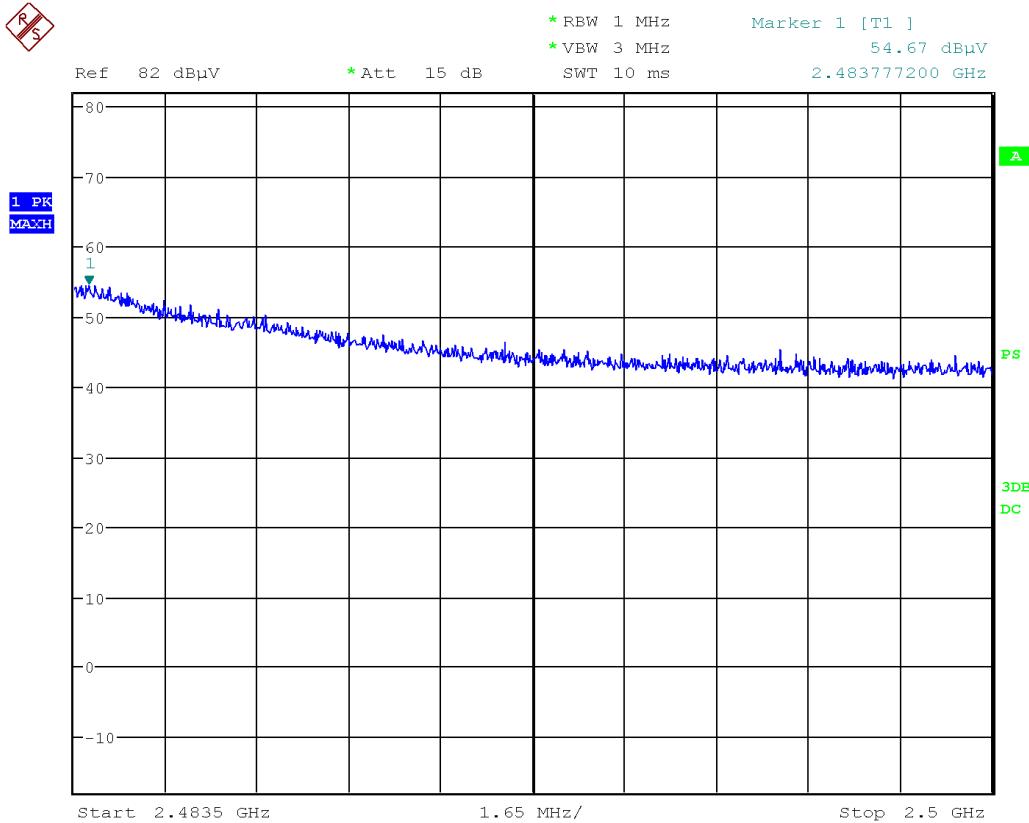


Date: 22.SEP.2021 16:36:25

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 47 Horizontal - Average Emission

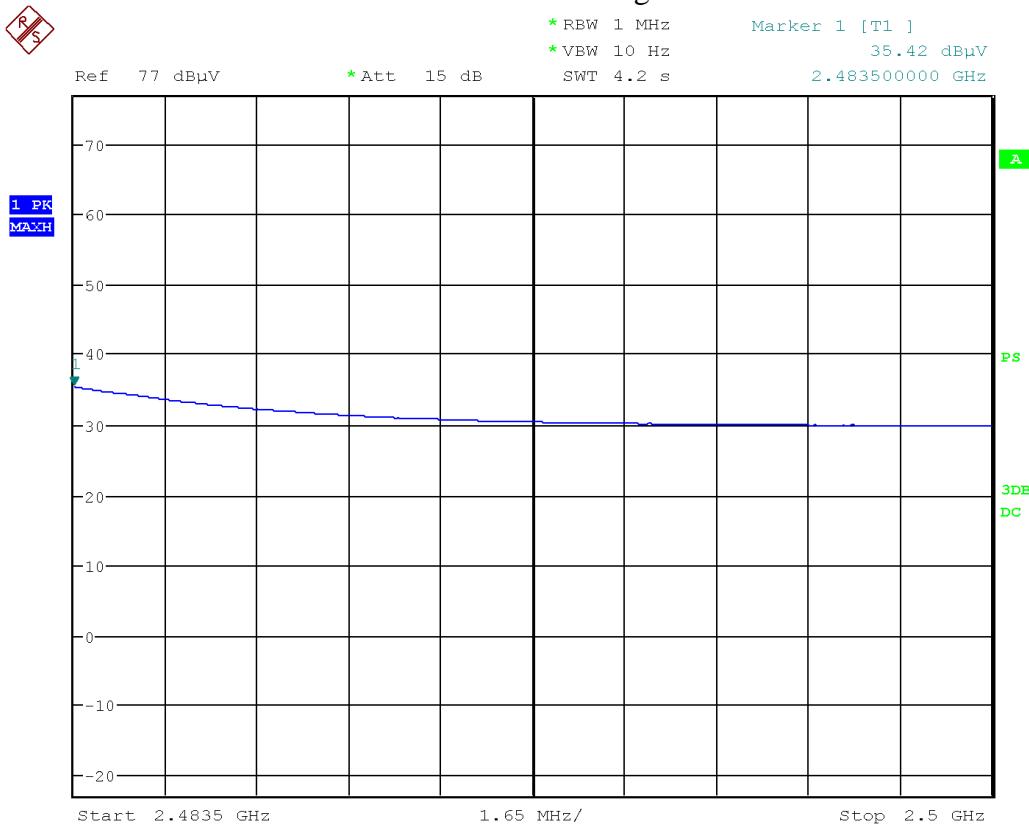


Date: 22.SEP.2021 16:10:29

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 48 Horizontal - Average Emission

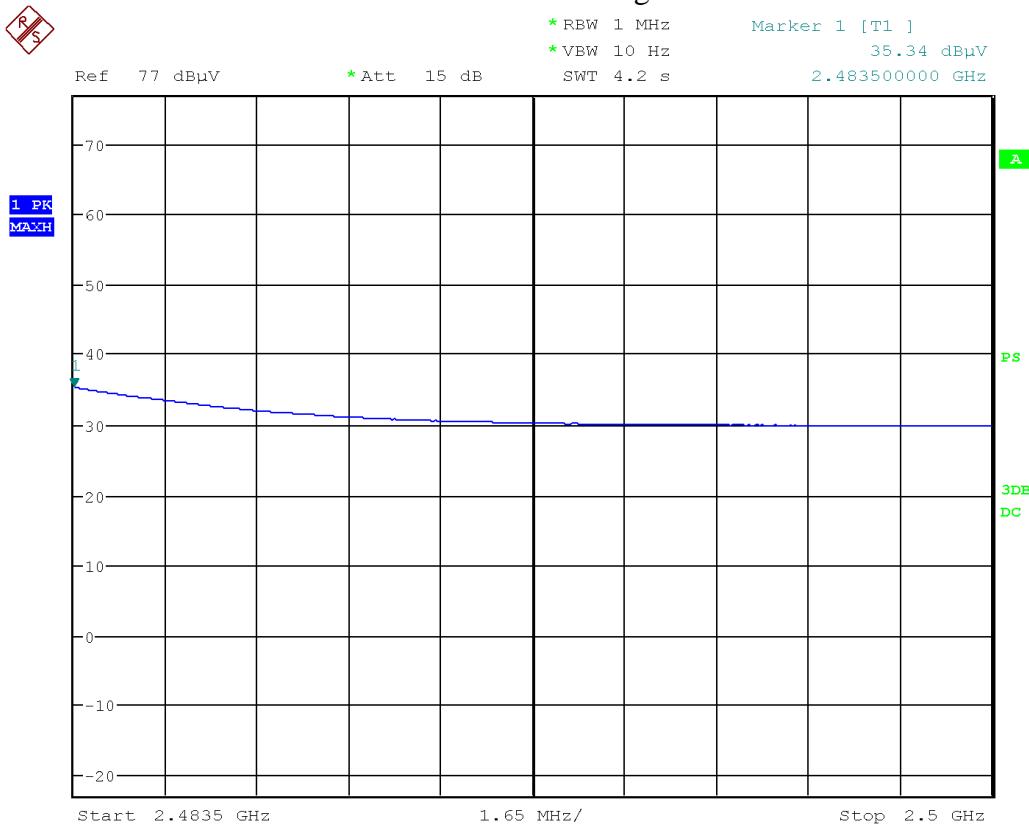


Date: 22.SEP.2021 16:31:23

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Band Edge – Channel 49
Horizontal - Average Emission

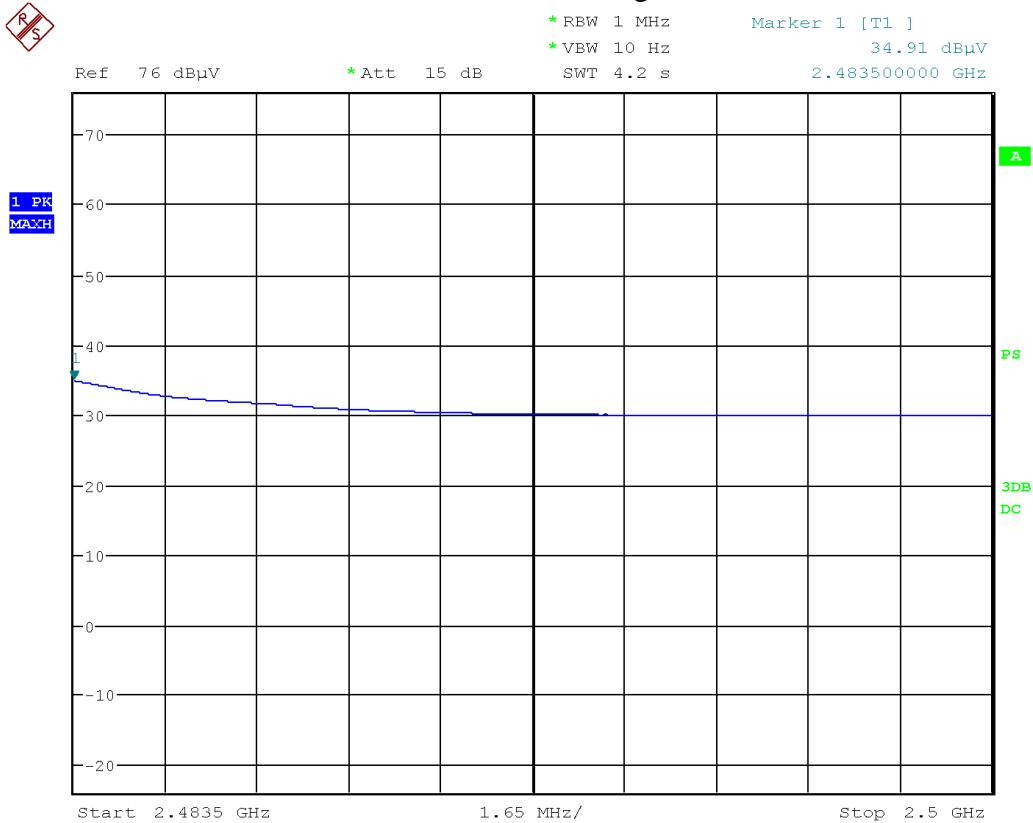


Date: 22.SEP.2021 16:34:21

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 47 Vertical – Average Emission

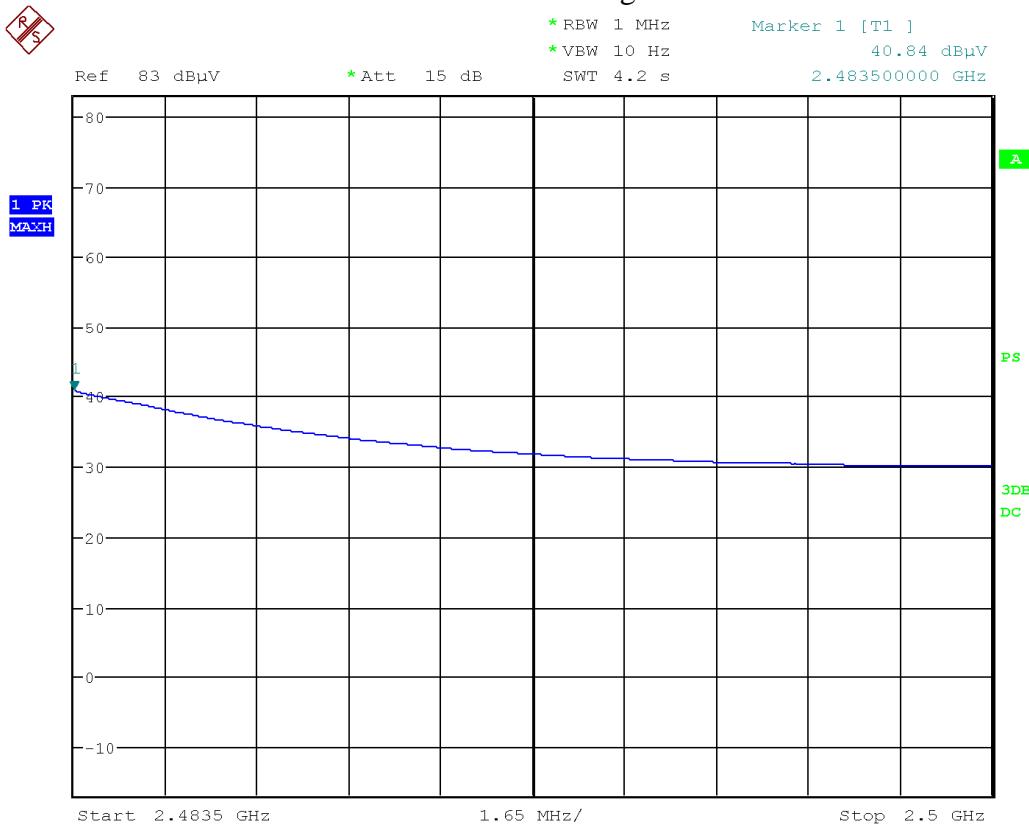


Date: 22.SEP.2021 16:00:24

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	 Canada
Product	ECB601/ECB501		
Standard(s)			

Band Edge – Channel 48
Vertical – Average Emission

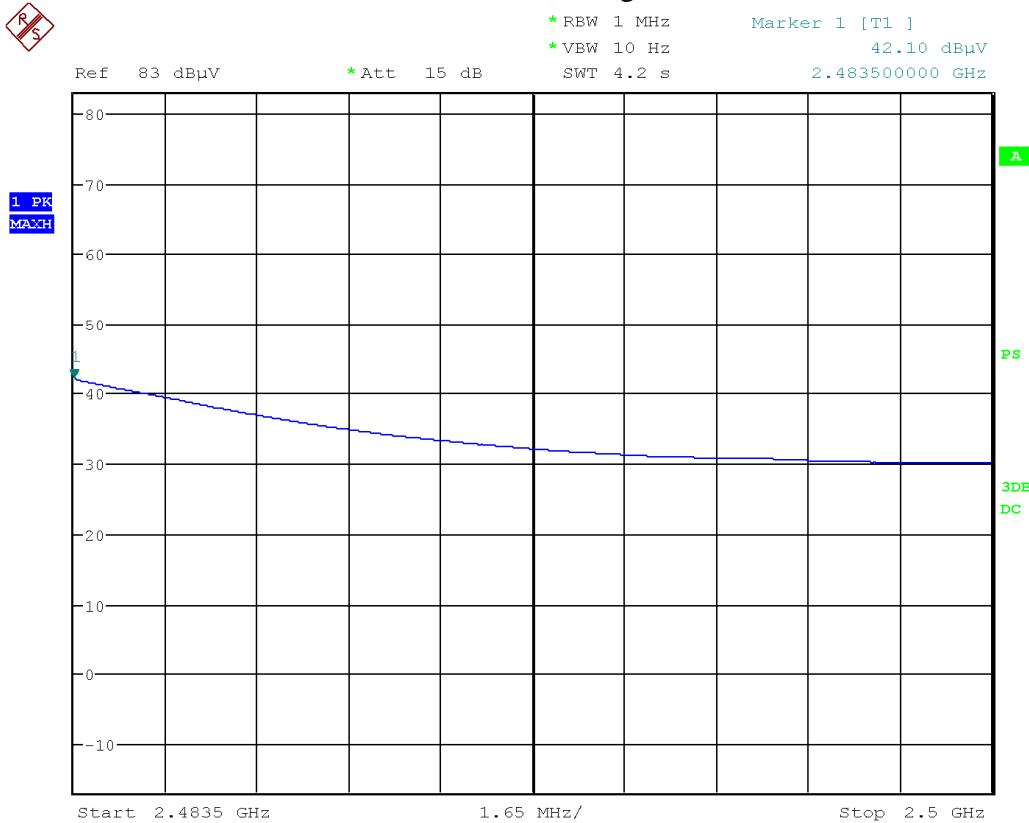


Date: 22.SEP.2021 16:23:14

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	



Band Edge – Channel 49 Vertical – Average Emission

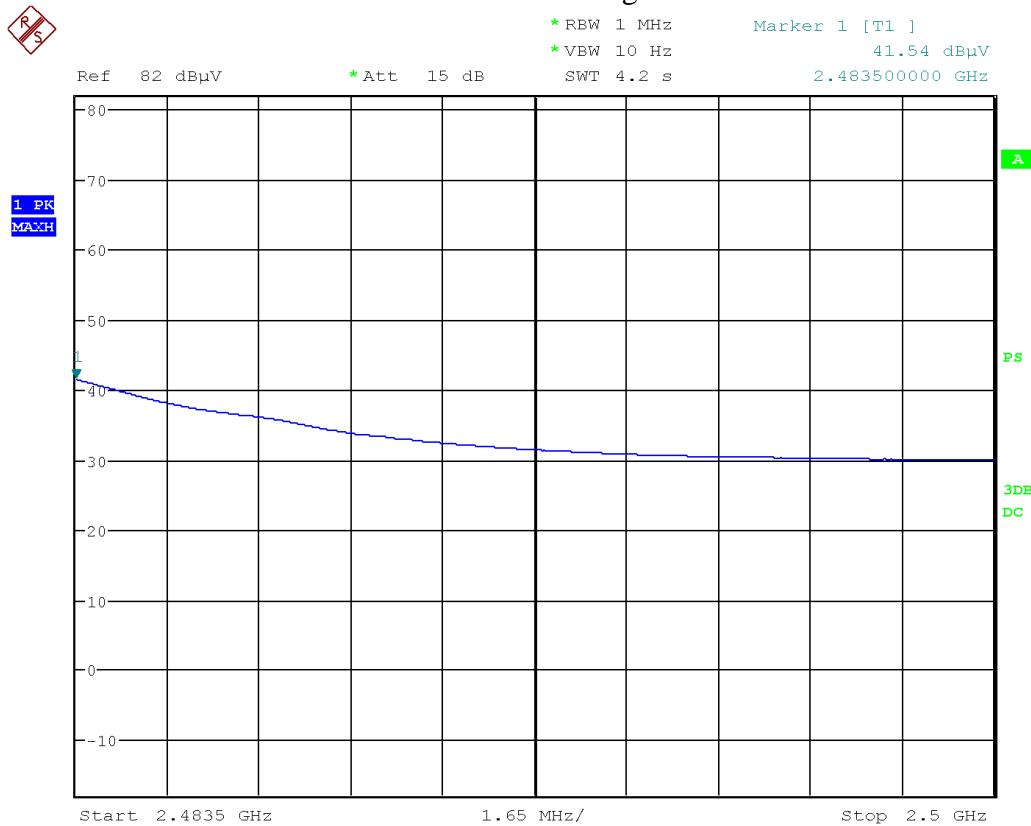

Date: 22.SEP.2021 16:36:43

Note: Restricted band Band Edge plot was taken at a 3m measurement distance. The marker shows the raw value. See the Final Measurements and Results section below for correct values.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Final Measurements and Results

The EUT passed. Low, middle, and high bands were measured. 3 high channels were measured as the last two high channels have lower power.

In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205 need to be verified with a final detector. Emissions outside the restricted bands were measured for informational purposes.

The measurements were maximized by rotating the turn table over a full 0-360 rotation and the antenna height was varied from 1 m to 4 m.

Frequency (Hz)	Detector	Correction Factor (dB)	Level (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dB)	Test Result
Horizontal						
440.67M	PEAK	-7.4	37.9	46.0	8.1	Pass
881.73M	PEAK	4.3	37.2	46.0	8.8	Pass
748.11M	PEAK	1.5	37.2	46.0	8.8	Pass
489.63M	PEAK	-4.8	36.5	46.0	9.5	Pass
367.23M	PEAK	-8.5	36.0	46.0	10.0	Pass
465.15M	PEAK	-5.9	36.0	46.0	10.0	Pass
Vertical						
465.15M	PEAK	-5.9	39.9	46.0	6.1	Pass
440.67M	PEAK	-7.4	38.5	46.0	7.5	Pass
881.94M	PEAK	4.3	37.5	46.0	8.5	Pass
748.29M	PEAK	1.5	37.5	46.0	8.5	Pass
367.23M	PEAK	-8.5	36.1	46.0	9.9	Pass
489.63M	PEAK	-4.8	35.2	46.0	10.8	Pass

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

ECB601

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dB μ V)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dB μ V/m)	Emission Limit (dB μ V/m)	Margin (dB)	Result
Low Channel (Ch1)											
2401.6	Peak	Horz	100.2	32.0	3.2	10.0	-34.0	111.4			PASS
2401.6	Avg	Horz	97.7	32.0	3.2	10.0	-34.0	108.8			PASS
2401.6	Peak	Vert	92.0	32.0	3.2	10.0	-34.0	103.2			PASS
2401.6	Avg	Vert	89.4	32.0	3.2	10.0	-34.0	100.6			PASS
2390	Peak	Horz	48.7	32.0	3.2	10.0	-34.1	59.8	74.0	14.2	PASS
2390	Avg	Horz	36.4	32.0	3.2	10.0	-34.1	47.5	54.0	6.5	PASS
2314.8	Peak	Vert	45.0	31.8	3.1	10.0	-34.3	55.6	74.0	18.4	PASS
2390	Avg	Vert	31.7	32.0	3.2	10.0	-34.1	42.8	54.0	11.2	PASS
2495.4	Peak	Horz	45.0	32.2	3.2	10.0	-33.7	56.7	74.0	17.3	PASS
2487	Avg	Horz	30.1	32.2	3.2	10.0	-33.8	41.8	54.0	12.2	PASS
2492.9	Peak	Vert	44.8	32.2	3.2	10.0	-33.7	56.5	74.0	17.5	PASS
2483.8	Avg	Vert	30.1	32.2	3.2	10.0	-33.8	41.8	54.0	12.2	PASS
4803.2	Peak	Horz	45.4	34.2	4.2	0.0	-32.5	51.4	74.0	22.6	PASS
4803.2	Avg	Horz	32.1	34.2	4.2	0.0	-32.5	38.1	54.0	15.9	PASS
4803.2	Peak	Vert	45.7	34.2	4.2	0.0	-32.5	51.7	74.0	22.3	PASS
4803.2	Avg	Vert	32.1	34.2	4.2	0.0	-32.5	38.1	54.0	15.9	PASS
7204.8	Peak	Horz	43.1	35.7	6.0	0.0	-32.9	51.9	74.0	22.1	PASS
7204.8	Avg	Horz	29.5	35.7	6.0	0.0	-32.9	38.3	54.0	15.7	PASS
7204.8	Peak	Vert	43.6	35.7	6.0	0.0	-32.9	52.4	74.0	21.6	PASS
7204.8	Avg	Vert	29.5	35.7	6.0	0.0	-32.9	38.3	54.0	15.7	PASS
9606.4	Peak	Horz	43.6	36.7	6.9	0.0	-31.6	55.6	74.0	18.4	PASS
9606.4	Avg	Horz	28.7	36.7	6.9	0.0	-31.6	40.7	54.0	13.3	PASS
9606.4	Peak	Vert	43.4	36.7	6.9	0.0	-31.6	55.4	74.0	18.6	PASS
9606.4	Avg	Vert	28.7	36.7	6.9	0.0	-31.6	40.7	54.0	13.3	PASS
12008	Peak	Horz	49.4	38.8	7.5	0.0	-31.3	64.4	74.0	9.6	PASS
12008	Avg	Horz	34.2	38.8	7.5	0.0	-31.3	49.2	54.0	4.8	PASS
12008	Peak	Vert	48.9	38.8	7.5	0.0	-31.3	63.9	74.0	10.1	PASS
12008	Avg	Vert	34.0	38.8	7.5	0.0	-31.3	49.0	54.0	5.0	PASS
Mid Channel (CH25)											
2440	Peak	Horz	100.2	32.2	3.2	10.0	-33.9	111.8			PASS
2440	Avg	Horz	97.7	32.2	3.2	10.0	-33.9	109.3			PASS
2440	Peak	Vert	91.4	32.2	3.2	10.0	-33.9	103.0			PASS
2440	Avg	Vert	88.8	32.2	3.2	10.0	-33.9	100.4			PASS
4880	Peak	Horz	45.4	34.2	4.4	0.0	-32.6	51.3	74.0	22.7	PASS
4880	Avg	Horz	31.5	34.2	4.4	0.0	-32.6	37.5	54.0	16.5	PASS
4880	Peak	Vert	45.7	34.2	4.4	0.0	-32.6	51.7	74.0	22.3	PASS
4880	Avg	Vert	31.8	34.2	4.4	0.0	-32.6	37.7	54.0	16.3	PASS
7320	Peak	Horz	46.0	35.7	6.0	0.0	-33.0	54.7	74.0	19.3	PASS
7320	Avg	Horz	31.7	35.7	6.0	0.0	-33.0	40.4	54.0	13.6	PASS
7320	Peak	Vert	44.2	35.7	6.0	0.0	-33.0	52.9	74.0	21.1	PASS
7320	Avg	Vert	30.3	35.7	6.0	0.0	-33.0	38.9	54.0	15.1	PASS
9760	Peak	Horz	42.9	36.8	6.9	0.0	-32.2	54.4	74.0	19.6	PASS
9760	Avg	Horz	28.9	36.8	6.9	0.0	-32.2	40.4	54.0	13.6	PASS
9760	Peak	Vert	42.8	36.8	6.9	0.0	-32.2	54.3	74.0	19.7	PASS
9760	Avg	Vert	28.9	36.8	6.9	0.0	-32.2	40.5	54.0	13.5	PASS
12200	Peak	Horz	44.1	39.1	7.6	0.0	-31.1	59.6	74.0	14.4	PASS
12200	Avg	Horz	29.6	39.1	7.6	0.0	-31.1	45.2	54.0	8.8	PASS
12200	Peak	Vert	43.7	39.1	7.6	0.0	-31.1	59.3	74.0	14.7	PASS
12200	Avg	Vert	29.7	39.1	7.6	0.0	-31.1	45.2	54.0	8.8	PASS

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247
Product	ECB601/ECB501	
Standard(s)		



Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
High Channel (CH 47)											
2475.2	Peak	Horz	100.4	32.2	3.2	10.0	-33.8	112.1			PASS
2475.2	Avg	Horz	98.0	32.2	3.2	10.0	-33.8	109.6			PASS
2475.2	Peak	Vert	92.2	32.2	3.2	10.0	-33.8	103.9			PASS
2475.2	Avg	Vert	89.6	32.2	3.2	10.0	-33.8	101.3			PASS
2380	Peak	Horz	44.9	32.0	3.2	10.0	-34.1	56.0	74.0	18.0	PASS
2388.3	Avg	Horz	30.4	32.0	3.2	10.0	-34.1	41.5	54.0	12.5	PASS
2364.8	Peak	Vert	44.1	32.0	3.2	10.0	-34.1	55.1	74.0	18.9	PASS
2389.2	Avg	Vert	30.4	32.0	3.2	10.0	-34.1	41.5	54.0	12.5	PASS
2483.8	Peak	Horz	53.6	32.2	3.2	10.0	-33.8	65.3	74.0	8.7	PASS
2483.5	Avg	Horz	40.5	32.2	3.2	10.0	-33.8	52.2	54.0	1.8	PASS
2483.6	Peak	Vert	47.9	32.2	3.2	10.0	-33.8	59.6	74.0	14.4	PASS
2483.5	Avg	Vert	34.3	32.2	3.2	10.0	-33.8	46.0	54.0	8.0	PASS
4950.4	Peak	Horz	44.6	34.1	4.5	0.0	-32.5	50.7	74.0	23.3	PASS
4950.4	Avg	Horz	31.5	34.1	4.5	0.0	-32.5	37.6	54.0	16.4	PASS
4950.4	Peak	Vert	44.7	34.1	4.5	0.0	-32.5	50.8	74.0	23.2	PASS
4950.4	Avg	Vert	31.2	34.1	4.5	0.0	-32.5	37.3	54.0	16.7	PASS
7425.6	Peak	Horz	43.5	35.7	5.9	0.0	-33.1	52.1	74.0	21.9	PASS
7425.6	Avg	Horz	29.5	35.7	5.9	0.0	-33.1	38.0	54.0	16.0	PASS
7425.6	Peak	Vert	42.0	35.7	5.9	0.0	-33.1	50.6	74.0	23.4	PASS
7425.6	Avg	Vert	28.0	35.7	5.9	0.0	-33.1	36.6	54.0	17.4	PASS
High Channel (CH 49)											
2478.4	Peak	Horz	95.4	32.2	3.2	10.0	-33.8	107.0			PASS
2478.4	Avg	Horz	92.8	32.2	3.2	10.0	-33.8	104.5			PASS
2478.4	Peak	Vert	87.1	32.2	3.2	10.0	-33.8	98.8			PASS
2478.4	Avg	Vert	84.6	32.2	3.2	10.0	-33.8	96.3			PASS
2375.6	Peak	Horz	44.7	32.0	3.2	10.0	-34.1	55.7	74.0	18.3	PASS
2389.9	Avg	Horz	30.5	32.0	3.2	10.0	-34.1	41.6	54.0	12.4	PASS
2381.2	Peak	Vert	44.7	32.0	3.2	10.0	-34.1	55.8	74.0	18.2	PASS
2389.6	Avg	Vert	30.5	32.0	3.2	10.0	-34.1	41.6	54.0	12.4	PASS
2484	Peak	Horz	54.8	32.2	3.2	10.0	-33.8	66.5	74.0	7.5	PASS
2483.5	Avg	Horz	41.7	32.2	3.2	10.0	-33.8	53.4	54.0	0.6	PASS
2484	Peak	Vert	48.4	32.2	3.2	10.0	-33.8	60.1	74.0	13.9	PASS
2483.5	Avg	Vert	35.1	32.2	3.2	10.0	-33.8	46.8	54.0	7.2	PASS
High Channel (Ch 48)											
2476.8	Peak	Horz	99.7	32.2	3.2	10.0	-33.8	111.4			PASS
2476.8	Avg	Horz	97.2	32.2	3.2	10.0	-33.8	108.9			PASS
2476.8	Peak	Vert	91.6	32.2	3.2	10.0	-33.8	103.3			PASS
2476.8	Avg	Vert	89.0	32.2	3.2	10.0	-33.8	100.7			PASS
2357	Peak	Horz	44.3	31.9	3.2	10.0	-34.2	55.2	74.0	18.8	PASS
2386.4	Avg	Horz	30.4	32.0	3.2	10.0	-34.1	41.5	54.0	12.5	PASS
2338.4	Peak	Vert	45.0	31.9	3.2	10.0	-34.2	55.9	74.0	18.1	PASS
2388.1	Avg	Vert	30.5	32.0	3.2	10.0	-34.1	41.6	54.0	12.4	PASS
2483.9	Peak	Horz	55.5	32.2	3.2	10.0	-33.8	67.2	74.0	6.8	PASS
2483.5	Avg	Horz	41.9	32.2	3.2	10.0	-33.8	53.6	54.0	0.4	PASS
2483.9	Peak	Vert	49.0	32.2	3.2	10.0	-33.8	60.7	74.0	13.3	PASS
2483.5	Avg	Vert	35.4	32.2	3.2	10.0	-33.8	47.1	54.0	6.9	PASS

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

ECB501

Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dB μ V)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dB μ V/m)	Emission Limit (dB μ V/m)	Margin (dB)	Result
Low Channel (Ch1)											
2401.6	Peak	Horz	91.8	32.0	3.2	10.0	-34.0	103.0			PASS
2401.6	Avg	Horz	89.3	32.0	3.2	10.0	-34.0	100.4			PASS
2401.6	Peak	Vert	98.7	32.0	3.2	10.0	-34.0	109.9			PASS
2401.6	Avg	Vert	96.2	32.0	3.2	10.0	-34.0	107.3			PASS
2367.1	Peak	Horz	44.8	32.0	3.2	10.0	-34.1	55.9	74.0	18.1	PASS
2390	Avg	Horz	31.5	32.0	3.2	10.0	-34.1	42.6	54.0	11.4	PASS
2390	Peak	Vert	47.5	32.0	3.2	10.0	-34.1	58.6	74.0	15.4	PASS
2390	Avg	Vert	35.0	32.0	3.2	10.0	-34.1	46.1	54.0	7.9	PASS
2483.7	Peak	Horz	45.2	32.2	3.2	10.0	-33.8	56.8	74.0	17.2	PASS
2486.7	Avg	Horz	30.1	32.2	3.2	10.0	-33.8	41.8	54.0	12.2	PASS
2494	Peak	Vert	44.4	32.2	3.2	10.0	-33.7	56.1	74.0	17.9	PASS
2483.7	Avg	Vert	30.0	32.2	3.2	10.0	-33.8	41.7	54.0	12.3	PASS
4803.2	Peak	Horz	47.8	34.2	4.2	0.0	-32.5	53.7	74.0	20.3	PASS
4803.2	Avg	Horz	36.2	34.2	4.2	0.0	-32.5	42.2	54.0	11.8	PASS
4803.2	Peak	Vert	46.8	34.2	4.2	0.0	-32.5	52.7	74.0	21.3	PASS
4803.2	Avg	Vert	33.7	34.2	4.2	0.0	-32.5	39.7	54.0	14.3	PASS
7204.8	Peak	Horz	42.3	35.7	6.0	0.0	-32.9	51.2	74.0	22.8	PASS
7204.8	Avg	Horz	27.2	35.7	6.0	0.0	-32.9	36.0	54.0	18.0	PASS
7204.8	Peak	Vert	41.6	35.7	6.0	0.0	-32.9	50.4	74.0	23.6	PASS
7204.8	Avg	Vert	27.2	35.7	6.0	0.0	-32.9	36.0	54.0	18.0	PASS
Mid Channel (CH25)											
2440	Peak	Horz	91.4	32.2	3.2	10.0	-33.9	103.0			PASS
2440	Avg	Horz	89.0	32.2	3.2	10.0	-33.9	100.5			PASS
2440	Peak	Vert	99.5	32.2	3.2	10.0	-33.9	111.1			PASS
2440	Avg	Vert	97.0	32.2	3.2	10.0	-33.9	108.6			PASS
4880	Peak	Horz	47.6	34.2	4.4	0.0	-32.6	53.5	74.0	20.5	PASS
4880	Avg	Horz	35.8	34.2	4.4	0.0	-32.6	41.7	54.0	12.3	PASS
4880	Peak	Vert	46.3	34.2	4.4	0.0	-32.6	52.2	74.0	21.8	PASS
4880	Avg	Vert	34.6	34.2	4.4	0.0	-32.6	40.5	54.0	13.5	PASS
7320	Peak	Horz	42.3	35.7	6.0	0.0	-33.0	51.0	74.0	23.0	PASS
7320	Avg	Horz	27.3	35.7	6.0	0.0	-33.0	35.9	54.0	18.1	PASS
7320	Peak	Vert	41.6	35.7	6.0	0.0	-33.0	50.3	74.0	23.7	PASS
7320	Avg	Vert	27.2	35.7	6.0	0.0	-33.0	35.8	54.0	18.2	PASS

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247
Product	ECB601/ECB501	
Standard(s)		



Test Frequency (MHz)	Detection Mode	Antenna Polarity (Horz/Vert)	Received Signal (dBµV)	Antenna Factor (dB/m)	Cable Factor (dB)	Attenuator (dB)	Pre-Amp Gain (dB)	Level (dBµV/m)	Emission Limit (dBµV/m)	Margin (dB)	Result
High Channel (CH 47)											
2475.2	Peak	Horz	93.7	32.2	3.2	10.0	-33.8	105.4			PASS
2475.2	Avg	Horz	91.2	32.2	3.2	10.0	-33.8	102.8			PASS
2475.2	Peak	Vert	101.1	32.2	3.2	10.0	-33.8	112.8			PASS
2475.2	Avg	Vert	98.6	32.2	3.2	10.0	-33.8	110.3			PASS
2341.7	Peak	Horz	44.5	31.9	3.2	10.0	-34.2	55.3	74.0	18.7	PASS
2400.1	Avg	Horz	30.5	32.0	3.2	10.0	-34.0	41.6	54.0	12.4	PASS
2395.1	Peak	Vert	45.2	32.0	3.2	10.0	-34.0	56.4	74.0	17.6	PASS
2398	Avg	Vert	30.5	32.0	3.2	10.0	-34.0	41.7	54.0	12.3	PASS
2483.5	Peak	Horz	49.2	32.2	3.2	10.0	-33.8	60.9	74.0	13.1	PASS
2483.5	Avg	Horz	35.4	32.2	3.2	10.0	-33.8	47.1	54.0	6.9	PASS
2483.9	Peak	Vert	54.8	32.2	3.2	10.0	-33.8	66.5	74.0	7.5	PASS
2483.5	Avg	Vert	40.8	32.2	3.2	10.0	-33.8	52.5	54.0	1.5	PASS
4950.4	Peak	Horz	48.4	34.1	4.5	0.0	-32.5	54.5	74.0	19.5	PASS
4950.4	Avg	Horz	36.5	34.1	4.5	0.0	-32.5	42.6	54.0	11.4	PASS
4950.4	Peak	Vert	46.6	34.1	4.5	0.0	-32.5	52.7	74.0	21.3	PASS
4950.4	Avg	Vert	34.1	34.1	4.5	0.0	-32.5	40.2	54.0	13.8	PASS
7425.6	Peak	Horz	43.1	35.7	5.9	0.0	-33.1	51.7	74.0	22.3	PASS
7425.6	Avg	Horz	28.1	35.7	5.9	0.0	-33.1	36.7	54.0	17.3	PASS
7425.6	Peak	Vert	41.8	35.7	5.9	0.0	-33.1	50.3	74.0	23.7	PASS
7425.6	Avg	Vert	27.4	35.7	5.9	0.0	-33.1	36.0	54.0	18.0	PASS
High Channel (CH 49)											
2478.4	Peak	Horz	88.1	32.2	3.2	10.0	-33.8	99.8			PASS
2478.4	Avg	Horz	85.5	32.2	3.2	10.0	-33.8	97.2			PASS
2478.4	Peak	Vert	96.2	32.2	3.2	10.0	-33.8	107.9			PASS
2478.4	Avg	Vert	93.7	32.2	3.2	10.0	-33.8	105.4			PASS
2391	Peak	Horz	45.5	32.0	3.2	10.0	-34.1	56.6	74.0	17.4	PASS
2401.3	Avg	Horz	30.4	32.0	3.2	10.0	-34.0	41.6	54.0	12.4	PASS
2394.4	Peak	Vert	44.5	32.0	3.2	10.0	-34.0	55.6	74.0	18.4	PASS
2400.6	Avg	Vert	30.5	32.0	3.2	10.0	-34.0	41.6	54.0	12.4	PASS
2483.6	Peak	Horz	48.3	32.2	3.2	10.0	-33.8	60.0	74.0	14.0	PASS
2483.5	Avg	Horz	34.9	32.2	3.2	10.0	-33.8	46.6	54.0	7.4	PASS
2483.8	Peak	Vert	54.7	32.2	3.2	10.0	-33.8	66.4	74.0	7.6	PASS
2483.5	Avg	Vert	41.5	32.2	3.2	10.0	-33.8	53.2	54.0	0.8	PASS
High Channel (Ch 48)											
2476.8	Peak	Horz	92.2	32.2	3.2	10.0	-33.8	103.9			PASS
2476.8	Avg	Horz	89.7	32.2	3.2	10.0	-33.8	101.3			PASS
2476.8	Peak	Vert	100.3	32.2	3.2	10.0	-33.8	111.9			PASS
2476.8	Avg	Vert	97.8	32.2	3.2	10.0	-33.8	109.5			PASS
2398.2	Peak	Horz	44.6	32.0	3.2	10.0	-34.0	55.7	74.0	18.3	PASS
2401.5	Avg	Horz	30.5	32.0	3.2	10.0	-34.0	41.6	54.0	12.4	PASS
2369.4	Peak	Vert	44.3	32.0	3.2	10.0	-34.1	55.3	74.0	18.7	PASS
2400.4	Avg	Vert	30.5	32.0	3.2	10.0	-34.0	41.7	54.0	12.3	PASS
2483.7	Peak	Horz	49.0	32.2	3.2	10.0	-33.8	60.7	74.0	13.3	PASS
2483.5	Avg	Horz	35.3	32.2	3.2	10.0	-33.8	47.0	54.0	7.0	PASS
2484	Peak	Vert	55.7	32.2	3.2	10.0	-33.8	67.4	74.0	6.6	PASS
2483.5	Avg	Vert	42.1	32.2	3.2	10.0	-33.8	53.8	54.0	0.2	PASS

Client	Ecobee Inc.	TÜV SUD Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESU 40	Rohde & Schwarz	Jan. 15, 2020	Jan. 15, 2022	GEMC 233
Loop Antenna	EM 6871	Electro-Metrics	Feb 26, 2021	Feb 26, 2023	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	Feb 26, 2021	Feb 26, 2023	GEMC 71
BiLog Antenna	3142-C	ETS-Lindgren	Nov. 25, 2020	Nov. 25, 2022	GEMC 8
Horn Antenna 2 – 18 GHz	WBH218HN	Q-par	Apr. 1, 2020	Apr. 1, 2022	GEMC 6375
Horn Antenna 1 – 18 GHz	3117	ETS-Lindgren	Feb. 17, 2020	Feb. 17, 2022	GEMC 340
Horn Antenna 18 - 26.5 GHz	SAS-572	A.H. Systems	Dec. 1, 2020	Dec. 1, 2022	GEMC 6371
Attenuator 6 dB	612-6-1	Meca Electronics, Inc	NCR	NCR	GEMC 286
Attenuator 10 dB	8493B	Agilent	Oct 4, 2021	Oct 4, 2022	GEMC133
Pre-Amp 9 kHz – 1 GHz	CPA9230	Chase	May 22, 2020	May 22, 2022	GEMC 301
Pre-Amp 1 – 26.5 GHz	HP 8449B	HP	Dec. 20, 2019	Dec. 20, 2021	GEMC 189
2.4GHz-2.5GHz Notch Filter	BRM50702	Micro-Tronics	NCR	NCR	GEMC 230
4GHz HPF	11SH10-4000/T12000	K & L Microwave	NCR	NCR	GEMC 119
RF Cable <1GHz	LMR-400	LexTec	NCR	NCR	GEMC 274
RF Cable <1GHz	Sucoflex 104A	Huber+Suhner	NCR	NCR	GEMC 271
RF Cable >1GHz	EMC2	MegaPhase	NCR	NCR	GEMC 369
Emissions Software	V2.1.0	TUV SUD Canada, Inc.	NCR	NCR	GEMC 361

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Power Line Conducted Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard, as measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio operators, maritime radio, CB radio, and so on, from unwanted interference.

Limits and Method

The limits are as defined in 47 CFR FCC Part 15 Section 15.207

Method is as defined in ANSI C63.4

Average Limits		Quasi-Peak Limits	
150 kHz – 500 kHz	56 to 46* dB μ V	150 kHz – 500 kHz	66 to 56* dB μ V
500 kHz – 5 MHz	46 dB μ V	500 kHz – 5 MHz	56 dB μ V
5 MHz – 30 MHz	50 dB μ V	5 MHz – 30 MHz	60 dB μ V


* Decreases linearly with the logarithm of the frequency

Both Quasi-Peak and Average limits are applicable and each is specified as being measured with a resolution bandwidth of 9 kHz. For Quasi-Peak, a video bandwidth at least three times greater than the resolution bandwidth is used.

Based on ANSI C63.4 Section 4.2, if the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Typical Setup Diagram

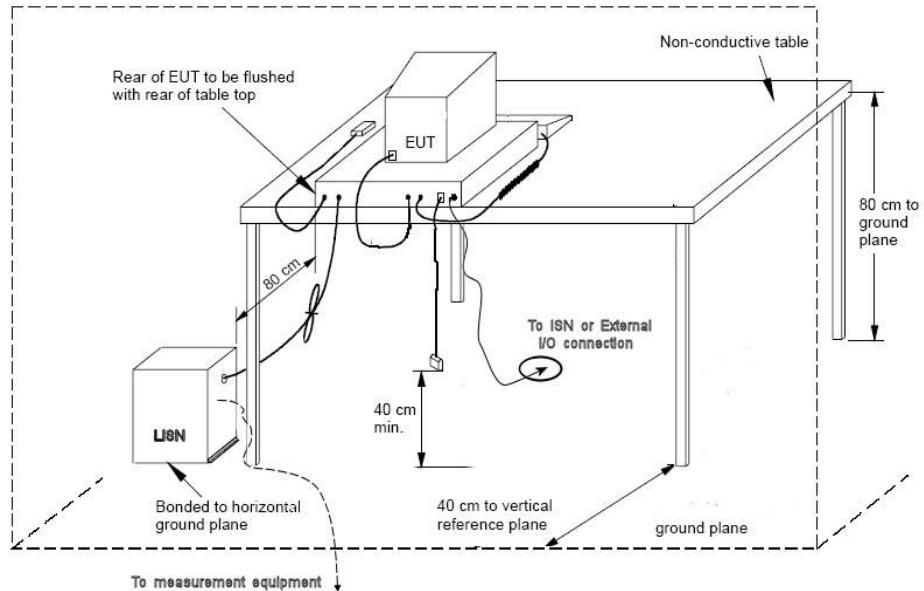

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is $\pm 2.27\text{dB}$ with a 'k=2' coverage factor and a 95% confidence level.


Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector. This peaking process is done as a worst case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

ECB601

Line 1 (L1) – 120Vac 60Hz

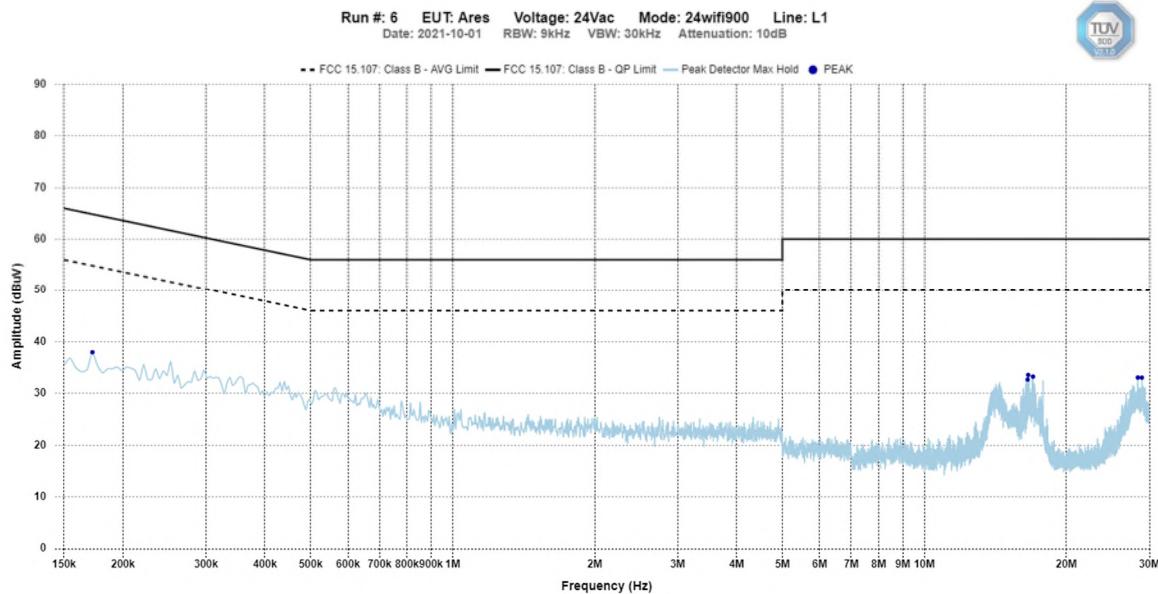


Line 2 (L2) – 120Vac 60Hz

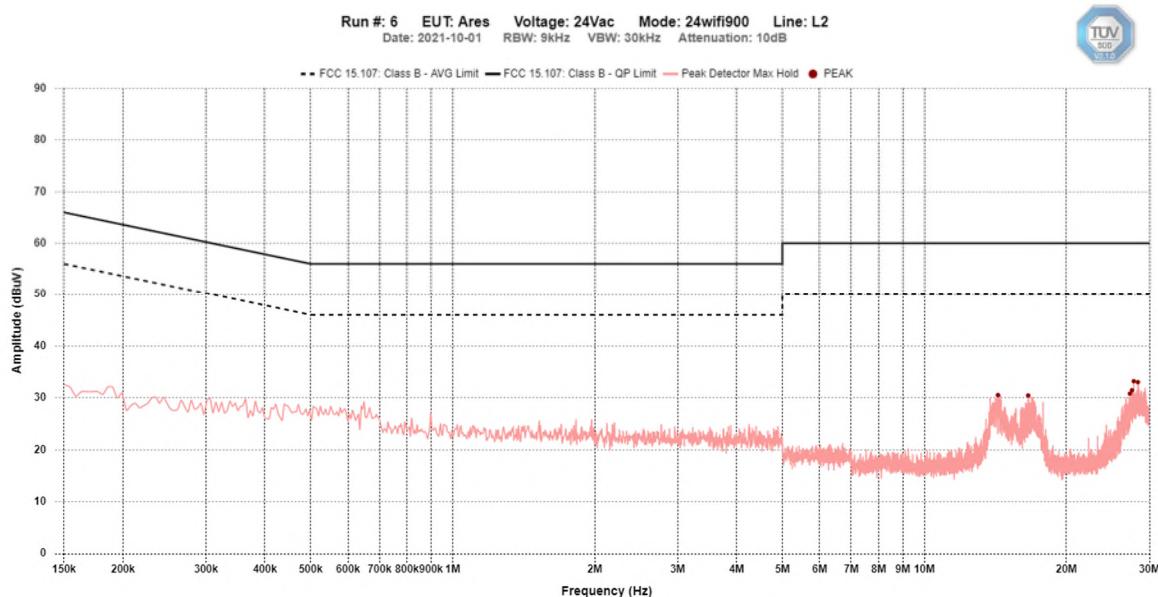


Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

ECB501

Line 1 (L1) – 120Vac 60Hz

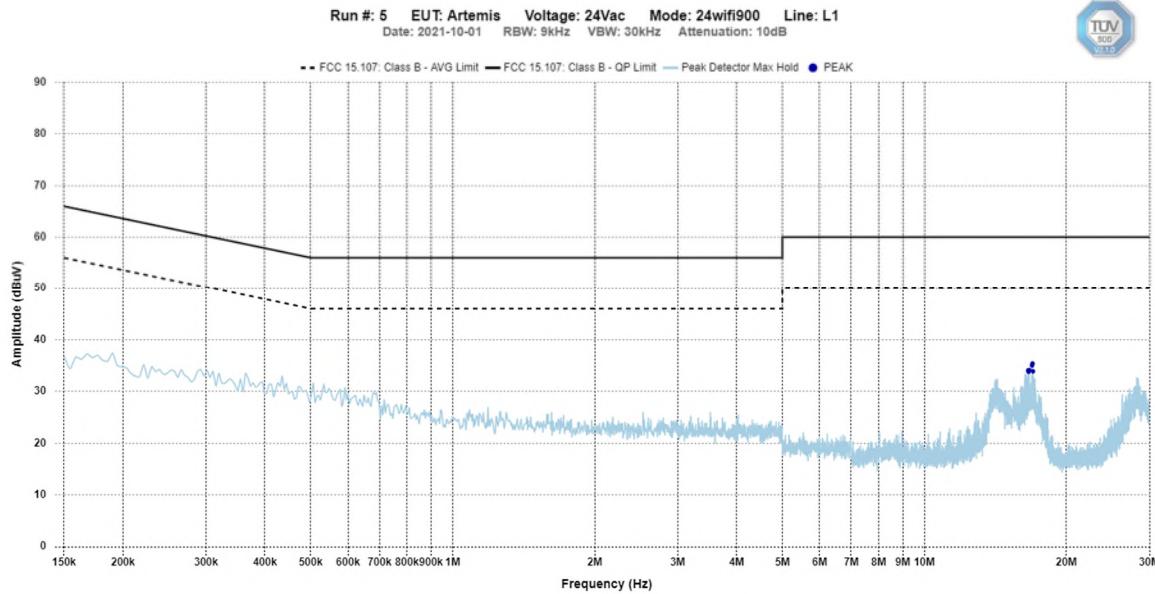

Line 2 (L2) – 120Vac 60Hz

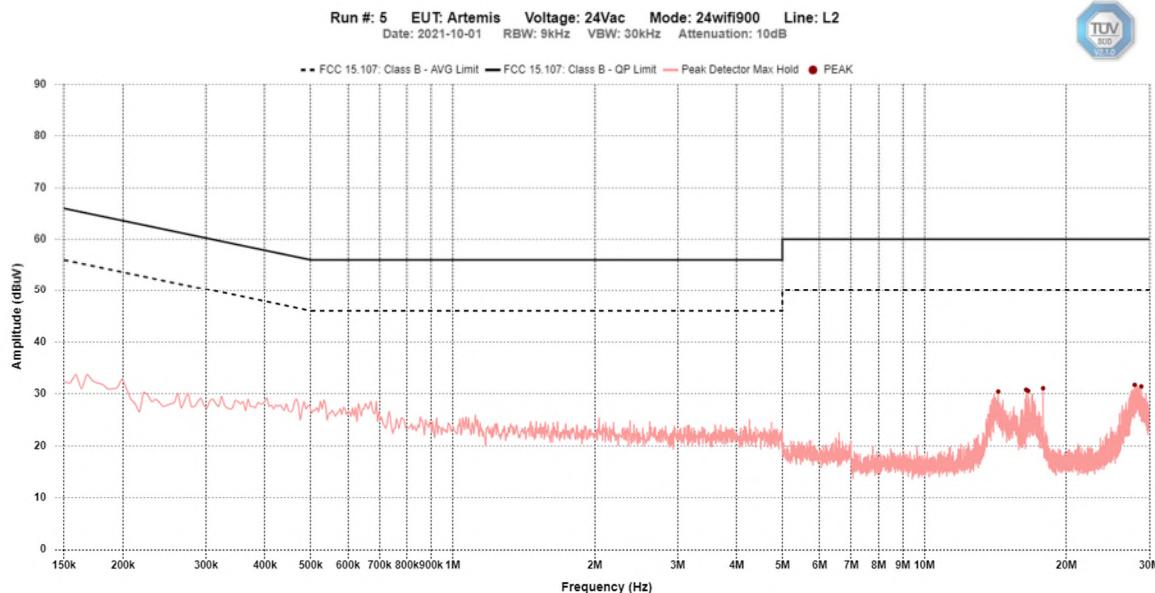

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

Final Measurements

EUT Name		EB601						
Limit		FCC 15.109						
Power Supply		120Vac 60Hz						
Frequency (Hz)	Detector	Correction Factor (dB)	Level (dBuV)	QP Limit (dBuV)	AVG Limit (dBuV)	QP Margin (dB)	AVG Margin (dB)	Test Result
Line 1								
16.603M	PEAK	10.4	33.6	60.0	50.0	26.4	16.4	Pass
17.0M	PEAK	10.5	33.2	60.0	50.0	26.8	16.8	Pass
172.276k	PEAK	10.1	38.0	65.4	55.4	27.4	17.4	Pass
28.36M	PEAK	10.9	33.1	60.0	50.0	26.9	16.9	Pass
28.922M	PEAK	10.9	33.0	60.0	50.0	27.0	17.0	Pass
16.559M	PEAK	10.4	32.7	60.0	50.0	27.3	17.3	Pass
Line 2								
27.804M	PEAK	10.8	33.2	60.0	50.0	26.8	16.8	Pass
28.365M	PEAK	10.9	33.0	60.0	50.0	27.0	17.0	Pass
27.559M	PEAK	10.8	31.5	60.0	50.0	28.5	18.5	Pass
27.282M	PEAK	10.8	30.8	60.0	50.0	29.2	19.2	Pass
14.327M	PEAK	10.4	30.5	60.0	50.0	29.5	19.5	Pass
16.603M	PEAK	10.4	30.5	60.0	50.0	29.5	19.5	Pass

Average and Quasi-Peak Emissions Table

Note:

Peak = Peak measurement

AVG = Average measurement

QP = Quasi-Peak measurement

See 'Appendix B – EUT, Peripherals and Test Setup Photos' for photos showing the test set-up for the highest line conducted emission

Client	Ecobee Inc.	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	 Canada
Product	ECB601/ECB501		
Standard(s)			

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESL 6	Rohde & Schwarz	Feb. 25, 2019	Feb. 25, 2021	GEMC 160
LISN	FCC-LISN-50/250-16-2-01	FCC	Jan. 16, 2020	Jan. 16, 2022	GEMC 302
RF Cable 3m	LMR-400-3M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 276
Attenuator 10 dB	6N10W-10	Inmet	NCR	NCR	GEMC 350
Emissions Software	0.1.99	TUV SUD Canada, Inc.	NCR	NCR	GEMC 58

FCC_ICES003_CE_Rev1

Client	Ecobee Inc.
Product	ECB601/ECB501
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247



Appendix A – EUT Summary

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

For further details for filing purposes, refer to filing package.

General EUT Description

Client	
Organization / Address	Ecobee Inc. 25 Dockside Drive. Suite 700 Toronto, ON. M5A 0B5, Canada
Contact	John Russomanno
Phone	416-809-2405
Email	johnr@ecobee.com
EUT Details	
EUT Name	ECB601/ECB501
FCC ID	WR955470766937
IC	7981A-55470766937
Equipment Category	Unlicensed transmitter
Basic EUT Functionality	EUT is a smart thermostat that have a 2400 – 2483.5 MHz DTS (802.11 b/g/n) and FHSS transmitters and a 902 – 928 MHz FHSS/Hybrid transmitter. 5250-5350 MHz and 5725-5850 MHz UNII transmitter.
Input Voltage and Frequency	24 Vac 60 Hz
Connectors available on EUT	1 (terminals for HVAC control)
Peripherals Required for Test	120 Vac – 24 Vac step down transformer.
Release type	Final
Intentional Radiator Frequency Range	2400 – 2483.5 MHz for DTS and FHSS 902 – 928 MHz FHSS/Hybrid 5250-5350 MHz and 5725-5850 MHz UNII transmitter.
Antenna	Flexible PCB antennas
Type of Transmitter	Hybrid, Frequency Hopping and Digitally Modulated
Modulation	FSK for Sub Gig Various for 2.4 GHz 802.11 b/g/n, FSK, etc
EUT Configuration	Test software was configured to transmit continuously at 100% duty cycle and to control

Client	Ecobee Inc.	 Canada
Product	ECB601/ECB501	
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247	

	hopping through its pseudo random sequence or single channel. Channels tested: Lowest and Highest
--	--

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT and Test Setup Photos'.

Client	Ecobee Inc.
Product	ECB601/ECB501
Standard(s)	RSS 247 Issue 2:2017 FCC Part 15 Subpart 15.247


Canada

Appendix B – EUT and Test Setup Photos

Refer to the files separate from this test report