



Canada

EMC & RF Test Report

As per

RSS-247 Issue 1:2015 & FCC Part 15 Subpart 15.247:2016

Unlicensed Intentional Radiators

on the

Ecobee3 Lite

Issued by:

TÜV SÜD Canada Inc.
11 Gordon Collins Dr,
Gormley, ON, L0H 1G0
Canada
Ph: (905) 883-7255

Name,
Senior EMC Project
Engineer

Testing produced for



See Appendix A for full client &
EUT details.



Testing Laboratory
Certificate #2955.02



R-4023, G-506
C-4498, T-1246



Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Table of Contents

Table of Contents	2
Report Scope	3
Summary	4
Test Results Summary	5
Notes, Justifications, or Deviations	6
Sample Calculation(s)	6
Applicable Standards, Specifications and Methods	7
Document Revision Status	8
Definitions and Acronyms	9
Testing Facility	10
Calibrations and Accreditations	10
Testing Environmental Conditions and Dates	11
Detailed Test Results Section	12
Channel Carrier Bandwidth	13
Carrier Frequency Separation	16
Number of Hopping Frequencies	19
Time of Occupancy	23
Maximum Peak Envelope Conducted Power - FHSS	27
Antenna Spurious Conducted Emissions (-20 dBc Requirement) – 15.247	30
Radiated Emissions – 15.247	34
Power Line Conducted Emissions	46
Appendix A – EUT Summary	51

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Report Scope

This report addresses the EMC verification testing and test results of the **Ecobee Inc.'s Ecobee3 Lite**, and is herein referred to as EUT (Equipment Under Test). The EUT was tested for compliance against the following standards:

RSS-247 Issue 1:2015

FCC Part 15 Subpart C 15.247:2016

Test procedures, results, justifications, and engineering considerations, if any, follow later in this report.

The results contained in this report relate only to the item(s) tested.

This report does not imply product endorsement by any government, accreditation agency, or TÜV SÜD Canada Inc.

Opinions or interpretations expressed in this report, if any, are outside the scope of TÜV SÜD Canada Inc. accreditations. Any opinions expressed do not necessarily reflect the opinions of TÜV SÜD Canada Inc., unless otherwise stated.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Summary

The results contained in this report relate only to the item(s) tested.

EUT:	Ecobee3 Lite
FCC Certification #, FCC ID:	WR9EBSTAT3LT01
Industry Canada Certification #, IC:	7981A-EBSTAT3LT01
EUT passed all tests performed	Yes
Tests conducted by	Min Xie

For testing dates, see "Testing Environmental Conditions and Dates".

Client	Ecobee Inc.	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	 Canada
Product	Ecobee3 Lite		
Standard(s)			

Test Results Summary

Standard/Method	Description	Class/Limit	Result
FCC 15.203	Antenna Requirement	Unique	Pass See Justification
FCC 15.205 RSS GEN Table 6	Restricted Bands for intentional operation	None within band	Pass See description
FCC 15.207 RSS GEN Table 3	Power line conducted emissions	QuasiPeak Average	N/A See Justification
FCC 15.209 RSS GEN Table 4	Radiated emissions	QuasiPeak Average	Pass
FCC 15.247(a)(1) RSS 247 5.1 (2)	Channel Separation	> 25 kHz or 20 dB BW	Pass
FCC 15.247(a)(1)(i) RSS 247 5.1 (3)	Number of channels	> 50	Pass
FCC 15.247(a)(1)(i) RSS 247 5.1 (3)	Time of occupancy	< 0.4 sec in 20 sec period	Pass
FCC 15.247(b) RSS 247 5.4(1)	Max output power	< 1 Watt	Pass
FCC 15.247(b)(4) RSS 247 5.4 (3)	Antenna Gain	< 6 dBi	Pass See Justification
FCC 15.247(d) RSS 247 5.5	Antenna conducted spurious	> 20 dBc	Pass
FCC 15.247(h) RSS GEN 247 5.1	FHSS Intelligence	No coordination	Pass See Justification
FCC 15.247(i) RSS-102	Maximum Permissible Exposure	> 20 cm separation.	Pass See justification and calculations
Overall Result			PASS

If the product as tested or otherwise complies with the specification, the EUT is deemed to comply with the requirement and is deemed a 'PASS' grade. If not 'FAIL' grade will be issued. Note that 'PASS' / 'FAIL' grade is independent of any measurement uncertainties. A 'PASS' / 'FAIL' grade within measurement uncertainty is marked with a '*'.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Notes, Justifications, or Deviations

The following notes, justifications for tests not performed or deviations from the above listed specifications apply:

For the Antenna requirement specified in FCC 15.203 (RSS-247 section 5.5), the unit uses a 1.5 dBi PCB antenna which is less than 6 dBi gain.

For the Restricted Bands of operation, the EUT is designed to only operate between 902 – 928 MHz.

The EUT is not a hybrid system and FCC 15.247 (f) does not apply to it.

For maximum permissible exposure is designed to operate greater than 20 cm from any personnel during normal operation. No testing is required, however worst case calculated exposure compliance follows later in this report.

The EUT does not coordination transmission with any other FHSs to avoid simultaneous occupation of hopping frequencies.

The EUT contains a 902 – 928 MHz FHSS transmitter and a 2400 – 2483.5 MHz DTS transmitter. The Firmware guarantees simultaneous will not occur. Antenna co-location testing is therefore not applicable.

For maximum permissible exposure, this device operates at less than 1 Watt at 902 - 928 MHz and is designed to operate greater than 20 cm from any personnel during normal operation. No testing is required, however worst case calculated exposure compliance was shown in the RF Exposure exhibits.

Sample Calculation(s)

Radiated Emission Test

Margin = Limit – (Received Signal + Antenna Factor + Cable Loss – Pre-Amp Gain)

Margin = 50.5dB μ V/m – (50dB μ V + 10dB + 2.5dB – 20dB)

Margin = 8.0 dB (pass)

Power Line Conducted Emission Test

Margin = Limit – (Received Signal + Attenuation Factor + Cable Loss + LISN Factor)

Margin = 73.0dB μ V – (50dB μ V + 10dB + 2.5dB + 0.5dB)

Margin = 10.0 dB (pass)

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Applicable Standards, Specifications and Methods

ANSI C63.4:2014 Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

ANSI C63.10:2013 American National Standard For Testing Unlicensed Wireless Devices

CFR 47 FCC 15 Subpart C:2016 Code of Federal Regulations – Radio Frequency Devices, Intentional Radiators

CISPR 22:2008 Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement

ICES-003 Issue 6 2016 Digital Apparatus - Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

RSS-GEN Issue 4 2014 General Requirements and Information for the Certification of Radio Apparatus

RSS-247 Issue 1:2015 Issue 1: Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS 102 Issue 5 2015 Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

FCC KDB 447498 v06 RF Exposure Procedures And Equipment Authorization Policies For Mobile And Portable Devices

ISO 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Document Revision Status

Revision 1 - Aug 15, 2016
Initial Release

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Definitions and Acronyms

The following definitions and acronyms are applicable in this report.
See also ANSI C63.14.

AE – Auxiliary Equipment. A digital accessory that feeds data into or receives data from another device (host) that in turn, controls its operation.

BW – Bandwidth. Unless otherwise stated, this is refers to the 6 dB bandwidth.

EMC – Electro-Magnetic Compatibility. The ability of an equipment or system to function satisfactorily in its electromagnetic environment without introducing intolerable electromagnetic disturbances to anything in that environment.

EMI – Electro-Magnetic Immunity. The ability to maintain a specified performance when the equipment is subjected to disturbance (unwanted) signals of specified levels.

EUT – Equipment Under Test. A device or system being evaluated for compliance that is representative of a product to be marketed.

ITE – Information Technology Equipment with a primary function(s) of entry, storage, display, retrieval, transmission, processing, switching, or control, of data.

LISN – Line Impedance Stabilization Network

NCR – No Calibration Required

RF – Radio Frequency

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Testing Facility

Testing for EMC on the EUT was carried out at TÜV SÜD Canada labs near Toronto, Ontario. The testing lab consists of a 3m semi-anechoic chamber calibrated to be able to allow measurements on an EUT that has a maximum width or length of up to 2m and a height of up to 3m. The chamber is equipped with a turntable that is capable of testing devices up to 3300lb in weight. This facility is capable of testing products that are rated for 120Vac and 240Vac single phase, or devices that are rated for a 208Vac 3 phase input. DC capability is also available for testing. The chamber is equipped with a mast that controls the polarization and height of the antenna. Control of the mast occurs in the control room adjoining the shielded chamber. Radiated emission measurements are performed using a BiLog antenna and a Horn antenna where applicable. Conducted emissions, unless otherwise stated, are performed using a LISN and using the Vertical Ground plane if applicable.

Calibrations and Accreditations

The 3m semi-anechoic chamber is registered with Federal Communications Commission (FCC, CA6844), Industry Canada (IC, 6844A-3) and Voluntary Control Council for Interference (VCCI, R-4023, G-506, C-4498, and T-1246). This chamber was calibrated for Normalized Site Attenuation (NSA) using test procedures outlined in ANSI C63.4 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". The chamber is lined with ferrite tiles and absorption cones to minimize any undesired reflections. The NSA data is kept on file at TÜV SÜD Canada. For radiated susceptibility testing, a 16 point field calibration has been performed on the chamber. The field uniformity data is kept on file at TÜV SÜD Canada. TÜV SÜD Canada Inc is accredited to ISO 17025 by A2LA with Testing Certificate #2555.01. The laboratory's current scope of accreditation listing can be found as listed on the A2LA website. All measuring equipment is calibrated on an annual or bi-annual basis as listed for each respective test.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Testing Environmental Conditions and Dates

Following environmental conditions were recorded in the facility during time of testing

Date	Test	Initials	Temperature (°C)	Humidity (%)	Pressure (kPa)
2016/7/21	Radiated Emissions	MX	20 – 24	40 – 51	98.0 – 102.0
2016/8/2	Antenna Conducted Emissions	MX	20 – 24	40 – 51	98.0 – 102.0
2016/7/8	Power Line Conducted Emissions	MX	20 – 24	40 – 51	98.0 – 102.0

Client	Ecobee Inc.
Product	Ecobee3 Lite
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016


Canada

Detailed Test Results Section

Client	Ecobee Inc.	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	 Canada
Product	Ecobee3 Lite		
Standard(s)			

Channel Carrier Bandwidth

Purpose

The purpose of this test is to allow for results that is used to help establish other limits. Although there is not specific limit for this requirement, the derived limits dependant on this information helps allow for other spread spectrum devices to co-exist in the same frequency spectrum.. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

Limits and Methods

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1). The test method is a defined in ANSI C63.10.

The maximum allowed 20 dB bandwidth for frequency hopping system operating in the 902 to 928 MHz band is 500 kHz.

Results


The EUT passed. The maximum 20 dB BW measured was 87.82 kHz.

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Pass/Fail
Low Channel	902.8	87.82	<500	Pass
Mid Channel	915.1	87.43	<500	Pass
High Channel	927.7	87.43	<500	Pass

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Graph(s)

The graphs shown below shows the 20 dB bandwidth during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the 20 dB bandwidth of a channel during operation of the EUT. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute.

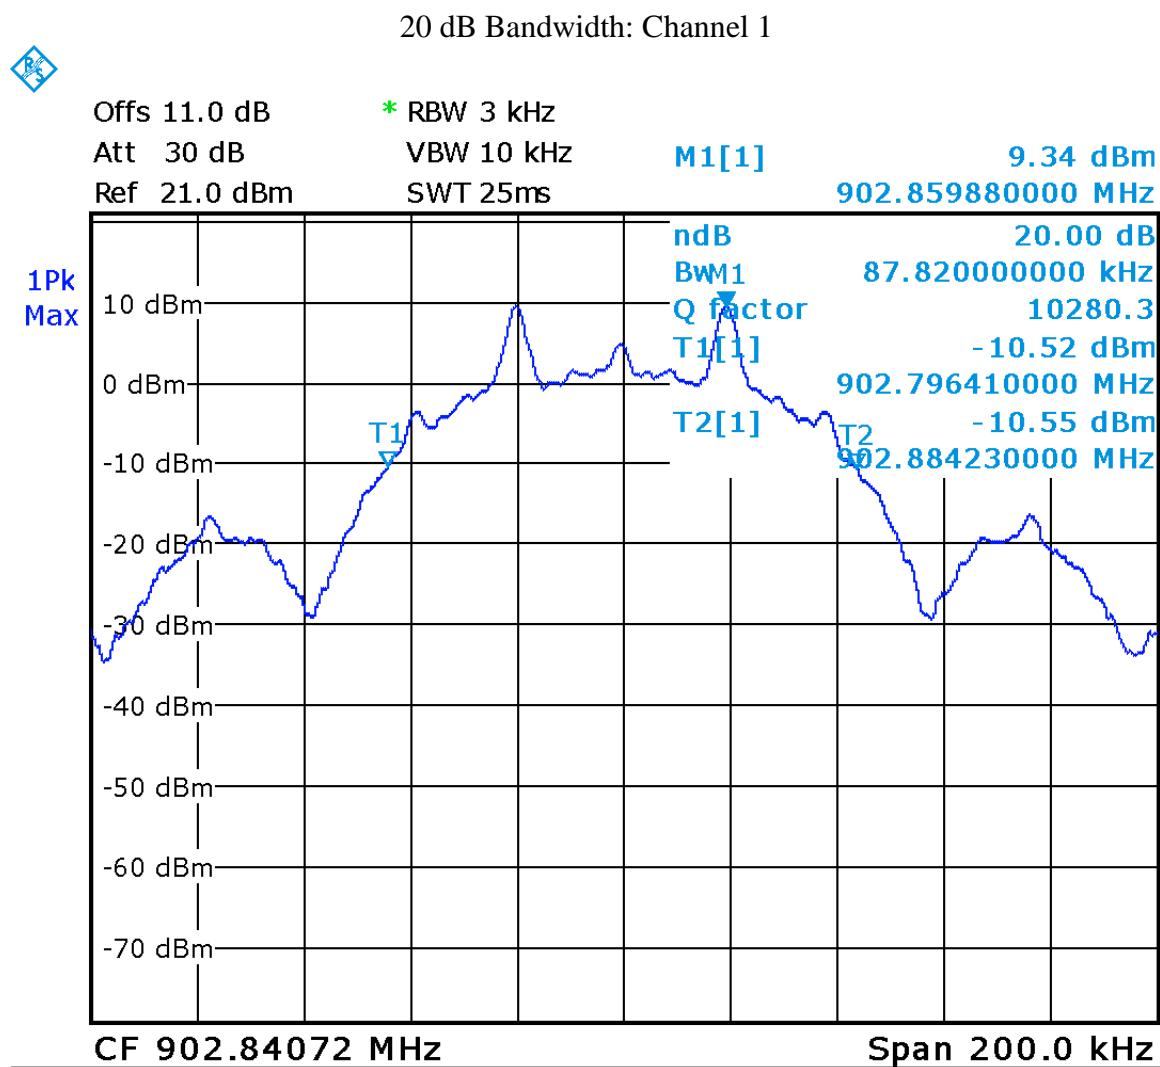

Date: 3.AUG.2016 17:38:52

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	ESL6	Rohde & Schwarz	Nov 25, 2015	Nov 25, 2017	GEMC 160
Attenuator 10 dB	8493B	Agilent	Feb 11, 2016	Feb 11, 2017	GEMC133
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	Feb-10, 2015	Feb-10, 2016	GEMC 29

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Carrier Frequency Separation

Purpose

The purpose of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

Limits and method

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1). The test method is as defined in ANSI C63.10.

	902 to 928 MHz	2400 to 2483.5 MHz	5275 to 5850 MHz
No conditions	25 kHz or 20 dB BW ¹	25 kHz or 20 dB BW ¹	25 kHz or 20 dB BW ¹
< 125 mW	--	25 kHz or 2/3 of 20 dB BW ¹	--

Note 1: The minimum channel separation is given by the greater of 25 kHz or 20 dB BW for unconditional operation. The 20 dB BW of the system was measured to be 87.82 kHz, so a channel separation limit of 87.82 kHz applies.


Results

The EUT passed the requirements of channel carrier spacing exceeding the measured 20 dB BW of the EUT. The 20 dB BW previously measured was 87.82 kHz, and the device had a minimum channel spacing of 352.1 kHz.

Client	Ecobee Inc.	TÜV SÜD Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Graph(s)

The graphs shown below shows the channel spacing during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less than 1 minute, as the device is stepping through its hopping table.

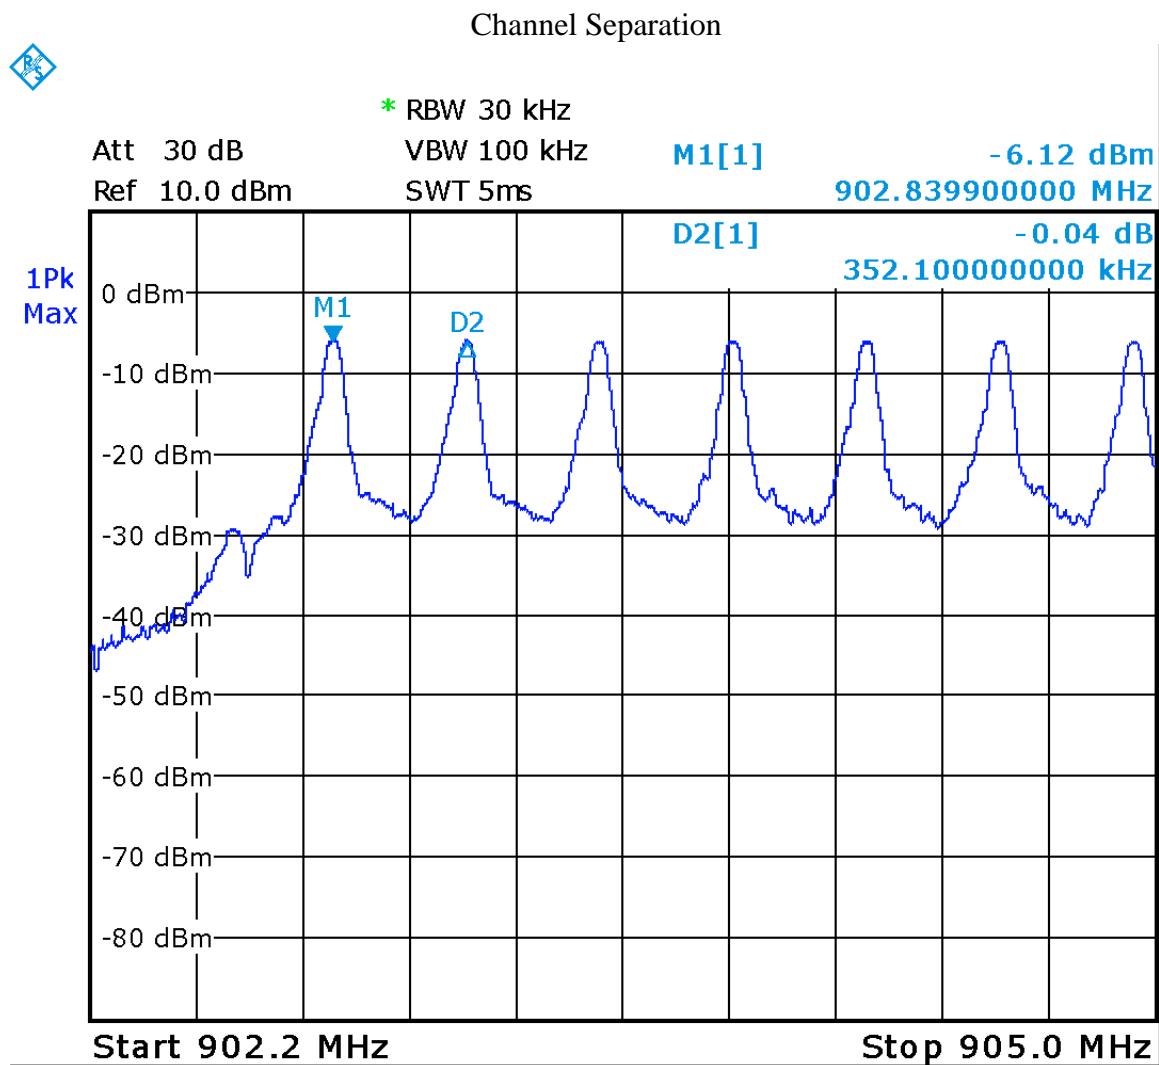

Date: 2.AUG.2016 17:03:16

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Ecobee Inc.	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	 Canada
Product	Ecobee3 Lite		
Standard(s)			

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	ESL6	Rohde & Schwarz	Nov 25, 2015	Nov 25, 2017	GEMC 160
Attenuator 10 dB	8493B	Agilent	Feb 11, 2016	Feb 11, 2017	GEMC133
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	Feb-10, 2015	Feb-10, 2016	GEMC 29

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Number of Hopping Frequencies

Purpose

The purpose of this test is to ensure that the RF energy of frequency hopping systems is sufficiently spread over a spectrum and that the radio energy is not overly dense. This limit helps allow for other spread spectrum devices to co-exist in the same frequency spectrum. This also helps prevent corruption of data by ensuring adequate channel separation to distinguish the reception of the intended information.

Limits and method

The limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1). The test method is as defined in ANSI C63.10.

	902 to 928 MHz	2400 to 2483.5 MHz	5275 to 5850 MHz
No conditions	≥ 50 channels	≥ 15 channels	≥ 75 channels
20 dB BW exceeds 250 kHz	≥ 25 channels	≥ 15 channels	≥ 75 channels

Results


The EUT passed the requirements of the number of channels. The number of channels the device occupies is 71 channels in the allocation band of 902 to 928 MHz.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Graph(s)

The graphs shown below shows the number of occupied channels during the operation of the device. This is measured by a max hold on the spectrum analyzer and the highest resolution bandwidth that is sufficiently low to exhibit the channel spacing of the signal being measured. This measurement is a peak measurement. Max hold is performed for a duration of not less then 10 minutes, or as sufficient to capture the channels occupied.


Graph 1 of 2 (35 channels)

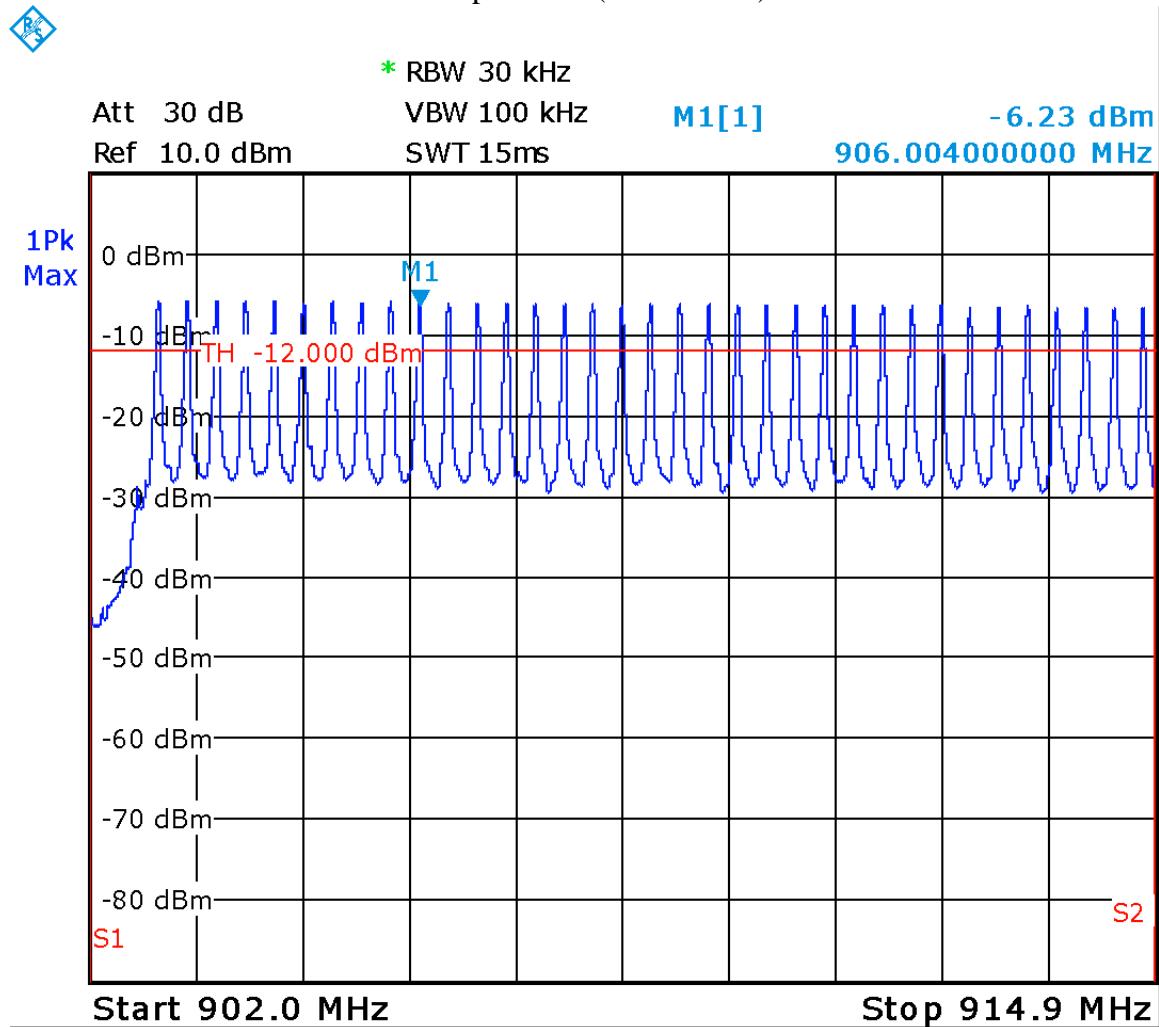

Date: 2.AUG.2016 17:40:30

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Graph 2 of 2 (36 channels)

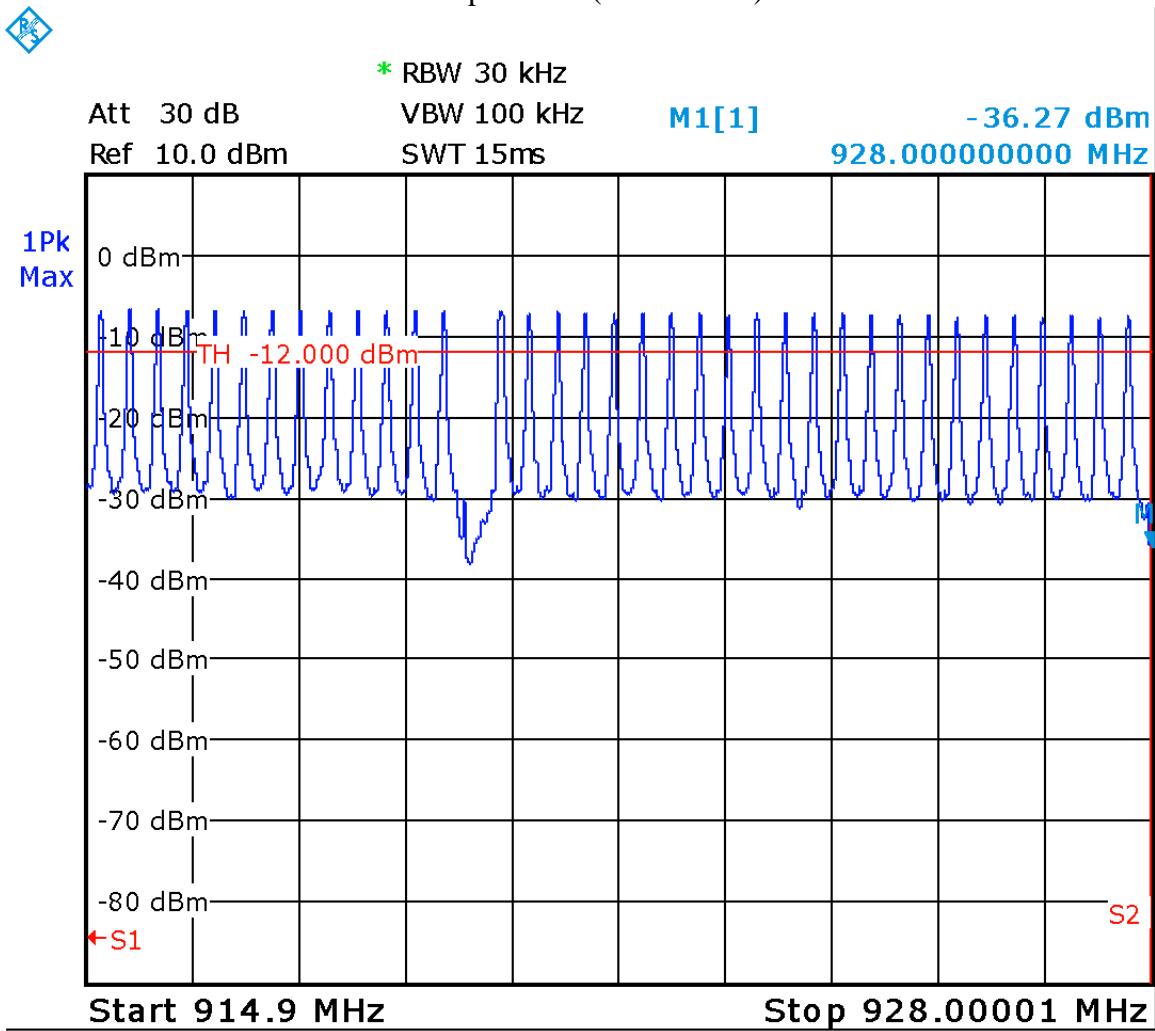

Date: 2.AUG.2016 17:45:41

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	ESL6	Rohde & Schwarz	Nov 25, 2015	Nov 25, 2017	GEMC 160
Attenuator 10 dB	8493B	Agilent	Feb 11, 2016	Feb 11, 2017	GEMC133
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	Feb-10, 2015	Feb-10, 2016	GEMC 29

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Time of Occupancy

Purpose

The purpose of this test is to ensure that the RF energy of frequency hopping systems is hopping at a minimum defined rate. This helps ensure sufficient time off to enable other frequency hopping devices to co-operate within this allocated band.

Limits

For 902 to 928 MHz systems, the limits are as defined in 47 CFR FCC Part 15 Section 15.247(a)(1)(i).

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

The 20 dB bandwidth of the system is <250 kHz and have more than 50 channels; therefore the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

Results

The EUT passed the requirements. The maximum average time of occupancy is 0.045 seconds.

The EUT cycles through its pseudo-random generated list of hopping frequencies. There are 71 channels occupied in total. The average transmit time is 0.18 ms per channel and each channel is repeated every 96.8 ms.

The analyzer sweep time is 400 ms.

There are 5 hops on the spectrum analyzer.

Number of hops in 20 s = (number of hops on spectrum analyzer) × (period specified in the requirements / analyzer sweep time)


Number of hops in 20 s = $5 \times (20000/400) = 250$

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Average time of occupancy = $250 \times 0.18 \text{ ms} = 45 \text{ ms}$


Graph(s)

Transmit time per hop

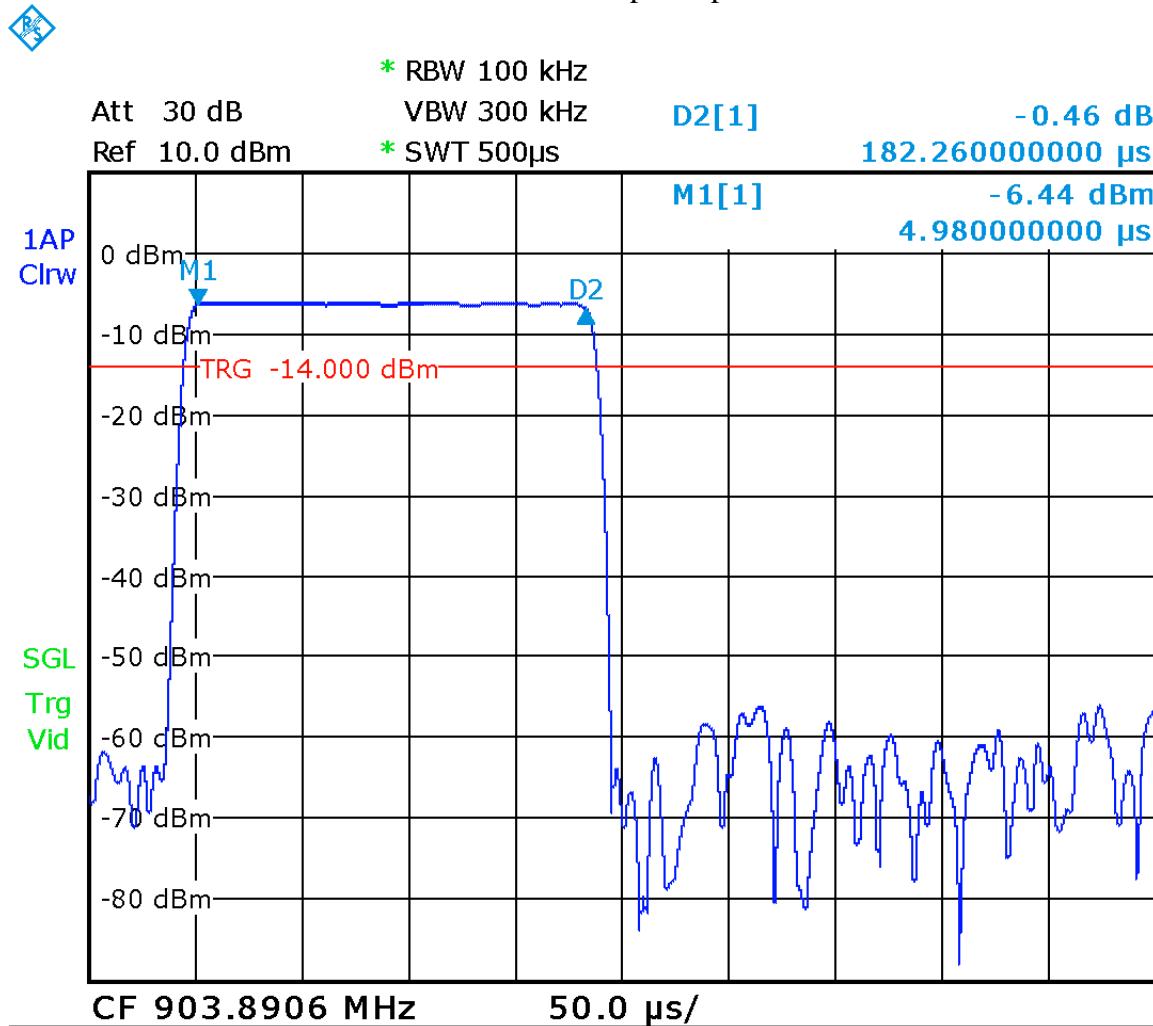

Date: 2.AUG.2016 17:15:16

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

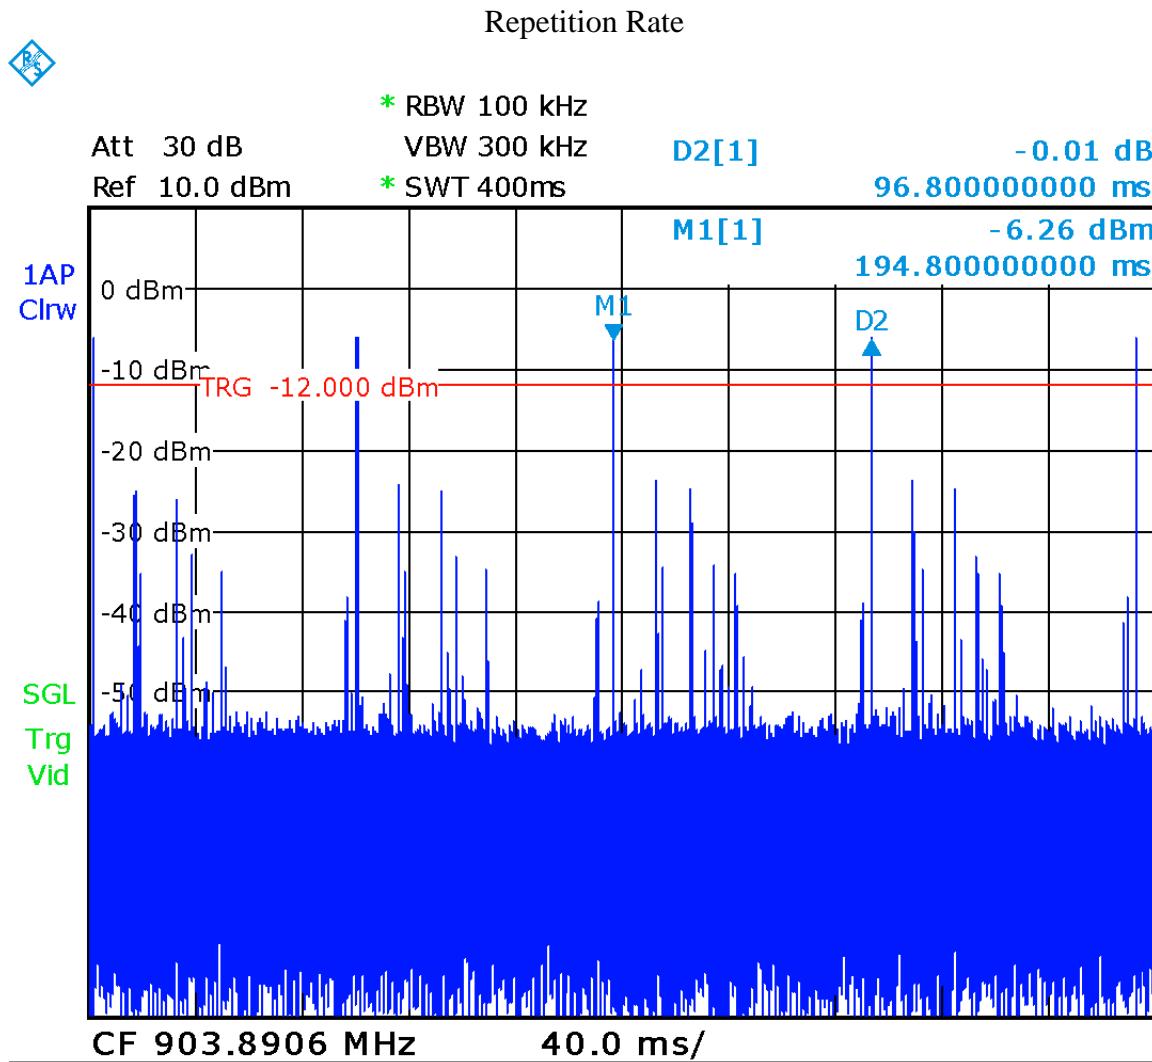

Date: 2.AUG.2016 17:20:46

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Ecobee Inc.	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	 Canada
Product	Ecobee3 Lite		
Standard(s)			

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	ESL6	Rohde & Schwarz	Nov 25, 2015	Nov 25, 2017	GEMC 160
Attenuator 10 dB	8493B	Agilent	Feb 11, 2016	Feb 11, 2017	GEMC133
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	Feb-10, 2015	Feb-10, 2016	GEMC 29

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Maximum Peak Envelope Conducted Power - FHSS

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element does not exceed the limits specified.

Limits and methods

The limits are defined in 15.247(b).

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

The test method is defined in ANSI C63.10.

Results


The EUT passed. The peak power measured was 9.68 dBm (9.29 mW).

Channel	Frequency (MHz)	Power (dBm)	Power (mW)	Limit (mW)	Pass/Fail
Low Channel	902.8	9.68	9.29	1000	Pass
Mid Channel	915.1	9.68	9.29	1000	Pass
High Channel	927.7	9.65	9.23	1000	Pass

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Measurement(s)

The graphs shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT.

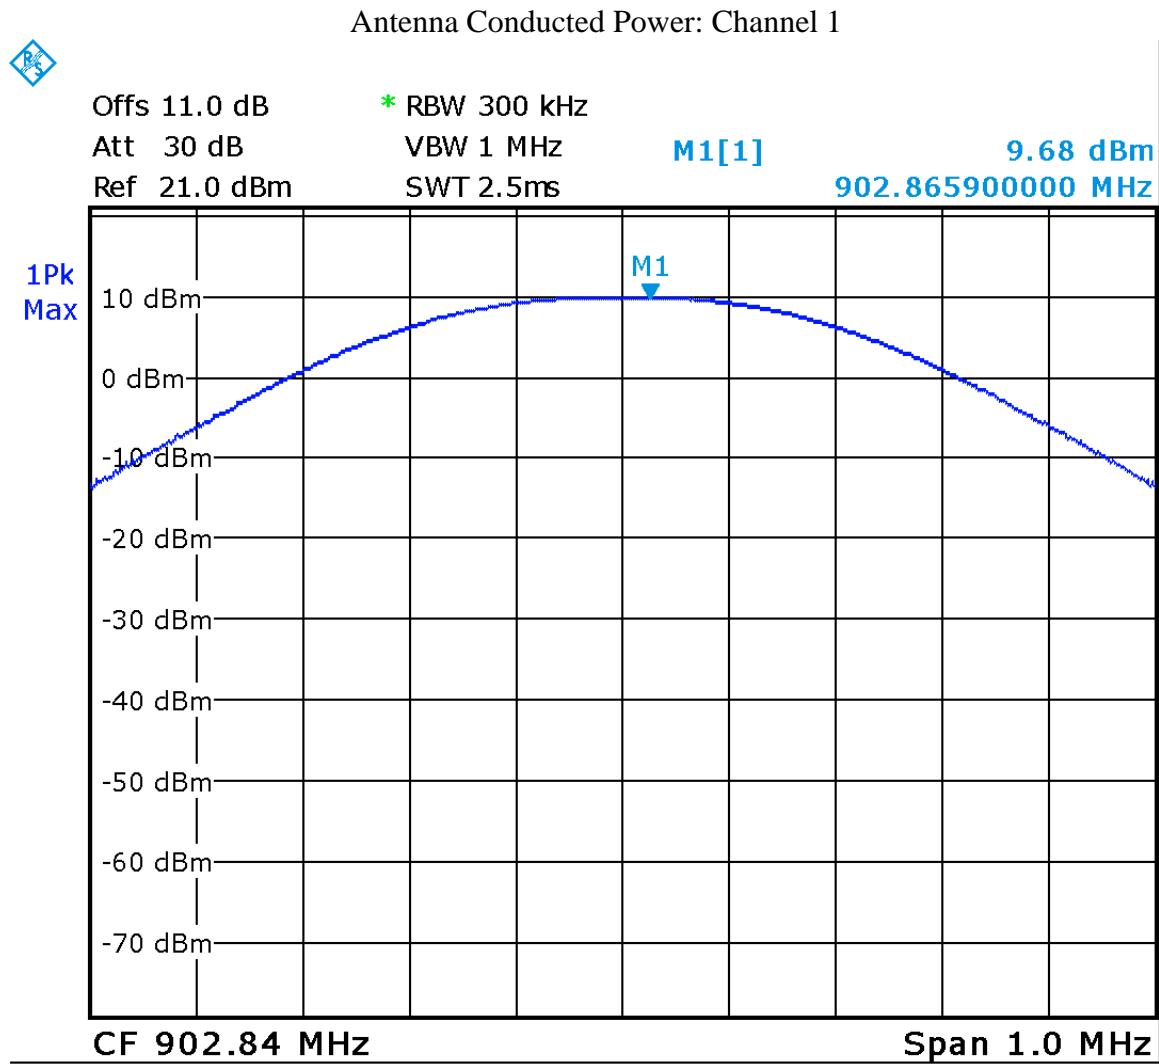

Date: 3.AUG.2016 17:33:44

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration date	Next calibration due date	Asset #
Spectrum Analyzer	ESL6	Rohde & Schwarz	Nov 25, 2015	Nov 25, 2017	GEMC 160
Attenuator 10 dB	8493B	Agilent	Feb 11, 2016	Feb 11, 2017	GEMC133
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	Feb-10, 2015	Feb-10, 2016	GEMC 29

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Antenna Spurious Conducted Emissions (-20 dBc Requirement) – 15.247

Purpose

The purpose of this test is to ensure that the maximum power conducted to the radiating element at frequencies outside of the authorized spectrum does not exceed the limits specified. This ensures that the only the intended signal is delivered to the radiating element.

Limits and Methods

The limits are defined in 15.247(d). In any 100 kHz band, the peak spurious harmonics emissions must be at least 20 dB below the fundamental. Spurious Conducted emissions are to be evaluated up to the 10th harmonic. This -20 dBc requirement also applies at the ‘band edge’. Band edge testing shall be performed with the EUT in hopping and in single channel modes.

The method is given in and ANSI C63.10


Results

The EUT passed the limits. Low, middle and high channels were measured. The worst case was presented as a graph for the spectrum. The -20 dBc requirement is shown for the lower band edge at 902 MHz in the low band. The -20 dBc requirement is also shown for the higher band edge at 928 MHz in the high band.


Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Graph(s)

The graphs shown below shows the peak power output of the device during the antenna conducted measurement during transmit operation of the EUT.

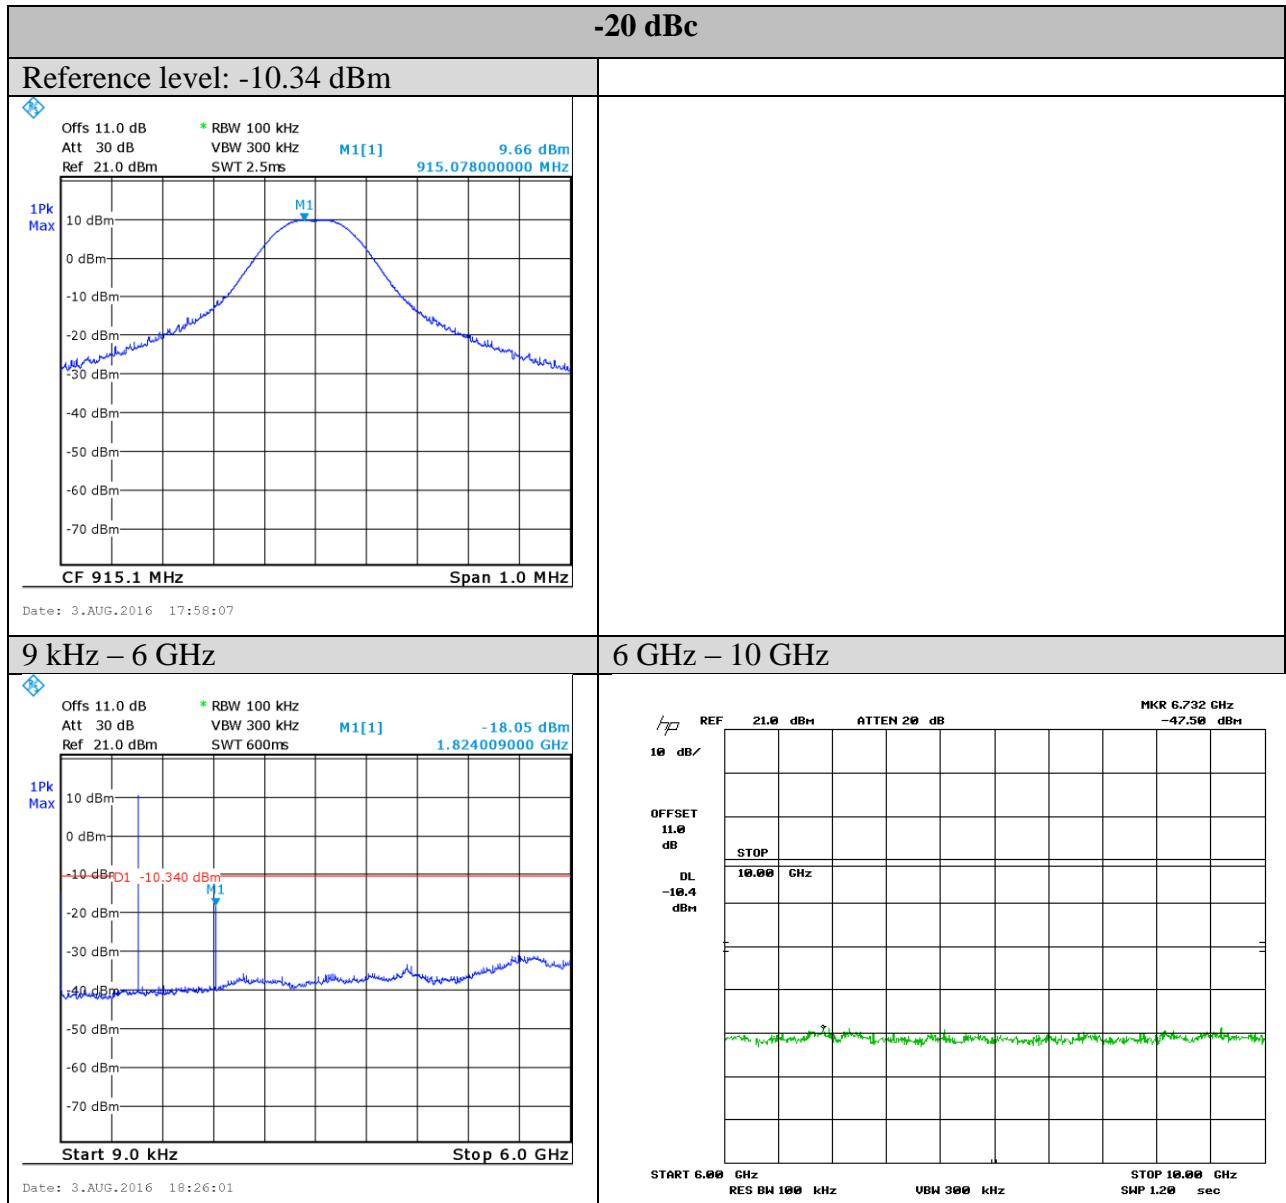

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

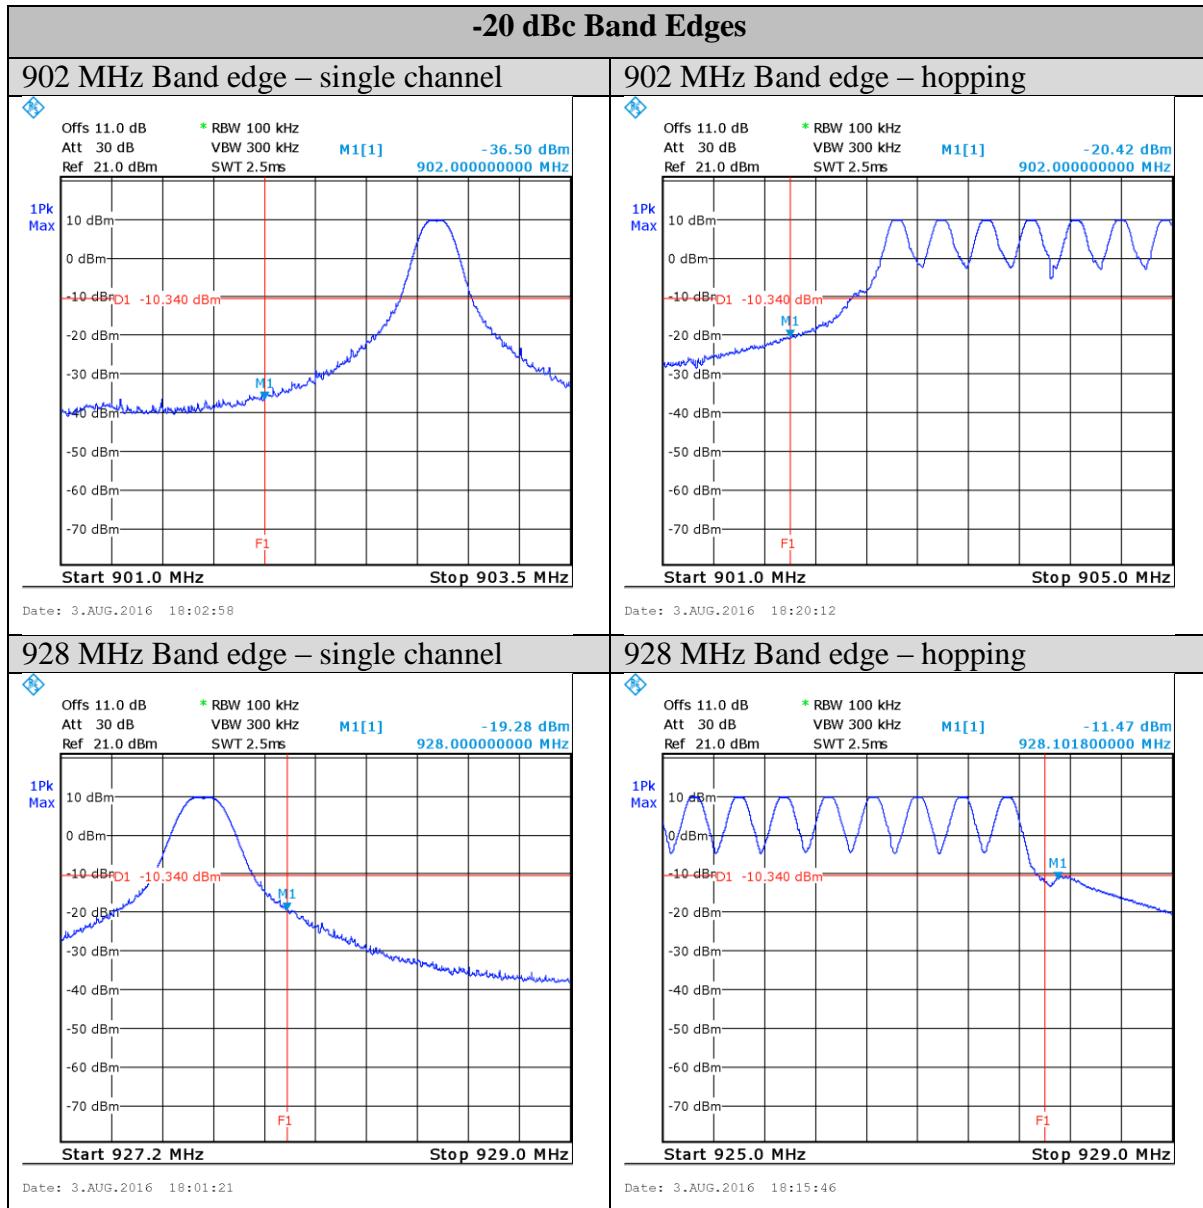

Note: See 'Appendix B – EUT & Test Setup Photographs' for photos showing the test set-up.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration / Verification date	Next calibration/ Verification due date	Asset #
Spectrum Analyzer	8566B	HP	Nov 27, 2015	Nov 27, 2017	GEMC 190
Quasi Peak Adapter	85650A	HP	Nov 27, 2015	Nov 27, 2017	GEMC 191
Spectrum Analyzer	ESL6	Rohde & Schwarz	Nov 25, 2015	Nov 25, 2017	GEMC 160
Attenuator 10 dB	8493B	Agilent	Feb-11, 2016	Feb-11, 2017	GEMC133

This report module is based on GEMC template "FCC – Power Line Conducted Emissions Class B_Rev1"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Radiated Emissions – 15.247

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT does not exceed the limits listed below as defined in the applicable test standard, as measured from a receiving antenna. This helps protect broadcast radio services such as television, FM radio, pagers, cellular telephones, emergency services, and so on, from unwanted interference.

Limit and Method

The method is given in Section 12.1 of FCC KDB 558074 and ANSI C 63.10

The limits are as defined in FCC Part 15, Section 15.209:

The limits, as defined in 15.247(d) for unintentional radiated emissions apply for those emissions that fall in the restricted bands, as defined in Section 15.205(a). These emissions must comply with the radiated emission limits specified in Section 15.209(a).

All unintentional emissions must also meet the ‘Spurious Conducted Emissions’ requirements of -20 dBc or greater. See also ‘Spurious Conducted Emissions’ for further details.

0.009 MHz – 0.490 MHz, 2400/F (kHz) uV/m at 300 m¹

0.490 MHz – 1.705 MHz, 24000/F (kHz) uV/m at 30 m¹

1.705 MHz – 30 MHz, 30 uV/m at 30 m¹

30 MHz – 88 MHz, 100 uV/m (40.0 dBuV/m¹) at 3 m

88 MHz – 216 MHz, 150 uV/m (43.5 dBuV/m¹) at 3 m

216 MHz – 960 MHz, 200 uV/m (46.0 dBuV/m¹) at 3 m

Above 960 MHz, 500 uV/m (54.0 dBuV/m¹) at 3 m

Above 1000 MHz, 500 uV/m (54 dBuV/m²) at 3m

Above 1000 MHz, 500 uV/m (74 dBuV/m³) at 3m


¹Limit is with Quasi Peak detector with bandwidths as defined in CISPR-16-1-1

²Limit is with 1 MHz measurement bandwidth and using an Average detector

³Limit is with 1 MHz measurement bandwidth and using a Peak detector

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Typical Radiated Emissions Setup

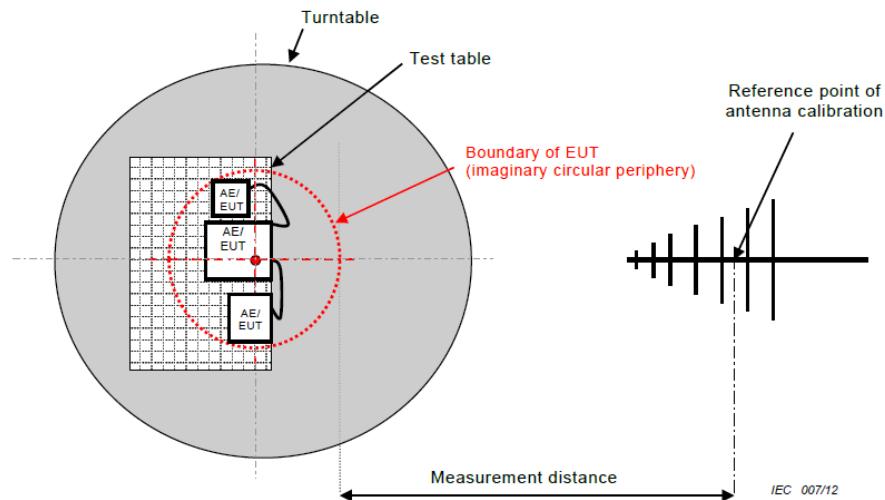

Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is +/-4.4 dB with a 'k=2' coverage factor and a 95% confidence level.

Preliminary Graphs

Note the graphs shown below are for graphical illustration only. For final measurements with the appropriate detector, please refer to the final measurement table where applicable. The graph shown below is a maximized peak measurement graph, measured with a resolution bandwidth greater than the final required detector and over a full 0-360 rotation. This peaking process is done as a worst case measurement. This process enables the detection of frequencies of concern for final measurement, and provides considerable time savings.


In accordance with FCC Part 15, Subpart A, Section 15.33, the device was scanned to the 10th harmonic.

Devices scanned may be scanned at alternate test distances, and in accordance with FCC Part 15, Subpart A, Section 15.31, an extrapolation factor of 20 dB/decade was used above 30 MHz and 40 dB/decade below 30 MHz. For example for 1 meter measurements, an extrapolation factor 9.5 dB from 20 Log (1m / 3m) is applied.


Low, middle and high channels were measured, each in three orthogonal axes were checked; however the worst case graphs are presented.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Band edge measure graphs were shown for illustrations purpose. See final measurement section for all measurements.

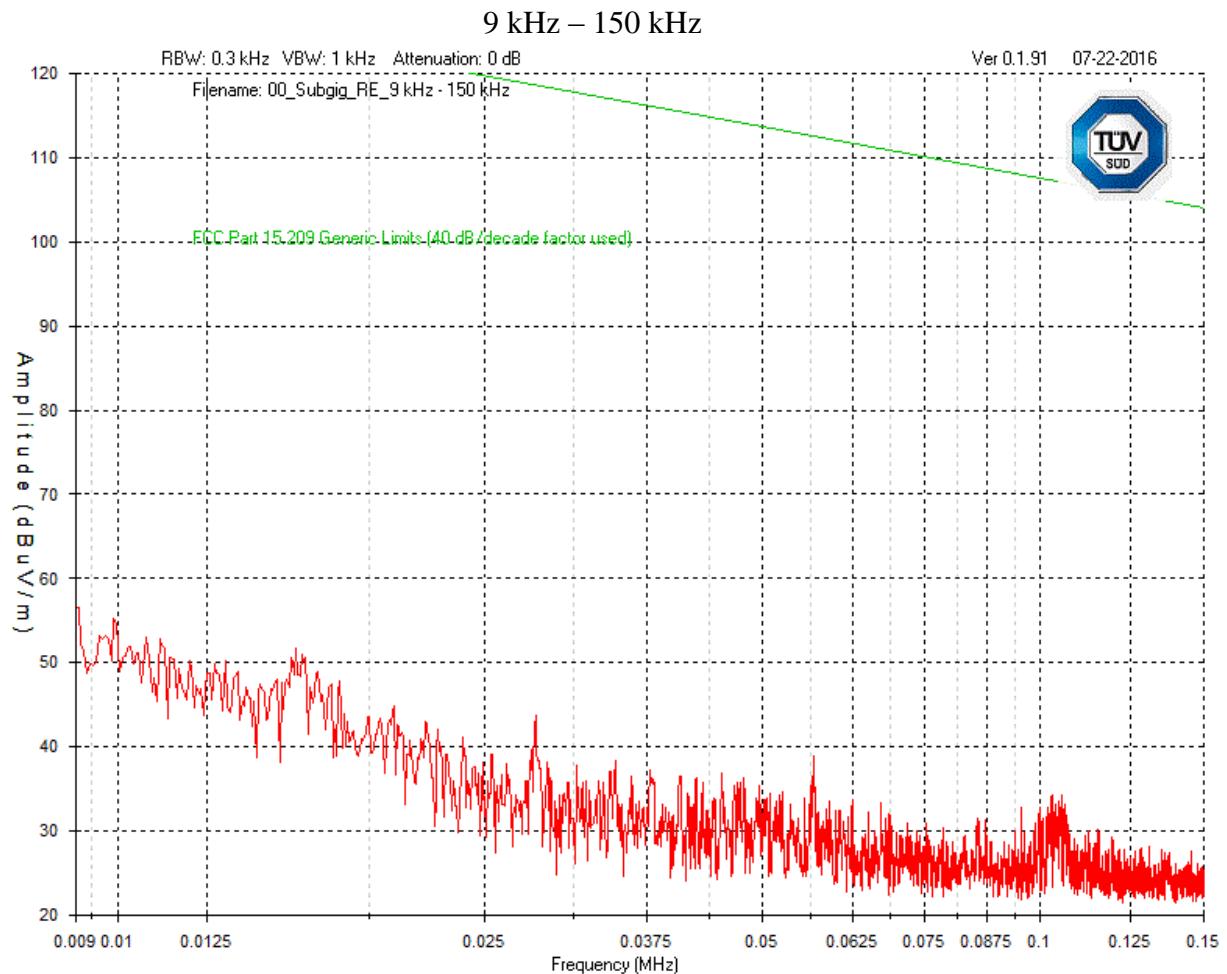


Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

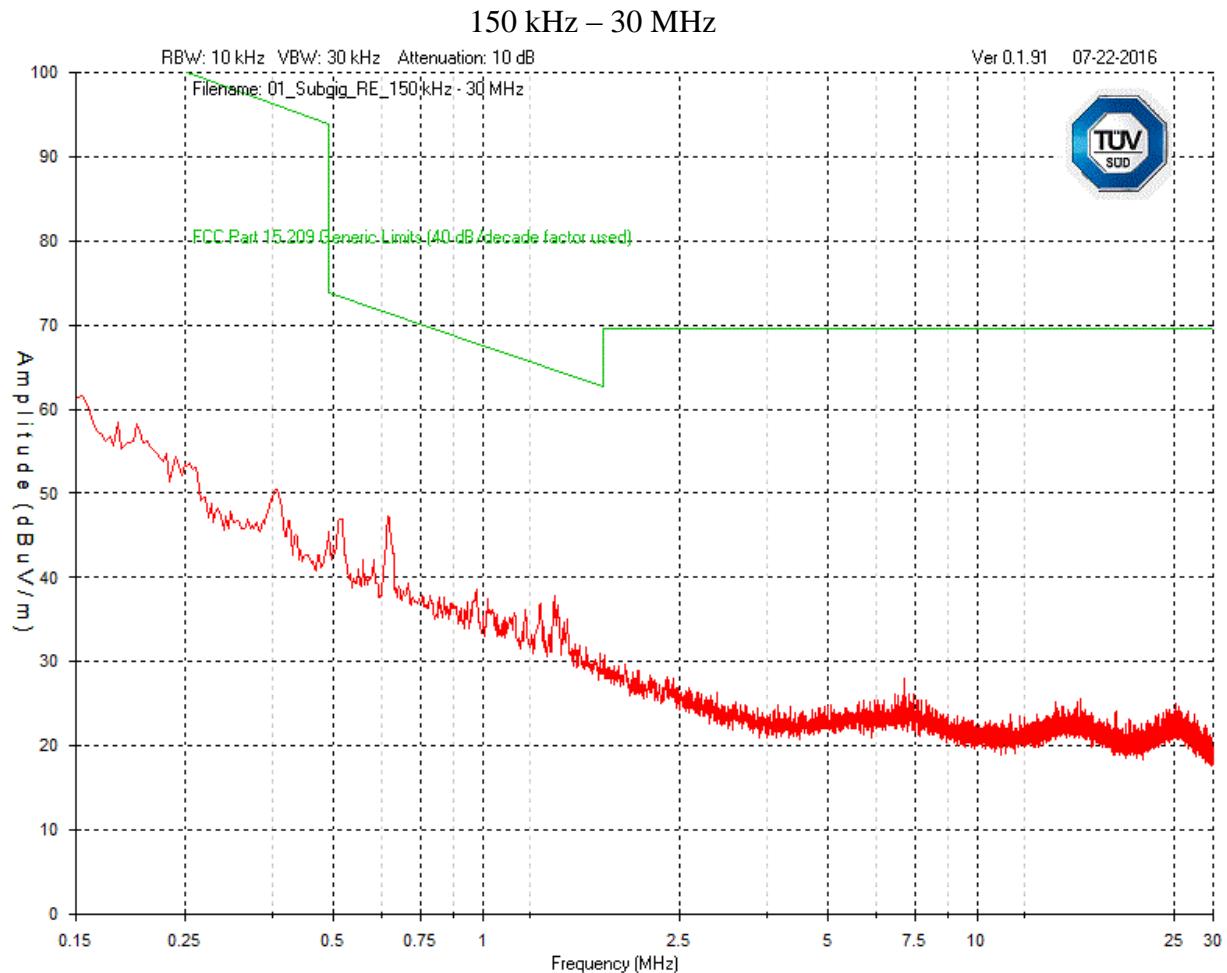


Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Mid Channel - 30 MHz – 1 GHz
Vertical – Peak Emission Graph

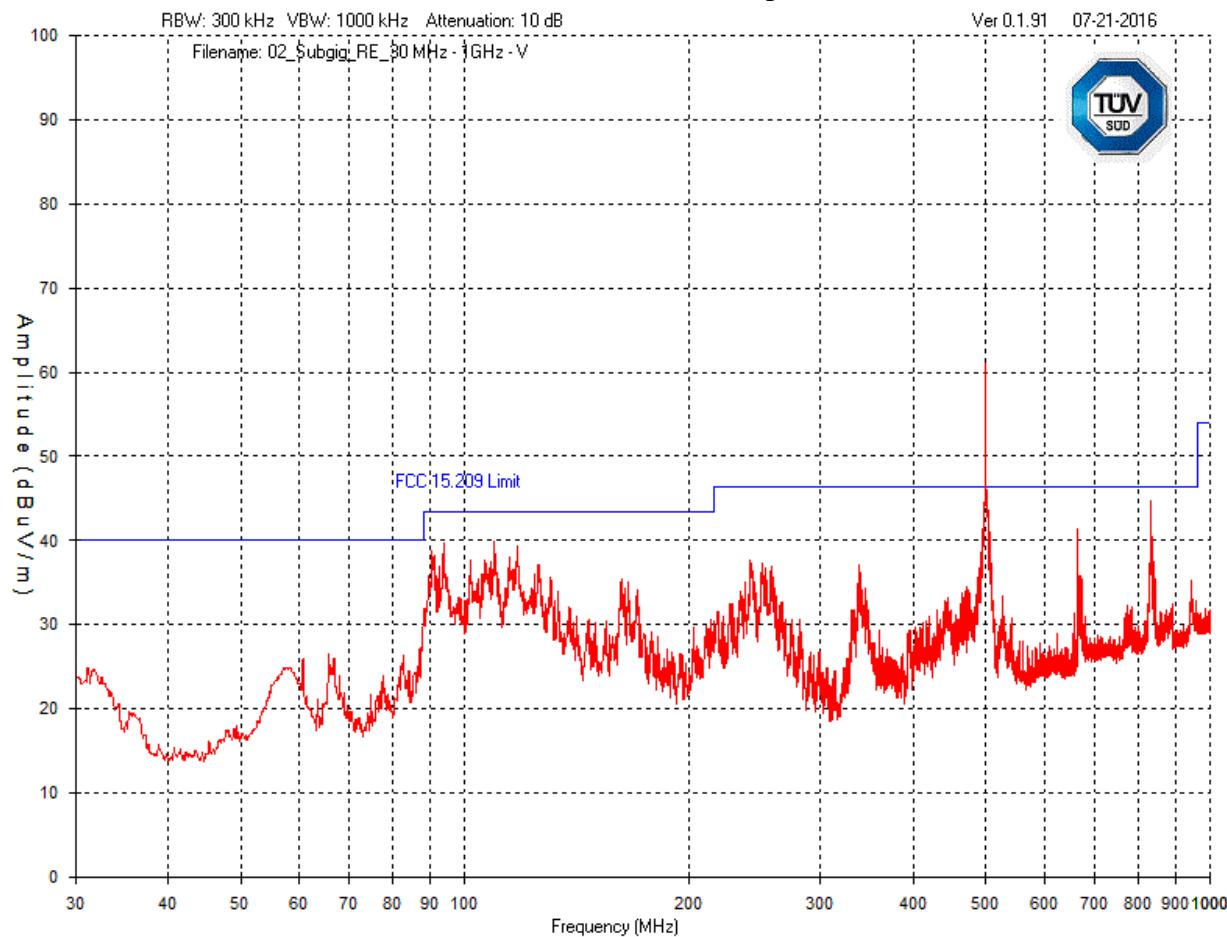

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	


Mid Channel – 30 MHz – 1 GHz
Horizontal - Peak Emission Graph

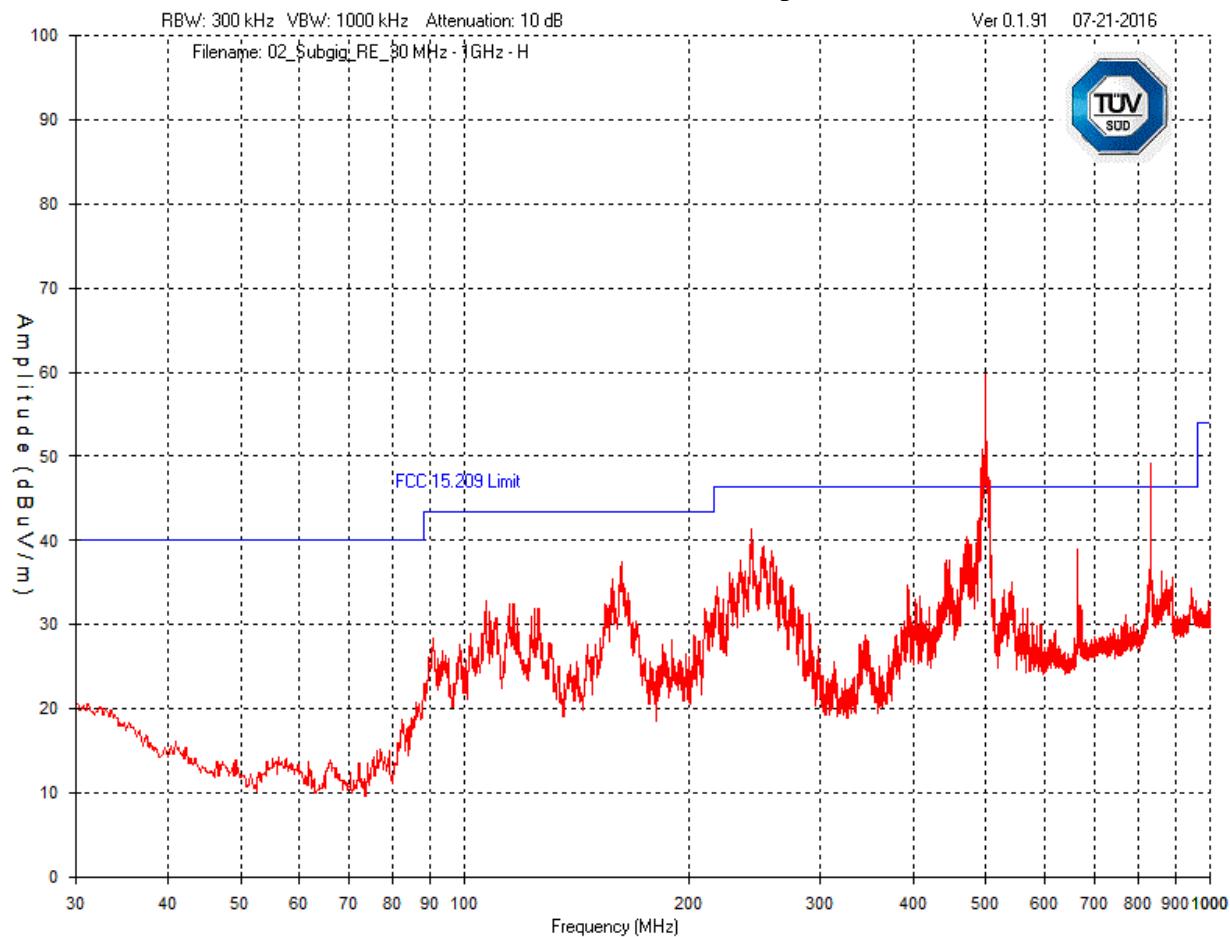

Client	Ecobee Inc.
Product	Ecobee3 Lite
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016



Mid Channel – 1 GHz – 2 GHz
Vertical - Peak Emission Graph

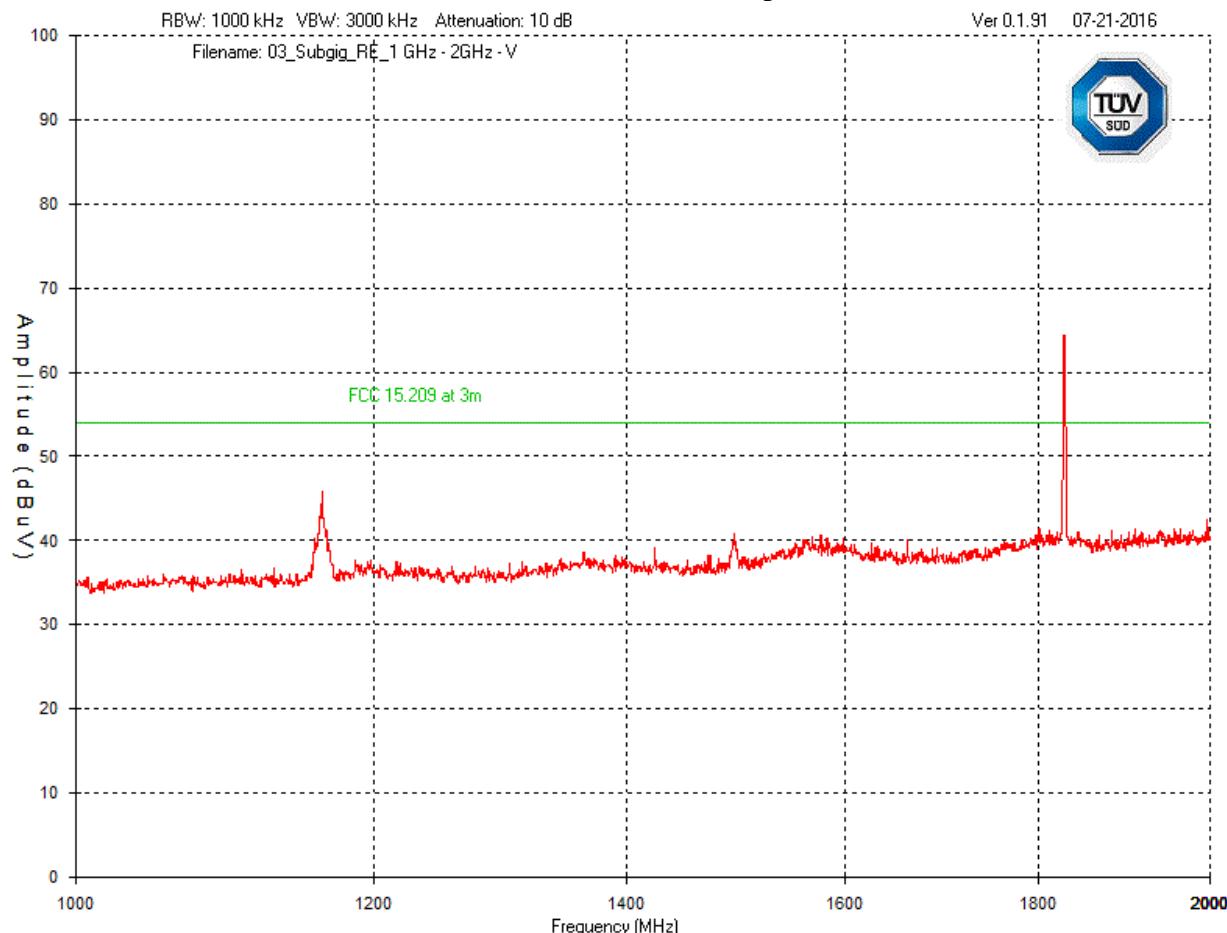


Note: See Final Measurements and Results section starting on page 44 for measurements.

Client	Ecobee Inc.
Product	Ecobee3 Lite
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016




Mid Channel – 1 GHz – 2 GHz Horizontal - Peak Emission Graph

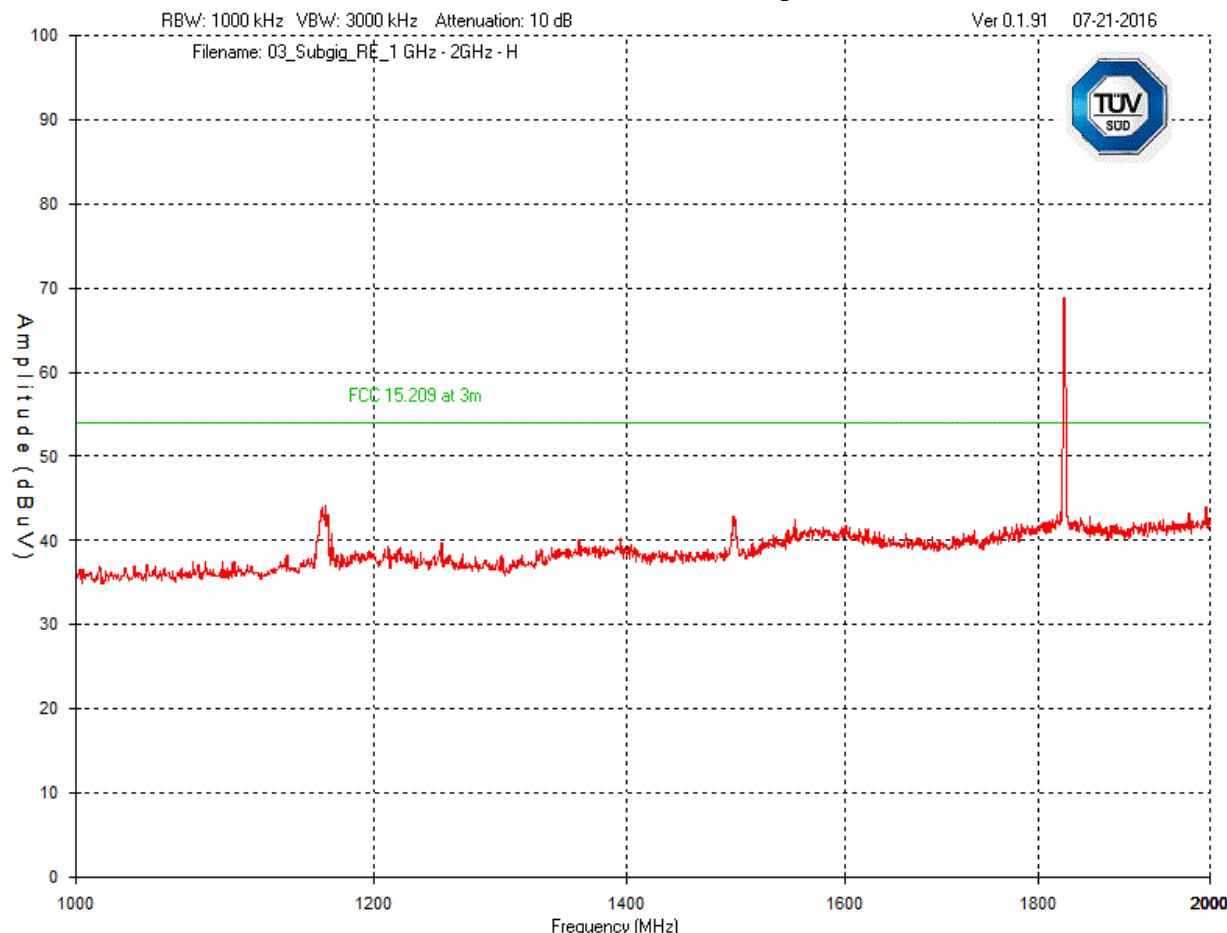

Note: See Final Measurements and Results section starting on page 44 for measurements.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	


Mid Channel – 2 GHz – 10 GHz
Vertical - Peak Emission Graph

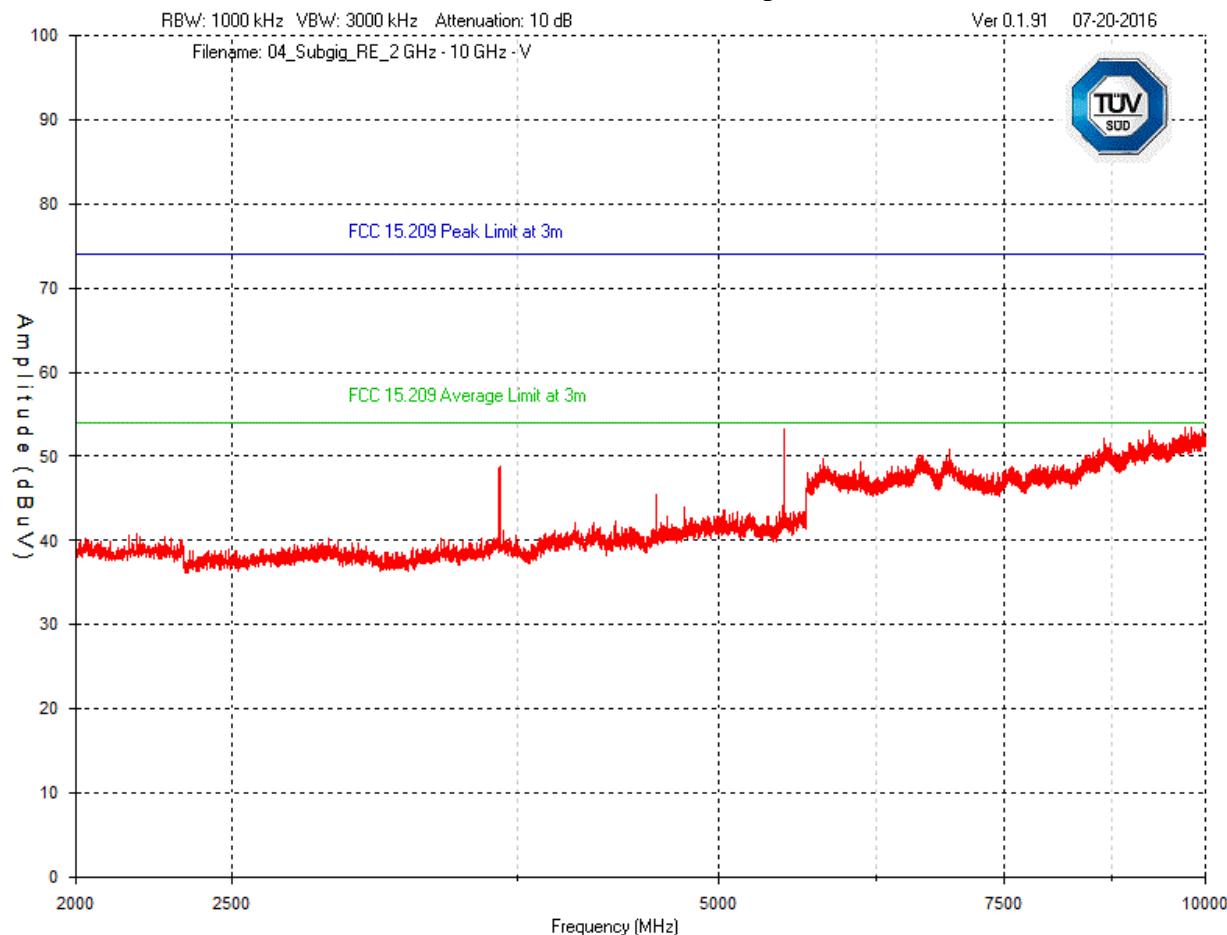

Note: See Final Measurements and Results section starting on page 44 for measurements.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Mid Channel – 2 GHz – 10 GHz
Horizontal - Peak Emission Graph

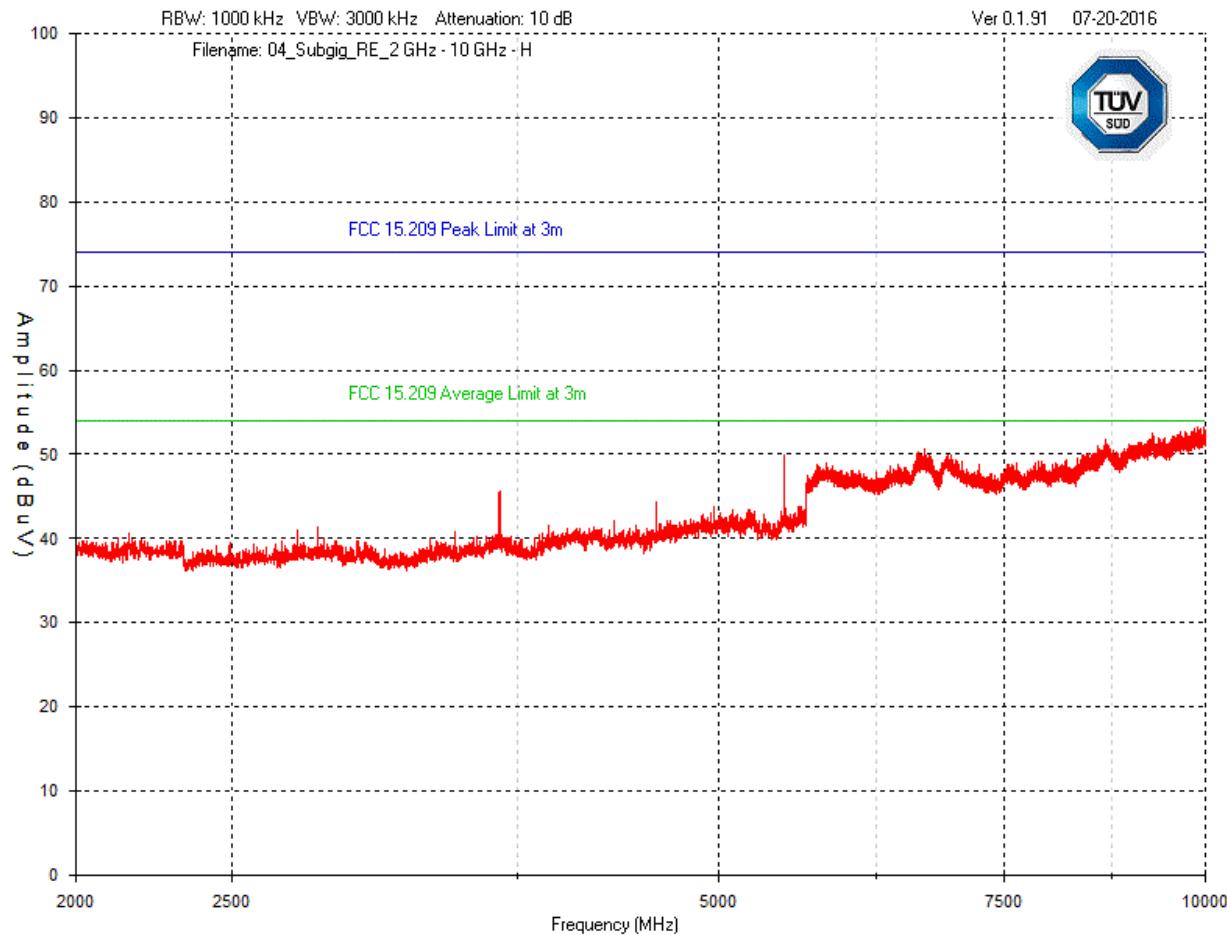

Note: See Final Measurements and Results section starting on page 44 for measurements.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Final Measurements and Results

The EUT passed the limits. Low, middle and high bands were measured.

In accordance with 15.247(d), only frequencies exceeding the 15.209 limit that occur within the bands listed in 15.205, need to be verified with a final detector. Emission outside the restricted bands were measured for information purpose.

The measurements were maximized by rotating the turn table over a full 0-360 rotation and the antenna height was varied from 1 m to 4 m.

Product Category	Class A						
Product	Ecobee3 Lite						
Supply	120 Vac 60 Hz						

Vertical Emission Table

Frequency (MHz)	Detector	Raw (dBuV)	Correction Factors (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
498.51	QP	57.5	-14.8	42.7	46.4	3.7	Pass
499.092	QP	52.8	-14.8	38.0	46.4	8.4	Pass
831.123	QP	45.8	-8.1	37.7	46.4	8.7	Pass
109.54	QP	47.7	-23.6	24.1	43.5	19.4	Pass
1829.33	AVG	20.4	-4.9	15.5	54.0	38.5	Pass*
9703.67	AVG	36.1	4.5	40.6	54.0	13.4	Pass
5489.67	AVG	50.6	0.1	50.7	54.0	3.3	Pass
6940	AVG	36.4	1.6	38.0	54.0	16.0	Pass
3659.33	AVG	49.8	-3.4	46.4	54.0	7.6	Pass

Horizontal Emission Table

498.704	QP	55.8	-14.1	41.7	46.4	4.7	Pass
831.123	QP	50.2	-7.1	43.1	46.4	3.4	Pass
1829.33	AVG	23.1	-3.1	20.0	54.0	34.0	Pass*
9887	AVG	36.2	5.7	41.9	54.0	12.1	Pass
6708	AVG	36.8	1.6	38.4	54.0	15.6	Pass
5489.33	AVG	46.3	0.1	46.4	54.0	7.6	Pass

*This is the 2nd harmonic of the transmitter. The Average emission was derived from adding duty cycle correction factor of -48.9 dB to the peak. The transmitter have an ON time of 0.36 ms in a 100 ms period.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Test Equipment List

Equipment	Model No.	Manufacturer	Last calibration / Verification date	Next calibration/ Verification due date	Asset #
Spectrum Analyzer	8566B	HP	Nov 27, 2015	Nov 27, 2017	GEMC 190
Quasi Peak Adapter	85650A	HP	Nov 27, 2015	Nov 27, 2017	GEMC 191
Loop Antenna	EM 6871	Electro-Metrics	Feb 3, 2015	Feb 5, 2017	GEMC 70
Loop Antenna	EM 6872	Electro-Metrics	Feb 3, 2015	Feb 5, 2017	GEMC 71
BiLog Antenna	3142-C	ETS	Sept 8, 2014	Sept 8, 2016	GEMC 8
Q-Par Horn Antenna (2 to 18 GHz)	WBH218HN	Q-par	Feb 12, 2016	Feb 12, 2018	GEMC 6375
Band Reject Filter	BRC50722	Micro-Tronics	Apr 9, 2015	Apr 9, 2016	GEMC 186
High pass filter	5IH30-1078	K & L Microwave	Apr 9, 2015	Apr 9, 2016	GEMC 118
Chase Preamp 9kHz - 2 GHz	CPA9231A	Chase	Sept 9, 2014	Sept 9, 2016	GEMC 6403
1-26G pre-amp	HP 8449B	HP	Sept 9, 2014	Sept 9, 2016	GEMC 6351
RF Cable 7m	LMR-400-7M-50OHM-MN-MN	LexTec	Feb 1, 2016	Feb 1, 2017	GEMC 28
RF Cable 1m	LMR-400-1M-50OHM-MN-MN	LexTec	Feb 1, 2016	Feb 1, 2017	GEMC 29
RF Cable 0.5M	LMR-400-0.5M-50OHM-MN-MN	LexTec	Feb 1, 2016	Feb 1, 2017	GEMC 31

This report module is based on template "FCC - 15.209 - Radiated Emissions_Rev1.doc"

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Power Line Conducted Emissions

Purpose

The purpose of this test is to ensure that the RF energy unintentionally emitted from the EUT's power line does not exceed the limits listed below as defined in the applicable test standard and measured from a LISN. This helps protect lower frequency radio services such as AM radio, shortwave radio, amateur radio, maritime radio, CB radio, and so on, from unwanted interference.

Limits & Method

The method is as defined in ANSI C63.10. The limits are as defined in FCC Part 15 Section 15.207 and RSS-GEN:

Average Limits		Quasi-Peak Limits	
150 kHz – 500 kHz	56 to 46* dB μ V	150 kHz – 500 kHz	66 to 56* dB μ V
500 kHz – 5 MHz	46 dB μ V	500 kHz – 5 MHz	56 dB μ V
5 MHz – 30 MHz	50 dB μ V	5 MHz – 30 MHz	60 dB μ V


* Decreases linearly with the logarithm of the frequency

Both Quasi-Peak and Average limits are applicable and each is specified as being measured with a resolution bandwidth of 9 kHz. For Quasi-Peak, a video bandwidth at least three times greater than the resolution bandwidth is used.

If the Peak or Quasi-Peak detector measurements do not exceed the Average limits, then the EUT is deemed to have passed the requirements.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Typical Setup Diagram

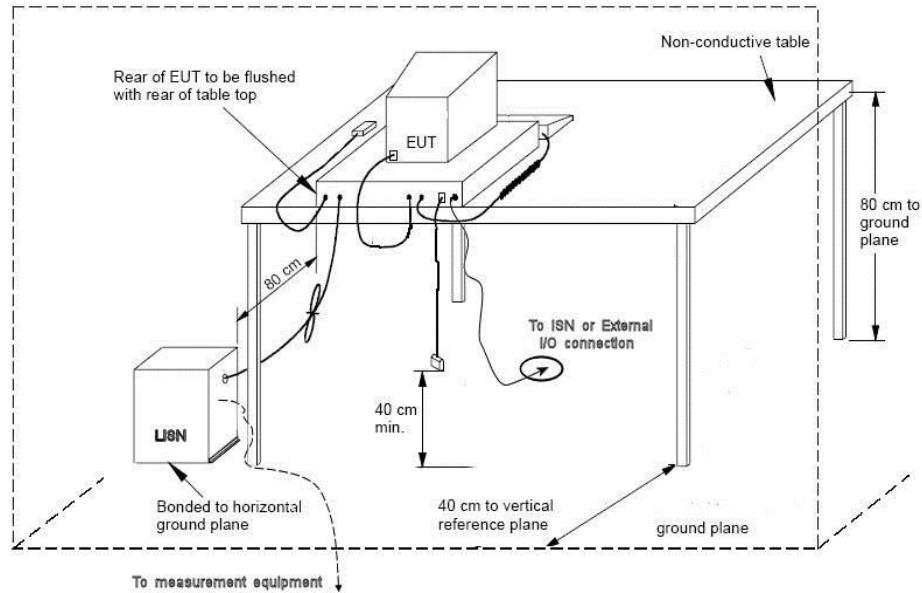


Measurement Uncertainty

The expanded measurement uncertainty is calculated in accordance with CISPR 16-4-2 and is $\pm 2.91\text{dB}$ with a 'k=2' coverage factor and a 95% confidence level.


Preliminary Graphs

The graphs shown below are maximized peak measurement graphs measured with a resolution bandwidth greater than or equal to the final required detector. This peaking process is done as a worst case measurement and enables the detection of frequencies of concern for final measurement. For final measurements with the appropriate detector, where applicable, please refer to the tables under Final Measurements.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

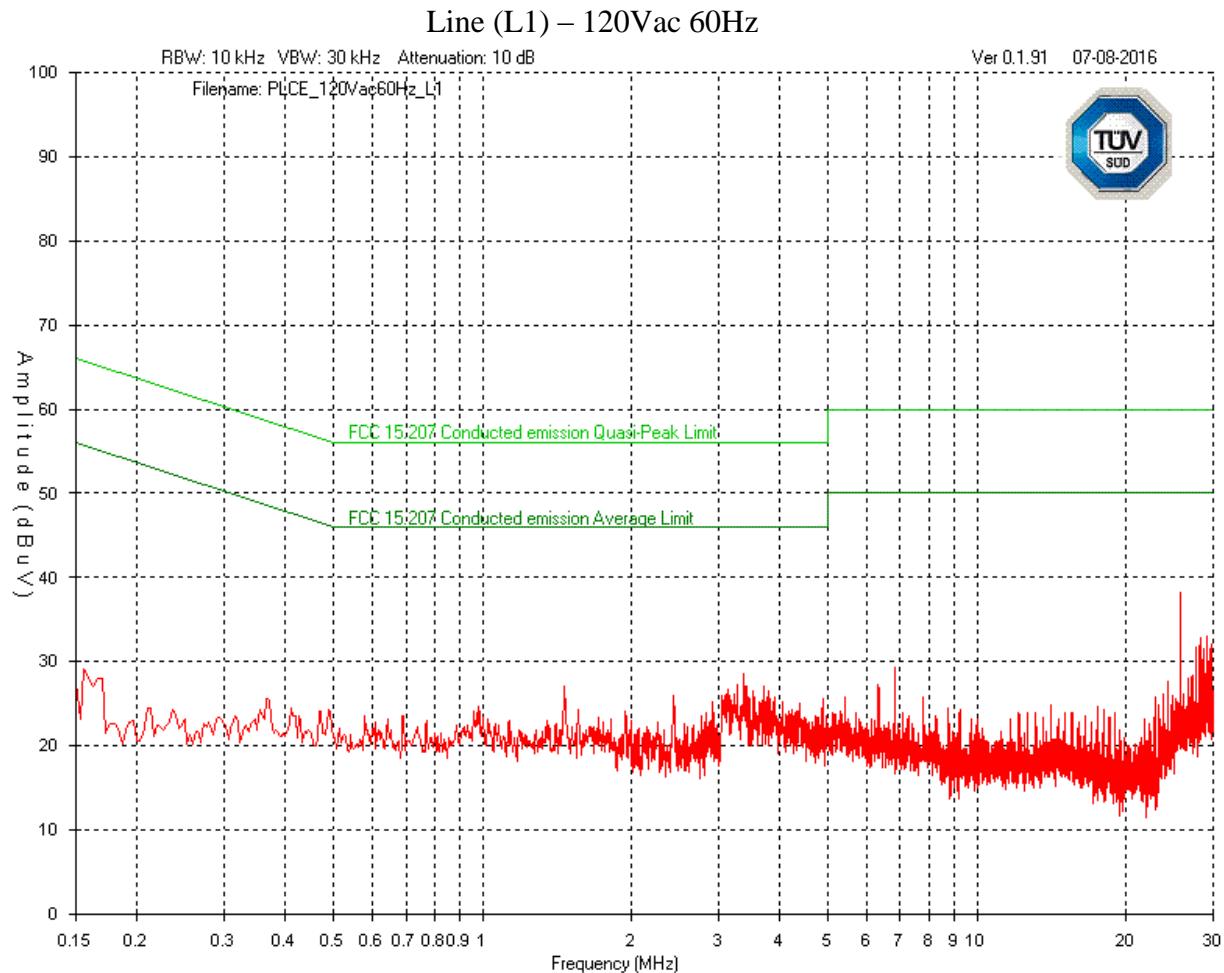

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

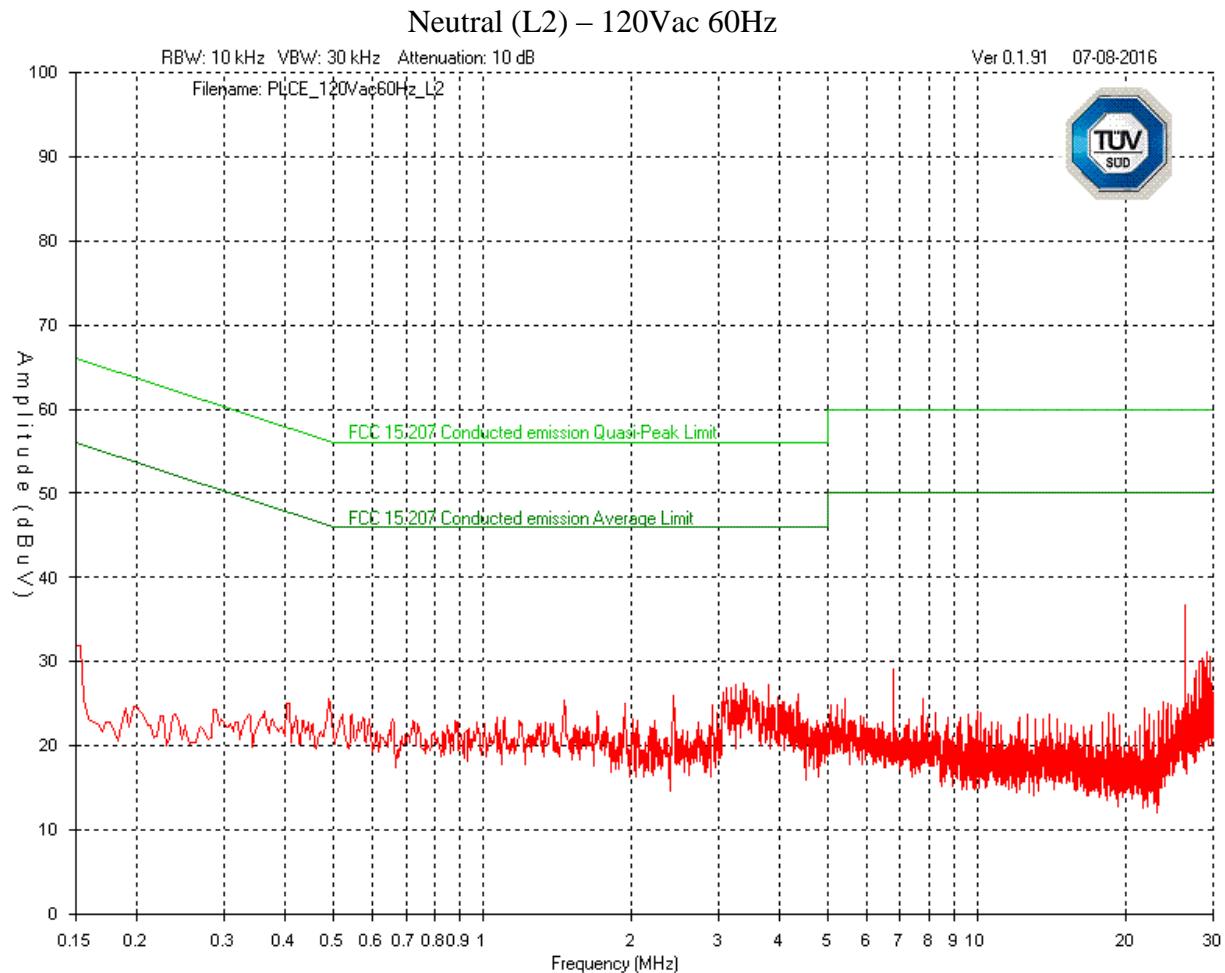

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

Final Measurements

All peak emission were below the average limit thus the EUT was deemed to meet power line conducted emission limits based on peak emission.

See 'Appendix B – EUT, Peripherals and Test Setup Photos' for photos showing the test set-up for the highest line conducted emission

Test Equipment List

Equipment	Model No.	Manufacturer	Last Calibration Date	Next Calibration Date	Asset #
Spectrum Analyzer	ESL 6	Rohde & Schwarz	Nov. 25, 2015	Nov. 25, 2017	GEMC 160
LISN	FCC-LISN-50/250-16-2-01	FCC	Jan. 15, 2015	Jan. 15, 2017	GEMC 65
RF Cable 7m	LMR-400-7M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 28
RF Cable 1m	LMR-400-1M-50Ω-MN-MN	LexTec	NCR	NCR	GEMC 29
10dB Attenuator	FP-50-10	Trilithic	NCR	NCR	GEMC 42
Emissions Software	0.1.91	Global EMC	NCR	NCR	GEMC 58

This report module is based on report template 'FCC_ICES003_CE_Rev1'

Client	Ecobee Inc.	
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	 Canada

Appendix A – EUT Summary

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

For further details for filing purposes, refer to filing package.

General EUT Description

Client	
Organization / Address	Ecobee Inc 250 University Avenue, Suite 400 Toronto, ON M5H 3E5
Contact	Kashif Ahmed
Phone	416 987 1048
Email	kashif@ecobee.com
EUT Details	
EUT Name	Ecobee3 Lite
FCC ID	WR9EBSTAT3LT01
Industry Canada #	7981A-EBSTAT3LT01
Equipment Category	Low power wireless thermostat
Basic EUT Functionality	EUT is a smart thermostat that have a 2400 – 2483.5 MHz DTS (802.11 b/g/n) transmitter and a 902 – 928 MHz FHSS transmitter.
Input Voltage and Frequency	24 Vac 60 Hz
Rated Input Current	2 A
Connectors available on EUT	1 (terminals for HVAC control)
Peripherals Required for Test	None
Release type	Final
Intentional Radiator Frequency	2400 – 2483.5 MHz for 802.11 b/g/n DTS 902 – 928 MHz FHSS
EUT Configuration	Wireless configured to transmit continuously at 100% duty cycle

Note the EUT is considered to have been received the date of the commencement of the first test, unless otherwise stated. For a close-up picture of the EUT, see 'Appendix B – EUT and Test Setup Photos'.

Client	Ecobee Inc.	 Canada
Product	Ecobee3 Lite	
Standard(s)	RSS 247 Issue 1:2015 FCC Part 15 Subpart 15.247:2016	

EUT Configuration

Please see Appendix B for a picture of the unit running in normal conditions.

- Wireless were configured to transmit at maximum possible duty cycle
- The 15.247 902 – 928 MHz transmitter were configured with the following settings:
 - A special test firmware were installed on the EUT to control hopping through its pseudo random sequence with the command o1.
 - c# to transmit on single channels.

Operational Setup

These devices are required to be attached to the EUT for its normal operation.

- A USB to serial cable was connected to the EUT for test mode setting.