

承认书

SPECIFICATION FOR APPROVAL

客户名称 (CUSTOMER NAME): 奥尼电子

客户料号 (CUSTOMER NAME):

产品名称 (PART NO.) : S2B4BC3F1B04006

送样日期 (SEND DATE.) :

新品承认 (Newly Approved) :

环保要求:

RoHS: ☐ 不要求 ☒ 符合 ROHS ☐ 其他 :

REACH: ☐ 不要求 ☒ 符合 REACH ☐ 其他 :

卤素限制: ☐ 不要求 ☐ 其他 :

出厂签章:

RD/研发部	ED/工程部	QA/品质部	SD/销售部	APPROVED/批准

承认签章:

RD/研发部	ED/工程部	QA/品质部	SD/销售部	APPROVED/批准

注: 此承认书一式三份按照左至右顺序签署。

敬请确认此承认书所有项目, 并签名和盖章后回签一份给我司。以作我司产品制作和存档之用, 多谢合作。

Scale :	Unit : mm	Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 0.1 X.XX : ± 0.01	深圳市福伯特电子有限公司 Shenzhen Fbetter Electronic Co.,Ltd ADD: Introduction Building 6F, Xinan Street 71, Baoan District, Shenzhen, Guangdong, China
Drawn By : Chris	Checked By : Nick		
Designed By : Cary	Approved By : Hank		

WIFI FPCB Antenna (B238HX)

1. Explanation of Product Number

S	2	B	4	B	C	3	F	1	B	0	4	0	0	6
(1)				(2)		(3)	(4)	(5)						

Product Description:

- (1) Product Categories:
B4: 2.4G Antenna
- (2) Antenna type:
FPC
- (3) Dimensions:
C3: 16.03*11.19*0.22
- (4) Material:
F:
- (5) Working Frequencies:
1B: 2.4G-2.5G
- (6) Antenna Series:
01: Serial number
- (7) RF Cable Loss / 引出射频线的线损 0.5(dB)

Scale :	Unit : mm	Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01	深圳市福伯特电子有限公司 Shenzhen Fbetter Electronic Co.,Ltd ADD: Introduction Building 6F, Xinan Street 71, Baoan District,Shenzhen, Guangdong, China
Drawn By : Chris	Checked By : Nick		
Designed By :Cary	Approved By :Hank		

2. Features

- *Stable and reliable in performances
- *RoHS compliance
- *Low cost

3. Applications

*2.4G

4. Description



* Unictron's FPCB antenna series are specially designed for 2.4G-2.5G band application. Based on Unictron's proprietary designs and processes, this FPCB antenna has excellent stability and sensitivity to consistently provide high signal reception efficiency.

5. Antenna Electrical Specifications :

Characteristics	Specifications			Unit
Outline Dimensions	16x12X0.23(mm)			mm
Frequency	2400~2500			MHz
Impedance	50			Ω
Polarization	Linear Polarization			
Return Loss Table	Return Loss			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
dB	-16.98	-29.81	-17.34	
VSWR Table	VSWR			
Freq.Band	2.4G Hz	2.45G Hz	2.5G Hz	
	1.32	1.08	1.29	
GAIN Table	Total Gain = Xpol + Ppol			
Freq.Band	2400MHz	2450MHz	2485MHz	2500MHz
Peak Gain(dBi)	-2.24	-1.88	-2.38	


Scale :	Unit : mm	Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01	深圳市福伯特电子有限公司 Shenzhen Fbetter Electronic Co.,Ltd ADD: Introduction Building 6F, Xinan Street 71, Baoan District,Shenzhen, Guangdong, China
Drawn By : Chris	Checked By : Nick		
Designed By :Cary	Approved By :Hank		

. Dimensions (unit: mm)

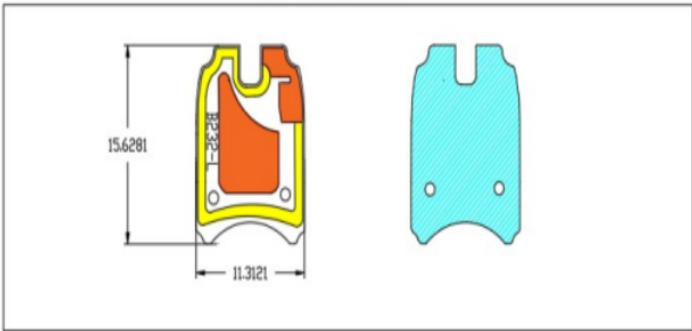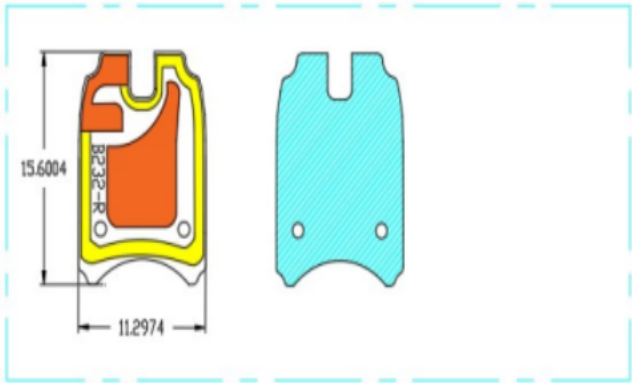


Unit:mm
未标示公差:±0.2

7. Measurement Characteristics:
(1) Return Loss

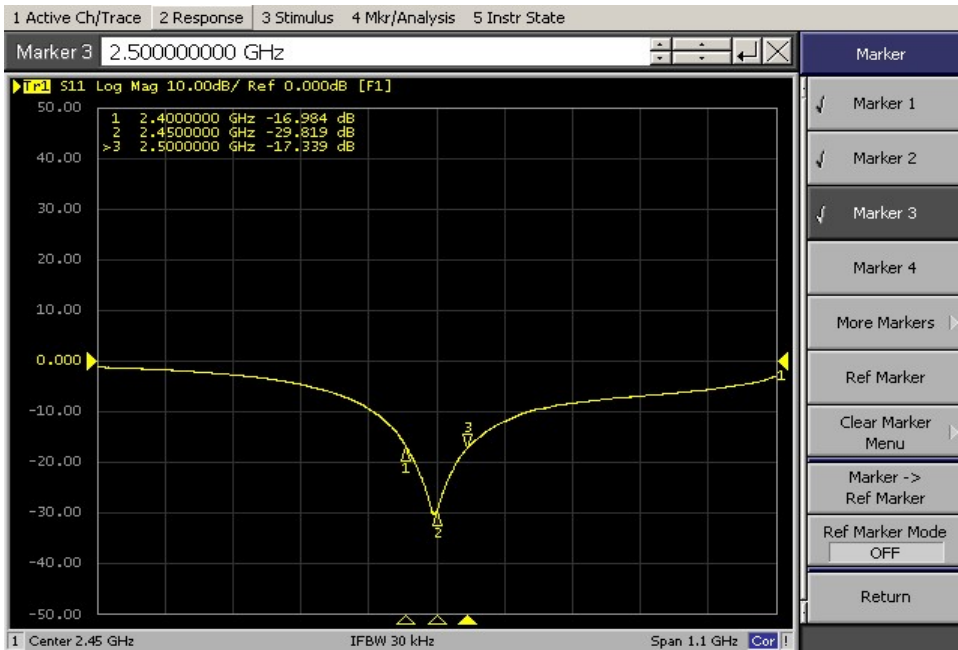


Scale :	Unit : mm	Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01	深圳市福伯特电子有限公司 Shenzhen Fbetter Electronic Co.,Ltd ADD: Introduction Building 6F, Xinan Street 71, Baoan District,Shenzhen, Guangdong, China
Drawn By : Chris	Checked By : Nick		
Designed By :Cary	Approved By :Hank		

(2) VSWR

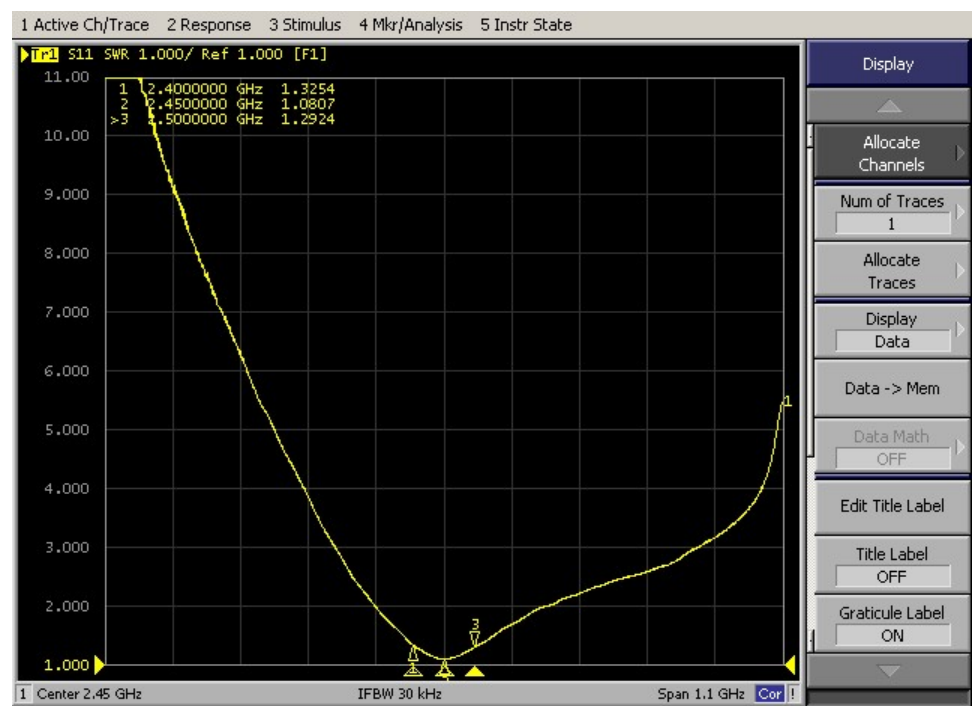

8. Three D Radiation Pattern measurement

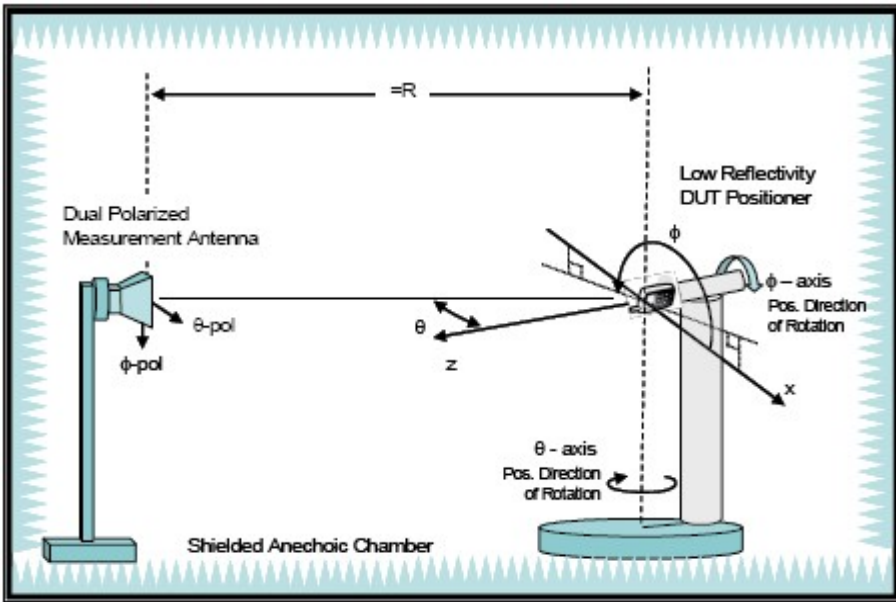

Scale :	Unit : mm	Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01	深圳市福伯特电子有限公司 Shenzhen Fbetter Electronic Co.,Ltd ADD: Introduction Building 6F, Xinan Street 71, Baoan District,Shenzhen, Guangdong, China
Drawn By : Chris	Checked By : Nick		
Designed By :Cary	Approved By :Hank		

9.Radiation Pattern

Gain complete machine (Radiation Pattern at 2450 MHz)

Frequency(MHz)	2400	2420	2450	2460	2480	2500
Efficiency (dB)	-2.22	-1.71	-2.09	-2.13	-2.24	-2.07
Efficiency (%)	27.9	29.3	32	29	28.7	26
Gain (dBi) Left	-2.24	-2.15	-1.88	-2.13	-2.32	-2.40
Gain (dBi) Right	-2.39	-2.26	-1.97	-2.33	-2.75	-2.91

10.Revision Control:

Revision	Date	Content	Remark
A	30.12.2021	New Issued.	N/A

Scale :

Unit : mm

Drawn By : Chris

Checked By : Nick

Designed By :Cary

Approved By :Hank

**Tolerances (Unless
otherwise specified)**

**X : ± 1 X.X : ±
0.1 X.XX : ± 0.01**

深圳市福伯特电子有限公司
Shenzhen Fbetter Electronic Co.,Ltd

ADD: Introduction Building 6F, Xinan
Street 71, Baoan District,Shenzhen,
Guangdong, China

包装图 (填写说明 : 所插入的图片须清晰可见)

1.包装照片 (图片) :

1、单个物料照片或者图片	
	
3、外包装的照片或者图片	
	

Scale :	Unit : mm	Tolerances (Unless otherwise specified) X : ± 1 X.X : ± 0.1 X.XX : ± 0.01	深圳市福伯特电子有限公司 Shenzhen Fbetter Electronic Co.,Ltd ADD: Introduction Building 6F, Xinan Street 71, Baoan District,Shenzhen, Guangdong, China
Drawn By : Chris	Checked By : Nick		
Designed By :Cary	Approved By :Hank		