

FCC TEST REPORT

REPORT NO.: RF120528C17

MODEL NO.: WG1300E00

FCC ID: WS2-WG1300E00

RECEIVED: May 28, 2012

TESTED: May 31 ~ Jun. 05, 2012

ISSUED: Jun. 13, 2012

APPLICANT: JORJIN TECHNOLOGIES INC.

ADDRESS: 5F., No. 28, Lane 141, Sing-ai Rd., Neihu District,

Taipei City 114, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services

(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,

New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei

Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Report No.: RF120528C17 1 of 40 Report Format Version 5.0.0



TABLE OF CONTENTS

RELEA	SE CONTROL RECORD	4
1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	DESCRIPTION OF SUPPORT UNITS	
3.3.1	CONFIGURATION OF SYSTEM UNDER TEST	.11
3.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	
4.	TEST TYPES AND RESULTS	13
4.1	RADIATED EMISSION AND BANDEDGE MEASUREMENT	13
4.1.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	13
4.1.2	TEST INSTRUMENTS	
4.1.3	TEST PROCEDURES	
4.1.4	DEVIATION FROM TEST STANDARD	
4.1.5	TEST SETUP	
4.1.6	EUT OPERATING CONDITIONS	
4.1.7	TEST RESULTS	
4.2	CONDUCTED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	
4.2.2	TEST INSTRUMENTS	
4.2.3	TEST PROCEDURES	
4.2.4	DEVIATION FROM TEST STANDARD	
4.2.5	TEST SETUP	25
4.2.6	EUT OPERATING CONDITIONS	25
4.2.7	TEST RESULTS	26
4.3	6dB BANDWIDTH MEASUREMENT	28
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	20
4.3.2	TEST SETUP	
4.3.3	TEST INSTRUMENTS	
4.3.4	TEST PROCEDURE	
4.3.5	DEVIATION FROM TEST STANDARD	
4.3.6	EUT OPERATING CONDITIONS	
4.3.7	TEST RESULTS	
4.3.7	CONDUCTED OUTPUT POWER	30
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	20
4.4.1	TEST SETUP	
4.4.2	TEST SETUPTEST INSTRUMENTS	30
4.4.3 4.4.4	TEST PROCEDURES	
4.4.5	DEVIATION FROM TEST STANDARD	
4.4.6	EUT OPERATING CONDITIONS	
4.4.7	TEST RESULTS	
4.4.7	POWER SPECTRAL DENSITY MEASUREMENT	21
4.5 4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	
4.5.1		
	TEST SETUP TEST INSTRUMENTS	
4.5.3 4.5.4		
4.5.4 4.5.5	TEST PROCEDURE DEVIATION FROM TEST STANDARD	
4.5.6	EUT OPERATING CONDITION	
4.5.7	TEST RESULTSCONDUCTED OUT OF BAND EMISSION MEASUREMENT	
4.6	CONDUCTED OUT OF DAND FARCUOAL MEACUREMENT	34
4.6.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	34



4.6.2	TEST SETUP	34
4.6.3	TEST INSTRUMENTS	34
4.6.4	TEST PROCEDURE	34
4.6.5	DEVIATION FROM TEST STANDARD	35
4.6.6	EUT OPERATING CONDITION	35
4.6.7	TEST RESULTS	35
	PHOTOGRAPHS OF THE TEST CONFIGURATION	38
	INFORMATION ON THE TESTING LABORATORIES	
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO 1	ГНЕ
	EUT BY THE LAB	40



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120528C17	Original release	Jun. 13, 2012

Report No.: RF120528C17 4 of 40 Report Format Version 5.0.0



1. CERTIFICATION

PRODUCT: Wireless LAN EM board for Module (802.11 bg)

MODEL NO.: WG1300E00

BRAND: Jorjin

APPLICANT: JORJIN TECHNOLOGIES INC.

TESTED: May 31 ~ Jun. 05, 2012

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment (model: WG1300E00) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY: Jun. 13, 2012

Pettie Chen / Specialist

APPROVED BY : , DATE : Jun. 13, 2012

Gary Chang / Technical Manager



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)							
STANDARD SECTION	TEST TYPE	RESULT	REMARK				
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -3.04dB at 0.37656MHz.				
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.4dB at 2483.50MHz.				
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.				
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.				
15.247(b)	Conducted power	PASS	Meet the requirement of limit.				
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.				
15.203	Antenna Requirement	PASS	No antenna connector is used.				

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY UNCERTAINTY	
Conducted emissions	150kHz~30MHz	2.44dB
	30MHz ~ 200MHz	3.19dB
Dadiated emissions	200MHz ~1000MHz	3.21dB
Radiated emissions	1GHz ~ 18GHz	2.26dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Wireless LAN EM board for Module (802.11 bg)
MODEL NO.	WG1300E00
POWER SUPPLY	3.3Vdc (host equipment)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps
OPERATING FREQUENCY	2412 ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	205.1mW
ANTENNA TYPE	Chip antenna with 2.5dBi gain
ANTENNA CONNECTOR	NA
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	NA

NOTE:

1. The EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g:

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Report No.: RF120528C17 8 of 40 Report Format Version 5.0.0



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT		APPLICA	ABLE TO		DESCRIPTION
CONFIGURE MODE	RE≥1G	RE<1G	PLC	APCM	DESCRIPTION
-	\checkmark	\checkmark	V	V	-

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11g	1 to 11	6	OFDM	BPSK	6.0

Report No.: RF120528C17 9 of 40 Report Format Version 5.0.0



BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	24deg. C, 65%RH	120Vac, 60Hz	Anderson Hong
RE<1G	24deg. C, 65%RH	120Vac, 60Hz	Anderson Hong
PLC	25deg. C, 65%RH	120Vac, 60Hz	Aska Huang
APCM	24deg. C, 65%RH	120Vac, 60Hz	Sun Lin

Report No.: RF120528C17 10 of 40 Report Format Version 5.0.0



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E5420	33MLMQ1	FCC DoC Approved
2	Convertible board	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE:

- 1. All power cords of the above support units are non shielded (1.8m).
- 2. Item 2 was provided by applicant.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

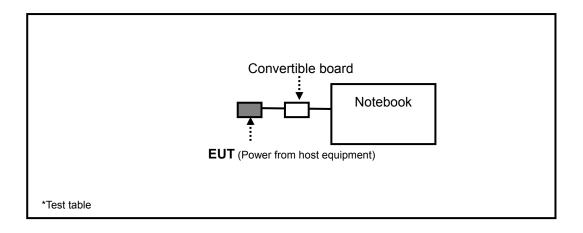



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247) 558074 D01 DTS Meas Guidance v01 ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Report No.: RF120528C17 12 of 40 Report Format Version 5.0.0



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Report No.: RF120528C17 13 of 40 Report Format Version 5.0.0



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Jan. 03, 2012	Jan. 02, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Jan. 30, 2012	Jan. 29, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Apr. 06, 2012	Apr. 05, 2013
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-408	Jan. 05, 2012	Jan. 04, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	148	Jul. 20, 2011	Jul. 19, 2012
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier Agilent	8449B	3008A01961	Oct. 29, 2011	Oct. 28, 2012
Preamplifier Agilent	8447D	2944A10738	Oct. 29, 2011	Oct. 28, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Nov. 03, 2011	Nov. 02, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Nov. 03, 2011	Nov. 02, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Nov. 03, 2011	Nov. 02, 2012
Software ADT	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table ADT	TT100.	TT93021704	NA	NA
Turn Table Controller ADT	SC100.	SC93021704	NA	NA
High Speed Peak Power Meter	ML2495A	1145013	Nov. 16, 2011	Nov. 15, 2012
Power Sensor	MA2411B	1026085	Oct. 13, 2011	Oct. 12, 2012

- **NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - 2. The calibration interval of the loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - 3. The test was performed in HwaYa Chamber 4.
 - 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 - 5. The FCC Site Registration No. is 460141.
 - 6. The IC Site Registration No. is IC7450F-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

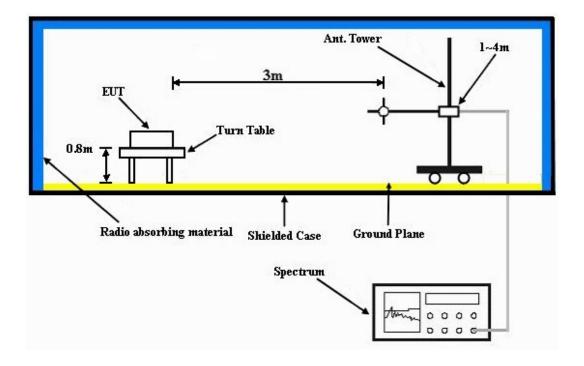

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Plugged the EUT into notebook via external board and placed them on the testing table.
- b. The notebook system ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the system in full functions.



4.1.7 TEST RESULTS

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.36 H	217	25.90	32.00
2	2390.00	46.1 AV	54.0	-7.9	1.36 H	217	14.10	32.00
3	*2412.00	109.5 PK			1.36 H	217	77.50	32.00
4	*2412.00	103.7 AV			1.36 H	217	71.70	32.00
5	4824.00	47.2 PK	74.0	-26.8	1.56 H	123	8.80	38.40
6	4824.00	33.9 AV	54.0	-20.1	1.56 H	123	-4.50	38.40
		ANTENNA	POLARIT	Y & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.8 PK	74.0	-17.2	1.62 V	96	24.80	32.00
2	2390.00	44.7 AV	54.0	-9.3	1.62 V	96	12.70	32.00
3	*2412.00	100.2 PK			1.62 V	96	68.20	32.00
4	*2412.00	94.7 AV			1.62 V	96	62.70	32.00
5	4824.00	47.1 PK	74.0	-26.9	1.25 V	266	8.70	38.40
6	4824.00	36.8 AV	54.0	-17.2	1.25 V	266	-1.60	38.40

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.1 PK			1.39 H	218	79.00	32.10
2	*2437.00	105.3 AV			1.39 H	218	73.20	32.10
3	4874.00	48.5 PK	74.0	-25.5	1.52 H	129	10.10	38.40
4	4874.00	35.1 AV	54.0	-18.9	1.52 H	129	-3.30	38.40
5	7311.00	52.9 PK	74.0	-21.1	1.32 H	40	8.60	44.30
6	7311.00	39.3 AV	54.0	-14.7	1.32 H	40	-5.00	44.30
		ANTENNA	POLARITY	Y & TEST DI	STANCE: V	ERTICAL A	T 3 M	
NO.	NO. FREQ. (MHz) LEVEL LIMIT MARGIN (dB) ANTENNA ANGLE RAW VALUE FACTOR							CORRECTION FACTOR (dB/m)
1	*2437.00	101.4 PK			1.59 V	95	69.30	32.10
2	*2437.00	95.9 AV			1.59 V	95	63.80	32.10
3	4874.00	47.1 PK	74.0	-26.9	1.22 V	262	8.70	38.40
4	4874.00	38.0 AV	54.0	-16.0	1.22 V	262	-0.40	38.40
5	7311.00	53.1 PK	74.0	-20.9	1.00 V	1	8.80	44.30
					1.00 V			44.30

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION	LIMIT (dBuV/m)	MARGIN (dB)	ΔΝΤΈΝΝΔ	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	*2462.00	110.3 PK			1.41 H	215	78.10	32.20		
2	*2462.00	104.4 AV			1.41 H	215	72.20	32.20		
3	2483.50	58.8 PK	74.0	-15.2	1.41 H	215	26.50	32.30		
4	2483.50	47.0 AV	54.0	-7.0	1.41 H	215	14.70	32.30		
5	4924.00	47.9 PK	74.0	-26.1	1.53 H	119	9.50	38.40		
6	4924.00	34.6 AV	54.0	-19.4	1.53 H	119	-3.80	38.40		
		ANTENNA	POLARIT	Y & TEST DI	STANCE: V	ERTICAL A	T 3 M			
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	*2462.00	100.9 PK			1.64 V	154	68.70	32.20		
2	*2462.00	95.4 AV			1.64 V	154	63.20	32.20		
3	2483.50	56.6 PK	74.0	-17.4	1.64 V	154	24.30	32.30		
4	2483.50	45.1 AV	54.0	-8.9	1.64 V	154	12.80	32.30		
5	4924.00	47.6 PK	74.0	-26.4	1.28 V	269	9.20	38.40		
Ü										

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	2390.00	63.4 PK	74.0	-10.6	1.41 H	224	31.40	32.00		
2	2390.00	49.2 AV	54.0	-4.8	1.41 H	224	17.20	32.00		
3	*2412.00	109.4 PK			1.41 H	224	77.40	32.00		
4	*2412.00	100.0 AV			1.41 H	224	68.00	32.00		
5	4824.00	46.8 PK	74.0	-27.2	1.29 H	83	8.40	38.40		
6	4824.00	34.6 AV	54.0	-19.4	1.29 H	83	-3.80	38.40		
		ANTENNA	POLARITY	Y & TEST DI	STANCE: V	ERTICAL A	T 3 M			
	NO. FREQ. (MHz) LEVEL LIMIT MARGIN (dB) ANTENNA ANGLE RAW VALUE FACT									
NO.	FREQ. (MHz)			MARGIN (dB)	, <u>_</u> , .			CORRECTION FACTOR (dB/m)		
NO .	FREQ. (MHz) 2390.00	LEVEL		MARGIN (dB) -16.4	, <u>_</u> , .	ANGLE		FACTOR		
	,	LEVEL (dBuV/m)	(dBuV/m)	, ,	HEIGHT (m)	ANGLE (Degree)	(dBuV)	FACTOR (dB/m)		
1	2390.00	LEVEL (dBuV/m) 57.6 PK	(dBuV/m)	-16.4	HEIGHT (m)	ANGLE (Degree)	(dBuV) 25.60	FACTOR (dB/m) 32.00		
1 2	2390.00 2390.00	LEVEL (dBuV/m) 57.6 PK 45.5 AV	(dBuV/m)	-16.4	1.32 V 1.32 V	ANGLE (Degree) 172	(dBuV) 25.60 13.50	FACTOR (dB/m) 32.00 32.00		
1 2 3	2390.00 2390.00 *2412.00	LEVEL (dBuV/m) 57.6 PK 45.5 AV 99.5 PK	(dBuV/m)	-16.4	1.32 V 1.32 V 1.32 V	ANGLE (Degree) 172 172	(dBuV) 25.60 13.50 67.50	FACTOR (dB/m) 32.00 32.00 32.00		

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	*2437.00	110.2 PK			1.36 H	247	78.10	32.10		
2	*2437.00	101.1 AV			1.36 H	247	69.00	32.10		
3	4874.00	47.7 PK	74.0	-26.3	1.31 H	79	9.30	38.40		
4	4874.00	35.6 AV	54.0	-18.4	1.31 H	79	-2.80	38.40		
5	7311.00	53.2 PK	74.0	-20.8	1.35 H	48	8.90	44.30		
6	7311.00	39.8 AV	54.0	-14.2	1.35 H	48	-4.50	44.30		
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M			
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	*2437.00	101.0 PK			1.00 V	90	68.90	32.10		
2	*2437.00	91.3 AV			1.00 V	90	59.20	32.10		
3	4874.00	49.0 PK	74.0	-25.0	1.00 V	69	10.60	38.40		
4	4874.00	36.4 AV	54.0	-17.6	1.00 V	69	-2.00	38.40		
5	7311.00	53.4 PK	74.0	-20.6	1.00 V	3	9.10	44.30		
6	7311.00	40.9 AV	54.0	-13.1	1.00 V	3	-3.40	44.30		

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2462.00	109.6 PK			1.35 H	246	77.40	32.20	
2	*2462.00	100.4 AV			1.35 H	246	68.20	32.20	
3	2483.50	67.0 PK	74.0	-7.0	1.35 H	246	34.70	32.30	
4	2483.50	51.6 AV	54.0	-2.4	1.35 H	246	19.30	32.30	
5	4924.00	47.2 PK	74.0	-26.8	1.31 H	86	8.80	38.40	
6	4924.00	34.9 AV	54.0	-19.1	1.31 H	86	-3.50	38.40	
		ANTENNA	POLARITY	Y & TEST DI	STANCE: V	ERTICAL A	T 3 M		
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)	
1	*2462.00	98.9 PK			1.01 V	91	66.70	32.20	
2	*2462.00	89.3 AV			1.01 V	91	57.10	32.20	
3	2483.50	58.4 PK	74.0	-15.6	1.00 V	91	26.10	32.30	
4	2483.50	45.4 AV	54.0	-8.6	1.00 V	91	13.10	32.30	
5	4924.00	48.2 PK	74.0	-25.8	1.02 V	69	9.80	38.40	
6	4924.00	35.9 AV	54.0	-18.1	1.02 V	69	-2.50	38.40	

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.
- 5. " * ": Fundamental frequency.



BELOW 1GHz WORST-CASE DATA: 802.11g

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL	Channel 6	FREQUENCY RANGE	Below 1000MHz	
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak	
ENVIRONMENTAL CONDITIONS	24deg. C, 65%RH	TESTED BY	Anderson Hong	

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	134.89	33.7 QP	43.5	-9.8	1.25 H	3	20.20	13.50		
2	232.11	36.3 QP	46.0	-9.7	1.25 H	39	23.40	12.90		
3	432.37	29.2 QP	46.0	-16.8	1.00 H	296	9.90	19.30		
4	585.97	33.3 QP	46.0	-12.7	1.25 H	12	10.10	23.20		
5	667.63	33.2 QP	46.0	-12.8	1.00 H	76	9.10	24.10		
6	840.67	36.3 QP	46.0	-9.7	1.50 H	73	8.70	27.60		
		ANTENNA	POLARITY	/ & TEST DI	STANCE: V	ERTICAL A	T 3 M			
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)		
1	68.79	28.5 QP	40.0	-11.5	1.25 V	334	16.00	12.50		
2	364.32	28.1 QP	46.0	-17.9	1.00 V	62	10.60	17.50		
3	432.37	28.9 QP	46.0	-17.1	1.25 V	17	9.60	19.30		
4	574.30	28.0 QP	46.0	-18.0	1.25 V	288	5.10	22.90		
5	667.63	30.9 QP	46.0	-15.1	1.50 V	113	6.80	24.10		
6	840.67	36.2 QP	46.0	-9.8	1.00 V	95	8.60	27.60		

- 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
- 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
- 3. The other emission levels were very low against the limit.
- 4. Margin value = Emission level Limit value.



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED	LIMIT (dBµV)
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 19, 2011	Nov. 18, 2012
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 29, 2011	Dec. 28, 2012
LISN ROHDE & SCHWARZ (EUT)	ESH2-Z5	100100	Dec. 30, 2011	Dec. 29, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 07, 2011	Jul. 06, 2012
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The test was performed in HwaYa Shielded Room 2.
- 3. The VCCI Site Registration No. is C-2047.



4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

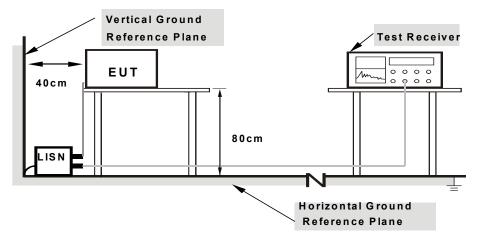

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA: 802.11g

PHASE	Line 1	6dB BANDWIDTH	9kHz
-------	--------	---------------	------

No	Freq. Corr. Facto	Corr.	Reading Value Emission Level		Limit		Margin			
		Factor	[dB	(uV)]	[dB	(uV)]	[dB	(uV)]	(d	B)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.17	44.11	23.18	44.28	23.35	65.58	55.58	-21.30	-32.23
2	0.37656	0.20	47.58	45.12	47.78	45.32	58.35	48.35	-10.58	-3.04
3	0.75547	0.22	41.48	40.37	41.70	40.59	56.00	46.00	-14.30	-5.41
4	1.51172	0.27	28.10	17.47	28.37	17.74	56.00	46.00	-27.63	-28.26
5	2.25705	0.31	43.72	37.06	44.03	37.37	56.00	46.00	-11.97	-8.63
6	2.63672	0.33	40.60	32.38	40.93	32.71	56.00	46.00	-15.07	-13.29

REMARKS:

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value.

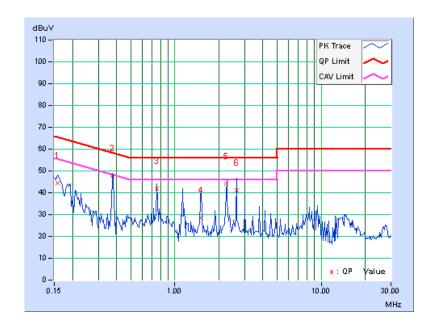


Report No.: RF120528C17 26 of 40 Report Format Version 5.0.0



PHASE	Line 2	6dB BANDWIDTH	9kHz

No	Freq. Corr. Factor		i Reading Vallie i			ission evel Lim		nit	Mar	gin
		ractor	[dB	(uV)]	[dB	(uV)]	[dB	(uV)]	(dl	B)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	0.17	40.31	20.93	40.48	21.10	65.38	55.38	-24.90	-34.28
2	0.40391	0.18	38.86	32.39	39.04	32.57	57.77	47.77	-18.73	-15.20
3	0.81016	0.19	41.97	39.30	42.16	39.49	56.00	46.00	-13.84	-6.51
4	1.21484	0.21	41.81	38.18	42.02	38.39	56.00	46.00	-13.98	-7.61
5	2.42578	0.29	47.55	40.30	47.84	40.59	56.00	46.00	-8.16	-5.41
6	2.82813	0.32	40.24	33.26	40.56	33.58	56.00	46.00	-15.44	-12.42

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value.

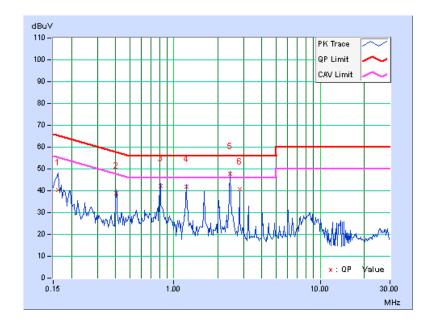




4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURE

- a. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
- b. Set the video bandwidth (VBW) \geq 3 x RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

Report No.: RF120528C17 28 of 40 Report Format Version 5.0.0



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	8.60	0.5	PASS
6	2437	9.08	0.5	PASS
11	2462	9.05	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.33	0.5	PASS
6	2437	16.29	0.5	PASS
11	2462	16.29	0.5	PASS

Report No.: RF120528C17 29 of 40 Report Format Version 5.0.0




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	121.1	20.83	30	PASS
6	2437	147.2	21.68	30	PASS
11	2462	114.6	20.59	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	164.1	22.15	30	PASS
6	2437	205.1	23.12	30	PASS
11	2462	159.2	22.02	30	PASS

Report No.: RF120528C17 31 of 40 Report Format Version 5.0.0




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
- b. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
- c. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- d. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where BWCF = 10log(3 kHz/100kHz)

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

Report No.: RF120528C17 32 of 40 Report Format Version 5.0.0



4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	9.71	-5.52	8	PASS
6	2437	10.47	-4.76	8	PASS
11	2462	9.61	-5.62	8	PASS

802.11g

Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	2.84	-12.39	8	PASS
6	2437	3.57	-11.66	8	PASS
11	2462	2.80	-12.43	8	PASS

Report No.: RF120528C17 33 of 40 Report Format Version 5.0.0




4.6 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

- 1. Set the RBW = 100 kHz.
- 2. Set the VBW ≥ 300 kHz.
- 3. Detector = peak.
- 4. Sweep time = auto couple.
- 5. Trace mode = max hold.
- 6. Allow trace to fully stabilize.
- 7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Report No.: RF120528C17 34 of 40 Report Format Version 5.0.0



MEASUREMENT PROCEDURE OOBE

- 1. Set RBW = 100 kHz.
- 2. Set VBW ≥ 300 kHz.
- 3. Set span to encompass the spectrum to be examined.
- 4. Detector = peak.
- 5. Trace Mode = max hold.
- 6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6


4.6.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

Report No.: RF120528C17 35 of 40 Report Format Version 5.0.0




802.11b

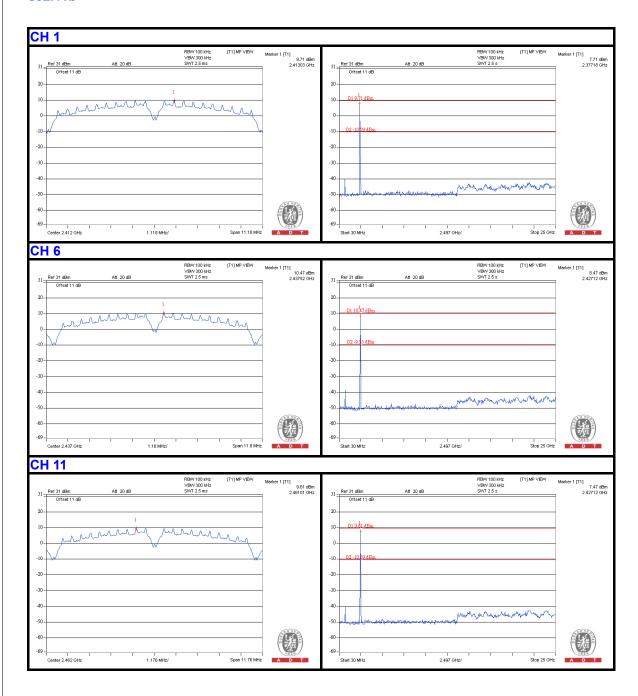



802.11g

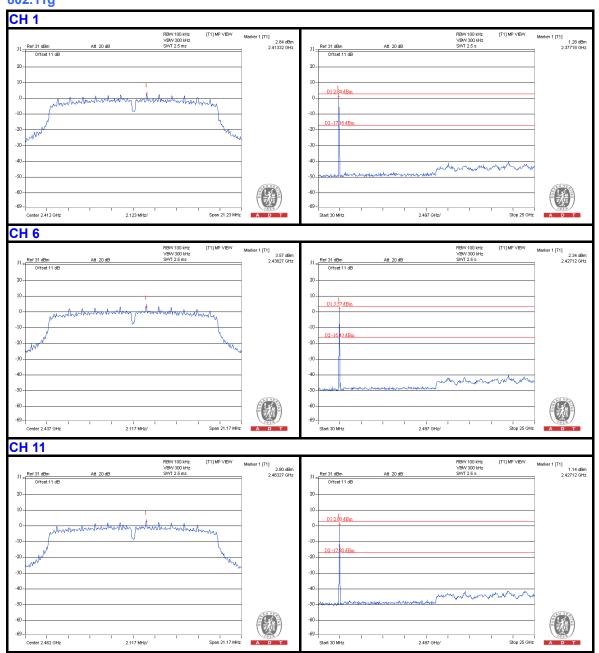



	7828 A D T
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	
Please refer to the attached file (Test Setup Photo).	

Report No.: RF120528C17 38 of 40 Report Format Version 5.0.0



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:Hsin Chu EMC/RF Lab:Tel: 886-2-26052180Tel: 886-3-5935343Fax: 886-2-26051924Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

Report No.: RF120528C17 39 of 40 Report Format Version 5.0.0



7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---