

FCC Test Report

Equipment : Wireless module

Brand Name : Jorjin

Model No. : WG7831DELF

Marketing Name : WG7831-D0

FCC ID : WS2-WG7831DELF

Standard : 47 CFR FCC Part 15.247 Operating Band : 2400 MHz – 2483.5 MHz

FCC Classification: DTS

Applicant : JORJIN TECHNOLOGIES INC.

17F, No. 239, Sec. 1, Datong Rd., Xizhi Dist.,

New Taipei City 22161, Taiwan

Manufacturer : Inventec Appliances (Pudong) Corporation

No. 789, Pu Xing Road, Shanghai, China P.R.C., 201114.

The product sample received on Feb. 04, 2015 and completely tested on Mar. 16, 2015. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Kevin Liang / Assistant Manager

Testing Laboratory 1190

Report No.: FR520334AL

SPORTON INTERNATIONAL INC. Page No. : 1 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

Table of Contents

I	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Support Equipment	7
1.3	Testing Applied Standards	7
1.4	Testing Location Information	7
1.5	Measurement Uncertainty	8
2	TEST CONFIGURATION OF EUT	9
2.1	The Worst Case Modulation Configuration	9
2.2	The Worst Case Power Setting Parameter	9
2.3	The Worst Case Measurement Configuration	10
2.4	Test Setup Diagram	11
3	TRANSMITTER TEST RESULT	13
3.1	AC Power-line Conducted Emissions	13
3.2	6dB Bandwidth	16
3.3	RF Output Power	18
3.4	Power Spectral Density	20
3.5	Transmitter Bandedge Emissions	22
3.6	Transmitter Unwanted Emissions	25
ļ	TEST EQUIPMENT AND CALIBRATION DATA	36

APPENDIX A. TEST PHOTOS

APPENDIX B. PHOTOGRAPHS OF EUT

Report No.: FR520334AL

Summary of Test Result

Report No.: FR520334AL

		Conform	ance Test Specifications		
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 15.970MHz 22.92 (Margin 27.08dB) - AV 28.32 (Margin 31.68dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	LE: 677.3000 kHz	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] LE: 9.63	Power [dBm] LE:30	Complied
3.4	15.247(e)	Power Spectral Density	PSD [dBm/100kHz] LE: -7.48	PSD [dBm/3kHz]: 8	Complied
3.5	15.247(d)	Transmitter Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2483.520MHz 56.90 (Margin 17.10dB) - PK 46.56 (Margin 7.44dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(d)	Transmitter Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 4960MHz 54.78 (Margin 9.43dB) - PK 44.57 (Margin 19.22dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied

SPORTON INTERNATIONAL INC. Page No. : 3 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



Revision History

Report No.: FR520334AL

Report No.	Version	Description	Issued Date
FR520334AL	Rev. 01	Initial issue of report	Mar. 20, 2015

SPORTON INTERNATIONAL INC. Page No. : 4 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	Bluetooth Version	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)		
2400-2483.5	v4.0 LE	2402-2480	0-39 [40]	9.63		

Report No.: FR520334AL

- Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.
- Note 2: RF output power specifies that Maximum Peak Conducted Output Power.
- Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)

1.1.2 Antenna Information

	Antenna Category								
\boxtimes									
		Temporary RF connector provided							
		No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.							

	Antenna General Information					
No.	Ant. Cat. Ant. Type Gain (dBi)					
1	Integral	Chip	-2.46			

SPORTON INTERNATIONAL INC. Page No. : 5 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report

1.1.3 Type of EUT

		ldent	ify EUT			
EU	EUT Serial Number N/A					
Pre	Presentation of Equipment					
		Туре	of EUT			
\boxtimes	Stand-alone					
	Combined (EUT where the	ne radio part is fully inte	grated within another device	2)		
	Combined Equipment – I	Brand Name / Model No	.:			
	Plug-in radio (EUT intend	ded for a variety of host	systems)			
	Host System – Brand Na	me / Model No.:				
	Other:					
1.1.	4 Test Signal Duty	Cycle				
		Operated Mode fo	or Worst Duty Cycle			
\boxtimes	Operated test mode for v	worst duty cycle				
	Test Signal Dut	y Cycle (x)		uty Factor 0 log 1/x)		
\boxtimes	∑ 71.43% - test mode single channel – LE					
1.1.	5 EUT Operationa	Condition				
Sup	pply Voltage	AC mains	⊠ DC			
Тур	e of DC Source	External DC supply	☐ External DC adapter	☐ From System		

Report No.: FR520334AL

SPORTON INTERNATIONAL INC. Page No. : 6 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report Report No.: FR520334AL

Support Equipment 1.2

	Support Equipment - RF Conducted						
No.	Equipment	Brand Name	Model Name	FCC ID			
1	DC Power Supply (Remote Workstation)	GWINSTEK	GPS-3030DD	DoC			

	Support Equipment - AC Conduction and Radiated Emission							
No.	Equipment	Brand Name	Model Name	FCC ID				
1	Notebook	DELL	E5540	DoC				
2	DC Power Supply (Remote Workstation)	GWINSTEK	GPS-3030DD	DoC				

1.3 **Testing Applied Standards**

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

• 47 CFR FCC Part 15

- ANSI C63.10-2013
- FCC KDB 558074 D01 v03r02
- FCC KDB 662911 v02r01

Testing Location Information 1.4

	Testing Location						
	HWA YA	ADD	:	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.			
		TEL	:	886-3-327-3456 FAX : 886-3-327-0973			
Test Condition				Test Site No.	Test Engineer	Test Environment	
	AC Conduc	ction		CO04-HY	Zeus	24°C / 48%	
RF Conducted			TH06-HY	Leo	23.8°C / 61%		
Radiated Emission			03CH03-HY	Daniel	21.8°C / 47%		

SPORTON INTERNATIONAL INC. Page No. : 7 of 36 TEL: 886-3-327-3456 Report Version : Rev. 01



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Report No.: FR520334AL

1	Measurement Uncertainty	
Test Item	Uncertainty	
AC power-line conducted emissions	±2.2 dB	
Emission bandwidth, 6dB bandwidth		±1.4 %
RF output power, conducted		±0.6 dB
Power density, conducted		±0.8 dB
Unwanted emissions, conducted	30 – 1000 MHz	±0.5 dB
	1 – 18 GHz	±0.6 dB
	18 – 40 GHz	±0.8 dB
	40 – 200 GHz	N/A
All emissions, radiated	30 – 1000 MHz	±2.5 dB
	1 – 18 GHz	±3.5 dB
	18 – 40 GHz	±3.8 dB
	40 – 200 GHz	N/A
Temperature		±0.8 °C
Humidity		±3 %
DC and low frequency voltages		±3 %
Time		±1.4 %
Duty Cycle		±1.4 %

SPORTON INTERNATIONAL INC. Page No. : 8 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing						
Bluetooth Version	Transmit Chains (N _{TX})	Data Rate	Modulation Mode			
LE	1	1 Mbps	LE-1Mbps			

Report No.: FR520334AL

Note 1: Bluetooth LE (Low Energy) using GFSK modulation for DTS digital modulation.

Note 2: Modulation modes consist below configuration:

DSSS LE-1Mbps: GFSK (1Mbps)

2.2 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version	HCI Tester				
Modulation Mode	2402 MHz 2440 MHz 2480 M		2480 MHz		
LE,1Mbps	Default	Default	Default		

SPORTON INTERNATIONAL INC. Page No. : 9 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests			
Tests Item AC power-line conducted emissions			
Condition AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz			
Operating Mode	Operating Mode Description		
1	DC Power & Radio link (Bluetooth)		

Report No.: FR520334AL


The Worst Case Mode for Following Conformance Tests			
Tests Item RF Output Power, Power Spectral Density, 6 dB Bandwidth			
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	LE-1Mbps		

The Worst Case Mode for Following Conformance Tests						
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions					
Test Condition	Radiated measurement					
	☐ EUT will be placed in	fixed position.				
User Position	EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.					
	EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.					
Operating Mode						
Modulation Mode	LE-1Mbps					
	X Plane Y Plane Z Pl					
Orthogonal Planes of EUT						
Worst Planes of EUT	V					

SPORTON INTERNATIONAL INC. Page No. : 10 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



2.4 Test Setup Diagram

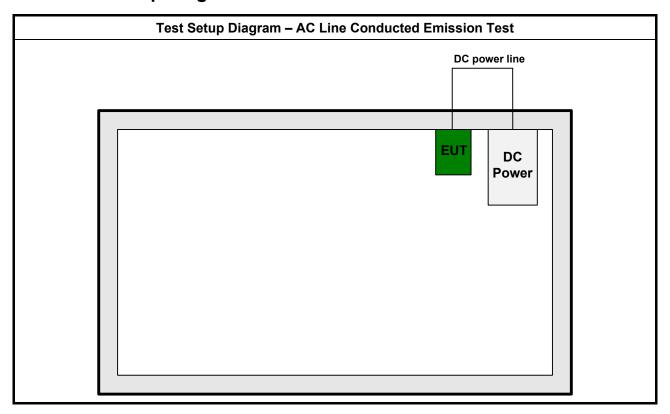

Report No.: FR520334AL

SPORTON INTERNATIONAL INC. Page No. : 11 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

Test Setup Diagram - Radiated Test (Below 1GHz) DC power line DC **Power** Test Setup Diagram - Radiated Test (Above 1GHz) DC power line DC **Power**

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-327-0973 Page No. : 12 of 36

Report Version

: Rev. 01

Report No.: FR520334AL



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

Frequency Emission (MHz) Quasi-Peak Average					
66 - 56 *	56 - 46 *				
56	46				
60	50				
	66 - 56 * 56				

Report No.: FR520334AL


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.	


3.1.4 Test Setup

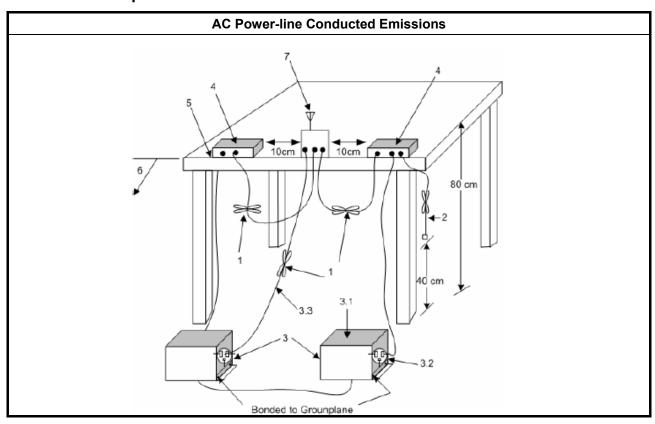

SPORTON INTERNATIONAL INC. Page No. : 13 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



3.1.5 Test Result of AC Power-line Conducted Emissions

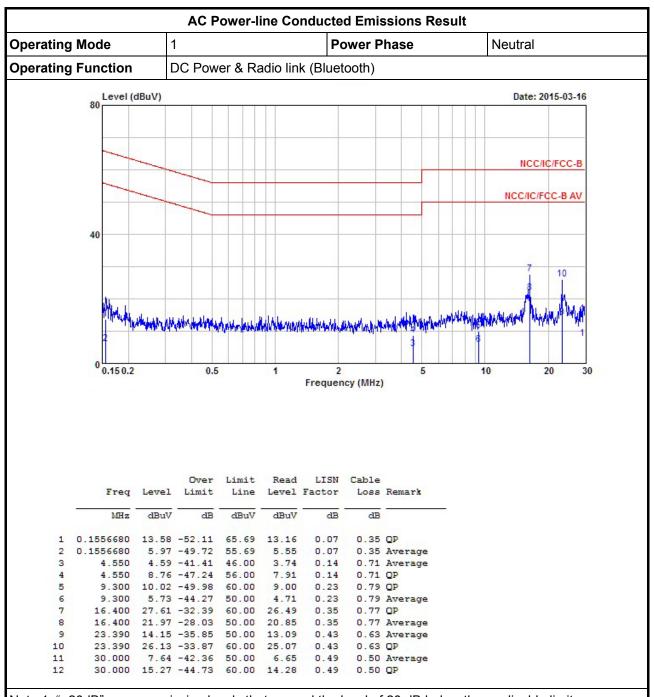

Report No.: FR520334AL

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

SPORTON INTERNATIONAL INC. Page No. : 14 of 36 TEL: 886-3-327-3456 Report Version : Rev. 01

AC Power-line Conducted Emissions Result Operating Mode Power Phase Line **Operating Function** DC Power & Radio link (Bluetooth) Level (dBuV) Date: 2015-03-16 80 NCC/IC/FCC-B NCC/IC/FCC-B AV 40 12 0.15 0.2 30 Frequency (MHz) Over Limit Read LISN Cable Freq Level Limit Line Level Factor Loss Remark MHz dBuV dB dBuV dBuV dB dB 0.1606960 17.76 -47.67 65.43 17.34 1 0.05 0.37 OP 0.37 Average 5.26 -50.17 55.43 0.1606960 4.84 0.05 4.180 4.73 -41.27 46.00 3.90 0.13 0.70 Average 4.180 12.02 -43.98 56.00 11.19 0.13 0.70 QP 7.290 13.89 -46.11 60.00 12.92 0.20 0.77 QP 7.290 5.53 -44.47 50.00 4.56 0.20 0.77 Average 6 11.140 14.20 -45.80 60.00 13.15 0.80 QP 0.25

Report No.: FR520334AL

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

27.22

17.81

0.25

0.32

0.32

0.39

0.39

0.80 Average 0.78 QP

0.78 Average

0.62 Average

0.62 QP

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

60.00

50.00

11.140 5.78 -44.22 50.00 4.73

15.970 22.92 -27.08 50.00 21.82

23.760 24.33 -35.67 60.00 23.32

28.32 -31.68

18.82 -31.18

SPORTON INTERNATIONAL INC. Page No. : 15 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

FAX: 886-3-327-0973

8

10 @

15.970

23.760

FCC Test Report

3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit			
Systems using digital modulation techniques:			
6 dB bandwidth ≥ 500 kHz.			

Report No.: FR520334AL


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

		Test Method
\boxtimes	For	the emission bandwidth shall be measured using one of the options below:
	\boxtimes	Refer as FCC KDB 558074 D01 v03r02, clause 8.1 Option 1 for 6 dB bandwidth measurement.
		Refer as FCC KDB 558074 D01 v03r02, clause 8.2 Option 2 for 6 dB bandwidth measurement.
		Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
\boxtimes	For	conducted measurement.
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

3.2.4 Test Setup

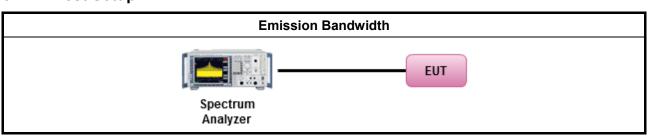


SPORTON INTERNATIONAL INC. Page No. : 16 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result						
Modulation Mode	Freq. (MHz)	99% Bandwidth (kHz)	6dB Bandwidth (kHz)			
LE-1Mbps 2402 LE-1Mbps 2440 LE-1Mbps 2480		1033.2850	668.6000			
		1041.9681	664.3000 677.3000			
		1041.9681				
Liı	mit	N/A	≥500 kHz			
Re	sult	Com	plied			

Report No.: FR520334AL

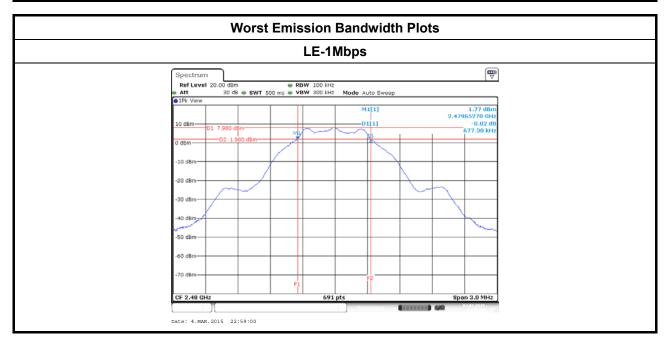

SPORTON INTERNATIONAL INC. Page No. : 17 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

3.3 RF Output Power

3.3.1 RF Output Power Limit

	RF Output Power Limit for Digital Modulation Systems			
Мах	Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit			
\boxtimes	2400-2483.5 MHz Band:			
	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm			
e.i.r	r.p. Power Limit:			
\boxtimes	2400-2483.5 MHz Band			
	Point-to-multipoint systems (P2M): P _{eirp} ≤ 36 dBm (4 W)			
G_{TX}	tout = maximum peak conducted output power or maximum conducted output power in dBm, t_{TX} = the maximum transmitting antenna directional gain in dBi. t_{eirp} = e.i.r.p. Power in dBm.			

Report No.: FR520334AL


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

	Test Method				
\boxtimes	Maximum Peak Conducted Output Power				
	\boxtimes	Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.			
		Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW ≥ EBW).			
\boxtimes	For	conducted measurement.			
	\boxtimes	The EUT supports single transmit chain and measurements performed on this transmit chain.			
		The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.			

3.3.4 Test Setup

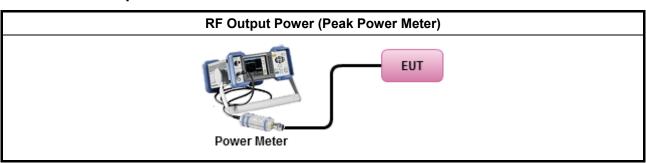

SPORTON INTERNATIONAL INC. Page No. : 18 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



3.3.5 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result						
Condition	RF Output Power (dBm)					
Modulation Mode Freq. (MHz)		RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
LE-1Mbps	2402	9.63	30	-2.46	7.17	36
LE-1Mbps	2440	9.11	30	-2.46	6.65	36
LE-1Mbps	2480	8.88	30	-2.46	6.42	36
Result	Complied					

Report No.: FR520334AL

3.3.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result										
Condition		RF Output Power (dBm)								
Modulation Mode Freq. (MHz)		Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power				
LE-1Mbps	2402	7.7	1.46	9.16	-2.46	6.70				
LE-1Mbps	2440	7.18	1.46	8.64	-2.46	6.18				
LE-1Mbps 2480		6.95	6.95 1.46 8.41			5.95				
Result			Complied							

SPORTON INTERNATIONAL INC. Page No. : 19 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

	Power Spectral Density Limit
\boxtimes	Power Spectral Density (PSD) ≤ 8 dBm/3kHz

Report No.: FR520334AL


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

								Test N	letho	od							
	outp the c conc of th	ut powoutput putput putput putput putput putput putput putputput putputputputputputputputputputputputputp	er. If bowe outpl age	max r limi ut po PSD	timum pit, then ower was proced	ty proce peak cor the peak as meas dures shacceptab	iducte PSD ured to all be	d outpu proced demo used, a	it pov ure b nstrat	ver water water water water water with the contraction with the contraction water wa	as me (Meth nplian	easured od PKPS ice to th	to dem SD) sha e outpu	onstrat all be us ut powe	te com sed. If er limit,	plian maxi thei	ice to imum n one
		Refer (RBW	a: =3-1	•	FCC Iz;dete	KDB ctor=pea	5580 k)	74 D	01	v03r	·02,	clause	10.2	2 Me	ethod	Pk	(PSD
	[duty	/ cycle	≥ 98	% or	extern	al video	powe	er trigge	r]								
		Refer averaç			KDB	558074	D01	v03r0	2, cla	ause	10.3	Method	d AVG	PSD-1	(spec	tral	trace
		Refer	as F	CC K	(DB 55	8074 D0	1 v03r	02, cla	use 1	0.4 N	1ethod	AVGPS	SD-1 Al	t. (slow	sweep	spe	eed)
	duty	cycle <	< 989	% and	d avera	age over	on/off	periods	with	duty	facto	ſ					
		Refer averaç			KDB	558074	D01	v03r0	2, cla	ause	10.5	Method	AVG	PSD-2	(spec	tral	trace
		Refer	as F	CC K	(DB 55	8074 D0	1 v03r	02, cla	use 1	0.6 N	1ethod	AVGPS	SD-2 Al	t. (slow	sweep	spe	eed)
\boxtimes	For	conduc	ted r	neas	ureme	nt.											
	\boxtimes	The E	UT s	uppo	orts sin	gle trans	mit ch	ain and	mea	suren	nents	perform	ed on t	his trar	nsmit c	hain.	
		The E	UT s	uppo	orts dive	ersity tra	nsmitti	ing and	the r	esults	s on tr	ansmit o	hain p	ort 1 is	the wo	rst c	ase.

3.4.4 Test Setup

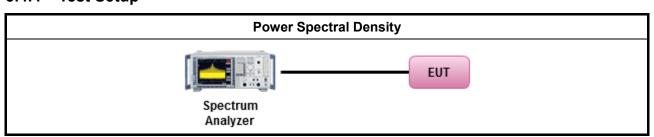


SPORTON INTERNATIONAL INC. Page No. : 20 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



3.4.5 Test Result of Power Spectral Density

	Power Spectral Density Result									
Modulation Mode	Freq. (MHz)	PSD (dBm/100kHz)	PSD Limit (dBm/3kHz)							
LE-1Mbps	2402	-8.00	8							
LE-1Mbps	2440	-7.48	8							
LE-1Mbps	2480	-9.38	8							
Res	sult	Complied								

Report No.: FR520334AL

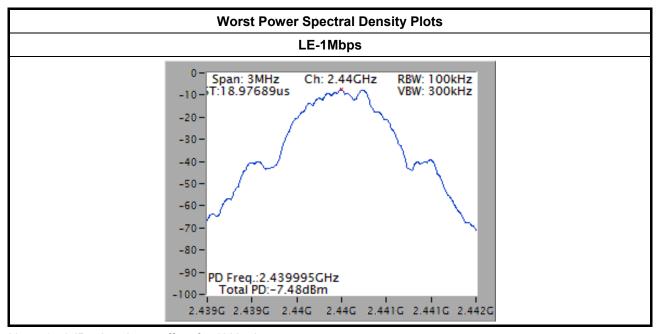


Note: 15.2dBm has been offset for 3kHz data.

SPORTON INTERNATIONAL INC. Page No. : 21 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



3.5 Transmitter Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

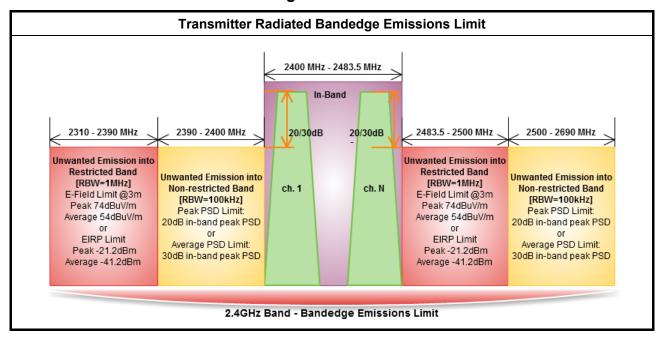

Report No.: FR520334AL

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 22 of 36 TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR520334AL


3.5.3 Test Procedures

			Test Method						
\boxtimes	The	average	emission levels shall be measured in [duty cycle ≥ 98 or duty factor].						
\boxtimes			ISI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency highest frequency channel within the allowed operating band.						
\boxtimes	For the transmitter unwanted emissions shall be measured using following options below:								
		Refer a bands.	s FCC KDB 558074 D01 v03r02, clause 11 for unwanted emissions into non-restricted						
	\boxtimes	Refer a	s FCC KDB 558074 D01 v03r02, clause 12 for unwanted emissions into restricted bands.						
			rfer as FCC KDB 558074 D01 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cle ≥98%)						
			fer as FCC KDB 558074 D01 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty ctor).						
		⊠ Re	fer as FCC KDB 558074 D01 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).						
		Re	fer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.						
		☐ Re	fer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.						
			fer as FCC KDB 558074 D01 v03r02, clause 11.3 and 12.2.4 measurement procedure ak limit.						
\boxtimes	Fort	the trans	mitter bandedge emissions shall be measured using following options below:						
			s FCC KDB 558074 D01 v03r02, clause 13.3 for narrower resolution bandwidth (100kHz) ne band power and summing the spectral levels (i.e., 1 MHz).						
	\boxtimes	Refer a	s ANSI C63.10, clause 6.9.2 for band-edge testing.						
		Refer a	s ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.						
\boxtimes	For	radiated	measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.7.						
	For	conducte	ed measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.2.						

SPORTON INTERNATIONAL INC. Page No. : 23 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



3.5.4 Test Setup

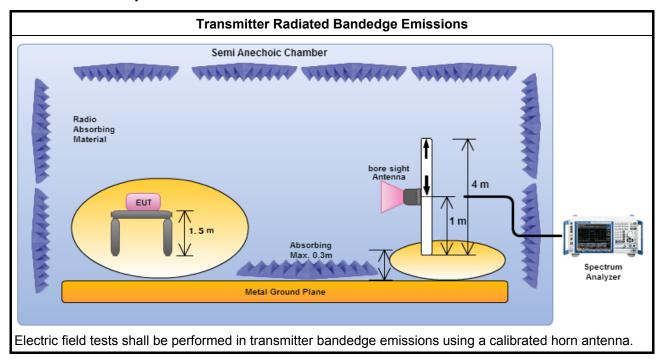

Report No.: FR520334AL

3.5.5 Transmitter Radiated Bandedge Emissions

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Non-restricted Band)											
Modulation	N _{TX}	Test Freq. (MHz)	In-band PSD [i] Freq. (MHz)		Out-band PSD [o] (dBuV/100kHz)	[i] - [o] (dB)	Limit (dB)	Pol.			
LE-1Mbps	1	2402	96.22	2397.108	59.69	36.53	20	V			
LE-1Mbps 1 2480 100.76 2527.040 60.83 39.93 20 V											

2400-2483.5MHz Transmitter Radiated Bandedge Emissions (Restricted Band)											
Modulation Mode	N _{TX}	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.	
LE-1Mbps	1	2402	3	2357.120	56.18	74	2330.400	44.72	54	V	
LE-1Mbps	1	2480	3	2483.680	56.90	74	2483.520	46.56	54	V	

Note 1: Measurement worst emissions of receive antenna polarization.

Note 2: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

SPORTON INTERNATIONAL INC. Page No. : 24 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



3.6 Transmitter Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit									
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)						
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300						
0.490~1.705	24000/F(kHz)	33.8 - 23	30						
1.705~30.0	30	29	30						
30~88	100	40	3						
88~216	150	43.5	3						
216~960	200	46	3						
Above 960	500	54	3						

Report No.: FR520334AL

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit								
RF output power procedure	Limit (dB)							
Peak output power procedure	20							
Average output power procedure	30							

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

SPORTON INTERNATIONAL INC. Page No. : 25 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



FCC Test Report No.: FR520334AL


3.6.3 Test Procedures

	Test Method
perfo equi extra dista	asurements may be performed at a distance other than the limit distance provided they are not formed in the near field and the emissions to be measured can be detected by the measurement ipment. When performing measurements at a distance other than that specified, the results shall be appolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance-squared for power-density asurements).
\boxtimes	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
\boxtimes	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
The	average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].
For	the transmitter unwanted emissions shall be measured using following options below:
\boxtimes	Refer as FCC KDB 558074 D01 v03r02, clause 11 for unwanted emissions into non-restricted bands.
\boxtimes	Refer as FCC KDB 558074 D01 v03r02, clause 12 for unwanted emissions into restricted bands.
	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.1 Option 1 (trace averaging for duty cycle ≥98%)
	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.2 Option 2 (trace averaging + duty factor).
	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.5.3 Option 3 (Reduced VBW≥1/T).
	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.
	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	Refer as FCC KDB 558074 D01 v03r02, clause 11.3 and 12.2.4 measurement procedure peak limit.
	Refer as FCC KDB 558074 D01 v03r02, clause 12.2.3 measurement procedure Quasi-Peak limit.
For	radiated measurement, refer as FCC KDB 558074 D01 v03r02, clause 12.2.7.
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
\boxtimes	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
For 12.2	conducted and cabinet radiation measurement, refer as FCC KDB 558074 D01 v03r02, clause 2.2.

SPORTON INTERNATIONAL INC. Page No. : 26 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01




3.6.4 Test Setup

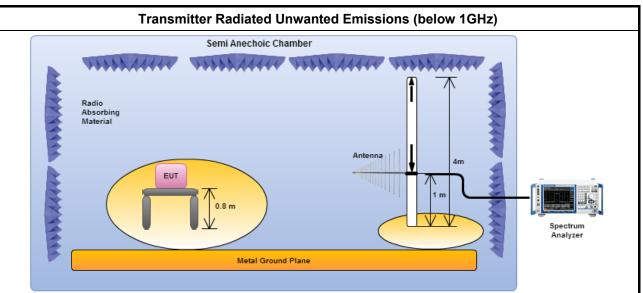

Report No.: FR520334AL

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna.

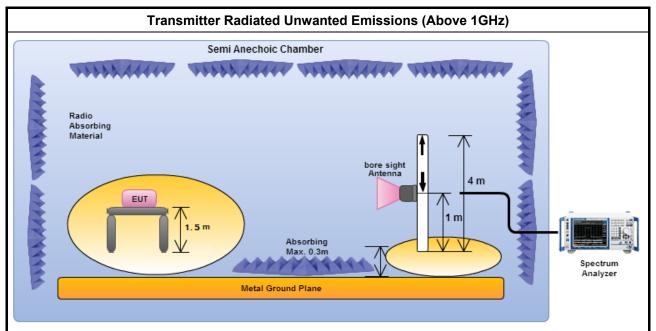


Electric field tests shall be performed in the frequency range of 1 GHz to 10th harmonic of highest fundamental frequency or 40 GHz using a calibrated horn antenna.

3.6.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

SPORTON INTERNATIONAL INC. Page No. : 27 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

6 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Report No.: FR520334AL

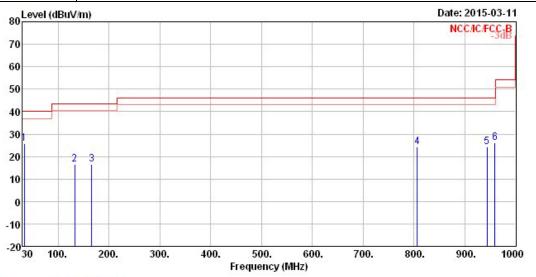

	Freq	Le∨el	0∨er Limit	Limit Line		Antenna Factor		Preamp Factor	Remark
87	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	33.880	25.69	-14.31	40.00	36.20	15.85	0.92	27.28	Peak
2	132.820	16.61	-26.89	43.50	30.28	11.60	1.90	27.17	Peak
3	165.800	16.62	-26.88	43.50	32.14	9.51	2.12	27.15	Peak
4	806.000	24.19	-21.81	46.00	27.39	19.49	4.92	27.61	Peak
5	943.740	24.35	-21.65	46.00	25.87	20.52	5.31	27.35	Peak
6	959.260	26.06	-19.94	46.00	27.28	20.79	5.36	27.37	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 28 of 36 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

Report No.: FR520334AL



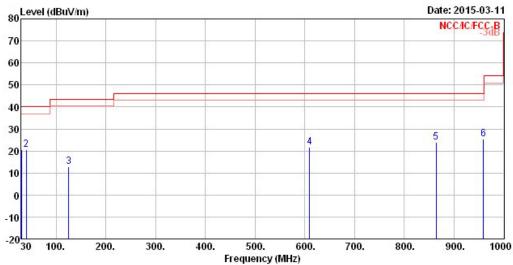

	Freq	Level	0∨er Limit	Limit Line		Antenna Factor			
87	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	S-
1	30.000	20.75	-19.25	40.00	29.38	1 7.94	0.82	27.39	Peak
2	39.700	20.49	-19.51	40.00	34.05	12.72	1.02	27.30	Peak
3	125.060	12.80	-30.70	43.50	25.78	12.37	1.83	27.18	Peak
4	610.060	21.71	-24.29	46.00	26.93	18.35	4.19	27.76	Peak
5	864.200	23.89	-22.11	46.00	26.20	20.10	5.00	27.41	Peak
6	959.260	25.56	-20.44	46.00	26.78	20.79	5.36	27.37	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 29 of 36 TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report No.: FR520334AL

3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)



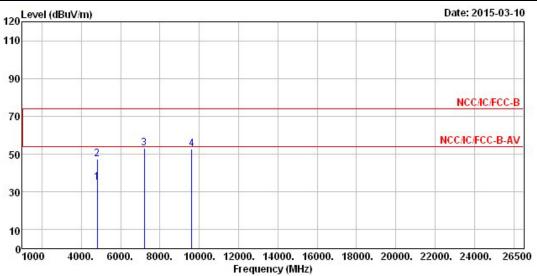


	Freq	Le∨el	O∨er Limit			Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4804.000	35.00	-19.00	54.00	29.78	33.20	4.49	32.47	Average
2	4804.000	47.42	-26.58	74.00	42.20	33.20	4.49	32.47	Peak
3	7206.000	53.20			44.28	35.84	5.71	32.63	Peak
4	9608.000	52.86			40.97	38.37	6.66	33.14	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: The item 5 in the un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (96.19 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 30 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

Report No.: FR520334AL

Transmitter Radiated Unwanted Emissions							
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2402				
Operating Function	Transmit	Polarization	Н				

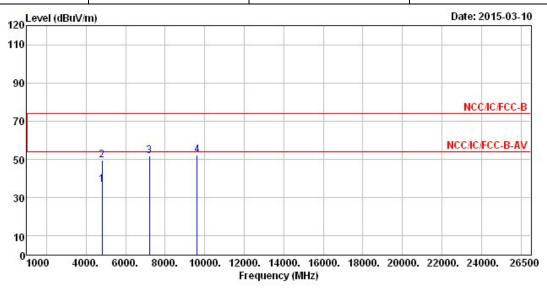


			0∨er	Limit	Read	Antenna	Cable	Preamp	
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	Óv :
1	4804.000	36.87	- 17 . 13	54.00	31.65	33.20	4.49	32.47	Average
2	4804.000	49.57	-24.43	74.00	44.35	33.20	4.49	32.47	Peak
3	7206.000	51.77			42.85	35.84	5.71	32.63	Peak
4	9608.000	52.27			40.38	38.37	6.66	33.14	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: The item 5 in the un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (96.19 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 31 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

	Transmitter Radiated Unwanted Emissions							
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2440					
Operating Function	Transmit	Polarization	V					

Report No.: FR520334AL

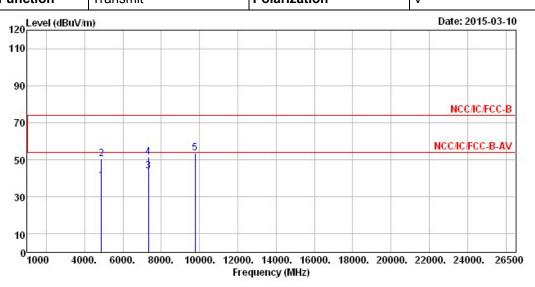

	Freq	Level	0∨er Limit	Limit Line		Antenna Factor		•	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4880.000	38.70	-15.30	54.00	33.33	33.31	4.51	32.45	Average
2	4880.000	50.50	-23.50	74.00	45.13	33.31	4.51	32.45	Peak
3	7320.000	44.01	-9.99	54.00	34.78	36.15	5.75	32.67	Average
4	7320.000	51.48	-22.52	74.00	42.25	36.15	5.75	32.67	Peak
5	9760.000	53.39			41.18	38.61	6.73	33.13	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: The item 5 in the un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (98.12 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 32 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

FCC Test Report

Transmitter Radiated Unwanted Emissions							
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2440				
Operating Function	Transmit	Polarization	Н				

Report No.: FR520334AL

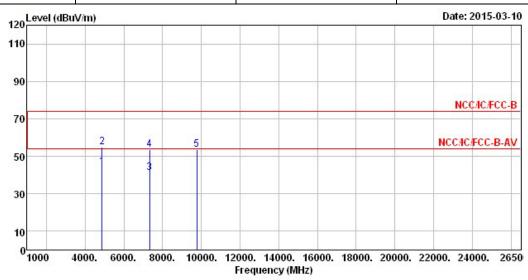

			0∨er	Limit	ReadA	Antenna	Cable	Preamp	
	Freq	Le∨el	Limit	Line	Le∨el	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	4880.000	44.40	-9.60	54.00	39.03	33.31	4.51	32.45	Average
2	4880.000	55.00	-19.00	74.00	49.63	33.31	4.51	32.45	Peak
3	7320.000	41.11	-12.89	54.00	31.88	36.15	5.75	32.67	Average
4	7320.000	53.62	-20.38	74.00	44.39	36.15	5.75	32.67	Peak
5	9760.000	53.67			41.46	38.61	6.73	33.13	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: The item 5 in the un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (98.12 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. : 33 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

Transmitter Radiated Unwanted Emissions

Modulation Mode LE-1Mbps Test Freq. (MHz) 2480

Operating Function Transmit Polarization V

Report No.: FR520334AL

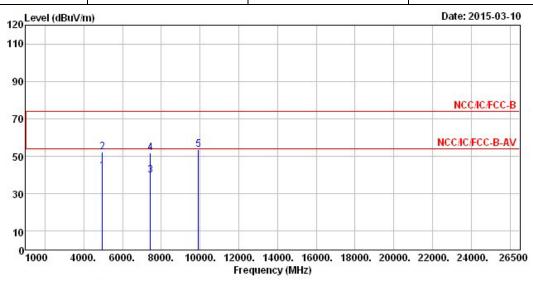

Freq	Le∨el	O∨er Limit	Limit Line		Antenna Factor			Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
4960.000	41.85	-12.15	54.00	36.28	33.44	4.57	32.44	Average
4960.000	52.13	-21.87	74.00	46.56	33.44	4.57	32.44	Peak
7440.000	39.65	-14.35	54.00	30.11	36.47	5.79	32.72	Average
7440.000	51.64	-22.36	74.00	42.10	36.47	5.79	32.72	Peak
9920.000	53.36			40.80	38.89	6.80	33.13	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 4: The items 3 and 4 in the un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.82 dBuV/m).
- Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us. VBW=3kHz.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 34 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01

FAX: 886-3-327-0973

Report No.: FR520334AL

Transmitter Radiated Unwanted Emissions							
Modulation Mode	LE-1Mbps	Test Freq. (MHz)	2480				
Operating Function	Transmit	Polarization	Н				

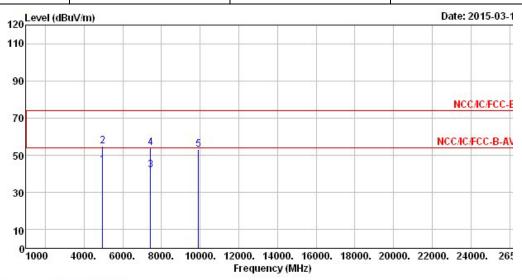

	Freq	Le∨el	0∨er Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	9
1	4960.000	44.57	-9.43	54.00	39.00	33.44	4.57	32.44	Average
2	4960.000	54.78	-19.22	74.00	49.21	33.44	4.57	32.44	Peak
3	7440 000	41 90	- 12 10	54 99	32 36	36 47	5 79	32 72	Average

4 7440.000 53.89 -20.11 74.00 44.35 36.47 5.79 32.72 Peak 5 9920.000 53.28 40.72 38.89 6.80 33.13 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: The items 3 and 4 in the un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (100.82 dBuV/m).

Note 5: Average emission setting: RBW=1MHz; VBW ≥ 1/T, where T is "Pulse On Time", e.g., LE VBW≥1/625us, VBW=3kHz.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : 35 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Apr. 14. 2014	AC Conduction
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 22, 2015	AC Conduction
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 31, 2014	AC Conduction
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	AC Conduction

Report No.: FR520334AL

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101500	9KHz~40GHz	Apr. 28, 2014	RF Conducted
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jul. 31, 2014	RF Conducted
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 29, 2015	RF Conducted
RF Cable-1m	HUBER+SUHNER	SUCOFLEX_104	SN 324557	30MHz ~ 26.5GHz	Feb. 24, 2015	RF Conducted

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 29, 2014	Radiation
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May 05, 2014	Radiation
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Sep. 01, 2014	Radiation
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 27, 2014	Radiation
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 20, 2014	Radiation
Horn Antenna	ETS · LINDGREN	3115	6741	1GHz ~ 18GHz	Jul. 11, 2014	Radiation
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	18GHz ~ 40GHz	Jan. 27, 2015	Radiation
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 15, 2014	Radiation
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 12, 2014	Radiation
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz~30 MHz	Feb. 02, 2015	Radiation

Note: Calibration Interval of instruments listed above is two year.

SPORTON INTERNATIONAL INC. Page No. : 36 of 36
TEL: 886-3-327-3456 Report Version : Rev. 01