FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Wireless module

Model: WG7833-B0, WG7833BEM2A, WG7833BEM2B

Trade Name: Jorjin

Issued to

Jorjin Technologies INC 17F,No.239, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 22161

Issued by

Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
http://www.ccsrf.com
service@ccsrf.com
Issued Date: May 29, 2015





Report No.: T150417W02-RP3

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	May 29, 2015	Initial Issue	ALL	Becca Chen

Page 2 Rev.00

TABLE OF CONTENTS

	TEST RESULT CERTIFICATION	
2.]	EUT DESCRIPTION	5
3. 7	TEST METHODOLOGY	6
3.1	1 EUT CONFIGURATION	6
3.2	2 EUT EXERCISE	6
3.3	3 GENERAL TEST PROCEDURES	6
3.4	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
3.5	5 DESCRIPTION OF TEST MODES	8
4.]	INSTRUMENT CALIBRATION	9
4.1	1 MEASURING INSTRUMENT CALIBRATION	9
4.2	2 MEASUREMENT EQUIPMENT USED	9
4.3	3 MEASUREMENT UNCERTAINTY	10
5.]	FACILITIES AND ACCREDITATIONS	11
5.1	1 FACILITIES	11
5.2	2 EQUIPMENT	11
5.3	3 TABLE OF ACCREDITATIONS AND LISTINGS	12
6.	SETUP OF EQUIPMENT UNDER TEST	13
6.1	1 SETUP CONFIGURATION OF EUT	13
6.2	2 SUPPORT EQUIPMENT	13
7.]	FCC PART 15.247 REQUIREMENTS	14
7.1	1 20 DB BANDWIDTH	14
7.2	PEAK POWER	21
7.3	3 AVERAGE POWER	22
7.4	4 BAND EDGES MEASUREMENT	23
7.5	5 FREQUENCY SEPARATION	49
7.6	6 NUMBER OF HOPPING FREQUENCY	54
7.7	7 TIME OF OCCUPANCY (DWELL TIME)	59
7.8	8 SPURIOUS EMISSIONS	67
7.9	9 POWERLINE CONDUCTED EMISSIONS	91
APP	PENDIX I - PHOTOGRAPHS OF TEST SETUP	92
A PP	PENDIX II - PHOTOGRAPHS OF EUT	

FCC ID: WS2-WG7833B0 Report No.: T150417W02-RP3

1. TEST RESULT CERTIFICATION

Applicant: Jorjin Technologies INC

17F,No.239, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City

22161

Equipment Under Test: Wireless module

Trade Name: Jorjin

Model: WG7833-B0, WG7833BEM2A, WG7833BEM2B

Date of Test: April 29 ~ May 27, 2015

APPLICABLE STANDARDS		
STANDARD	TEST RESULT	
FCC 47 CFR Part 15 Subpart C	No non-compliance noted	

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.10: 2009** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements set forth in the above standards. The test results of this report relate only to the tested sample EUT identified in this report.

Approved by: Reviewed by:

Miller Lee

Manager

Compliance Certification Services Inc.

Willer Lee

Angel Cheng

Section Manager

Compliance Certification Services Inc.

Page 4 Rev.00



2. EUT DESCRIPTION

Product	Wireless module	Wireless module			
Trade Name	Jorjin	Jorjin			
Model Number	WG7833-B0, WG78	WG7833-B0, WG7833BEM2A, WG7833BEM2B			
	Model	External PCB	Antenna connector		
Model Diseasoners	WG7833-B0	X	X		
Model Discrepancy	WG7833BEM2A	0	0		
	WG7833BEM2B	0	X		
Received Date	April 17, 2015	April 17, 2015			
Power Rating	Powered from host device via USB Cable				
Frequency Range	2402 ~ 2480 MHz				
Transmit Power	11.61 dBm				
Modulation Technique	GFSK for 1Mbps; π/4-DQPSK for 2Mbps; 8DPSK for 3Mbps				
Number of Channels	79 Channels				
Antenna Specification	H2B1BE1A1B020 2. Dipole Antenna / V	1. PCB Antenna / Unictron H2B1BE1A1B0200: 4.13 dBi 2. Dipole Antenna / WIESON GPOT155-002: 1.60 dBi			

Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>WS2-WG7833B0</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 5 Rev.00

FCC ID: WS2-WG7833B0 Report No.: T150417W02-RP3

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2009 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209, 15.247 and DA00-705.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10: 2009.

Page 6 Rev.00

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	$\binom{2}{}$
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 7 Rev.00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 **DESCRIPTION OF TEST MODES**

The EUT (model: WG7833-B0) had been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz) with 1Mbps data rate was chosen for full testing.

During the preliminary test, GFSK, $\pi/4$ -QPSK & 8DPSK with DH1 were pre-tested and found that 8DPSK emits the highest output power. Then the tests were carried on with DH1 compare to DH3 & DH5 and found that 8DPSK with DH5 emit the highest output power, and therefore had been tested under operating condition.

Following channels were selected for the radiated emission testing only as listed below:

Tested Channel	Modulation Type	Packet Type	Data Rate
Low, Mid, High	GFSK	DH 5	1
Low, Mid, High	8DPSK	DH 5	3

Page 8 Rev.00



4. INSTRUMENT CALIBRATION

MEASURING INSTRUMENT CALIBRATION 4.1

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	US42510252	11/23/2015	
Thermostatic/Hrgrosatic Chamber	TAICHY	MHG-150LF	930619	10/07/2015	
AC Power Source	EXTECH	6205	1140845	N.C.R	
DC Power Supply	ABM	8301HD	D011531	N.C.R	
Power Meter	Anritsu	ML2495A	1012009	06/03/2015	
Power Sensor	Anritsu	MA2411A	0917072	06/03/2015	
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/09/2015	
Test S/W	EZ-EMC (CCS-3A1RE)				

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	Agilent	E4446A	US42510268	09/18/2015	
EMI Test Receiver	R&S	ESCI	100064	05/30/2015	
Bilog Antenna	Sunol Sciences	JB3	A030105	08/19/2015	
Horn Antenna	EMCO	3117	00055165	01/26/2016	
Horn Antenna	EMCO	3116	26370	12/25/2015	
Turn Table	CCS	CC-T-1F	N/A	N.C.R	
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	
Controller	CCS	CC-C-1F	N/A	N.C.R	
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016	
Pre-Amplifier	EMC	EMC 01265	4035	08/09/2016	
Pre-Amplifier	MITEQ	AMF-6F-260400-4 0-8P	985646	12/25/2015	
Coaxial Cable	Huber+Suhner	102	29212/2	12/25/2015	
Coaxial Cable	Huber+Suhner	102	29406/2	12/25/2015	
Test S/W	EZ-EMC (CCS-3A1RE)				

Conducted Emission room					
Name of Equipment Manufacturer Model Serial Number Calibration					
N/A					

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. $N.C.R = No\ Calibration\ Request.$

Page 9 Rev.00



4.3

MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	N/A
3M Semi Anechoic Chamber / <200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

> Page 10 Rev.00

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at
 No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C. Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235
The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10

and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 11 Rev.00



5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12,2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method –47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	Canada IC 2324G-1 IC 2324G-2

^{*} No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

Page 12 Rev.00

FCC ID: WS2-WG7833B0

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

SUPPORT EQUIPMENT 6.2

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	TOSHIBA	Satellite M840	N/A	PPD-AR5B225	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Report No.: T150417W02-RP3

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 13 Rev.00


7. FCC PART 15.247 REQUIREMENTS

7.1 20 DB BANDWIDTH

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=30 kHz, VBW = 100 kHz, Sweep = 3.2 ms.
- 4. Mark the peak frequency and 20dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.955
Mid	2441	0.94
High	2480	0.93

For 8DPSK / DH5


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.305
Mid	2441	1.3
High	2480	1.295

Page 14 Rev.00

Test Plot

For GFSK / DH5


20dB Bandwidth (CH Low)

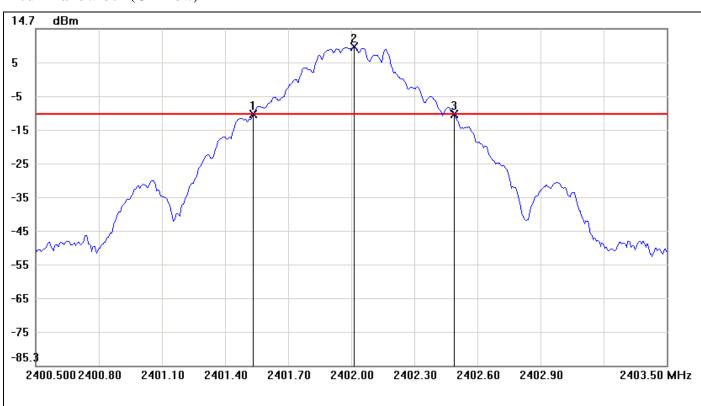

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.5350	-10.79	-10.76	-0.03
2	2402.0150	9.24	-10.76	20.00
3	2402.4900	-10.76	-10.76	0.00

No.		△Frequency(MHz)	ΔLevel(dB)
1	mk3-mk1	0.955	0.03


20dB Bandwidth (CH Mid)

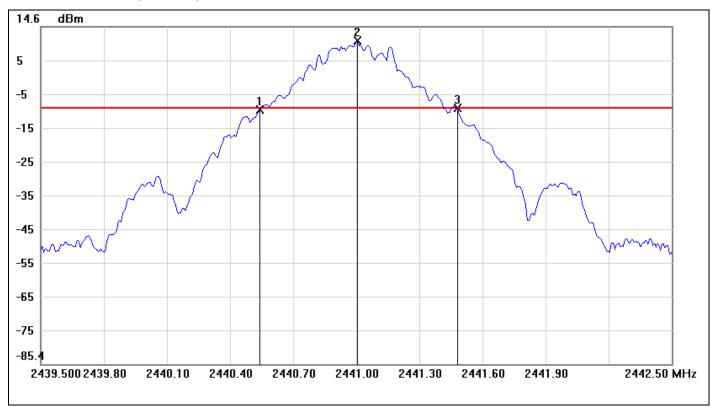

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.5400	-10.11	-9.52	-0.59
2	2441.0050	10.48	-9.52	20.00
3	2441.4800	-9.56	-9.52	-0.04

No.		△Frequency(MHz)	ΔLevel(dB)
1	mk3-mk1	0.94	0.55

20dB Bandwidth (CH High)

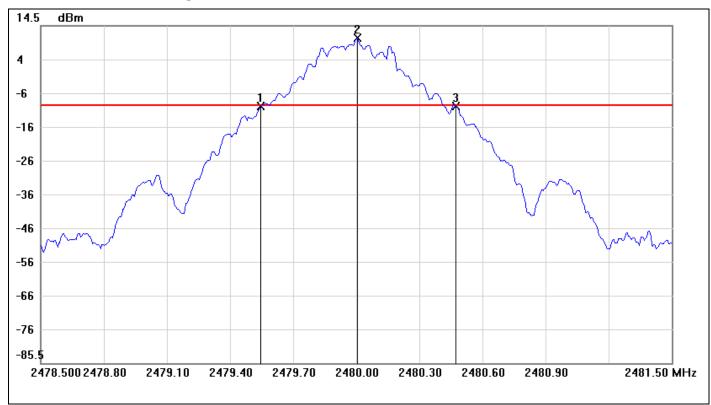


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.5450	-9.38	-9.26	-0.12
2	2480.0050	10.74	-9.26	20.00
3	2480.4750	-9.35	-9.26	-0.09

No.		△Frequency(MHz)	ΔLevel(dB)
1	mk3-mk1	0.93	0.03

Page 17 Rev.00

For 8DPSK / DH5

20dB Bandwidth (CH Low)

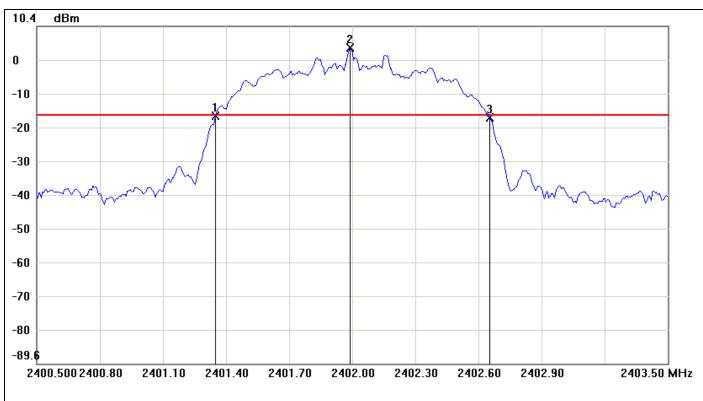


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3500	-16.18	-16.06	-0.12
2	2401.9900	3.94	-16.06	20.00
3	2402.6550	-16.72	-16.06	-0.66

No.		△Frequency(MHz)	ΔLevel(dB)
1	mk3-mk1	1.305	-0.54

Page 18 Rev.00

20dB Bandwidth (CH Mid)

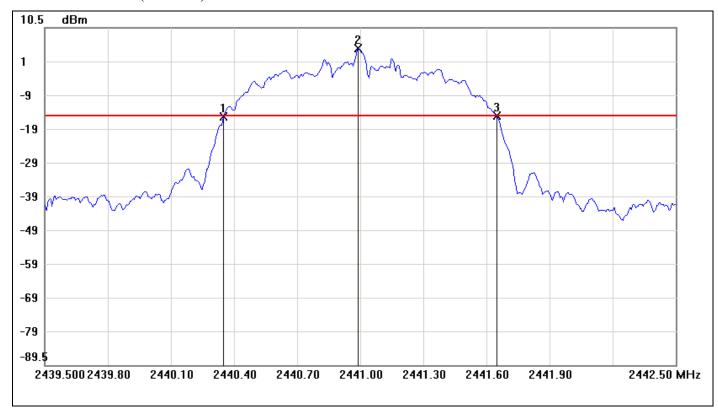


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.3500	-15.91	-15.50	-0.41
2	2440.9900	4.50	-15.50	20.00
3	2441.6500	-15.56	-15.50	-0.06

No.		△Frequency(MHz)	ΔLevel(dB)
1	mk3-mk1	1.3	0.35

Page 19 Rev.00



20dB Bandwidth (CH High)

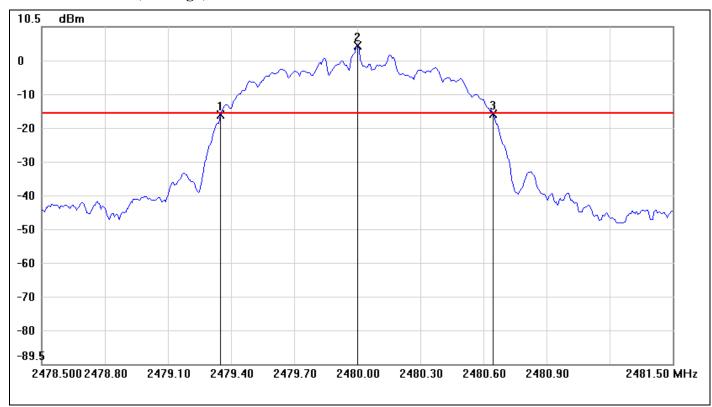

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.3500	-15.64	-15.25	-0.39
2	2480.0000	4.75	-15.25	20.00
3	2480.6450	-15.42	-15.25	-0.17

No.		△Frequency(MHz)	∆Level(dB)
1	mk3-mk1	1.295	0.22

Page 20 Rev.00

FCC ID: WS2-WG7833B0

Report No.: T150417W02-RP3


PEAK POWER 7.2

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
- 2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	11.21	0.0132		PASS
Mid	2441	11.61	0.0145	0.125	PASS
High	2480	11.35	0.0136		PASS

For 8DPSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	7.86	0.0061		PASS
Mid	2441	8.10	0.0065	0.125	PASS
High	2480	8.32	0.0068		PASS

Page 21 Rev.00




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	10.95	0.0124
Mid	2441	11.31	0.0135
High	2480	11.09	0.0129

For 8DPSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)		
Low	2402	4.62	0.0029		
Mid	2441	4.90	0.0031		
High	2480	5.20	0.0033		

Page 22 Rev.00


7.4 BAND EDGES MEASUREMENT

LIMIT


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Configuration

For Radiated

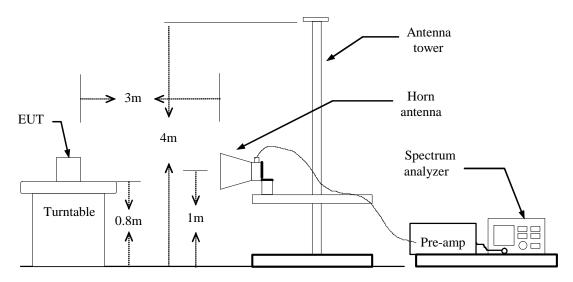

For Conducted



Page 23 Rev.00

FCC ID: WS2-WG7833B0

Report No.: T150417W02-RP3

TEST PROCEDURE

For Radiated

- 1. The EUT is placed on a turn table, which is 1.5m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
 - (c) if duty cycle \geq 98%, VBW=10Hz.

if duty cycle<98% VBW=1/T.

BT<98%, VBW= 360Hz

EDR<98%, VBW=360Hz

5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

For Conducted

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 300 kHz. The video bandwidth is set to 300 kHz.

TEST RESULTS

Refer to attach spectrum analyzer data chart.

Page 24 Rev.00


Compliance Certification Services Inc. FCC ID: WS2-WG7833B0 Report No.: T150417W02-RP3

For PCB Anteena

GFSK / DH5

Band Edges (CH Low)

Polarity: Vertical

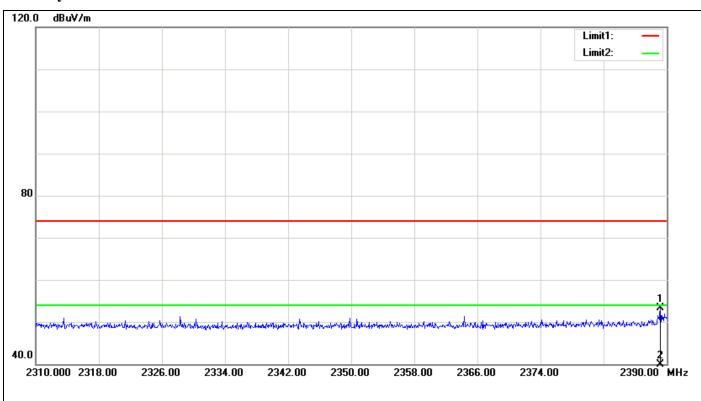


	No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
		(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
ſ	1	2389.200	54.44	-1.06	53.38	74.00	-20.62	100	77	peak
	2	2389.200	40.19	-1.06	39.13	54.00	-14.87	100	77	AVG

Page 25 Rev.00

Report No.: T150417W02-RP3

Polarity: Horizontal

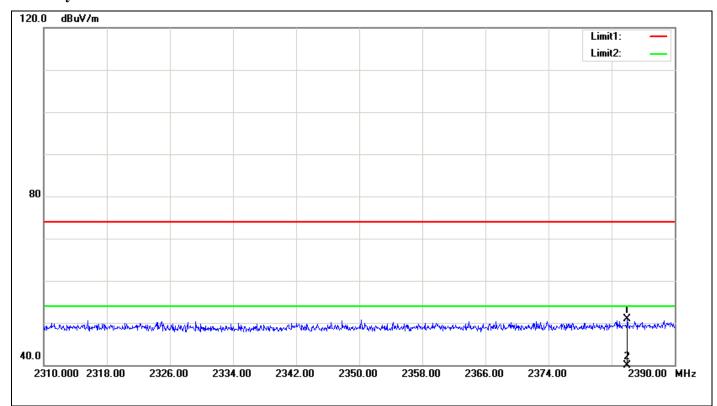


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2384.000	52.03	-1.11	50.92	74.00	-23.08	100	65	peak
2	2384.000	40.41	-1.11	39.30	54.00	-14.70	100	65	AVG

Page 26 Rev.00



Band Edges (CH High)

Polarity: Vertical

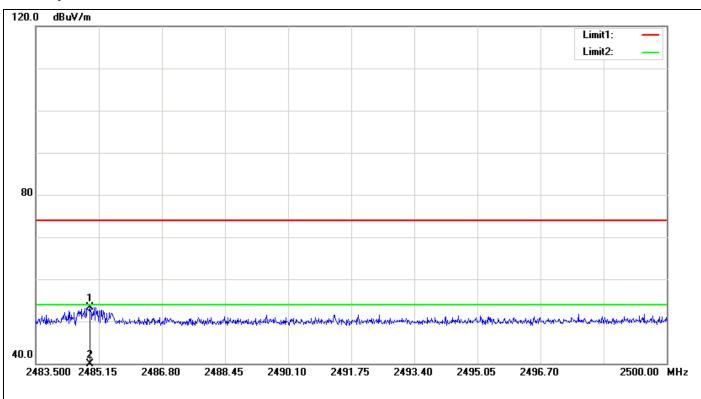


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.919	53.78	-0.46	53.32	74.00	-20.68	100	352	peak
2	2484.919	40.44	-0.46	39.98	54.00	-14.02	100	352	AVG

Page 27 Rev.00



Polarity: Horizontal

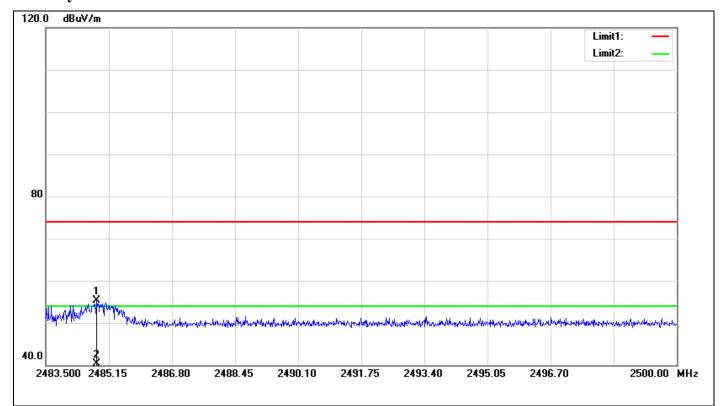

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.836	55.70	-0.46	55.24	74.00	-18.76	100	141	peak
2	2484.836	40.69	-0.46	40.23	54.00	-13.77	100	141	AVG


Page 28 Rev.00

FCC ID: WS2-WG7833B0

8DPSK / DH5

Band Edges (CH Low)

Polarity: Vertical

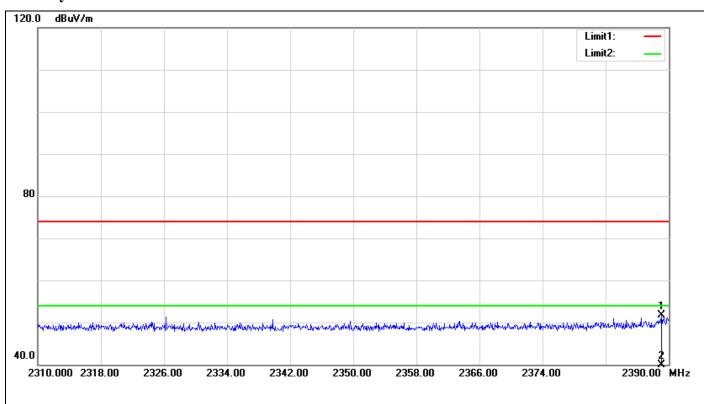


Report No.: T150417W02-RP3

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.040	52.83	-1.06	51.77	74.00	-22.23	100	336	peak
2	2389.040	40.44	-1.06	39.38	54.00	-14.62	100	336	AVG

Rev.00 Page 29

Report No.: T150417W02-RP3

Polarity: Horizontal

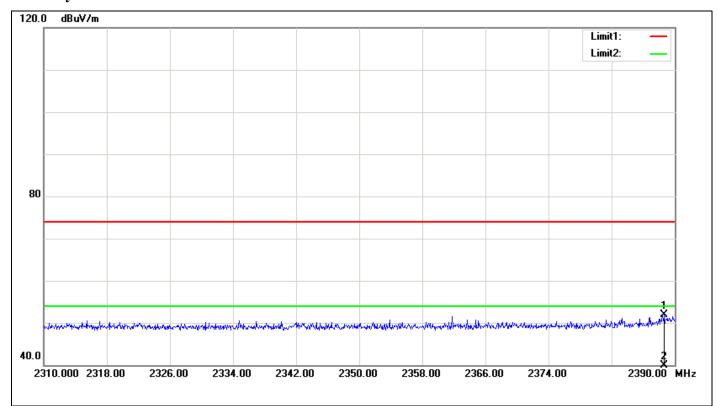


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2388.640	52.96	-1.06	51.90	74.00	-22.10	100	184	peak
2	2388.640	40.44	-1.06	39.38	54.00	-14.62	100	184	AVG

Page 30 Rev.00



Band Edges (CH High)

Polarity: Vertical

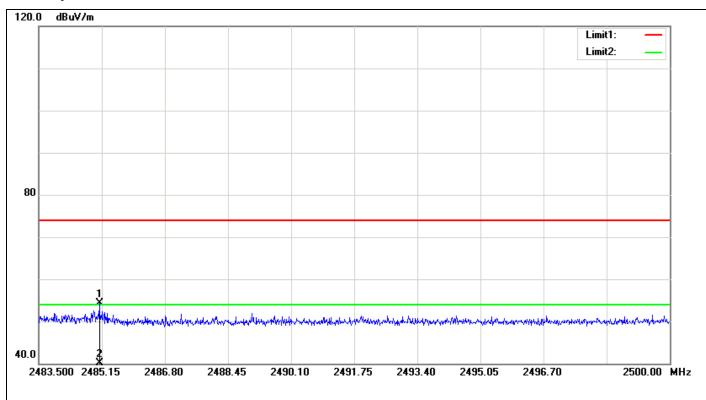


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2485.084	54.76	-0.45	54.31	74.00	-19.69	100	110	peak
2	2485.084	40.64	-0.45	40.19	54.00	-13.81	100	110	AVG

Rev.00 Page 31

Report No.: T150417W02-RP3

Polarity: Horizontal

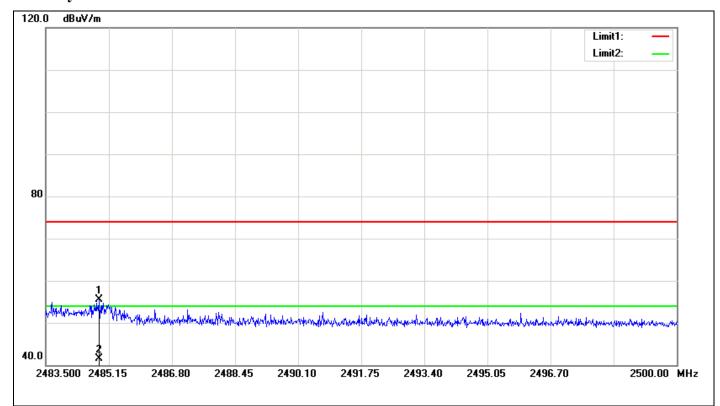

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.886	55.91	-0.46	55.45	74.00	-18.55	100	6	peak
2	2484.886	41.91	-0.46	41.45	54.00	-12.55	100	6	AVG

Page 32 Rev.00




For Dipole Anteena

GFSK / DH5

Band Edges (CH Low)

Polarity: Vertical

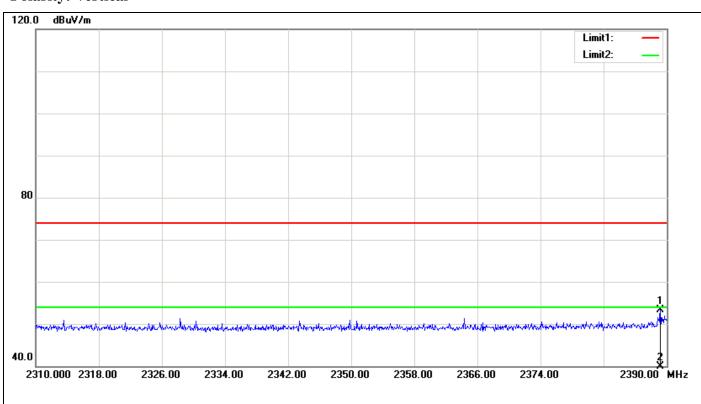


	No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
		(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
ſ	1	2389.200	54.44	-1.06	53.38	74.00	-20.62	100	77	peak
Ī	2	2389.200	40.19	-1.06	39.13	54.00	-14.87	100	77	AVG

Page 33 Rev.00

Report No.: T150417W02-RP3

Polarity: Horizontal

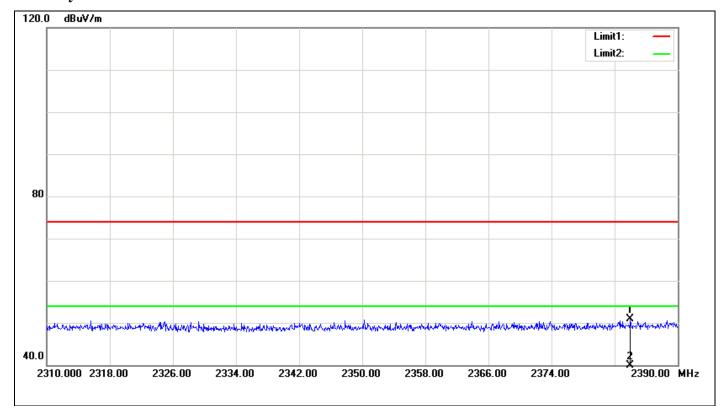


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2384.000	52.03	-1.11	50.92	74.00	-23.08	100	65	peak
2	2384.000	40.41	-1.11	39.30	54.00	-14.70	100	65	AVG

Page 34 Rev.00



Polarity: Vertical


Band Edges (CH High)

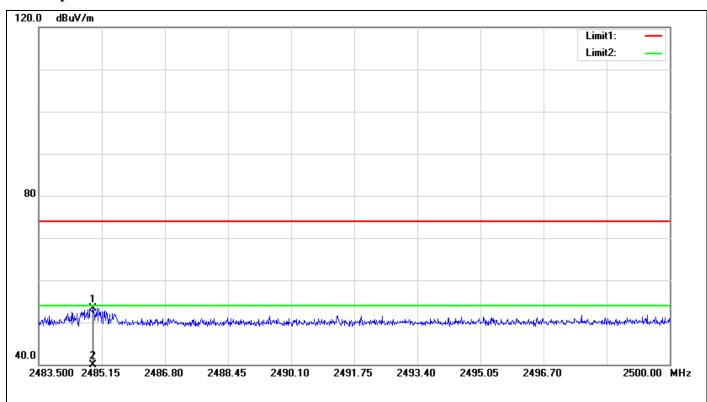

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.919	53.78	-0.46	53.32	74.00	-20.68	100	352	peak
2	2484.919	40.44	-0.46	39.98	54.00	-14.02	100	352	AVG

Page 35 Rev.00

Polarity: Horizontal

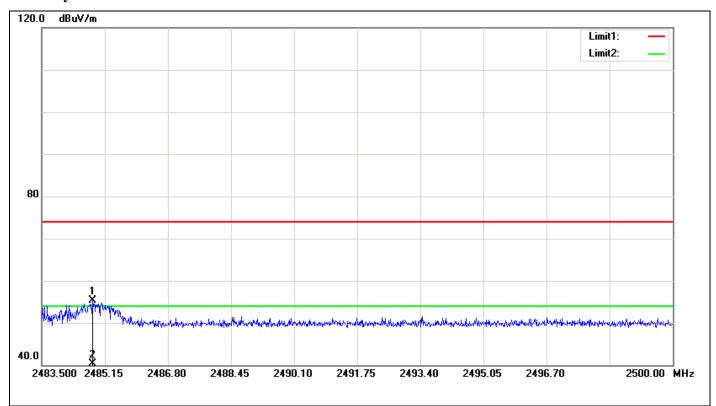


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.836	55.70	-0.46	55.24	74.00	-18.76	100	141	peak
2	2484.836	40.69	-0.46	40.23	54.00	-13.77	100	141	AVG

Page 36 Rev.00 FCC ID: WS2-WG7833B0

8DPSK / DH5

Band Edges (CH Low)

Polarity: Vertical

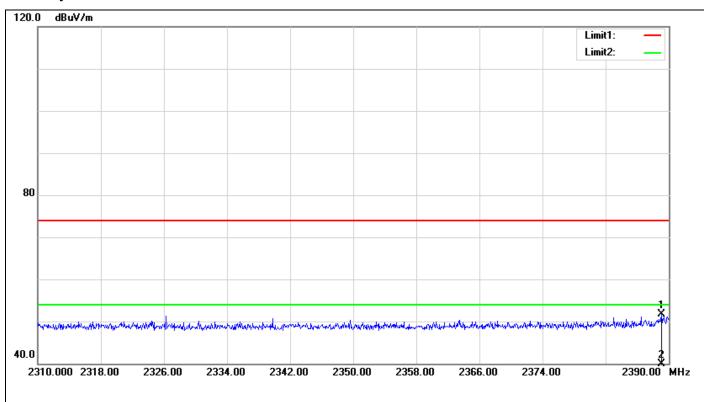


Report No.: T150417W02-RP3

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2389.040	52.83	-1.06	51.77	74.00	-22.23	100	336	peak
2	2389.040	40.44	-1.06	39.38	54.00	-14.62	100	336	AVG

Page 37 Rev.00

Report No.: T150417W02-RP3

Polarity: Horizontal

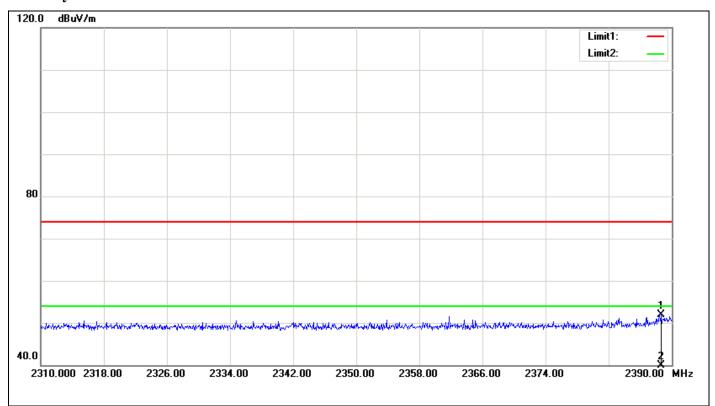


No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2388.640	52.96	-1.06	51.90	74.00	-22.10	100	184	peak
2	2388.640	40.44	-1.06	39.38	54.00	-14.62	100	184	AVG

Page 38 Rev.00



Band Edges (CH High)


Polarity: Vertical

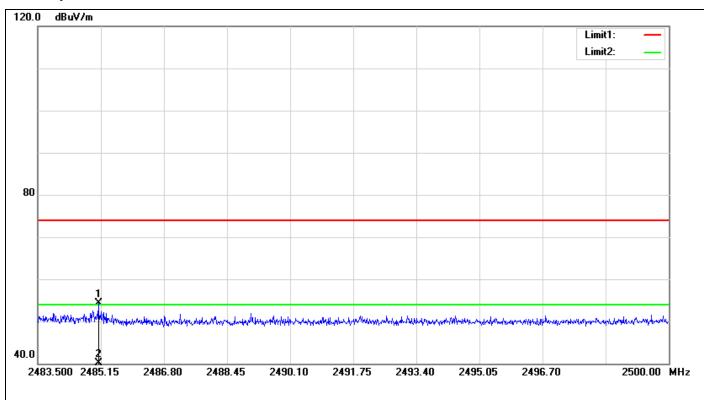

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2485.084	54.76	-0.45	54.31	74.00	-19.69	100	110	peak
2	2485.084	40.64	-0.45	40.19	54.00	-13.81	100	110	AVG

Page 39 Rev.00 FCC ID: WS2-WG7833B0

Polarity: Horizontal

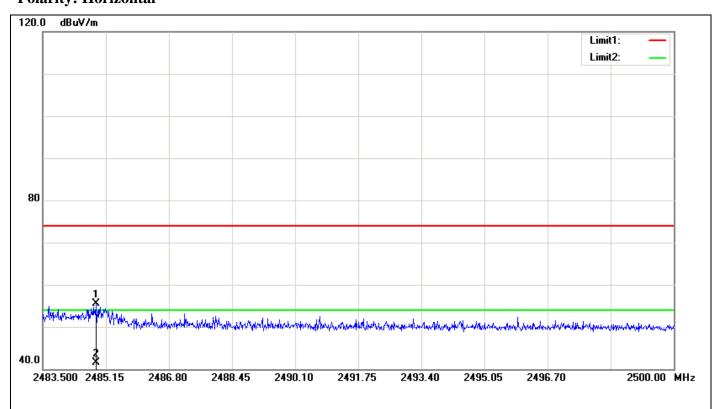


Report No.: T150417W02-RP3

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	
1	2484.886	55.91	-0.46	55.45	74.00	-18.55	100	6	peak
2	2484.886	41.91	-0.46	41.45	54.00	-12.55	100	6	AVG

Page 40 Rev.00

GFSK

Conducted Band Edges (CH Low)

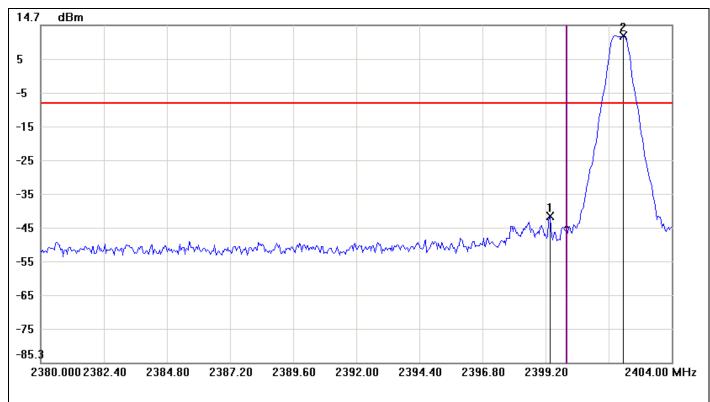


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.3600	-41.95	-8.38	-33.57
2	2402.1600	11.62	-8.38	20.00

Page 41 Rev.00



Band Edges (CH High)

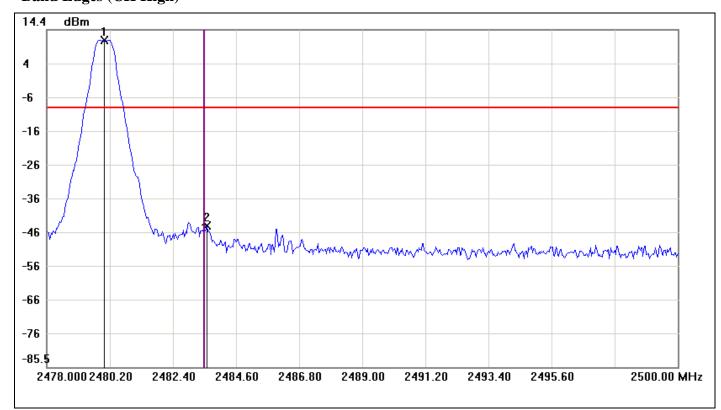


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2480.0167	11.43	-8.57	20.00
2	2483.5733	-43.76	-8.57	-35.19

Page 42 Rev.00



Hopping Mode (CH Low)

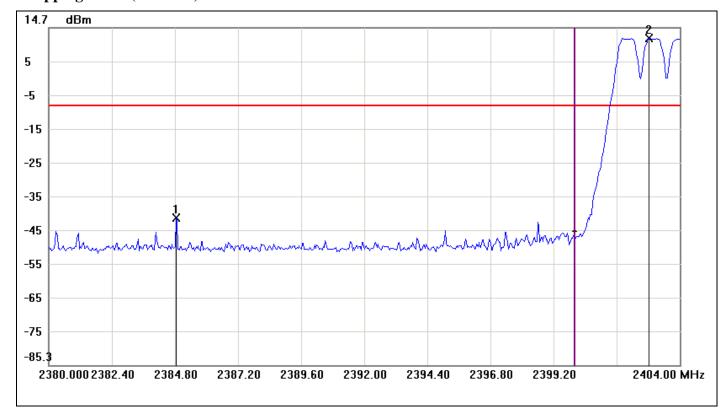


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2384.8400	-41.77	-8.41	-33.36
2	2402.8400	11.59	-8.41	20.00

Page 43 Rev.00



Hopping Mode (CH High)

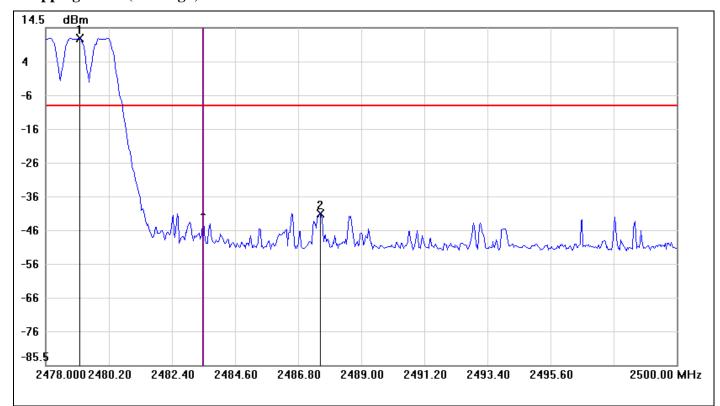


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2479.1733	11.40	-8.60	20.00
2	2487.5700	-40.52	-8.60	-31.92

Page 44 Rev.00

8DPSK


Band Edges (CH Low)

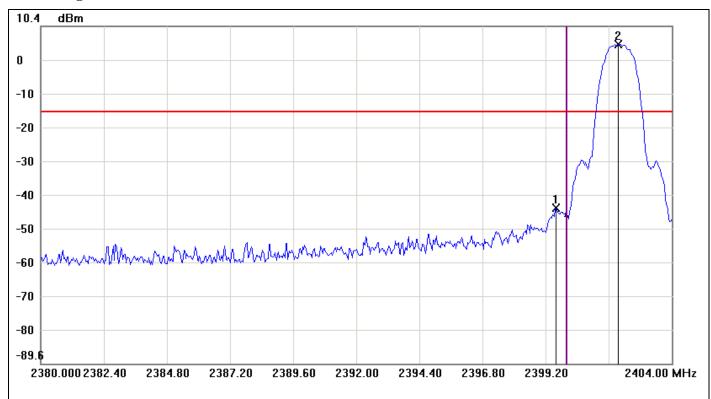

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.6000	-43.53	-14.98	-28.55
2	2401.9600	5.02	-14.98	20.00

Page 45 Rev.00

Band Edges (CH High)

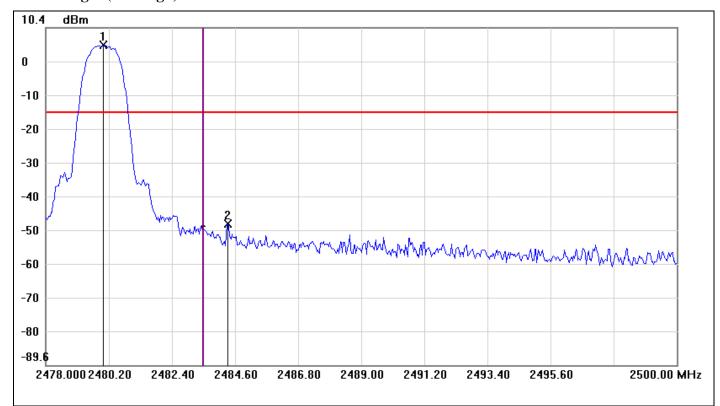


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2480.0167	5.31	-14.69	20.00
2	2484.3433	-47.65	-14.69	-32.96

Page 46 Rev.00


Report No.: T150417W02-RP3

Hopping Mode (CH Low)

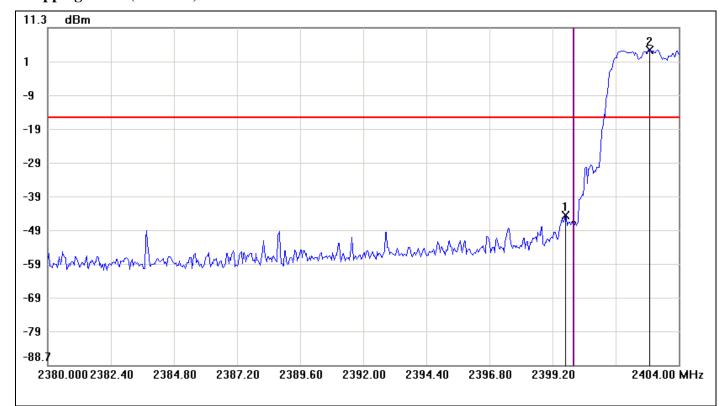


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2399.6800	-44.35	-15.32	-29.03
2	2402.8800	4.68	-15.32	20.00

Page 47 Rev.00



Report No.: T150417W02-RP3

Hopping Mode (CH High)

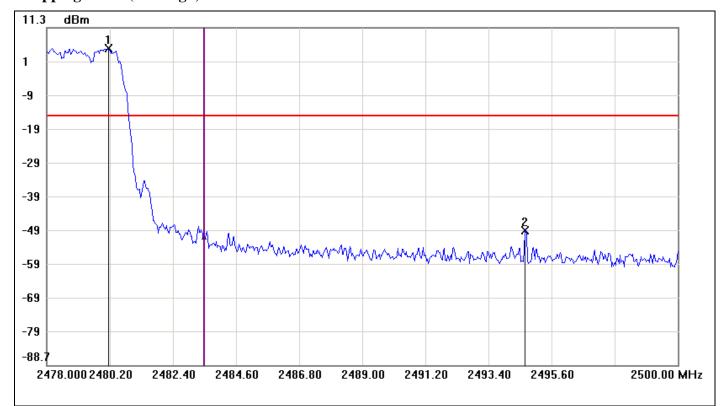

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2480.1633	5.19	-14.81	20.00
2	2494.6833	-48.93	-14.81	-34.12


Page 48 Rev.00

7.5 FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Sweep = 3.2 ms.
- 5. Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

For GFSK / DH5

Channel Separation (MHz)	two-thirds of the 20 dB bandwidth	Channel Separation Limit	Result
1.05	0.6366	>two-thirds of the 20 dB bandwidth	Pass

For 8DPSK / DH5


Channel Separation (MHz)	two-thirds of the 20 dB bandwidth	Channel Separation Limit	Result
1.18	0.87	>two-thirds of the 20 dB bandwidth	Pass

Page 49 Rev.00

Test Plot

For GFSK / DH5

Measurement of Channel Separation

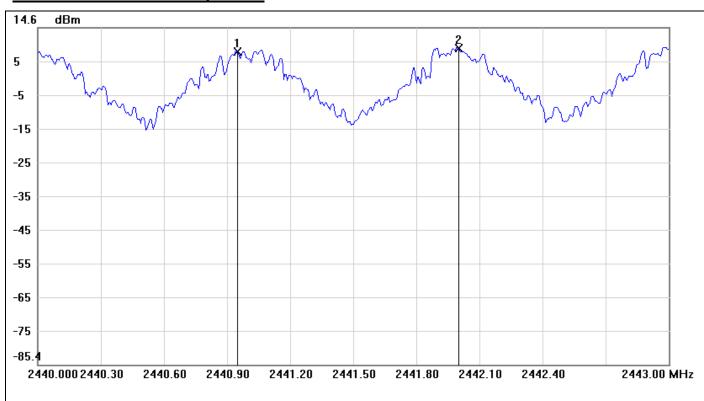


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9500	7.59		
2	2442.0000	8.49		

No.		△Frequency(MHz)	∆Level(dB)
1	mk2-mk1	1.05	0.9

Page 50 Rev.00



Measurement of 20dB Bandwidth

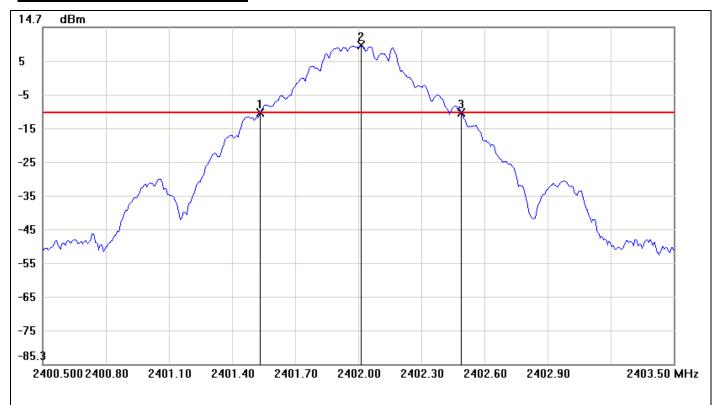

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.5350	-10.79	-10.76	-0.03
2	2402.0150	9.24	-10.76	20.00
3	2402.4900	-10.76	-10.76	0.00

No.		△Frequency(MHz)	∆Level(dB)
1	mk3-mk1	0.955	0.03


Page 51 Rev.00



FCC ID: WS2-WG7833B0

For 8DPSK / DH5

Measurement of Channel Separation

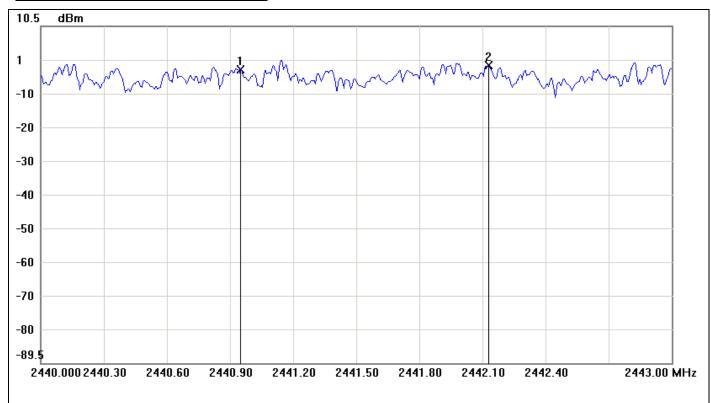


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2440.9500	-2.25		
2	2442.1300	-1.06		

No.		△Frequency(MHz)	∆Level(dB)
1	mk2-mk1	1.18	1.19

Page 52 Rev.00

Measurement of 20dB Bandwidth

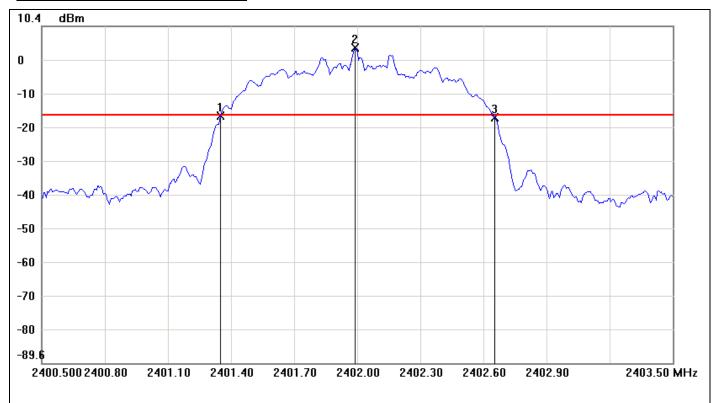

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	2401.3500	-16.18	-16.06	-0.12
2	2401.9900	3.94	-16.06	20.00
3	2402.6550	-16.72	-16.06	-0.66

No.		△Frequency(MHz)	∆Level(dB)
1	mk3-mk1	1.305	-0.54

Page 53 Rev.00


7.6 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2430.5MHz, Sweep = auto Start=2430.5MHz, Stop = 2460.5MHz, Sweep = auto and Start=2460.5MHz, Stop = 2485.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW, VBW=510kHz.
- 5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data


Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS


Page 54 Rev.00


Test Plot

For GFSK

Channel Number

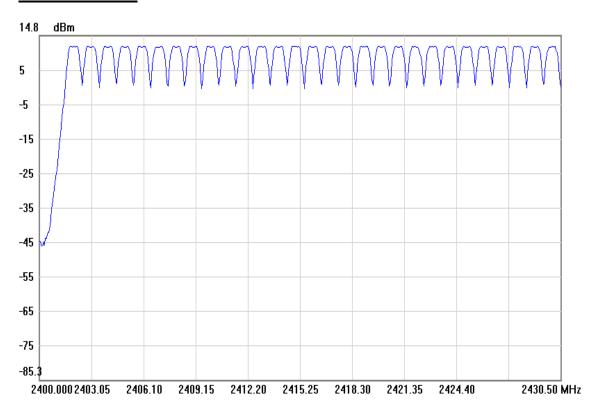


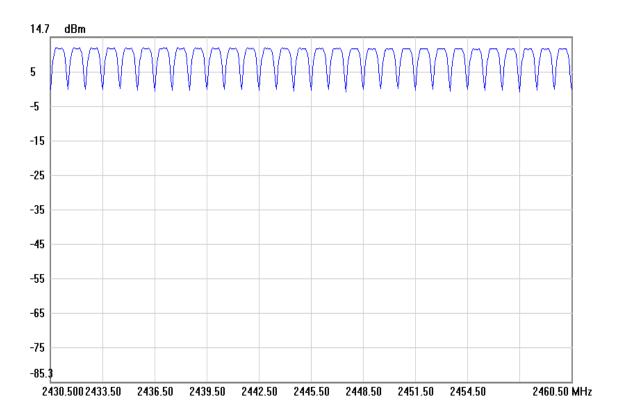


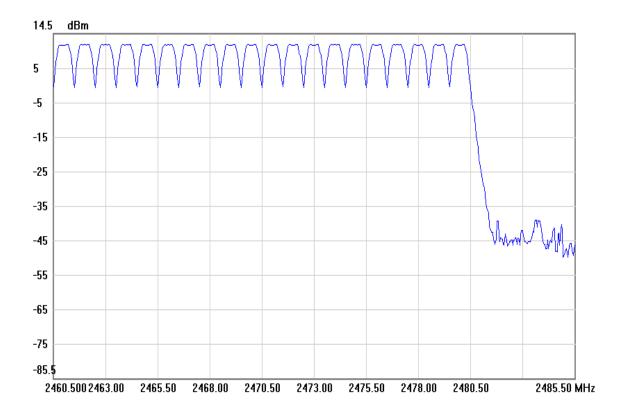


For 8DPSK

Channel Number

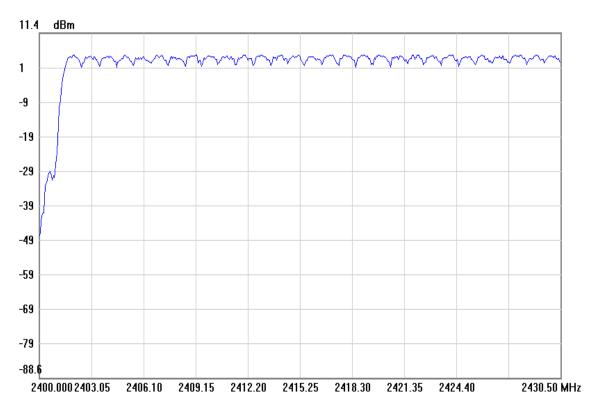

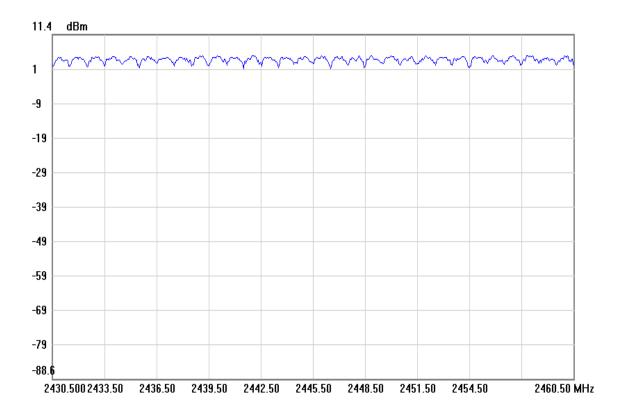

Page 57 Rev.00

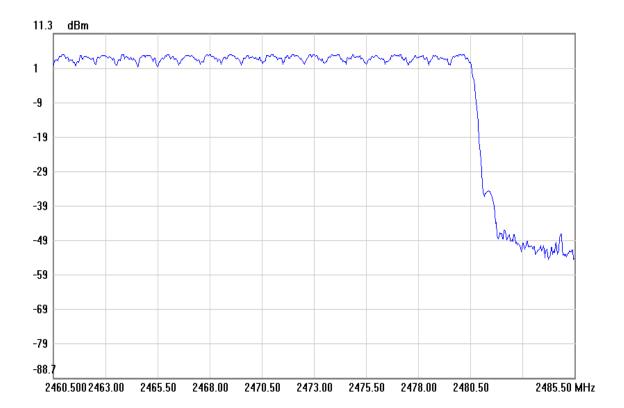


7.7 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms.
- 5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted

Page 59 Rev.00

FCC ID: WS2-WG7833B0

Report No.: T150417W02-RP3

Test Data

For GFSK

DH 1: 0.405 * (1600/2)/79 * 31.6 = 129.600 (ms)

DH 3: 1.67 * (1600/4)/79 * 31.6 = 267.200 (ms)

DH 5: 2.925 * (1600/6)/79 * 31.6 = 312.000 (ms)

	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
DH 1	0.405	129.600	31.60		PASS
DH 3	1.67	267.200	31.60	400.00	PASS
DH 5	2.925	312.000	31.60		PASS

For 8DPSK

DH 1: 0.4116 * (1600/2)/79 * 31.6 = 131.712 (ms)

DH 3: 1.67 * (1600/4)/79 * 31.6 = 267.200 (ms)

DH 5: 2.9333 * (1600/6)/79 * 31.6 = 312.885 (ms)


	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
DH 1	0.4116	131.712	31.60		PASS
DH 3	1.67	267.200	31.60	400.00	PASS
DH 5	2.9333	312.885	31.60		PASS

Page 60 Rev.00

Test Plot

For GFSK

DH 1

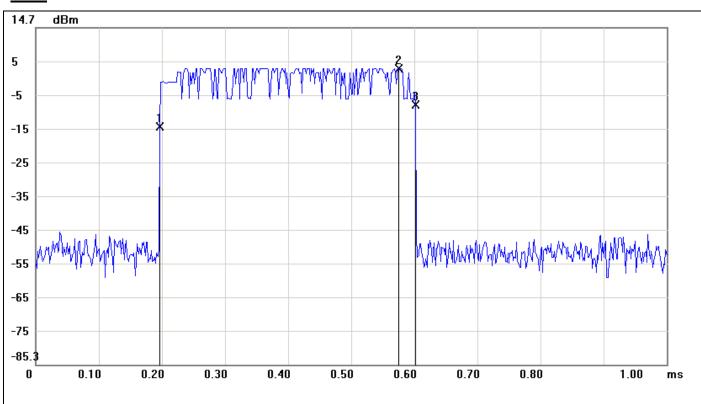


No.	Sweep time(ms)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	0.1967	-14.74		
2	0.5750	2.67		
3	0.6017	-8.21		

No.		ΔTime(ms)	ΔLevel(dB)
1	mk3-mk1	0.405	6.53

Page 61 Rev.00

<u>DH 3</u>

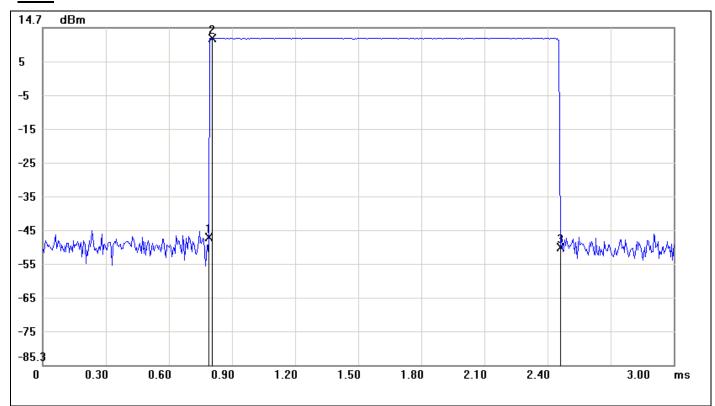


No.	Sweep time(ms)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	0.7900	-47.33		
2	0.8050	11.57		
3	2.4600	-50.34		

No.		∆Time(ms)	ΔLevel(dB)
1	mk3-mk1	1.67	-3.01

Page 62 Rev.00



DH 5

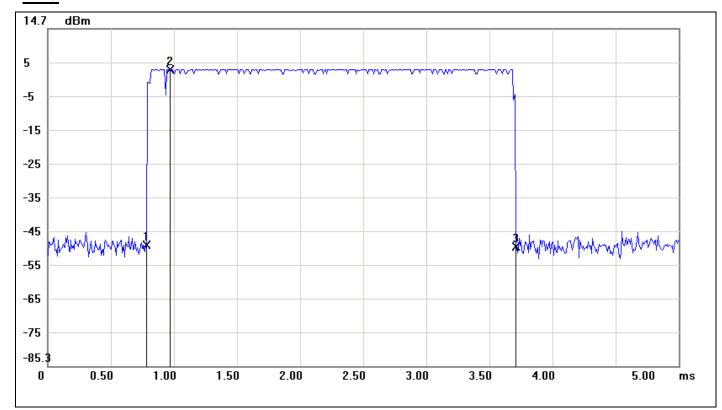

No.	Sweep time(ms)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	0.7833	-49.38		
2	0.9667	2.64		
3	3.7083	-49.80		


No.		∆Time(ms)	∆Level(dB)
1	mk3-mk1	2.925	-0.42

Page 63 Rev.00



For 8DPSK

<u>DH 1</u>

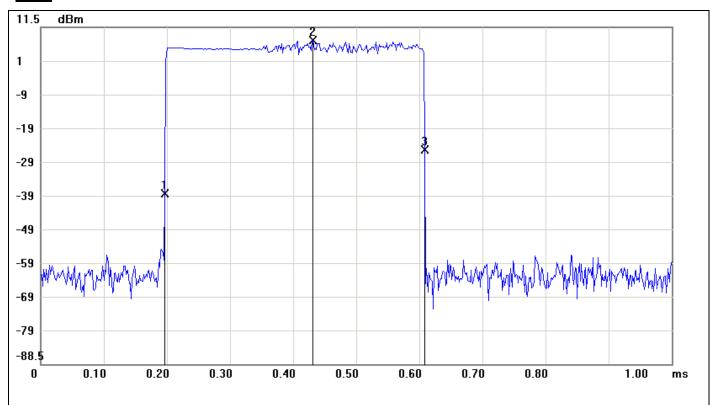


No.	Sweep time(ms)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	0.1967	-38.00		
2	0.4317	7.50		
3	0.6083	-25.01		

No.		∆Time(ms)	ΔLevel(dB)
1	mk3-mk1	0.4116	12.99

Page 64 Rev.00

<u>DH 3</u>

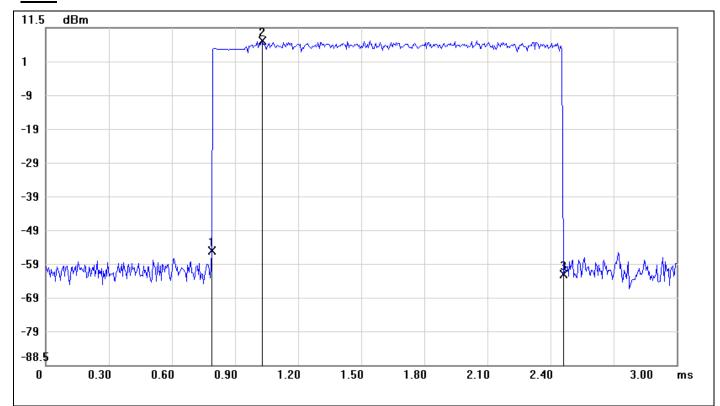


No.	Sweep time(ms)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	0.7900	-54.66		
2	1.0300	7.47		
3	2.4600	-61.63		

No.		∆Time(ms)	ΔLevel(dB)
1	mk3-mk1	1.67	-6.97

Page 65 Rev.00



<u>DH 5</u>

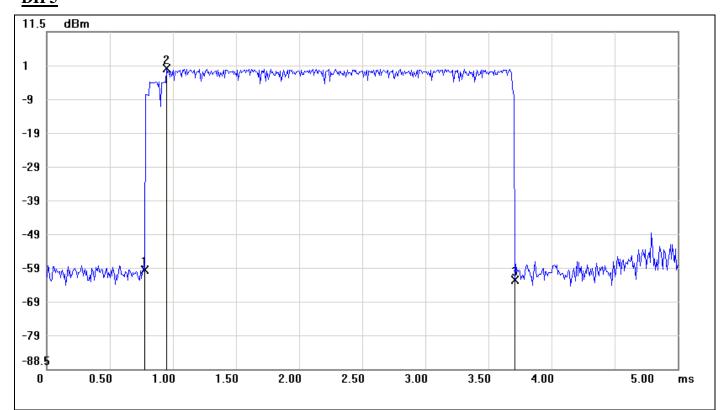

No.	Sweep time(ms)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	0.7750	-59.28		
2	0.9500	0.65		
3	3.7083	-62.10		

No.		∆Time(ms)	ΔLevel(dB)
1	mk3-mk1	2.9333	-2.82

Page 66 Rev.00


7.8 SPURIOUS EMISSIONS

7.8.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

Page 67 Rev.00

Test Plot

For GFSK / DH5


CH Low

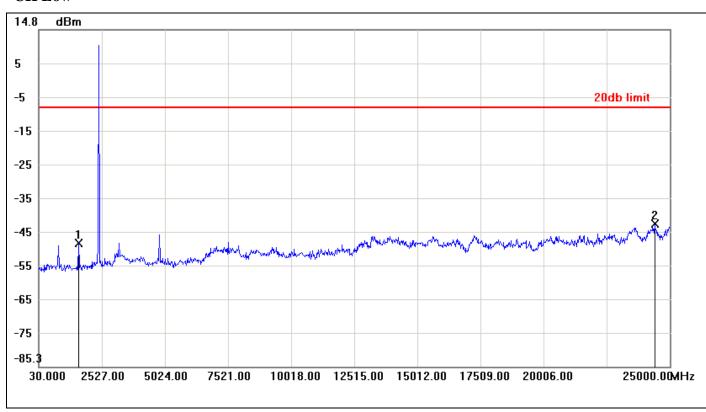

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1603.1100	-48.71	-8.46	-40.25
2	24400.7200	-42.96	-8.46	-34.50

Page 68 Rev.00

CH Mid

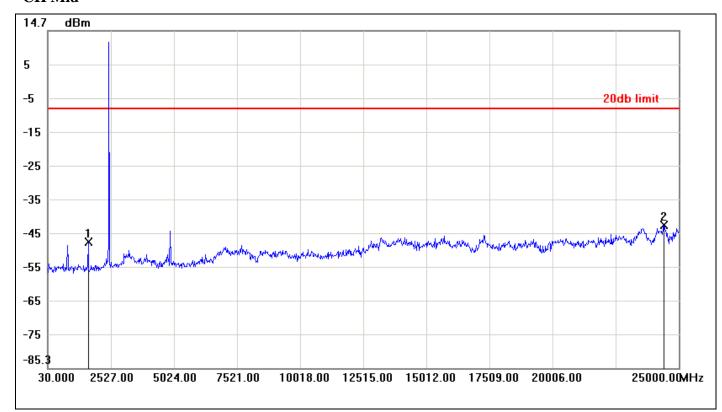


No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1628.0800	-48.01	-8.55	-39.46
2	24400.7200	-42.83	-8.55	-34.28

Page 69 Rev.00

Report No.: T150417W02-RP3

CH High

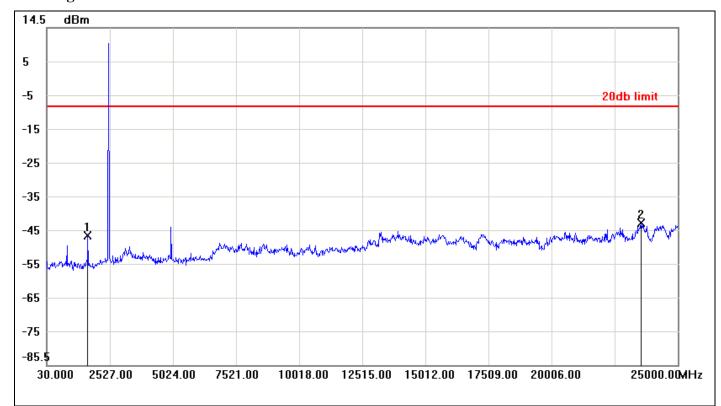

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	1653.0500	-47.03	-8.77	-38.26
2	23551.7400	-43.34	-8.77	-34.57

Page 70 Rev.00



For 8DPSK / DH5


CH Low



No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	804.0700	-58.54	-15.04	-43.50
2	24950.0600	-53.55	-15.04	-38.51

Page 71 Rev.00


CH Mid

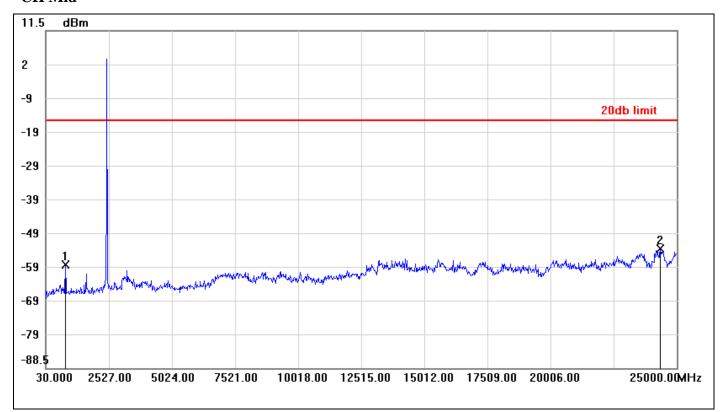

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	804.0700	-57.94	-15.12	-42.82
2	24350.7800	-53.09	-15.12	-37.97

Page 72 Rev.00

CH High

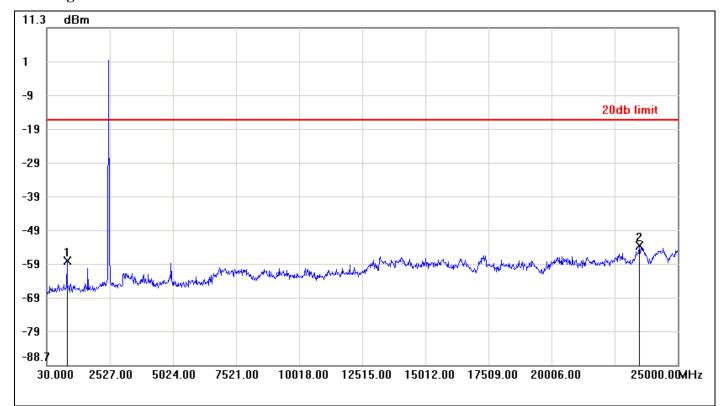

No.	Frequency(MHz)	Result(dBm)	Limit(dBm)	Margin(dBm)
1	829.0400	-57.76	-15.95	-41.81
2	23476.8300	-53.40	-15.95	-37.45

Page 73 Rev.00

7.8.2 Radiated Emissions

LIMIT

All spurious emissions shall comply with the limits of §15.209(a) and RSS-Gen Table 2 & Table 5.

RSS-Gen Table 2 & Table 5: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz (Note)

Frequency	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)					
(MHz)	Transmitters	Receivers				
30-88	100 (3 nW)	100 (3 nW)				
88-216	150 (6.8 nW)	150 (6.8 nW)				
216-960	200 (12 nW)	200 (12 nW)				
Above 960	500 (75 nW)	500 (75 nW)				

Note: *Measurements for compliance with limits in the above table may be performed at distances other than 3 metres, in accordance with Section 7.2.7.

Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)


Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/377F (F in kHz)	3000
490-1,705 kHz	24,000/F (F in kHz)	24,000/377F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.


Page 74 Rev.00

Test Configuration

9kHz ~ 30MHz

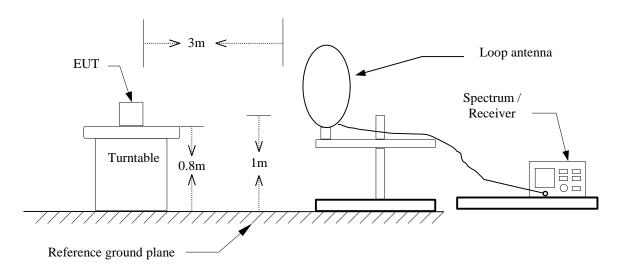


30MHz ~ 1GHz

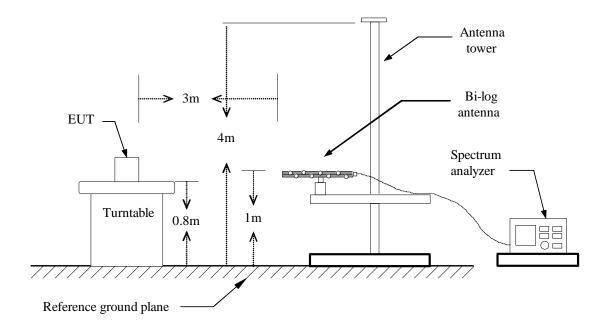

Page 75 Rev.00

Above 1 GHz

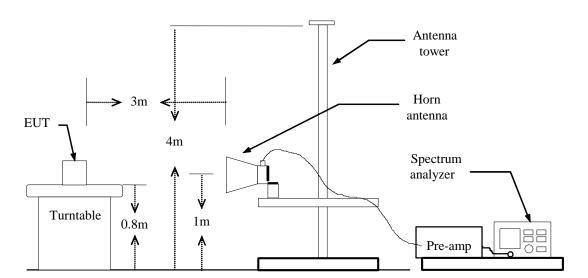

Page 76 Rev.00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 1.5m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=300Hz / Sweep=AUTO
- (C) if duty cycle \geq 98%, VBW=10Hz. if duty cycle<98% VBW=1/T. BT<98%, VBW= 360Hz EDR<98%, VBW=360Hz
- 7. Repeat above procedures until the measurements for all frequencies are complete.

Page 77 Rev.00

Below 1 GHz

Operation Mode: Normal Link **Test Date:** April 29, 2015

Temperature: 27°C **Tested by:** Andy Shi

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
57.1600	54.62	-23.64	30.98	40.00	-9.02	Peak	V
84.3200	54.50	-23.20	31.30	40.00	-8.70	Peak	V
123.1200	46.91	-17.42	29.49	43.50	-14.01	Peak	V
246.3100	40.11	-18.48	21.63	46.00	-24.37	Peak	V
448.0700	40.07	-12.71	27.36	46.00	-18.64	Peak	V
625.5800	35.09	-9.90	25.19	46.00	-20.81	Peak	V
57.1600	53.91	-23.64	30.27	40.00	-9.73	Peak	Н
95.9600	53.34	-21.90	31.44	43.50	-12.06	Peak	Н
150.2800	50.12	-17.99	32.13	43.50	-11.37	Peak	Н
342.3400	47.91	-15.38	32.53	46.00	-13.47	Peak	Н
448.0700	39.25	-12.71	26.54	46.00	-19.46	Peak	Н
757.5000	39.27	-7.80	31.47	46.00	-14.53	Peak	Н

Remark:

- 1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. $Margin(dB) = Remark\ result\ (dBuV/m) Quasi-peak\ limit\ (dBuV/m)$.

Page 78 Rev.00

Above 1 GHz

For PCB Antenna

Operation Mode: TX / GFSK / DH5 / CH Low **Test Date:** May 8, 2015

Temperature: 27°C **Tested by:** Owen Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2290.000	51.85	-5.32	46.53	74.00	-27.47	peak	V
4791.667	48.57	2.67	51.24	74.00	-22.76	peak	V
N/A							
2273.333	51.88	-5.35	46.53	74.00	-27.47	peak	Н
4800.000	51.73	2.68	54.41	74.00	-19.59	peak	Н
4800.000	41.38	2.68	44.06	54.00	-9.94	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 79 Rev.00

Operation Mode: TX / GFSK / DH5 / CH Mid **Test Date:** May 8, 2015

Temperature: 27°C **Tested by:** Owen Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2333.333	51.55	-5.15	46.40	74.00	-27.60	peak	V
4883.333	50.57	2.87	53.44	74.00	-20.56	peak	V
4883.333	48.72	2.87	51.59	54.00	-2.41	peak	V
N/A							
2310.000	52.23	-5.25	46.98	74.00	-27.02	peak	Н
4883.333	52.36	2.87	55.23	74.00	-18.77	peak	Н
4883.333	50.79	2.87	53.66	54.00	-0.34	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 80 Rev.00

Operation Mode: TX / GFSK / DH5 / CH High **Test Date:** May 8, 2015

Temperature: 27 °C **Tested by:** Owen Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2263.333	52.43	-5.37	47.06	74.00	-26.94	peak	V
4958.333	52.49	3.04	55.53	74.00	-18.47	peak	V
4958.333	50.72	3.04	53.76	54.00	-0.24	peak	V
N/A							
		•			•	•	
2356.667	52.08	-5.04	47.04	74.00	-26.96	peak	Н
4958.333	51.33	3.04	54.37	74.00	-19.63	peak	Н
4958.333	50.52	3.04	53.56	54.00	-0.44	peak	Н
N/A							

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Operation Mode: TX / 8DPSK / DH5 / CH Low **Test Date:** May 8, 2015

Temperature: 27 °C **Tested by:** Owen Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2283.333	52.50	-5.33	47.17	74.00	-26.83	peak	V
4800.000	48.33	2.68	51.01	74.00	-22.99	peak	V
N/A							
		<u> </u>				<u> </u>	
2316.667	51.13	-5.22	45.91	74.00	-28.09	peak	Н
4808.333	47.09	2.70	49.79	74.00	-24.21	peak	Н
N/A							

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Operation Mode: TX / 8DPSK / DH5 / CH Mid Test Date: May 8, 2015

Temperature: 27°C **Tested by:** Owen Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2346.667	51.78	-5.09	46.69	74.00	-27.31	peak	V
4883.333	46.69	2.87	49.56	74.00	-24.44	peak	V
N/A							
2236.667	51.89	-5.42	46.47	74.00	-27.53	peak	Н
4883.333	44.78	2.87	47.65	74.00	-26.35	peak	Н
N/A							

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Operation Mode: TX / 8DPSK / DH5 / CH High **Test Date:** May 8, 2015

Temperature: 27 °C **Tested by:** Owen Wu

Humidity: 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2340.000	51.72	-5.12	46.60	74.00	-27.40	peak	V
4958.333	46.96	3.04	50.00	74.00	-24.00	peak	V
N/A							
2180.000	52.06	-5.53	46.53	74.00	-27.47	peak	Н
4958.333	44.18	3.04	47.22	74.00	-26.78	peak	Н
N/A							

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

For Dipole Antenna

Operation Mode: TX / GFSK / DH5 / CH Low **Test Date:** May 27, 2015

Temperature: 27 °C **Tested by:** Dennis Li **Humidity:** 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1764.000	50.95	-3.90	47.05	74.00	-26.95	peak	V
4290.000	40.48	6.34	46.82	74.00	-27.18	peak	V
5365.000	40.12	9.89	50.01	74.00	-23.99	peak	V
N/A							
1750.000	50.68	-3.99	46.69	74.00	-27.31	peak	Н
4605.000	40.11	7.53	47.64	74.00	-26.36	peak	Н
5300.000	40.21	9.37	49.58	74.00	-24.42	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 85 Rev.00



Operation Mode: TX / GFSK / DH5 / CH Mid **Test Date:** May 27, 2015

Temperature:27 °CTested by:Dennis LiHumidity:53 % RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1836.000	49.86	-3.47	46.39	74.00	-27.61	peak	V
4520.000	40.29	7.30	47.59	74.00	-26.41	peak	V
5700.000	38.07	10.80	48.87	74.00	-25.13	peak	V
N/A							
		•					
1594.000	51.09	-4.94	46.15	74.00	-27.85	peak	Н
4435.000	40.21	6.97	47.18	74.00	-26.82	peak	Н
5610.000	39.53	10.32	49.85	74.00	-24.15	peak	Н
N/A							

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).



Operation Mode: TX / GFSK / DH5 / CH High **Test Date:** May 27, 2015

Temperature:27 °CTested by:Dennis LiHumidity:53 % RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1676.000	50.14	-4.44	45.70	74.00	-28.30	peak	V
4270.000	40.76	6.25	47.01	74.00	-26.99	peak	V
5340.000	40.30	9.68	49.98	74.00	-24.02	peak	V
N/A							
1594.000	51.11	-4.94	46.17	74.00	-27.83	peak	Н
4290.000	40.96	6.34	47.30	74.00	-26.70	peak	Н
5400.000	40.06	10.20	50.26	74.00	-23.74	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 87 Rev.00



Operation Mode: TX / 8DPSK / DH5 / CH Low **Test Date:** May 27, 2015

Temperature: 27°C **Tested by:** Dennis Li **Humidity:** 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1732.000	50.51	-4.10	46.41	74.00	-27.59	peak	V
4485.000	39.94	7.18	47.12	74.00	-26.88	peak	V
5360.000	40.20	9.85	50.05	74.00	-23.95	peak	V
N/A							
1728.000	49.79	-4.12	45.67	74.00	-28.33	peak	Н
4110.000	39.98	5.56	45.54	74.00	-28.46	peak	Н
6045.000	39.44	12.56	52.00	74.00	-22.00	peak	Н
N/A							

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).



Operation Mode: TX / 8DPSK / DH5 / CH Mid Test Date: May 27, 2015

Temperature: 27°C **Tested by:** Dennis Li **Humidity:** 53 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1580.000	50.69	-5.02	45.67	74.00	-28.33	peak	V
4635.000	40.45	7.61	48.06	74.00	-25.94	peak	V
5440.000	39.92	10.01	49.93	74.00	-24.07	peak	V
N/A							
		•					
1776.000	51.16	-3.83	47.33	74.00	-26.67	peak	Н
4165.000	39.91	5.80	45.71	74.00	-28.29	peak	Н
5315.000	40.08	9.49	49.57	74.00	-24.43	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 89 Rev.00



Operation Mode: TX / 8DPSK / DH5 / CH High **Test Date:** May 27, 2015

Temperature:27 °CTested by:Dennis LiHumidity:53 % RHPolarity:Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1712.000	50.37	-4.22	46.15	74.00	-27.85	peak	V
4550.000	40.99	7.38	48.37	74.00	-25.63	peak	V
6130.000	38.94	12.86	51.80	74.00	-22.20	peak	V
N/A							
				1	Ī		
1676.000	49.85	-4.44	45.41	74.00	-28.59	peak	Н
4560.000	40.37	7.41	47.78	74.00	-26.22	peak	Н
5585.000	39.62	10.18	49.80	74.00	-24.20	peak	Н
N/A							

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 90 Rev.00



FCC ID: WS2-WG7833B0

7.9 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.4, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dBμV)				
(IVITIZ)	Quasi-peak	Average			
0.15 to 0.50	66 to 56*	56 to 46*			
0.50 to 5	56	46			
5 to 30	60	50			

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Not applicable, because EUT does not connect to AC Main Source direct.

Page 91 Rev.00