



TEST REPORT

No.I18N00717-SAR

For

Doro AB

LTE Phone

Model Name: DSB-0090

With

Hardware Version: 1XX1

Software Version:

FRANK01A-S10A_DSB0090_600_USERDEBUG_180503

FCC ID: WS5DSB0090

Issued Date: 2018-06-08

Designation Number: CN1210

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology


Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001


Email: yewu@caict.ac.cn, website: www.csxit.com



Picture 1: Constituents of the sample

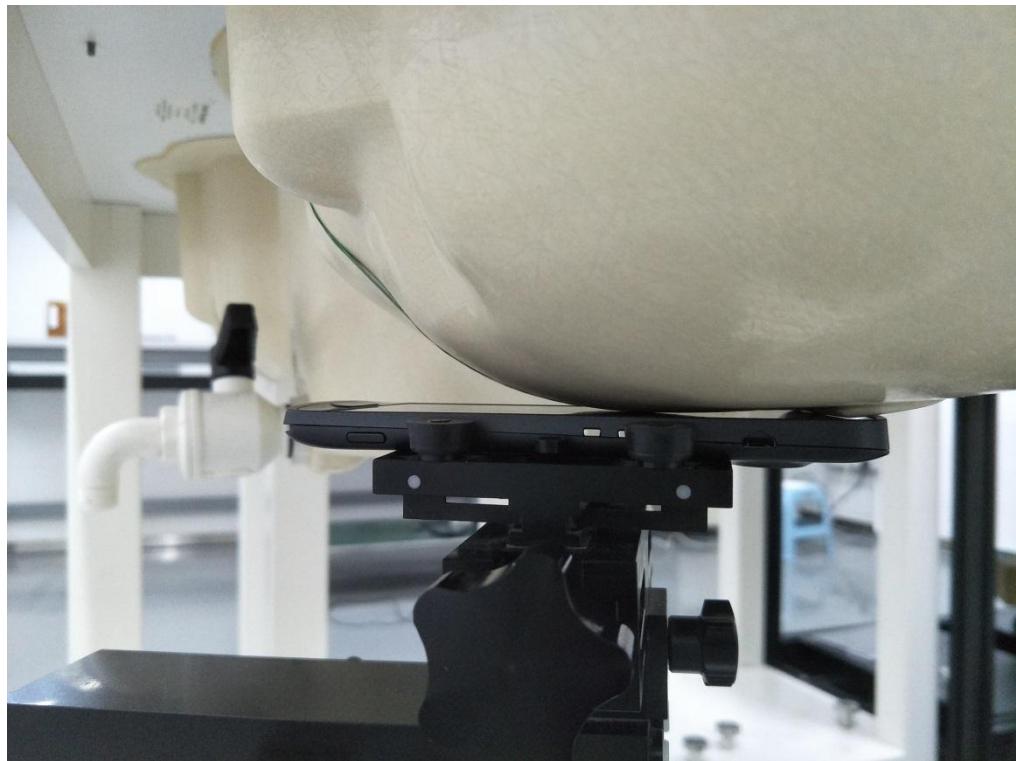


Picture 2: Left Hand Touch Cheek Position

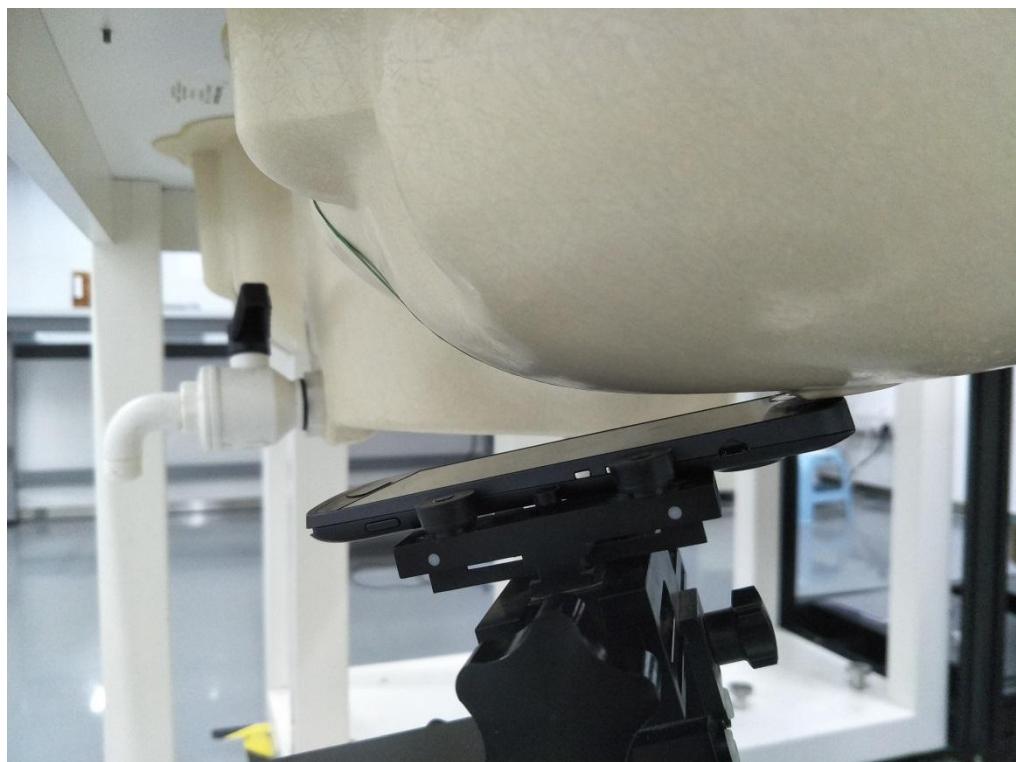

Picture 3: Left Hand Tilt 15° Position




Picture 4: Right Hand Touch Cheek Position

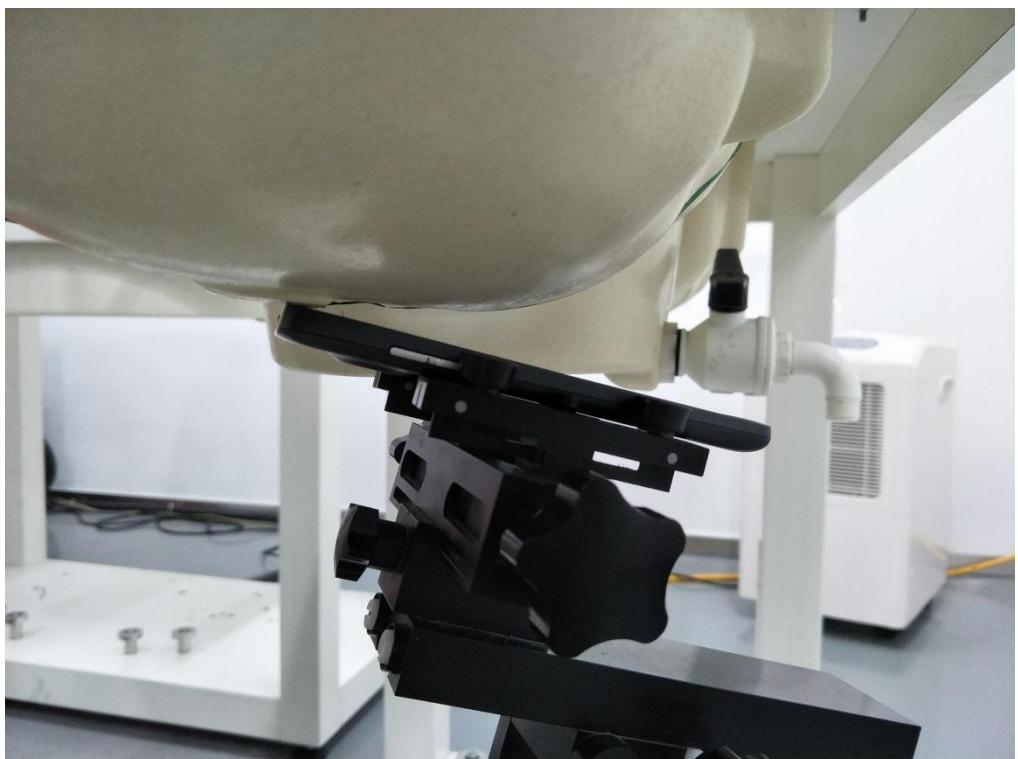


Picture 5: Right Hand Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom.

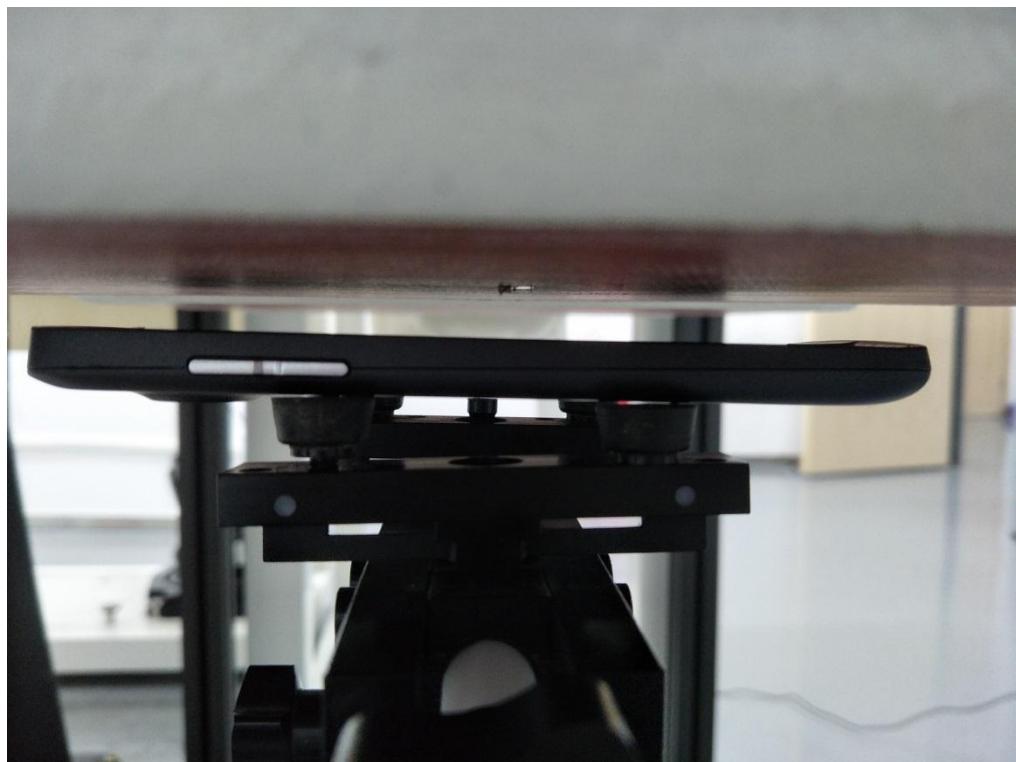

Picture 6: Front side

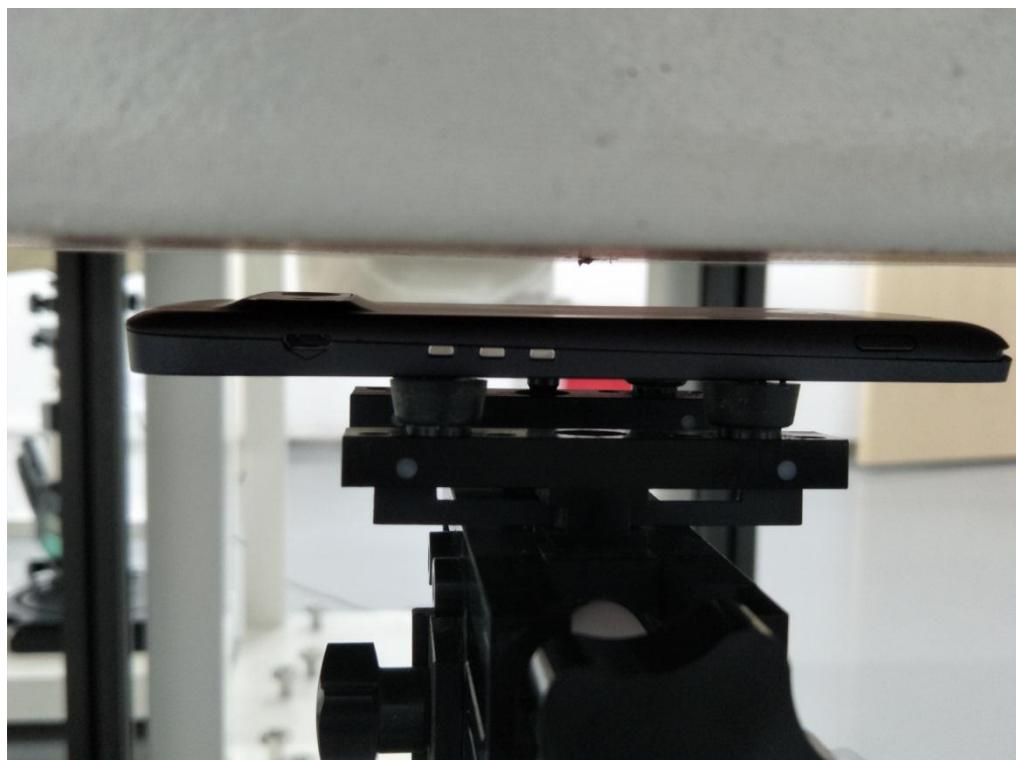

Picture 7: Rear side




Picture 8: Left side



Picture 9: Right side



Picture 10: Top side

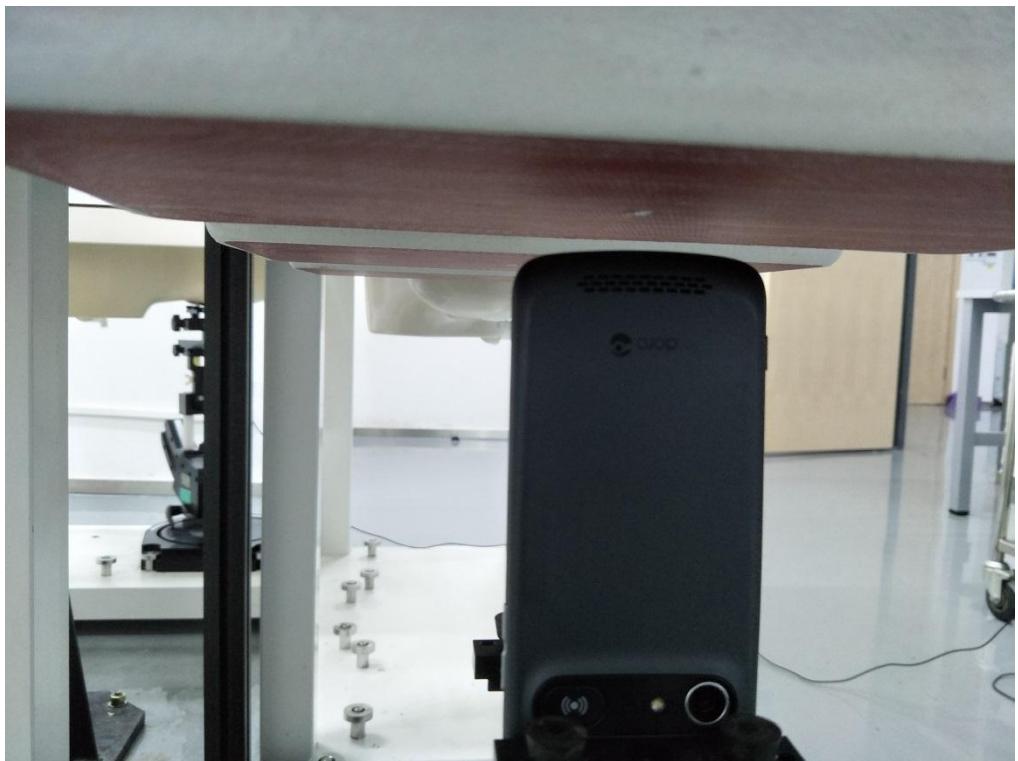

Picture 11: Bottom side



Picture 12: Bottom side with headset