

SMD CERAMIC ANTENNA

Data Sheet


CS-2450-31-L

For 2400-2480MHz

3.2x1.6mm [EIA1206]

Feature


- Light weight, compact
- Wide bandwidth, low cost
- Built-in antenna with high gain

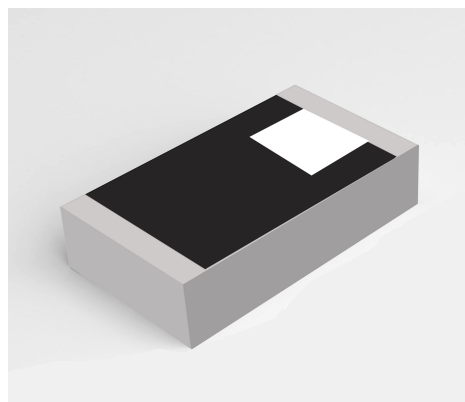

Application

- Bluetooth
- IEEE802.11g/b
- Zigbee systems
- etc...

Shapes And Dimensions Dimensions in mm

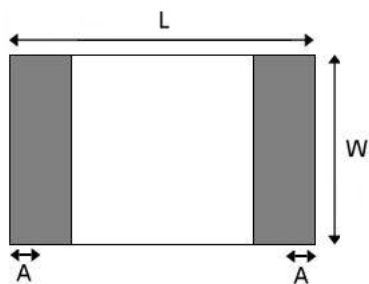

L	W	A	H
3.10±0.10	1.55±0.10	0.40±0.20	0.55±0.1




Electrical Characteristics per line(TA=25°C)


Parameter	Specification	Units
Frequency Band	2400~2480	MHz
Polarization	Line	
*Peak Gain	2.6	dBi
* Efficiency	72.30	%
Impedance	50	Ω

■ Part Numbering System


CS - 2450 - 31 - L
 Material Frequency Size Type

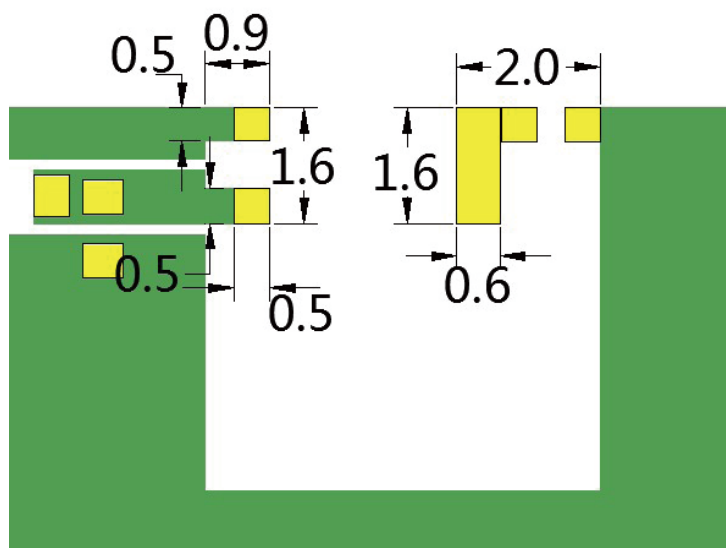


Evaluation Board

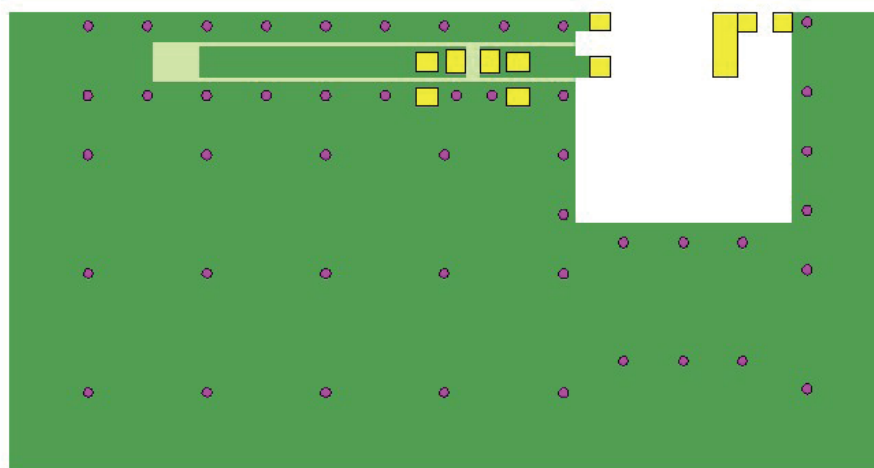

- ANT
- PAD
- TOP
- BOTTOM
- VIA

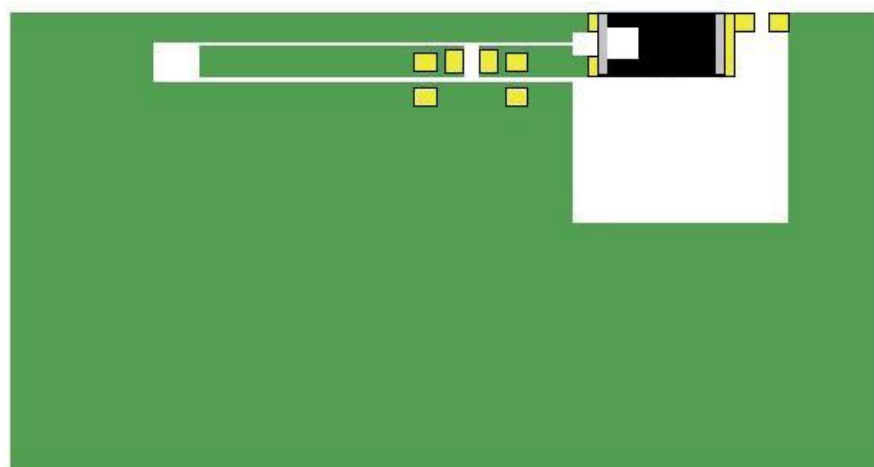

- ANT
- PAD
- TOP
- BOTTOM

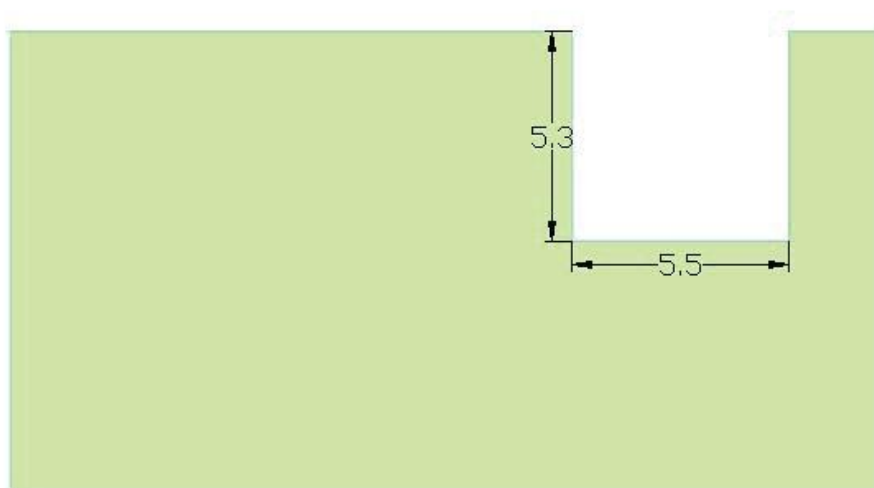


■ Radiation Patterns


□ 2.4GHz WLAN BAND

◎ 3D Gain Pattern (2400 MHz)


Units : dBi

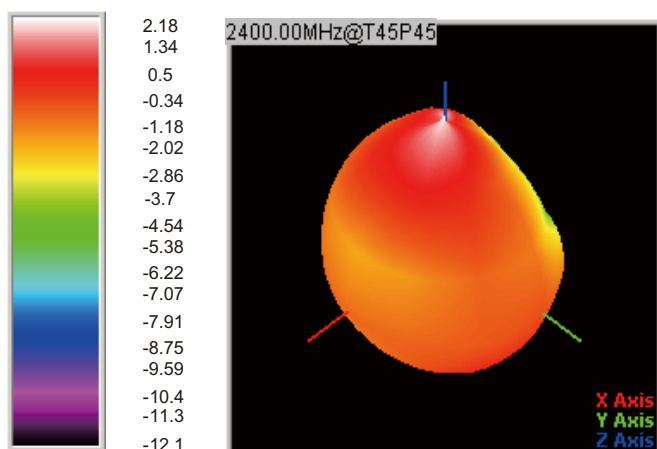

◎ 3D Gain Pattern (2440 MHz)


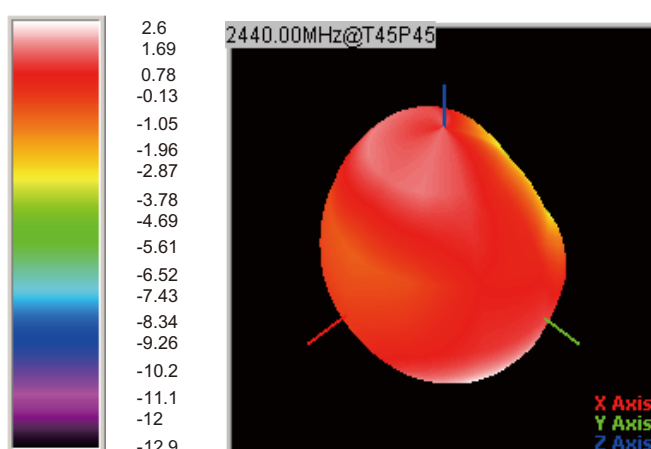


◎ 3D Gain Pattern (2480 MHz)

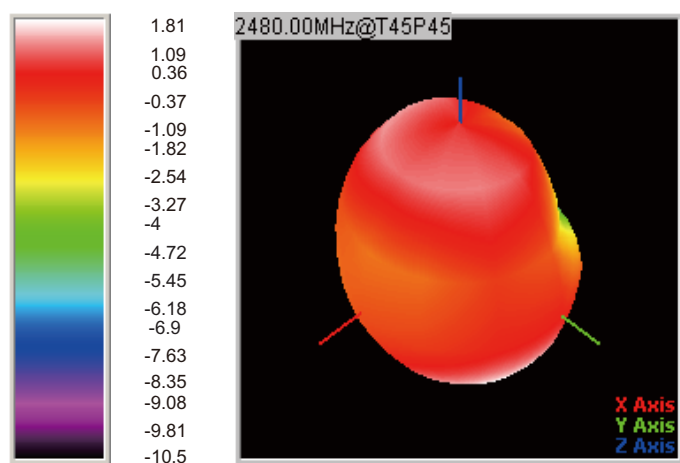


■ Frequency Characteristics

□ EFFICIENCY AND VSWR

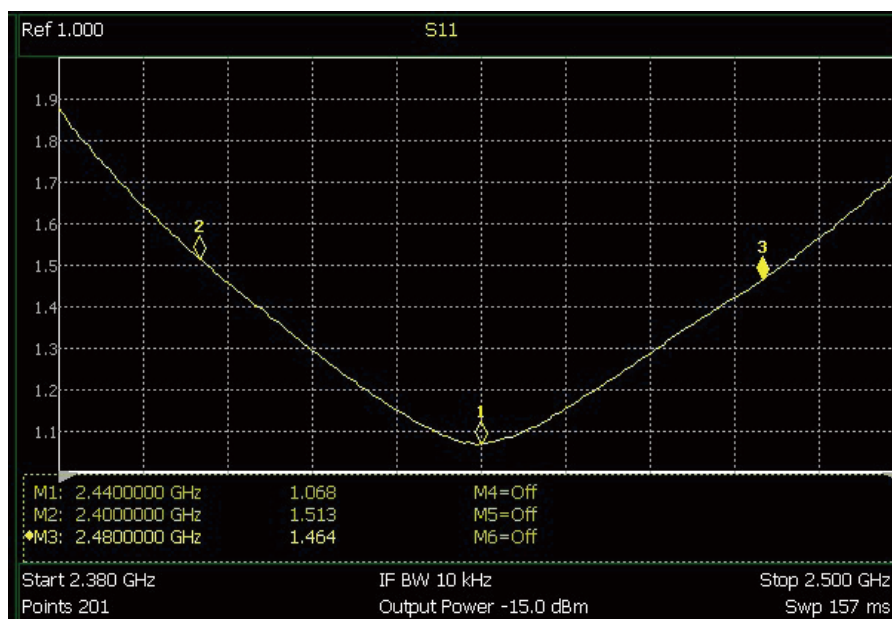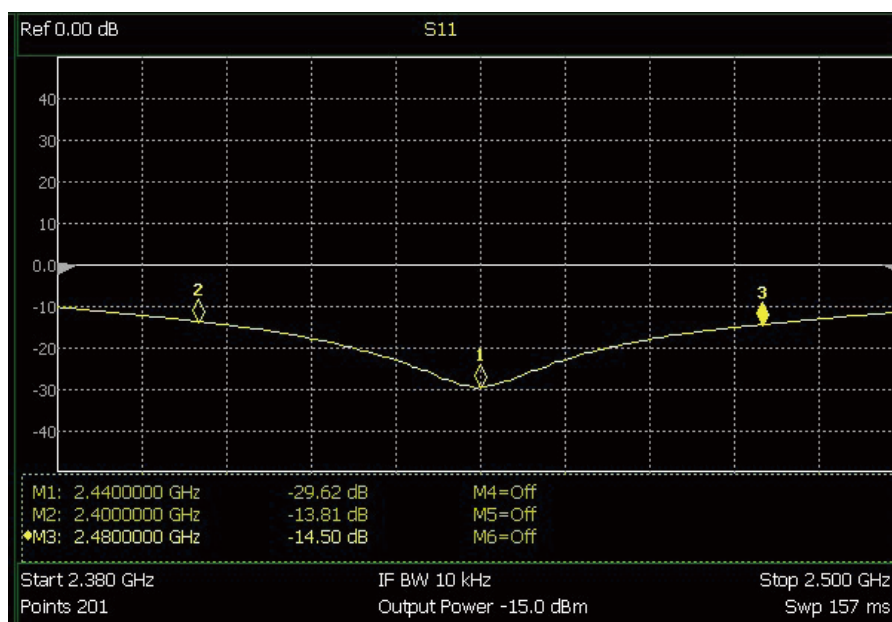


■ RECOMMENDED REFLOW PROFILE

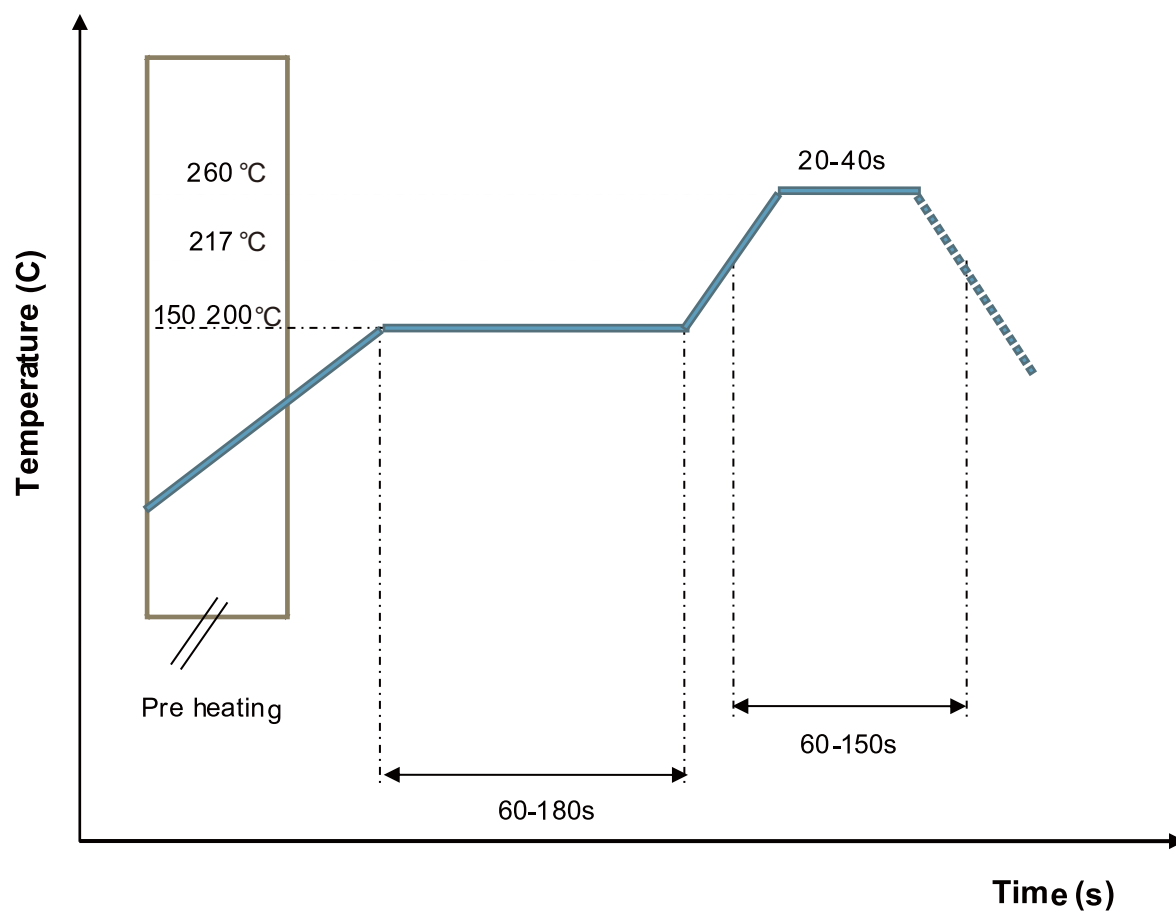


■ Packaging Style

□ REEL DIMENSIONS

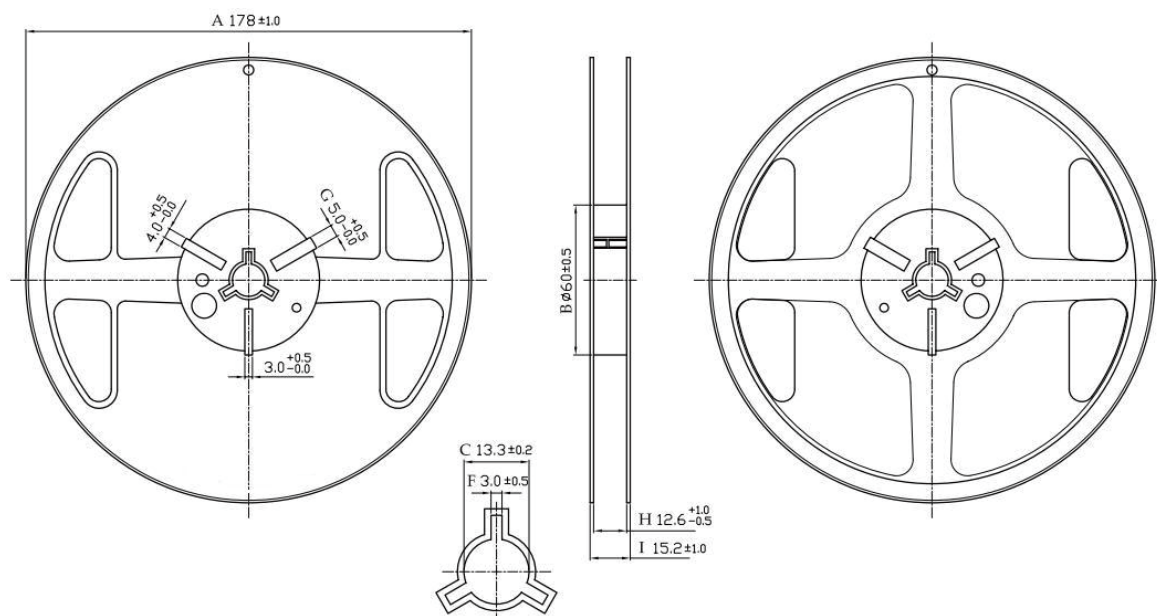

□ TAPE DIMENSIONS

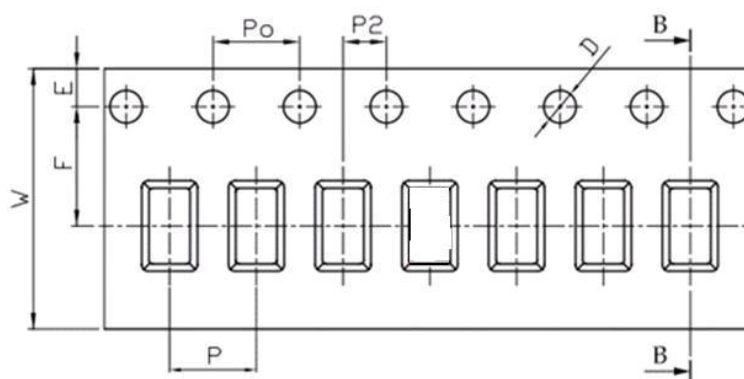

Feature	Specifications	Tolerances
W	8.00	± 0.30
P	4.00	± 0.10
E	1.75	± 0.10
F	3.50	± 0.10
P2	2.00	± 0.10
D	1.50	$+0.10$ -0.00
P ₀	4.00	± 0.10
10P ₀	40.00	± 0.20

Quantity: 5000 pieces per 7 reel