Test Report No **081208.2** Report date: 16 February 2009

TEST REPORT

MGL Avionics V10 VHF Airband Transceiver

tested for compliance with the

Code of Federal Regulations (CFR) 47

Part 87 – Aviation Services

Part 15 – Radio Frequency Devices

for

MGL Avionics cc

This Test Report is issued with the authority of:

Andrew Cutler - General Manager

andrew Cutte



E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Table of Contents

1.	CLIENT INFORMATION	3
2.	DESCRIPTION OF TEST SAMPLE	3
3.	SUMMARY OF TEST RESULTS	4
4.	TEST SAMPLE DESCRIPTION	5
5.	TEST CONDITIONS	6
6.	ATTESTATION	7
7.	TEST RESULTS	8
8.	TEST EQUIPMENT USED	21
9.	ACCREDITATIONS	21
10.	PHOTOGRAPH (S)	22

Test Report No **081208.2** Report date: 16 February 2009

1. CLIENT INFORMATION

Company Name MGL Avionics cc

Address 5 Fuchsia Street

Heldervue

Somerset West 7130

Country South Africa

Contact Mr Rainer Lamers

2. DESCRIPTION OF TEST SAMPLE

Brand Name MGL Avionics

Model Tested V10

Product VHF Aircraft Transceiver

Manufacturer MGL Avionics

Country of Origin South Africa

Serial Number V10 081101061, V10 081101064

FCC ID WSJV10

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

3. COMPLIANCE STATEMENT & RESULT SUMMARY

The MGL Avionics V10 VHF Airband Transceiver <u>complies with</u> 47 CFR Part 87 and Part 15 when tested in accordance with 47 CFR Part 2, Part 15 and Part 87 and when the test methods as described in ANSI C63.4 – 2003 were applied.

A summary of the applicable clauses is detailed below

CLAUSE	TEST PERFORMED	RESULT
2.1041 2.1057	Measurement procedures Frequency spectrum to be investigated	Noted Noted
87.131 2.1046	Power and emissions RF power output	Complies Noted
87.133 2.1055	Frequency stability Frequency stability	Noted
87.135 2.202	Bandwidth of emission Bandwidths	Complies Noted
87.137	Types of emissions	Complies
87.139 2.1049 2.1051 2.1053	Emission limitations Occupied bandwidth Spurious emissions at antenna terminals Field strength of spurious radiation	Complies Noted Complies Complies
87.141 2.1047 2.1047(a) 2.1047(b)	Modulation requirements Modulation Characteristics Low pass filter response Modulation limiting characteristics	Complies Noted Complies Complies
15.111	Antenna conducted power measurement	Complies
1.1310	Radio frequency radiation exposure limits	Complies

Test Report No **081208.2** Report date: 16 February 2009

4. TEST SAMPLE DESCRIPTION

The sample tested has the following specifications:

Rated Transmitter Output Power

6.5 watts (38.1 dBm) at 13.8 Vdc 5.0 watts (37.0 dBm) at 12.0 Vdc 3.5 watts (35.4 dBm) at 10.0 Vdc

Transmitter frequency range

118.0000 - 136.9750 MHz

Receiver frequency range

108.0000 - 136.9750 MHz

Test frequency

127.0000 MHz

Channel Spacing

25.0 kHz

Is capable of tuning in steps of 1 MHz, 50 kHz or 25 kHz.

FCC Bands

Part 87: 118.0 – 137.0 MHz

Emission Designators / Modes of operation

6K0A3E

Power Supply

External supply between 10 – 28 Vdc supply. Typical operating voltage would be 13.8 Vdc

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

5. TEST CONDITIONS

Standard Temperature and Humidity

Temperature: $+25^{\circ}\text{C} \pm 4^{\circ}$ maintained. Relative Humidity: $60\% \pm 10\%$ observed.

Standard Test Power Source

Standard Test Voltage: 13.8 Vdc.

Extreme Temperature

High Temperature: + 50°C maintained. Low Temperature: - 20 °C maintained.

Extreme Test Voltages

High Voltage: 28.0 Vdc Low Voltage: 10.0 Vdc

Testing carried out at the extremes of voltages as stated by customer

Page 6 of 24

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

6. ATTESTATION

Testing of the **MGL Avionics V10 VHF Aircraft Transceiver** complies with the Code of Federal Regulations (CFR) 47 Part 87 – Aviation Services and (CFR) 47 Part 15 – Radio Frequency Devices.

This report describes the tests and measurements performed for the purpose of determining compliance with the specification with the following conditions:

The client selected the test sample.

The report relates only to the sample tested.

This report does not contain corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

In addition this equipment has been tested in accordance with the requirements contained in the appropriate Commission regulations.

To the best of my knowledge, these tests were performed using measurement procedures that are consistent with industry or Commission standards and demonstrate that the equipment complies with the appropriate standards.

I further certify that the necessary measurements were made by EMC Technologies NZ Ltd, 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand.

Andrew Cutler General Manager

EMC Technologies NZ Ltd

du Cathe

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

7. TEST RESULTS

Power and emissions

Measurements were carried out at the RF output terminals of the transmitter using a 30 dB power attenuator and a 50 ohm dummy load.

Measurements were carried out when the transmitter was not being modulated.

Frequency	Voltage	Rated (dBm)	Measured (dBm)
127.000	10.0	35.4	35.4
127.000	13.8	38.1	37.7
127.000	28.0	38.1	37.7

The manufacturer's specification is 6.5 watts (38.1 dBm) with a tolerance of +/- 10% when powered at 13.8 Vdc.

This gives a range of 5.85 to 7.15 watts that equates to 37.6 dBm to 38.5 dBm.

Testing was carried out at maximum power output.

The transmitter is used for aircraft communications in the VHF band.

Limit:

Section 87.131 specifies a limit of 55 watts for A3E emissions in the VHF band.

Result: Complies

Measurement Uncertainty: ±0.5 dB

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Frequency Stability

Frequency stability measurements were between - 20 °C and + 50 °C in 10 °C increments.

At each temperature the transmitter was given a period of 30 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were made at 10 Vdc, 13.8 Vdc and 28.0 Vdc which are the stated voltage extremes.

Nominal Frequency: 127.000 MHz

Temp.	10.0 Vdc	13.8 Vdc	28.0 Vdc
+50°C	-266	-265	-262
+40°C	+362	+366	+370
+30°C	+150	+153	+155
+20°C	-392	-390	-395
+10°C	-378	-375	-378
0°C	-110	-112	-109
-10°C	+197	+196	+198
-20°C	+570	+577	+574

Limit:

Part 87.133 states that aircraft stations operating in the band 108 – 137 MHz after 1 January 1990 are required to have frequency tolerance of 20 ppm.

Testing was carried out on 127.000 MHz. 20 ppm = $20 \times 127 = 2540 \text{ Hz}$.

Result: Complies

Measurement Uncertainty: ±30 Hz

Page 9 of 24

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Bandwidth of emission

In accordance with Section 87.135 the following will apply.

- (a) Occupied bandwidth measurements have been made in accordance with Section 87.139(a)
- (b) As the transmitter operates in the 117.975 136.000 MHz band after January 1, 1974 using A3E, the authorised bandwidth will be 25.0 kHz. See the table in Section 87.137(a)
- (c) The necessary bandwidth has been calculated as follows:

The table in Section 87.137(a) defines an emission bandwidth of 6 kHz.

Using the formula in Section 2.202(g) where Bn = 2 * M

M = 3 kHz which is the maximum modulation frequency

Bn therefore equals 6 kHz.

Using the results obtained for the low pass filter it can be seen that this filter has a cut off point of 2.9 kHz

Bn therefore equals 5.8 kHz

Types of emissions

In accordance with Section 87.137(a):

- Class of emission is A3E
- Emission designator is 6K00A3E
- Transmitter operates above 50 MHz and operates in the band 117.975 136.000 MHz
- Transmitter is to be approved after January 1st, 1974
- Therefore the authorised bandwidth will be 25.0 kHz.

Test Report No **081208.2** Report date: 16 February 2009


Modulation Requirements

In accordance with Section 87.141 the following will apply:

The transmitter tested has been designed to transmit speech in the range 118.0 – 136.975 MHz using amplitude modulation (A3E) with 25.0 kHz channel steps.

(a) A family of curves showing the percentage of modulation versus the modulation input voltage that shows that when using A3E the modulation percentage does not exceed 100%.


Modulation limiting

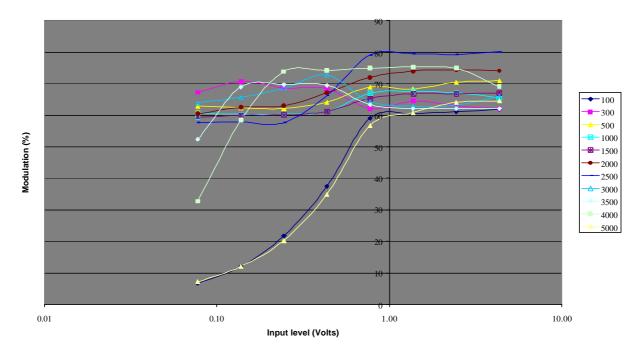

Test Report No **081208.2** Report date: 16 February 2009

(b) Frequency response of the audio frequency low pass filter between 100 Hz and 5000 Hz.

Audio input response

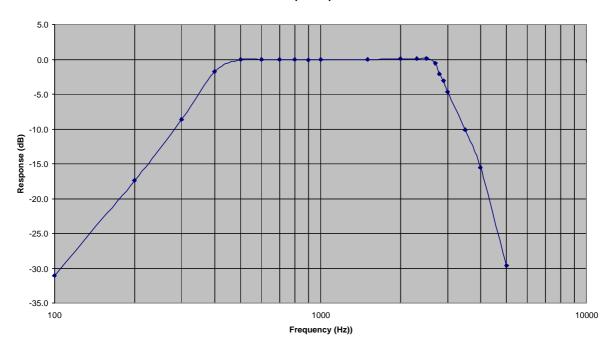

Limit:

Section 87.141(a) When A3E emission is used the modulation percentage must not exceed 100%.

Result: Complies

Measurement Uncertainty: $\pm 1\%$.

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Emission limitations

Section 87.139 (a) defines the emission mask for this type of transmitter.

Measurements have been made using a modulation frequency of 2500 Hz at a level 16 dB higher than that needed to provide 50% modulation.

This modulation frequency was the frequency of maximum response (worst case emission mask display).


Measurements have been made with an authorised bandwidth of 25 kHz applied.

The reference level for the following emission mask measurements has been determined using a resolution bandwidth of 30 kHz with the transmitter not being modulated.

Measurements were made with the spectrum analyser operating in peak hold centred on the allocated frequency.

Measurements were made when the transmitter was modulated by a single 2500 Hz tone and when the transmitter was modulated by a tone in the range of 100 Hz to 5000 Hz.


Modulated by a 2500 Hz tone

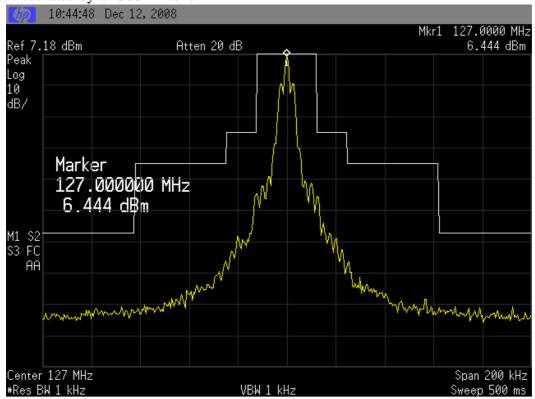

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Modulated by a range of tones from 100 to 5000 Hz

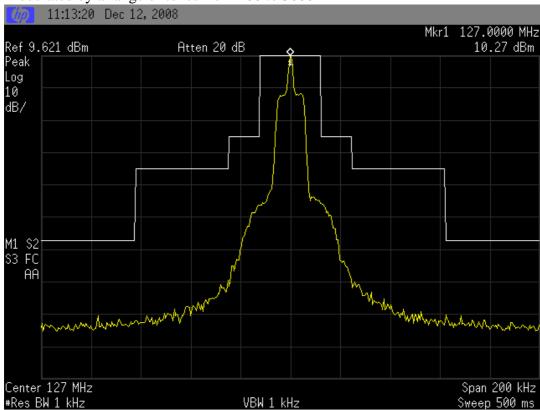

Result: Complies

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Transmitter spurious emissions at the antenna terminals

Frequency: 127.000 MHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
254.000	-31.8	-13.0
381.000	-43.0	-13.0
508.000	-53.3	-13.0
635.000	-36.9	-13.0
762.000	-28.0	-13.0
889.000	-49.7	-13.0
1016.000	-51.6	-13.0
1143.000	< -55.0	-13.0
1270.000	< -55.0	-13.0

Limit:

Part 87.139(a) states that any spurious emission must be attenuated by at least 43+10 log pY dB

The transmitter power is 6.5 watts. This gives an attenuation of 51.1 dB and a limit of -13.0 dBm.

Part 2.1051 states that emissions greater than 20 dB below the limit need not be specified

Part 2.1057 states that the spectrum should be investigated up to the 10th harmonic if the transmitter operates below 10 GHz.

Emissions less that -40 dBm have been reported for completeness.

No measurements were made above the 10th harmonic.

Measurements have been made with the transmitter transmitting continuously with no modulation when powered at 13.8 Vdc.

Result: Complies

Measurement Uncertainty: ±3.3 dB

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Field strength of the transmitter spurious emissions

Frequency: 127.00 00 MHz

Transmit Mode – Spurious emissions including harmonics

Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Polarity	Margin (dB)
254.000	43.0	-54.4	-20.0	Vertical	34.4
254.000	56.2	-41.2	-20.0	Horizontal	21.2
381.000	38.9	-58.5	-20.0	Vertical	38.5
381.000	46.0	-51.4	-20.0	Horizontal	31.4
508.000	46.7	-50.7	-20.0	Vertical	30.7
508.000	49.6	-47.8	-20.0	Horizontal	27.8
635.000	58.4	-39.0	-20.0	Vertical	19.0
635.000	61.5	-36.0	-20.0	Horizontal	16.0
762.000	59.1	-38.3	-20.0	Vertical	18.3
762.000	69.3	-28.1	-20.0	Horizontal	8.1
889.000	45.9	-51.5	-20.0	Vertical	31.5
889.000	51.7	-45.7	-20.0	Horizontal	25.7
1016.000	48.9	-48.5	-20.0	Vertical	28.5
1016.000	56.2	-41.2	-20.0	Horizontal	21.2
1143.000	48.2	-49.2	-20.0	Vertical	29.2
1143.000	55.1	-42.3	-20.0	Horizontal	22.3
1270.000	52.5	-44.9	-20.0	Vertical	24.9
1270.000	57.1	-40.3	-20.0	Horizontal	20.3

Test Report No **081208.2** Report date: 16 February 2009

Standby Mode (Not transmitting) – Spurious emissions observed

Frequency	Level	Power	Limit	Polarity	Margin
(MHz)	(dBuV/m)	(dBm)	(dBm)		(dB)
104.000	39.0	-58.4	-20.0	Horizontal	38.4
117.000	26.3	-71.0	-20.0	Horizontal	51.0
130.000	29.2	-68.2	-20.0	Vertical	48.2
143.000	30.2	-67.2	-20.0	Vertical	47.2
156.000	35.1	-62.3	-20.0	Horizontal	42.3
169.000	36.1	-61.3	-20.0	Horizontal	41.3
172.000	55.1	-42.3	-20.0	Horizontal	22.3
182.000	36.4	-36.0	-20.0	Horizontal	16.0
195.000	40.8	-56.6	-20.0	Horizontal	36.6
208.000	38.3	-59.1	-20.0	Horizontal	39.1
221.000	42.2	-55.2	-20.0	Horizontal	35.2
234.000	42.0	-55.4	-20.0	Horizontal	35.4
247.000	37.7	-59.7	-20.0	Horizontal	39.7
260.000	34.5	-62.9	-20.0	Horizontal	42.9
286.000	32.9	-64.5	-20.0	Horizontal	44.5
299.000	31.2	-66.2	-20.0	Horizontal	46.2
312.000	35.0	-62.4	-20.0	Horizontal	42.4
344.000	46.5	-50.9	-20.0	Horizontal	30.9
516.000	48.9	-48.5	-20.0	Horizontal	28.5
688.000	38.2	-59.2	-20.0	Horizontal	39.2
860.000	56.2	-41.2	-20.0	Horizontal	21.2
1204.000	48.2	-49.2	-20.0	Horizontal	29.2

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated in January, 2006.

The transmitter was tested while transmitting continuously while attached to a dummy load when powered at 13.8 Vdc.

The power level of each emission has been determined by replacing the transmitter with a dipole antenna that was connected to a signal generator.

The signal generator output level was then increased until the same field strength level was observed at each emission frequency.

The level recorded is the signal generator output level in dBm less any gains / losses due to the coax cable and the dipole antenna.

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Limit:

All spurious emissions are to be attenuated by at least $50 + 10 \log (P)$.

The rated power of 5.5 watts gives a limit of -20 dBm.

No measurements were made above the 10th harmonic.

Result: Complies with an 8.1 dB margin at 762 MHz (Horizontal) when transmitting on 127 MHz.

Measurement Uncertainty: ±4.1 dB

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Receiver Spurious emissions at antenna terminals

Receive frequency: 127.000 MHz

Intermediate frequencies: 45.0 MHz and 455 kHz

Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
172.000	-61.2	-57.0
344.000	-80.7	-57.0
516.000	-71.0	-57.0
688.000	-85.0	-57.0
860.000	-66.0	-57.0
1032.000	-84.0	-57.0
1204.000	-76.0	-57.0
1548.000	-87.0	-57.0

Testing was carried out at the antenna terminals in accordance with CFR 47 Part 15, section 15.111 using a spectrum analyser.

All other emissions observed less than -90.0 dBm.

Limit:

In accordance with CFR 47 Part 15, section 15.111 the power of any emission at the antenna terminal should not exceed 2 nW.

This gives a limit of -57.0 dBm.

Result: Complies.

Measurement Uncertainty: ±3.3 dB

E-mail: aucklab@ihug.co.nz

Test Report No **081208.2** Report date: 16 February 2009

Radio Frequency Hazard Information

As per Section 1.1310 mobile transmitters are required to be operated in a manner that ensures that the public is not exposed to RF energy levels in accordance with OST/OET Bulletin Number 65.

A minimum safe distance between the user / general public and the device has been calculated below.

In accordance with Section 1.1310 the Maximum Permissible Exposure (MPE) power density limit for the General Population / Uncontrolled Exposure of 0.2 mW/m² or 27.5 V/m has been applied.

The minimum distance from the antenna at which the MPE is met is calculated from the equation relating field strength in V/m, transmit power in watts, transmit antenna gain and separation distance in metres:

The rate power of this transmitter is 6.5 watts which has been measured to be 5.9 watts.

In a typically mobile installation this transceiver would be used with a whip \(^1\)/4 wave dipole type of antenna with a gain of 1.64.

```
d = \sqrt{(30 * P * G) / E}
= \sqrt{(30 * 6.5 * 1.64) / 27.5}
= 0.65 metres or 65 cm
```

The above calculations that this device will meet the MPE requirement for mobile devices providing a safe distance of at least 65 cm is provided.

A warning to this affect will need to be inserted in the equipment manual.

Result: Complies

Test Report No **081208.2** Report date: 16 February 2009

8. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial #	Asset
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709
VHF Balun	Schwarzbeck	VHA 9103	-	RFS 3603
Biconical Antenna	Schwarzbeck	BBA 9106	-	RFS 3612
Log Periodic Antenna	Schwarzbeck	VUSLP 9111	9111-228	3785
UHF Dipole Antenna	Schwarzbeck	UHA 9107	-	RFS 3604
Horn Antenna	Electrometrics	RGA-60	6234	E1494
Horn Antenna	EMCO	3115	9511-4629	E1526
Measurement Receiver	Rohde & Schwarz	ESCS 30	847124/020	E1595
Spectrum Analyzer	Hewlett Packard	E7405A	US39150142	3776
Frequency Counter	Hewlett Packard	HP 5342A	1916A01713	E1224
Power Supply	Hewlett Packard	6032A	2743A-02859	E1069
Thermal chamber	Contherm	M180F	86025	E1129
Thermometer	DSIR	RT200	035	E1049
Variac	General Radio	1592	-	3690

9. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd registration with the Federal Communications Commission as a listed facility, Registration Number: 90838, which was last updated in January 2006.

All testing has been carried out in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with 46 accreditation bodies in 34 economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

EMC Technologies (NZ) Ltd Test Report No 081208.2

Test Report No **081208.2**Report date: 16 February 2009

10. PHOTOGRAPH (S)






E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd Test Report No 081208.2

Report date: 16 February 2009



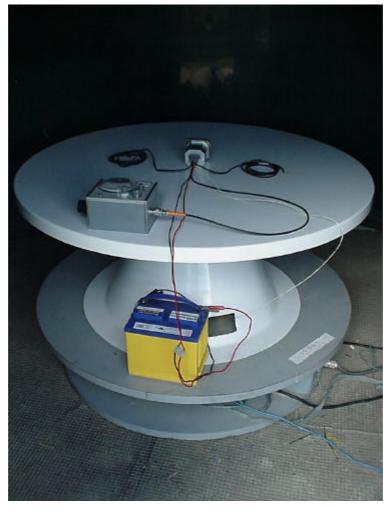

E-mail: aucklab@ihug.co.nz

EMC Technologies (NZ) Ltd Test Report No 081208.2

Report date: 16 February 2009



E-mail: aucklab@ihug.co.nz