# Changsha SunSky Electronic Design & Development Co.,Ltd.

Wireless Voting Keypad

Model: ARS\_M52

25 August, 2011 Report No.: 11070044 (This report supersedes NONE)



Modifications made to the product: None


This Test Report is Issued Under the Authority of:

Peter Cai
Peter Cai
Spring Zhou
Test Engineer
Technical Manager

This test report may be reproduced in full only.

Test result presented in this test report is applicable to the representative sample only.

# RF Test Report





 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 2 of 50

 www.siemic.com.

# **Laboratory Introduction**

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to <u>testing</u> and <u>certification</u>, SIEMIC provides initial design reviews and <u>compliance</u> <u>management</u> through out a project. Our extensive experience with <u>China</u>, <u>Asia Pacific</u>, <u>North America</u>, <u>European</u>, <u>and international</u> compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the <u>global markets</u>.

**Accreditations for Conformity Assessment** 

ci caitations for	acultations for comorning Assessment							
Country/Region	Accreditation Body	Scope						
USA	FCC, A2LA	EMC , RF/Wireless , Telecom						
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom						
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom , Safety						
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom						
Australia	NATA, NIST	EMC, RF, Telecom , Safety						
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety						
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom						
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom						
Europe	A2LA, NIST	EMC, RF, Telecom , Safety						

# **Accreditations for Product Certifications**

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive



Serial#: 11070044 Issue Date: 25 August, 2011 Page: 3 of 50 www.siemic.com.c

This page has been left blank intentionally.

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 4 of 50 www.siemic.com.

# **CONTENTS**

1	EXECUTIVE SUMMARY & EUT INFORMATION	5
	TECHNICAL DETAILS	
3	MODIFICATION	7
4	TEST SUMMARY	8
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
ANN	EX A. TEST INSTRUMENT & METHOD	33
ANN	EX B. EUT AND TEST SETUP PHOTOGRAPHS	37
ANN	EX C. TEST SETUP AND SUPPORTING EQUIPMENT	43
ANN	EX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST	47
ANN	EX E. SIEMIC ACCREDITATION CERTIFICATES	48



Serial#: 11070044 Issue Date: 25 August, 2011 Page: 5 of 50 www.siemic.com.c

# 1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the Changsha SunSky Electronic Design & Development Co.,Ltd. Wireless Voting Keypad, and model ARS\_M52 against the current Stipulated Standards. The Wireless Voting Keypad has demonstrated compliance with the FCC 15.247:2010.

# **EUT Information**

EUT: Wireless Voting Keypad

Description

Model No : ARS\_M52

Serial No : N/A Input Power : 3Vdc

Classification

Per Stipulated : DTS

**Test Standard** 



FCC ID:

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 6 of 50 www.siemic.com

WSVSUNVOTEKEYM5X

	2 TECHNICAL DETAILS
Purpose	Compliance testing of Wireless Voting Keypad with stipulated standard
Applicant / Client	Changsha SunSky Electronic Design&Development Co.,Ltd. Room1024, BuildingA, Biaozhi Business Center, No.198 Xiang Fu Road, Tianxin District, Changsha, China
Manufacturer	Changsha SunSky Electronic Design&Development Co.,Ltd. Room1024, BuildingA, Biaozhi Business Center, No.198 Xiang Fu Road, Tianxin District, Changsha, China
Laboratory performing the tests	SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email:info@siemic.com
Test report reference number	11070044
Date EUT received	8 August, 2011
Standard applied	FCC 15.247:2010
Dates of test (from – to)	8 August ~11 August, 2011
No of Units:	#1
Equipment Category:	DTS
Trade Name:	SunVote
Model :	ARS_M52
RF Operating Frequency (ies)	2404MHz – 2466MHz
Number of Channels :	32
Modulation :	MSK



Serial#: 11070044 Issue Date: 25 August, 2011 Page: 7 of 50 www.siemic.com.cn

# 3 MODIFICATION

NONE

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 8 of 50 www.siemic.com

# 4 TEST SUMMARY

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

Spread Spectrum System/Device

**Test Results Summary** 

Test Standard	Description	Pass / Fail
CFR 47 Part 15.247: 2010		
15.203	Antenna Requirement	Pass
15.205	Restricted Band of Operation	Pass
15.207(a)	Conducted Emissions Voltage	N/A
15.247(a)(1)	Channel Separation	N/A
15.247(a)(1)	Occupied Bandwidth	Pass
15.247(a)(2)	6dB Bandwidth	Pass
15.247(a)(1)	Number of Hopping Channels	N/A
15.247(a)(1)	Time of Occupancy	N/A
15.247(b)	Output Power	Pass
15.247(c)	Antenna Gain > 6 dBi	Pass
15.247(d)	Conducted Spurious Emissions	Pass
15.209; 15.247(d)	Radiated Spurious Emissions	Pass
15.247(e)	Power Spectral Density	Pass
15.247(f)	Hybrid System Requirement	N/A
15.247(g)	Hopping Capability	N/A
15.247(h)	Hopping Coordination Requirement	N/A
15.247(i)	RF Exposure requirement	Pass

ANSI C63.4: 2009

PS: All measurement uncertainties are not taken into consideration for all presented test result.

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 9 of 50

 www.siemic.com (

# 5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

# 5.1 Antenna Requirement

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The EUT antenna is PCB antenna. Antenna maximum gain is -3.4dBi.

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 10 of 50

 www.siemic.com.c

# **5.2** Conducted Emissions Voltage

#### Requirement:

	Conducted limit (dBµV)			
Frequency of emission (MHz)	Quasi-peak	Average		
0.15–0.5	66 to 56*	56 to 46*		
0.5–5	56	46		
5–30	60	50		

<sup>\*</sup>Decreases with the logarithm of the frequency.

#### **Procedures:**

- 1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
- 2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- 3. Conducted Emissions Measurement Uncertainty
  All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz 30MHz (Average & Quasi-peak) is ±3.5dB.
- 4. Environmental Conditions Temperature 25°C Relative Humidity 50% Atmospheric Pressure 1019mbar

5. Test date : N/A Tested By : Peter Cai

Note: Battery operated, not applicable.

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 11 of 50 | www.siemic.com.

# 5.3 6dB Occupied Bandwidth

1. <u>Conducted Measurement</u>

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions Temperature 25°C

Relative Humidity 50% Atmospheric Pressure 1019mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are

normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.

4. Test date: 10 August, 2011

Tested By: Peter Cai

Requirement(s): 47 CFR § 15.247(a)(1)


**Procedures:** The 6dB Bandwidths were measured conducted using a spectrum analyzer at low, mid, and hi channels. 6dB Bandwidth Limit: >500kHz.

**Test result: Pass** 


Channel	Channel Frequency (MHz)	6dB Occupied Bandwidth Limit (MHz)	6dB Channel Bandwidth (MHz)	
Low	2404	0.5	0.600	
Mid	2432	0.5	0.607	
High	2466	0.5	0.607	

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 12 of 50 | www.siemic.com.

# Refer to the attached plots.

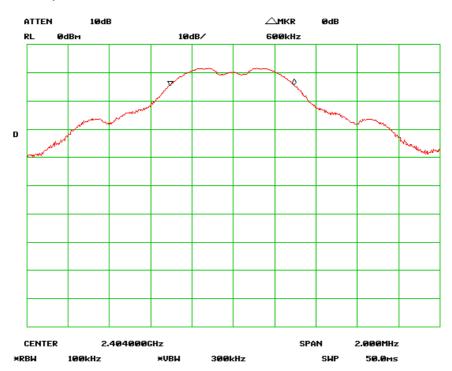

6dB Bandwidth - Low Channel

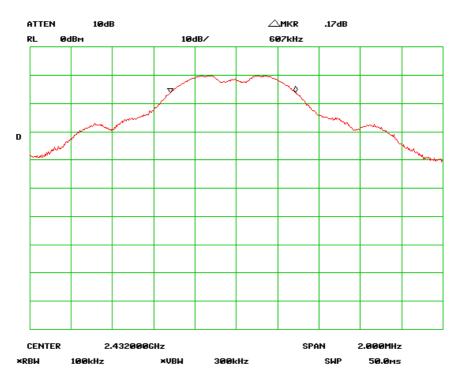


6dB Bandwidth - Mid Channel

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 13 of 50

 www.siemic.com.cn

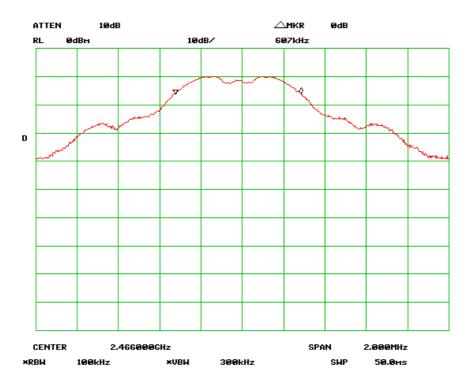

 ${\bf 6dB}\;{\bf Bandwidth-High}\;{\bf Channel}$ 

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 14 of 50 www.siemic.com.

# 5.4 Power Spectral Density

1. <u>Conducted Measurement</u>

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions Temperature 25°C Relative Humidity 50%

Atmospheric Pressure 1019mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are

normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.

4. Test date: 10 August, 2011

Tested By: Peter Cai

**Requirement(s):** 47 CFR § 15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3KHz band during any time interval of continuous transmission.

**Procedures:** The power spectral density measurement was taken conducted using a spectrum analyzer.


RBW=3KHz, VBW>RBW, Sweep time to SPAN/RBW(s).

**Test result: Pass** 


Channel	Channel Frequency (MHz)	Peak Spectral Density Limit (dBm/3KHz)	Peak Spectral Density (dBm/3KHz)
Low	2404	8	-10.00
Mid	2432	8	-10.33
High	2466	8	-11.17

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 15 of 50 | www.siemic.com.o

# Refer to the attached plots.

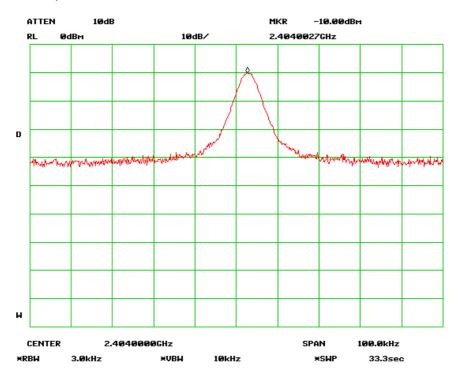

**PSD - Low Channel** 

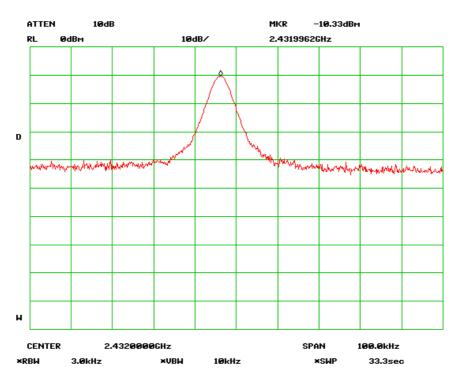


**PSD - Mid Channel** 

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 16 of 50

 www.siemic.com.cn

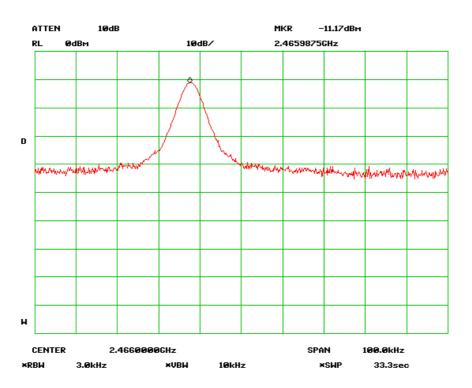

**PSD - High Channel** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 17 of 50 | www.siemic.com.

# 5.5 Peak Output Power

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz - 40GHz is  $\pm 1.5dB$ .

3. Environmental Conditions Temperature 25°C Relative Humidity 50%

Atmospheric Pressure 1019mbar

4. Test date : 10 August, 2011 Tested By : Peter Cai

Standard Requirement: 47 CFR § 15.247(b)


**Procedures:** The peak output power was measured conducted using a spectrum analyzer at low, mid, and hi channels. Peak detector was set to measure the power output. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm. The highest antenna gain that will be used is -3.4dBi.

#### **Test Result: Pass**


Channel	Channel Frequency (MHz)	Peak Output Power Limit (dBm)	Measured Output Power (dBm)
Low	2404	30	-6.00
Mid	2432	30	-6.50
High	2466	30	-7.33

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 18 of 50 | www.siemic.com.o

# Refer to the attached plots.

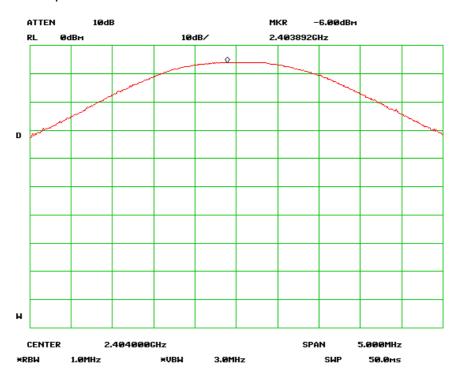


**Output Power Low Channel** 

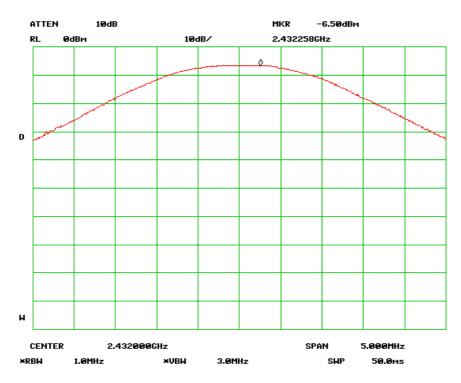

**Output Power Mid Channel** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 19 of 50 | www.siemic.com.cn

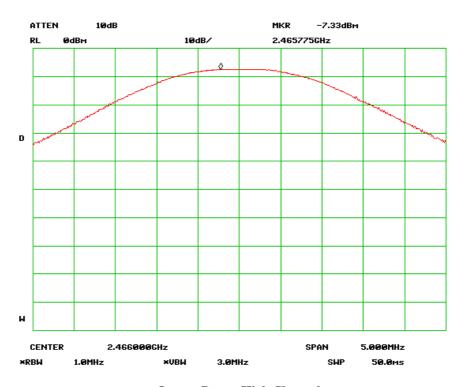

**Output Power High Channel** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 20 of 50 | www.siemic.com.

# 5.6 Antenna Port Emission

1. <u>Conducted Measurement</u>

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are

normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ±1.5dB.

3. Environmental Conditions Temperature 25°C

Relative Humidity 50% Atmospheric Pressure 1019mbar


4. Test date : 10 August, 2011 Tested By : Peter Cai

**Standard Requirement:** Radiated emission limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power


**Procedures:** The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels. The limit was determined by attenuating 20 dB of the RF peak power output.

**Test Result: Pass** 

Refer to the attached plots.

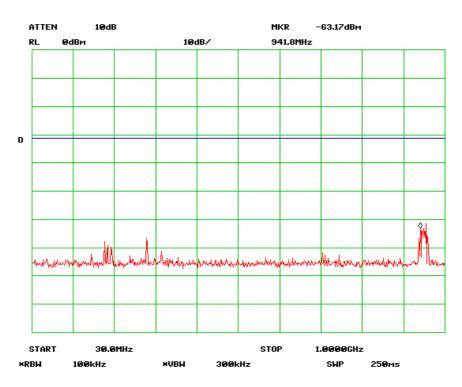


**Antenna Port Emission Low Channel -1** 

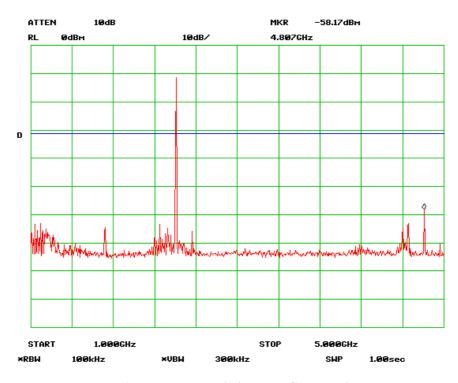


**Antenna Port Emission Low Channel -2** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 22 of 50 | www.siemic.com.

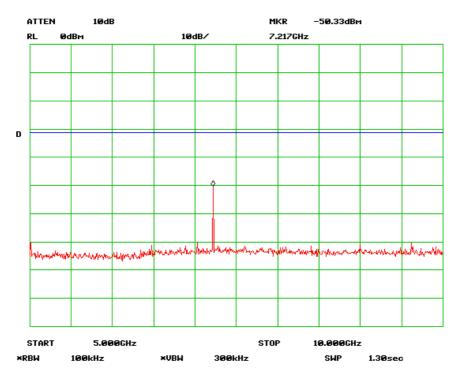


**Antenna Port Emission Low Channel -3** 

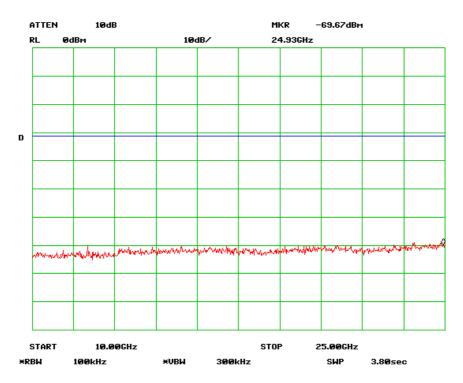


**Antenna Port Emission Low Channel -4** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 23 of 50 | www.siemic.com.

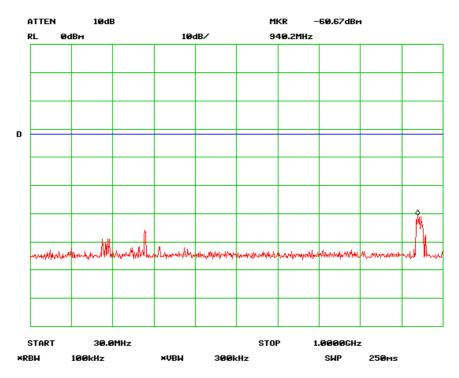


**Antenna Port Emission Mid-1 Channel** 

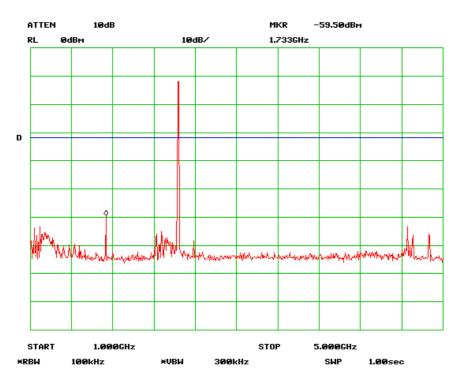


**Antenna Port Emission Mid-2 Channel** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 24 of 50 | www.siemic.com.

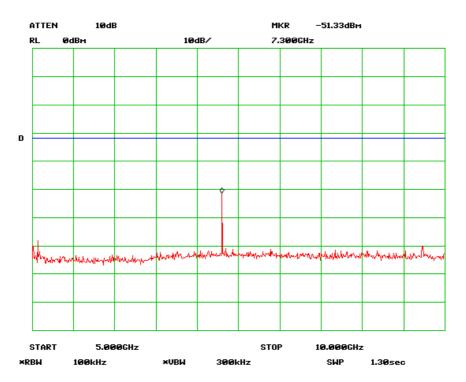


**Antenna Port Emission Mid-3 Channel** 

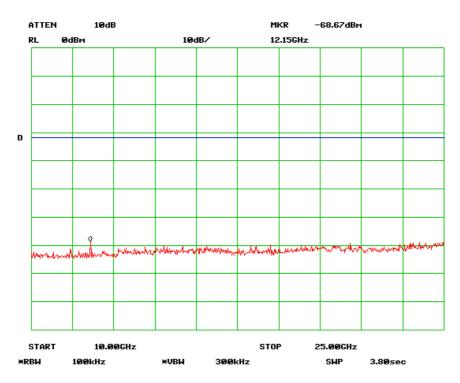


**Antenna Port Emission Mid-4 Channel** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 25 of 50 | www.siemic.com.

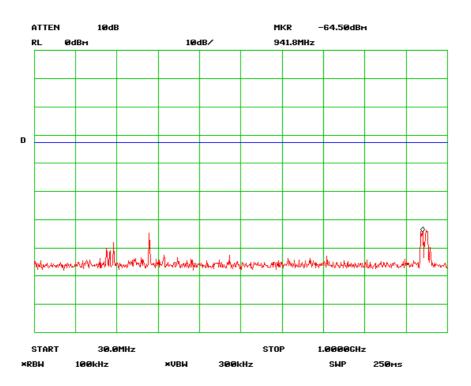


**Antenna Port Emission High-1 Channel** 

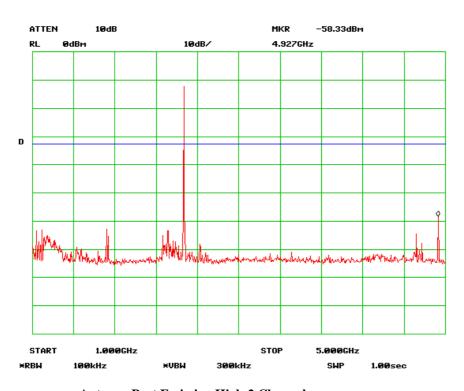


**Antenna Port Emission High-2 Channel** 

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 26 of 50 www.siemic.com.c

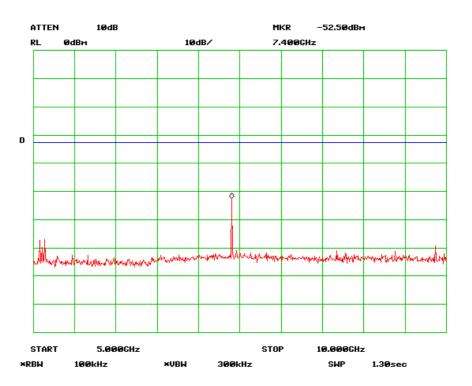

**Antenna Port Emission High-3 Channel** 

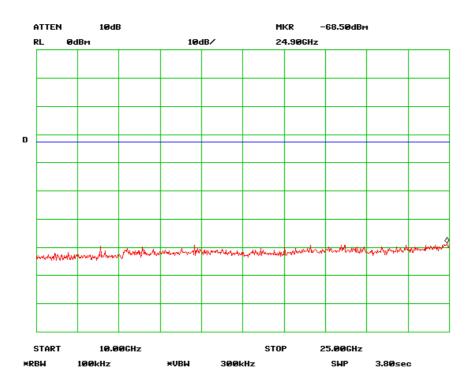

**Antenna Port Emission High-4 Channel** 

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 27 of 50

 www.siemic.com.c

# 5.7 Radiated Spurious Emission < 1GHz

- 1. <u>All possible modes of operation were investigated. Only the 6 worst case emissions measured,</u> using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
- 2. <u>A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.</u>
- 3. Radiated Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above (3m & 10m) is +/-6dB.

4. Environmental Conditions Temperature 25°C Relative Humidity 50%

Atmospheric Pressure 1019mbar


5. Test date: 10 August, 2011 Tested By: Peter Cai

**Standard Requirement:** The emissions from the Low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges.

**Test Result: Pass** 

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 28 of 50 | www.siemic.com.

#### **Radiated Emission Plot**

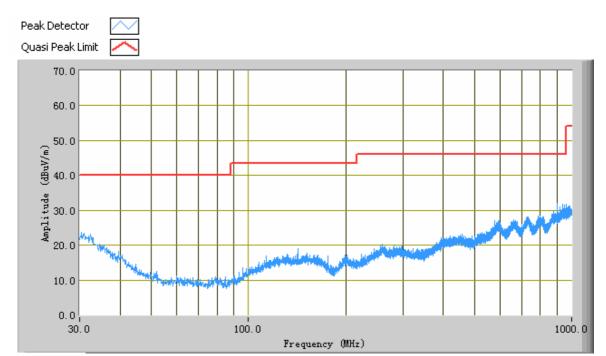


Test Data

Frequency (MHz)	Peak (dBuV/m)	Azimuth	Polarity(H /V)	Height (cm)	Factors (dB)	Limit (dBuV/m)	Margin (dB)
900.33	31.96	183.40	V	200.00	-17.71	46.00	-14.04
934.89	31.62	296.20	V	200.00	-17.48	46.00	-14.38
950.04	31.43	191.90	V	400.00	-17.38	46.00	-14.57
917.19	31.00	143.70	V	300.00	-17.60	46.00	-15.00
955.02	30.57	145.60	V	200.00	-17.32	46.00	-15.43
878.39	29.76	268.10	V	400.00	-18.60	46.00	-16.24

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 29 of 50 | www.siemic.com.

#### **Radiated Emission Plot**

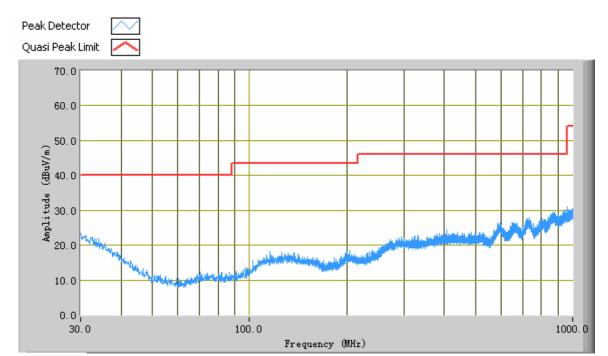

Test Data

(MHz) (dBuV/m)	/ <b>V</b> )	(cm)	(dB)	(dBuV/m)	Margin (dB)
950.17 30.06 182.60	H	100.00	-18.28	46.00	-15.94
938.65 29.61 127.60	H	300.00	-18.40	46.00	-16.39
951.74 29.49 357.10	H	400.00	-18.25	46.00	-16.51
30.00 23.44 145.10	H	100.00	-22.98	40.00	-16.56
878.39 29.30 119.50	H	200.00	-18.67	46.00	-16.70
867.35 29.30 59.00	Н	300.00	-18.59	46.00	-16.70

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 30 of 50

 www.siemic.com.c
 www.siemic.com.c

# 5.8 Radiated Spurious Emissions > 1GHz & Band Edge

- 1. <u>All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.</u>
- 2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
- 3. Radiated Emissions Measurement Uncertainty
  All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz 1GHz & 1GHz above (3m & 10m) is

4. Environmental Conditions Temperature 25°C Relative Humidity 50% Atmospheric Pressure 1019mbar

5. Test date : 10 August, 2011 Tested By : Peter Cai

**Standard Requirement:** The emissions from the Low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges.

**Test Result: Pass** 

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 31 of 50

 www.siemic.com

#### @ 2404MHz @ 3 Meter

Frequency	Direction	Height	Polar	Cable loss	Amplifier	Corrected Reading	15.247/15.209	15.247/15.209	
GHz	Degree	Meter	H/V	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin	Comments
4.808	0.00	1.22	٧	5.15	55.00	62.4	74.00	-11.6	Peak
4.808	0.00	1.10	h	5.15	55.00	61.3	74.00	-12.7	Peak
4.808	0.00	1.22	٧	5.15	55.00	50.7	54.00	-3.3	Ave
4.808	0.00	1.10	h	5.15	55.00	50.0	54.00	-4.0	Ave
7.212	5.30	1.12	٧	7.23	55.00	65.6	74.00	-8.4	Peak
7.212	6.11	1.15	h	7.23	55.00	63.7	74.00	-10.3	Peak
7.212	5.30	1.12	٧	7.23	55.00	49.5	54.00	-4.5	Ave
7.212	6.11	1.15	h	7.23	55.00	47.9	54.00	-6.1	Ave

Emission was scanned up to 25GHz.

#### @ 2432MHz @ 3Meter

	e z iozivitiz e civicoci								
Frequency	Direction	Height	Polar	Cable loss	Amplifier	Corrected Reading	15.247/15.209	15.247/15.209	
GHz	Degree	Meter	H/V	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin	Comments
4.864	31.00	1.10	٧	5.16	55.00	60.2	74.00	-13.8	Peak
4.864	25.00	1.00	h	5.16	55.00	61.5	74.00	-12.5	Peak
4.864	31.00	1.10	٧	5.16	55.00	51.8	54.00	-2.2	Ave
4.864	25.00	1.00	h	5.16	55.00	51.6	54.00	-2.4	Ave
7.296	13.00	1.20	٧	7.31	55.00	68.1	74.00	-5.9	Peak
7.296	4.00	1.03	h	7.31	55.00	66.4	74.00	-7.6	Peak
7.296	13.00	1.20	٧	7.31	55.00	50.5	54.00	-3.5	Ave
7.296	4.00	1.03	h	7.31	55.00	50.1	54.00	-3.9	Ave

Emission was scanned up to 25GHz.

#### @ 2466MHz @ 3Meter

© 2400MHZ © SWEET									
Frequency	Direction	Height	Polar	Cable loss	Amplifier	Corrected Reading	15.247/15.209	15.247/15.209	
GHz	Degree	Meter	H/V	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin	Comments
4.932	15.00	1.07	٧	5.17	55.00	61.4	74.00	-12.6	Peak
4.932	25.00	1.10	h	5.17	55.00	60.2	74.00	-13.8	Peak
4.932	15.00	1.07	٧	5.17	55.00	51.1	54.00	-2.9	Ave
4.932	25.00	1.10	h	5.17	55.00	51.8	54.00	-2.2	Ave
7.398	0	1.20	٧	7.36	55.00	66.4	74.00	-7.6	Peak
7.398	3.00	1.00	h	7.36	55.00	64.4	74.00	-9.6	Peak
7.398	0	1.20	٧	7.36	55.00	48.9	54.00	-5.1	Ave
7.398	3.00	1.00	h	7.36	55.00	48.2	54.00	-5.8	Ave
			25011						

Emission was scanned up to 25GHz.



 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 32 of 50

 www.siemic.com.cn

# **Band Edge**

Channel	Polarity	Detector	Frequency	Result	Limit	Margin
Low Channel	V	Peak	2400	33.43	74	-40.57
Low Channel	Н	Peak	2400	31.05	74	-42.95
Low Channel	V	Avg	2400	28.56	54	-25.44
Low Channel	Н	Avg	2400	27.88	54	-26.12

Channel	Polarity	Detector	Frequency	Result	Limit	Margin
High Channel	V	Peak	2483.5	36.85	74	-37.15
High Channel	Н	Peak	2483.5	35.67	74	-38.33
High Channel	V	Avg	2483.5	27.22	54	-26.78
High Channel	Н	Avg	2483.5	28.43	54	-25.57

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 33 of 50 | www.siemic.com.cn

# **Annex A. TEST INSTRUMENT & METHOD**

# Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Manufacturer	Model	CAL Due Date	
Spectrum Analyzer	HP	8563 E	2012.05.25	
EMI Receiver	Rohde & Schwarz	ESPI 3	2012.05.25	
Antenna (30MHz~2GHz)	Sunol Sciences	JB1	2011.10.04	
Horn Antenna (1~18GHz)	A-INFOMW	JXTXLB-10180	2012.06.24	
Horn Antenna (1~18GHz)	ETS-Lindgren	3115	2012.06.24	
Pre-Amplifier(0.01 ~ 1.3GHz)	HP	8447F	2012.05.25	
Pre-Amplifier(0.1 ~ 18GHz)	MITEQ	AMF-7D-00101800-30- 10P	2012.05.25	
Horn Antenna (18~40GHz)	Com Power	AH-840	2012.05.25	
Microwave Pre-Amp (18~40GHz)	Com Power	PA-840	2012.05.25	
LISN	Com-Power	LI 115	2012.05.25	
LISN	Com-Power	LI 115	2012.05.25	
LIMITER	Com-Power	LIT-153	2012.05.25	

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 34 of 50

 www.siemic.com.c
 www.siemic.com.c

#### Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

#### **Test Set-up**

- 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
- 2. The power supply for the EUT was fed through a  $50\Omega/50\mu H$  EUT LISN, connected to filtered mains.
- 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
- 4. All other supporting equipments were powered separately from another main supply.

#### **Test Method**

- 1. The EUT was switched on and allowed to warm up to its normal operating condition.
- A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
- 3. High peaks, relative to the limit line, were then selected.
- 4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
- 5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

#### **Sample Calculation Example**

At 20 MHz  $limit = 250 \mu V = 47.96 dB\mu V$ 

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver =  $40.00 \text{ dB}\mu\text{V}$  (Calibrated for system losses)

Therefore, Q-P margin = 47.96 - 40.00 = 7.96 i.e. **7.96 dB below limit** 

#### Annex A. iii. RADIATED EMISSIONS TEST DESCRIPTION


#### **EUT Characterisation**

EUT characterisation, over the frequency range from 30MHz to 10<sup>th</sup> Harmonic , was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

#### **Test Set-up**

- 1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
- 2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
- 3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

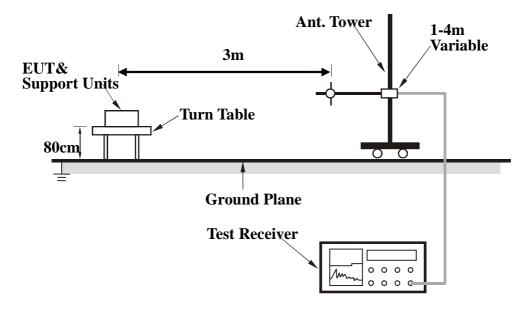

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 36 of 50 | www.siemic.com.

#### **Test Method**

The following procedure was performed to determine the maximum emission axis of EUT:

- 1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission
- 2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
- 3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

- 1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
- 2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
- 3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
- 4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from  $0 \circ 0.000$  with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
- 5. Repeat step 4 until all frequencies need to be measured were complete.
- 6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth	
30 to 1000	Peak	100 kHz	100 kHz	
Above 1000	Peak	1 MHz	1 MHz	
Above 1000	Average	1 MHz	10 Hz	

#### Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

Peak = Reading + Corrected Factor

where

Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any) And the average value is

Average = Peak Value + Duty Factor or Set RBW = 1MHz, VBW = 10Hz.

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 37 of 50 | www.siemic.com.u

### Annex B. EUT AND TEST SETUP PHOTOGRAPHS

### Annex B.i. Photograph 1: EUT External Photo



Front View of EUT



Rear View of EUT

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 38 of 50

 www.siemic.com.cn



Top View of EUT



Bottom View of EUT




 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 39 of 50

 www.siemic.com.c

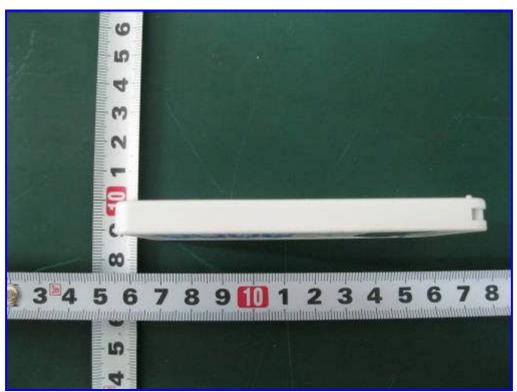


Left View of EUT




Right View of EUT

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 40 of 50 | www.siemic.com.

#### Annex B.ii. Photograph 2: EUT Internal Photo

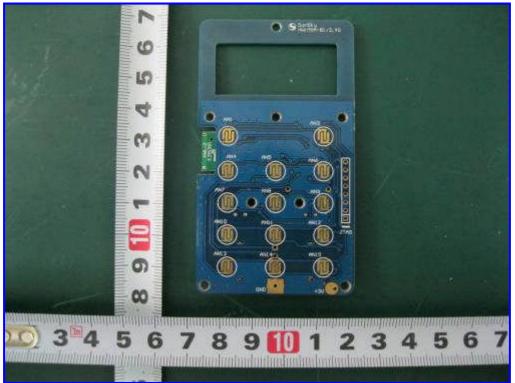


Front View of PCB board

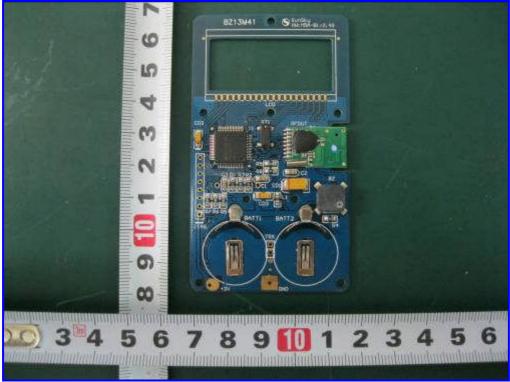

Rear View of PCB board

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 41 of 50 www.siemic.com.c

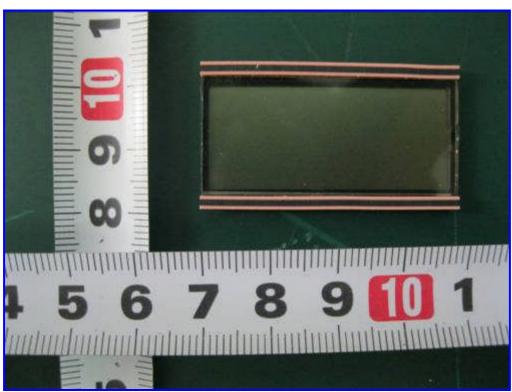


Front View of LCD display




Rear View of LCD display

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 42 of 50

## Annex B.iii. Photograph 3: Test Setup Photo

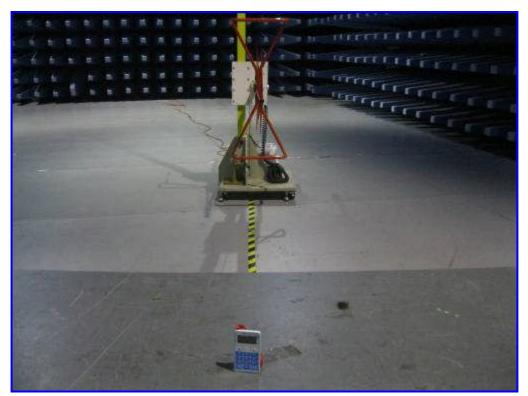

Radiated Emission Test Setup Front View below 1GHz

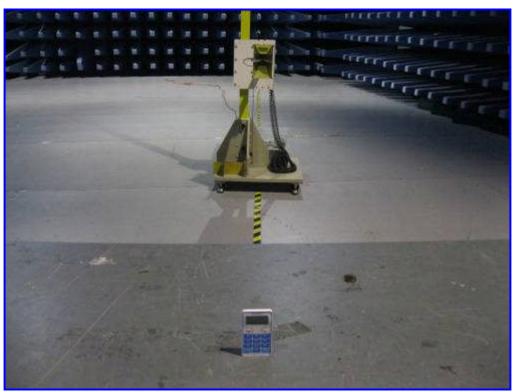

Radiated Emission Test Setup Front View above 1GHz

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 43 of 50 www.siemic.com.

# **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**


#### **EUT TEST CONDITIONS**

### Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
N/A	N/A	N/A

## **Block Configuration Diagram for Radiated Emission**

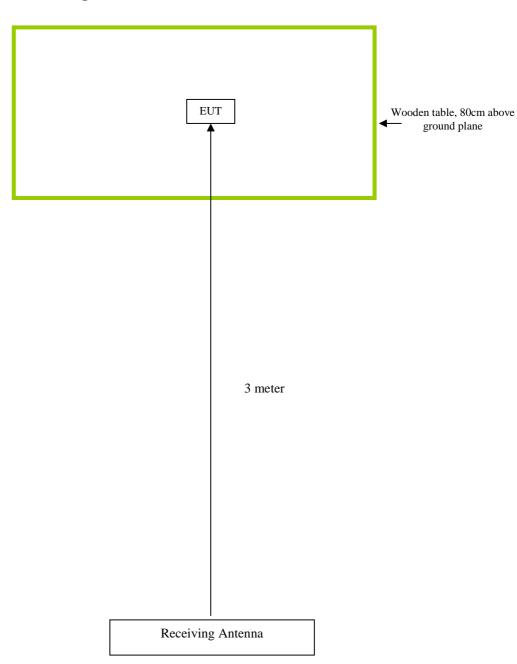

Serial#: 11070044 Issue Date: 25 August, 2011 Page: 45 of 50 www.siemic.com

# **Block Configuration Diagram for Conducted Emission**

N/A

| Serial#: 11070044 | Issue Date: 25 August, 2011 | Page: 46 of 50 | www.siemic.com.cn

## Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation	
Emissions	The EUT was continuously transmitting to stimulate the worst case.	

 Serial#:
 11070044

 Issue Date:
 25 August, 2011

 Page:
 47 of 50

 www.siemic.com.cn

# Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment

Issue Date: 25 August, 2011 Page: 48 of 50

### **Annex E. SIEMIC ACCREDITATION CERTIFICATES**

#### SIEMIC ACCREDITATION DETAILS: FCC Registration NO:986914



Serial#: 11070044 Issue Date: 25 August, 2011 Page: 49 of 50 www.siemic.com

#### SIEMIC ACCREDITATION DETAILS: FCC Listing, Registration NO:986914

#### FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division 7435 Oakland Mills Road Columbia, MD 21046

April 19, 2011

Registration Number: 986914

SIEMIC Nanjing (China) Laboratories 2-1 Longcang Avenue, Yuhua Economic and Technology Development Park, Nanjing, 210039 China

Attention: Leslie Bai,

Re: Measurement facility located at 2-1 Longcang Avenue, Nanjing, China

Anechoic chamber (3 meters) and 3&10 meter OATS

Date of Renewal: April 19, 2011

#### Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website <a href="www.fcc.gov">www.fcc.gov</a> under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish Industry Analyst

11070044 Serial#: Issue Date: 25 August, 2011 Page: 50 of 50

#### SIEMIC ACCREDITATION DETAILS: Industry of Canada Registration No. 4842

Industry Industrie
Canada Canada

January 25, 2011

OUR FILE: 46405-4842 Submission No: 145222

Siemic Nanjing (China) Laboratories

2-1 Longcang Avenue

Yuhua Economic & Technology Dev. Park, Nanjing

China

Attention: Leslie Bai

Dear Sir/Madame:

The Bureau has received your application for the registration of a 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (Site# 4842B-2). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: 4842B

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed three years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely

Dalwinder Gill

For: Wireless Laboratory Manager Certification and Engineering Bureau 3701 Carling Ave., Building 94 P.O. Box 11490. Station "H

Ottawa, Outario K2H 8S2 Email: dalwinder.gill@ic.gc.ca Tel. No. (613) 998-8363 Fax. No. (613) 990-4752