

TEST REPORT

Testing Laboratory:

SK Tech Co., Ltd.
88, Geulgaeul-ro, 81beon-gil,
Wabu-eup, Namyangju-si,
Gyeonggi-do, Korea
TEL: +82-31-576-2204
FAX: +82-31-576-2205

Test Report Number: SKT-RFC-180003**Date of issue: March 29, 2018****Applicant:****OSANG Healthcare Co., Ltd.**

132, Anyangcheondong-ro, Dongan-gu, Anyang-si, Gyeonggi-do, South Korea

Manufacturer:**OSANG Healthcare Co., Ltd.**

132, Anyangcheondong-ro, Dongan-gu, Anyang-si, Gyeonggi-do, South Korea

Product:

Blood Glucose Test Meter

Model:

IGM-1003F, IGM-1003G

(please see P5 for all the model numbers)

FCC ID:

WSX-IGM-1003F

Project number:

SKTEU18-0083

EUT received:

January 29, 2018


Applied standards: ANSI C63.10-2013 and ANSI C63.4-2014
558074 D01 DTS Meas Guidance v04

Rule parts: FCC Part 15 Subpart C - Intentional radiators

Equipment Class: DTS - Part 15 Digital Transmission System

Remarks to the standards: None

The above equipment has been tested by SK Tech Co., Ltd., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product or system, which was tested.



Wonsik Ham / Testing Engineer



Jongsoo Yoon / Technical Manager

This report shall not be reproduced except in full, without the written approval of SK Tech Co., Ltd. The client should not use it to claim product endorsement by any government agencies.



Revision History of Test Report

Rev.	Revisions	Effect page	Approved by	Date
-	Initial issue	All	Jongsoo Yoon	Mar. 29, 2018



TABLE OF CONTENTS

1	Summary of test results	4
2	Description of equipment under test (EUT)	5
3	Test and measurement conditions	6
3.1.	Test configuration (arrangement of EUT)	6
3.2.	Description of support units (accessory equipment).....	6
3.3.	Interconnection and I/O cables.....	6
3.4.	Measurement Uncertainty (U)	6
3.5.	Test date	6
4	Facilities and accreditations	7
4.1.	Facilities.....	7
4.2.	Accreditations	7
4.3.	List of test and measurement instruments.....	7
5	Test and measurements	8
5.1.	Antenna requirement	8
5.2.	6 dB bandwidth.....	9
5.3.	Maximum peak output power	11
5.4.	Spurious emissions, Band edge, and Restricted bands	13
5.5.	Peak power spectral density.....	25



1 Summary of test results

Requirement	CFR 47 Section	Result
Antenna Requirement	15.203, 15.247(b)(4)	Meets the requirements
6dB Bandwidth	15.247(a)(2)	Meets the requirements
Maximum Peak Output Power	15.247(b)(3), (4)	Meets the requirements
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	Meets the requirements
Peak Power Spectral Density	15.247(e)	Meets the requirements
AC power line Conducted emissions	15.207(a)	N/A

Note: The EUT is operated from the battery (DC 3 V coin battery), and therefore the test suites related to AC Mains port were not applicable.



2 Description of equipment under test (EUT)

Product: Blood Glucose Test Meter
Model: **IGM-1003F, IGM-1003G**
Serial number: None (prototype)

Model differences:

Model name	Difference	Tested (checked)
IGM-1003F	fully tested model that was provided by the applicant	<input checked="" type="checkbox"/>
IGM-1003G	Model IGM-1003G is identical to basic model except the enclosure design.	

Note: All the differences were compared with the test sample.

Technical data:

Power source	DC 3.0 V lithium battery (type CR2032)
Local Oscillator or X-Tal	32.768 kHz, 32 MHz
Transmit Frequency	2402 MHz ~ 2480 MHz (40 channels, Bluetooth LE only)
Antenna Type	Integral PCB antenna(gain: 0 dBi)
Type of Modulation	GFSK
RF Output power	-1.11 dBm PEAK(measured)

I/O port	Type	Q'ty	Remark
Phone Jack	Jack	1	(Note)
Test strip	Slot (for the measurements of blood glucose)	1	

Note: The test report for the compliance with FCC Part 15B as a digital device was issued with other test report number.

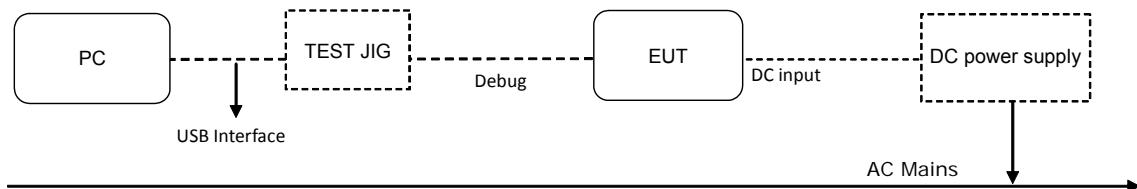
Modification of EUT during the compliance testing: none



3 Test and measurement conditions

3.1. Test configuration (arrangement of EUT)

The measurements were taken in continuous transmitting mode without off-time intervals. For controlling the EUT as TEST MODE, the test program and the cable assembly were provided by the applicant.



The measurements were taken in TEST MODE provided by the applicant for controlling the EUT.

- Software version (SmartRF Studio 7): 2.6.0
- Software manufacturer: Texas Instruments
- Power setting: 4 dBm

3.2. Description of support units (accessory equipment)

The following support units or accessories were used to form a representative test configuration during the tests.

#	Equipment	Manufacturer	Model No.	Serial No.
1	PC	Lenovo	Andice_SIT_A75_TW	NA17743689
2	TEST JIG	-	-	-
3	DC power supply	HP	6633A	2838A-01000

Note: For radiated spurious emission measurements, the measurements were performed without PC after setting the radio module to TEST MODE.

3.3. Interconnection and I/O cables

The following support units or accessories were used to form a representative test configuration during the tests.

#	Start		End		Cable	
	Name	I/O port	Name	I/O port	length (m)	shielded (Y/N)
1	EUT	Debug	TEST JIG	Debug	0.2	N
2	EUT	DC Input	DC power supply	DC Output	2.5	N
3	TEST JIG	USB	PC	USB	1.0	N

Note: All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.

3.4. Measurement Uncertainty (U)

Measurement Item	Combined Standard Uncertainty U_c	Expanded Uncertainty $U = k \times U_c (k = 2)$
Conducted RF power	± 1.49 dB	± 2.98 dB
Conducted emissions	± 1.51 dB	± 3.02 dB
Radiated emissions (30 MHz to 1000 MHz)	± 2.63 dB	± 5.26 dB
Radiated emissions (above 1000 MHz)	± 2.57 dB	± 5.14 dB

3.5. Test date

Date Tested	February 24, 2018 – February 26, 2018
-------------	---------------------------------------



4 Facilities and accreditations

4.1. Facilities

All of the measurements described in this report were performed at SK Tech Co., Ltd

Site I: 88, Geulgaeul-ro 81beon-gil, Wabu-eup, Namyangju-si, Gyeonggi-do, Korea

Site II: 124-8, Geulgaeul-ro, Wabu-eup, Namyangju-si, Gyeonggi-do, Korea

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-4. The sites comply with the Normalized Site Attenuation requirements given in ANSI C63.4, and site VSWR requirements specified in CISPR 16-1-4. The measuring apparatus and ancillary equipment conform to CISPR 16-1 series.

4.2. Accreditations

The laboratory has been also notified to FCC by RRA as a Conformity Assessment Body, and designated to perform compliance testing on equipment subject to Declaration of Conformity (DOC) and Certification under Parts 15 and 18 of the FCC Rules.

Designation No. KR0007

4.3. List of test and measurement instruments

No	Description	Manufacturer	Model	Serial No.	Cal. due	Use
1	Spectrum Analyzer	Agilent	E4405B	US40520856	2019.03.05	
2	Spectrum Analyzer	Agilent	E4440A	MY46186322	2018.07.10	<input checked="" type="checkbox"/>
3	EMI Test Receiver	Rohde&Schwarz	ESR26	101441	2018.09.04	<input checked="" type="checkbox"/>
4	EMI Test Receiver	Rohde&Schwarz	ESIB40	100277	2018.05.12	<input checked="" type="checkbox"/>
5	Pre-amplifier (30 MHz - 1 GHz)	TSJ	MLA-10K01-B01-27	2005350	2018.07.07	<input checked="" type="checkbox"/>
6	Pre-amplifier (1 GHz - 18 GHz)	MITEQ	AFS44	1116321	2018.07.07	<input checked="" type="checkbox"/>
7	Pre-amplifier (1 GHz - 18 GHz)	TSJ	MLA-100M18-B02-38	1539546	2019.03.05	
8	Pre-amplifier (18 GHz - 26.5 GHz)	TSJ	MLA-18265-J01-35	8490	2019.03.08	<input checked="" type="checkbox"/>
9	Power Meter	Agilent	E4417A	MY45100426	2018.07.27	
10	Power Meter	Agilent	E4418B	US39402176	2018.07.05	
11	Power Sensor	Agilent	E9327A	MY44420696	2018.07.05	
12	Power Sensor	Agilent	8485A	3318A13916	2018.07.07	
13	Attenuator (10dB)	HP	8491B	38067	2018.07.05	<input checked="" type="checkbox"/>
14	High Pass Filter	Wainwright	WHKX3.0/18G	8	2018.07.05	<input checked="" type="checkbox"/>
15	VHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	VHAP	1014 / 1015	2018.09.09	
16	UHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	UHAP	989 / 990	2018.09.09	
17	Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	2019.12.06	<input checked="" type="checkbox"/>
18	Bilog broadband Antenna	Schwarzbeck	VULB9168	9168-230	2020.03.23	<input checked="" type="checkbox"/>
19	Horn Antenna (1 GHz - 18 GHz)	Schwarzbeck	BBHA9120D	9120D-816	2020.03.23	<input checked="" type="checkbox"/>
20	Horn Antenna (1 GHz - 18 GHz)	ETS-LINDGREN	3115	00040723	2019.05.25	
21	Horn Antenna (1 GHz - 18 GHz)	ETS-LINDGREN	3115	00056768	2020.03.23	
22	Horn Antenna (15 GHz - 40 GHz)	Schwarzbeck	BBHA9170	BBHA9170318	2019.05.02	<input checked="" type="checkbox"/>
23	Vector Signal Generator	Agilent	E4438C	MY42080359	2019.03.06	
24	PSG analog signal generator	Agilent	E8257D	MY45141255	2018.07.05	
25	DC Power Supply	HP	6633A	2838A-01000	2018.07.05	<input checked="" type="checkbox"/>
26	DC Power Supply	HP	6633A	3325A04972	2018.07.05	
27	Hygro/Thermo Graph	Testo	608-H1	-	2018.07.07	<input checked="" type="checkbox"/>
28	Temperature/Humidity Chamber	DAE JIN ENG	DJ-THC02	06071	2019.03.07	



5 Test and measurements

5.1. Antenna requirement

5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.2 Result:

PASS

The transmitter has the integral PCB antenna. The directional gain of the antenna is less than 0 dBi.



5.2. 6 dB bandwidth

5.2.1 Regulation

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

5.2.2 Test Procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2.3 Test Results:

PASS

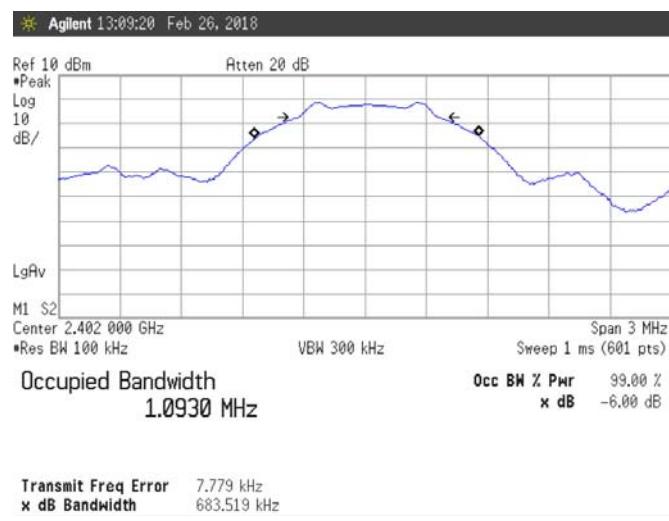
Table 1: Measured value of the 6 dB Bandwidth

Modulation	Operating frequency	Occupied Bandwidth (99%)	6dB Bandwidth	Limit
GFSK	2402 MHz	1.093 MHz	0.684 MHz	≥ 500 kHz
	2442 MHz	1.086 MHz	0.701 MHz	≥ 500 kHz
	2480 MHz	1.080 MHz	0.695 MHz	≥ 500 kHz

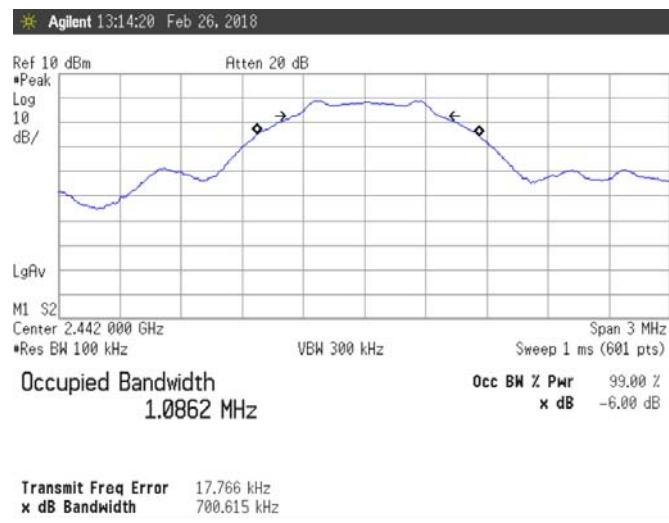


Figure 1. Plot of the 6dB Bandwidth & Occupied Bandwidth (99%)

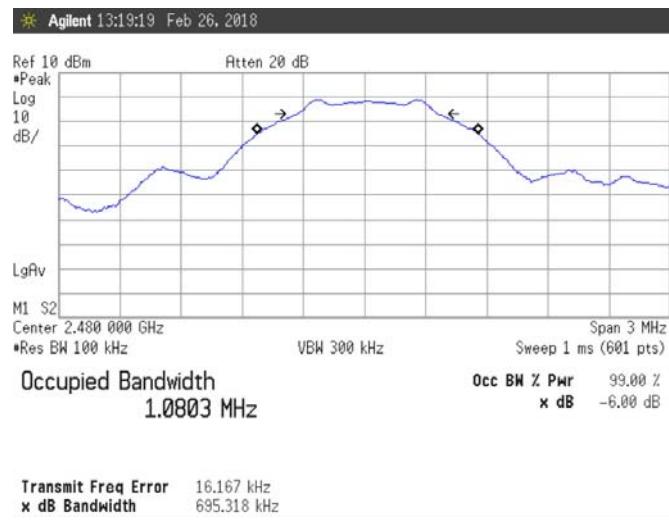
Lowest Channel (2402 MHz)



Middle Channel (2442 MHz)



Highest Channel (2480 MHz)





5.3. Maximum peak output power

5.3.1 Regulation

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.2 Test Procedure

1. Set the RBW \geq DTS bandwidth.
2. Set the VBW \geq 3 x RBW.
3. Set the span \geq 3 x RBW.
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.3.3 Test Results:

PASS

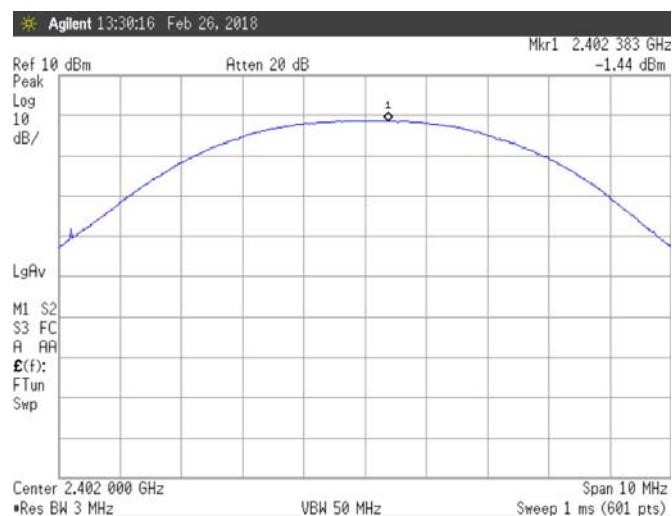
Table 2: Measured values of the Maximum Peak Conducted Output Power

Operating frequency	PEAK POWER		Limit
	[dBm]	[W]	
2402 MHz	-1.44	0.000 72	1 W
2442 MHz	-1.11	0.000 77	1 W
2480 MHz	-1.26	0.000 75	1 W

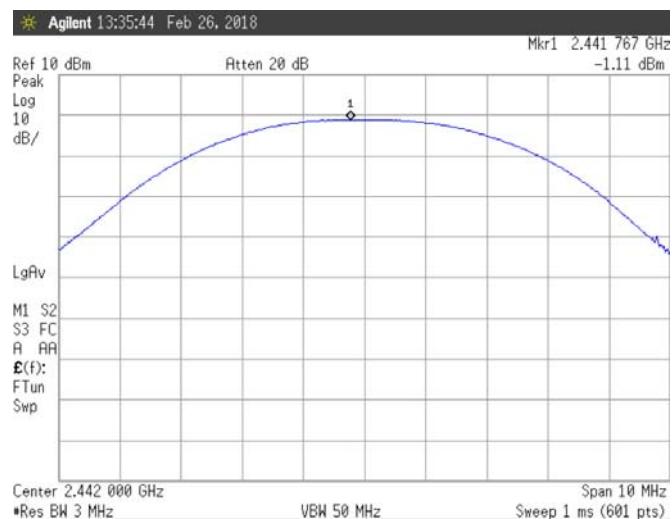


Figure 2. Plot of the Maximum Peak Conducted Output Power

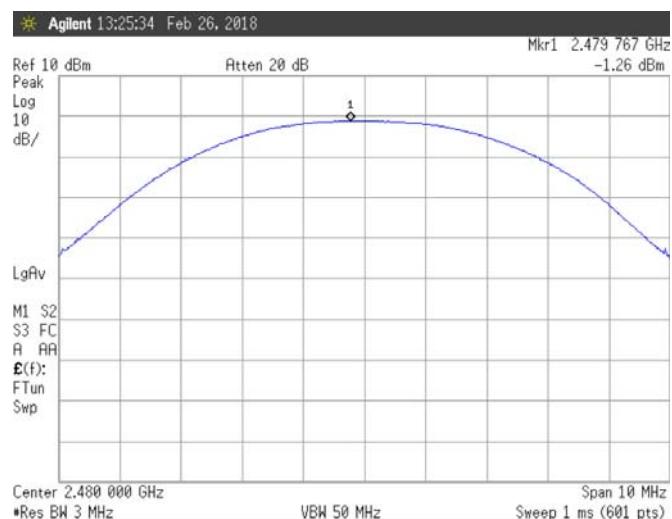
Lowest Channel (2402 MHz)



Middle Channel (2442 MHz)



Highest Channel (2480 MHz)





5.4. Spurious emissions, Band edge, and Restricted bands

5.4.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as is permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength limit (μ V/m)	Field strength limit (dB μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	48.5 - 13.8	300
0.490 - 1.705	24000/F (kHz)	33.6 - 23.0	30
1.705 - 30.0	30	29.5	30
30 - 88	100	40.0	3
88 - 216	150	43.5	3
216 - 960	200	46.0	3
Above 960	500	54.0	3

** The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector. For the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, the radiated emission limits are based on measurements employing an average detector.

5.4.2 Test Procedure

1) Band-edge measurements for RF conducted emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1 % of spectrum analyzer display span

VBW \geq 3 x RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.



2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq 3 x RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters or 1 meter if applicable.
2. The EUT was placed on the top of the 0.8-meter height (or 1.5 meter height for above 1 GHz). To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated (0° to 360°).
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 9 kHz to 30 MHz using the loop antenna, from 30 to 1000 MHz using the Bilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To increase the overall measurement sensitivity, the closer test distances and/or narrower bandwidths may be used. If the closer measurement distance (1 meter) were used, the beamwidth of the measuring antenna versus size of the EUT was taken into account.
5. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test receiver was set up to average, peak, and quasi-peak detector function with specified bandwidth. It was attempted to maximize the emission, by varying the configuration of the EUT and the cables routing.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function specified in 6.3 and 6.4, 6.5, or 6.6, as applicable, and the appropriate regulatory requirements for the frequency being measured.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to approximately 1 % to 5 % of the total span, unless otherwise specified, with a video bandwidth equal to or greater than the RBW.
Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not an absolute field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
3. Subtract the delta measured in b) from the field strengths measured in a). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance of the restricted bands, described in 5.9.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band edge, where a "standard" bandwidth is the bandwidth specified by 4.2.3.2 for the frequency being measured. For example, band-edge measurements in the restricted band that begins at 2483.5 MHz require a measurement bandwidth of at least 1 MHz.
Therefore the "delta" technique for measuring emissions up to 2 MHz removed from the band edge may be used. Radiated emissions that are removed by more than two "standard" bandwidths shall be measured in the conventional manner.



5.4.3 Test Results:

PASS

Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 3 and 4.

Spurious RF conducted emissions were shown in the Figure 5.

Spurious RF radiated emissions were shown in the Figure 6.

Table 3: Measured values of the Field strength of spurious emission (Radiated)

Average/Peak/Quasi-peak data, radiated emissions (below 30 MHz)

Frequency (MHz)	RBW (kHz)	Reading (dB μ V)	AF (dB/m)	Cable Loss (dB)	Actual (dB μ V/m)	Limit (at 3m) (dB μ V/m)	Margin (dB)
No Radiated Spurious Emissions Found							

Quasi-peak data, radiated emissions (30 MHz to 1000 MHz)

Frequency (MHz)	Pol. (V/H)	Height (m)	Reading (dB μ V)	AMP (dB)	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Lowest channel (2402 MHz)									
X-axis									
162.274	H	1.78	44.4	30.0	12.7	1.6	28.7	43.5	14.8
291.287	H	1.16	48.0	30.0	13.0	2.1	33.1	46.0	12.9
319.776	H	1.01	45.9	30.0	13.8	2.2	31.9	46.0	14.1
389.256	H	1.00	43.4	30.1	15.5	2.5	31.3	46.0	14.7
389.563	V	1.23	40.1	30.1	15.5	2.5	28.0	46.0	18.0
Y-axis									
162.269	H	1.81	44.3	30.0	12.7	1.6	28.6	43.5	14.9
291.336	H	1.15	47.5	30.0	13.1	2.1	32.7	46.0	13.3
319.818	H	1.02	45.1	30.0	13.8	2.2	31.1	46.0	14.9
389.305	H	1.00	42.9	30.1	15.5	2.5	30.8	46.0	15.2
389.560	V	1.09	39.8	30.1	15.5	2.5	27.7	46.0	18.3
Z-axis									
162.274	H	1.84	43.8	30.0	12.7	1.6	28.1	43.5	15.4
290.279	H	1.22	48.4	30.0	13.0	2.1	33.5	46.0	12.5
317.074	H	1.02	45.3	30.0	13.8	2.2	31.3	46.0	14.7
389.826	H	1.00	42.6	30.1	15.5	2.5	30.5	46.0	15.5
391.967	V	1.12	39.7	30.2	15.6	2.5	27.6	46.0	18.4

Note: 1) V/H: Vertical / Horizontal polarization

2) AMP, AF and CL: pre-amplifier gain, antenna factor and cable loss including an attenuator/filter if used

3) Actual = Reading - AMP + AF + CL

4) Margin = Limit - Actual



Quasi-peak data, radiated emissions (30 MHz to 1000 MHz)									
Frequency (MHz)	Pol. (V/H)	Height (m)	Reading (dB μ V)	AMP (dB)	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Middle channel (2442 MHz)									
X-axis									
162.289	H	1.78	44.1	30.0	12.7	1.6	28.4	43.5	15.1
291.272	H	1.16	47.7	30.0	13.0	2.1	32.8	46.0	13.2
321.783	H	1.02	45.2	30.0	13.9	2.3	31.4	46.0	14.6
389.049	H	1.00	43.3	30.1	15.5	2.5	31.2	46.0	14.8
390.889	V	1.15	40.4	30.1	15.6	2.5	28.4	46.0	17.6
Y-axis									
162.274	H	1.77	44.3	30.0	12.7	1.6	28.6	43.5	14.9
289.272	H	1.19	46.8	30.0	13.0	2.1	31.9	46.0	14.1
320.063	H	1.02	45.1	30.0	13.8	2.2	31.1	46.0	14.9
389.154	V	1.19	39.9	30.1	15.5	2.5	27.8	46.0	18.2
389.164	H	1.00	42.8	30.1	15.5	2.5	30.7	46.0	15.3
Z-axis									
162.289	H	1.77	43.7	30.0	12.7	1.6	28.0	43.5	15.5
290.292	H	1.15	48.1	30.0	13.0	2.1	33.2	46.0	12.8
318.514	H	1.00	45.3	30.0	13.8	2.2	31.3	46.0	14.7
390.048	V	1.12	39.8	30.1	15.5	2.5	27.7	46.0	18.3
390.061	H	1.00	43.0	30.1	15.5	2.5	30.9	46.0	15.1

Note: 1) V/H: Vertical / Horizontal polarization

2) AMP, AF and CL: pre-amplifier gain, antenna factor and cable loss including an attenuator/filter if used

3) Actual = Reading - AMP + AF + CL

4) Margin = Limit - Actual



Quasi-peak data, radiated emissions (30 MHz to 1000 MHz)									
Frequency (MHz)	Pol. (V/H)	Height (m)	Reading (dB μ V)	AMP (dB)	AF (dB/m)	CL (dB)	Actual (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Highest channel (2480 MHz)									
X-axis									
162.266	H	1.71	44.2	30.0	12.7	1.6	28.5	43.5	15.0
291.323	H	1.15	47.8	30.0	13.1	2.1	33.0	46.0	13.0
319.989	H	1.01	45.4	30.0	13.8	2.2	31.4	46.0	14.6
389.068	H	1.00	42.8	30.1	15.5	2.5	30.7	46.0	15.3
389.200	V	1.09	40.3	30.1	15.5	2.5	28.2	46.0	17.8
Y-axis									
289.629	H	1.23	47.1	30.0	13.0	2.1	32.2	46.0	13.8
321.797	H	1.01	45.1	30.0	13.9	2.3	31.3	46.0	14.7
389.532	H	1.00	42.5	30.1	15.5	2.5	30.4	46.0	15.6
417.676	V	1.12	39.9	30.2	16.2	2.6	28.5	46.0	17.5
Z-axis									
162.286	H	1.77	43.7	30.0	12.7	1.6	28.0	43.5	15.5
290.268	H	1.22	48.2	30.0	13.0	2.1	33.3	46.0	12.7
318.528	H	1.01	45.2	30.0	13.8	2.2	31.2	46.0	14.8
390.201	V	1.09	39.6	30.1	15.5	2.5	27.5	46.0	18.5
390.239	H	1.00	41.9	30.1	15.5	2.5	29.8	46.0	16.2

Note: 1) V/H: Vertical / Horizontal polarization

2) AMP, AF and CL: pre-amplifier gain, antenna factor and cable loss including an attenuator/filter if used

3) Actual = Reading - AMP + AF + CL

4) Margin = Limit - Actual



Peak and average data, radiated emissions (above 1000 MHz)														
Freq. (MHz)	Pol. (V/H)	Height (m)	Reading (dB μ V)		AMP (dB)	AF (dB/m)	CL (dB)	Actual (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		
			PK	AV				PK	AV	PK	AV	PK	AV	
X-axis														
2466.0	H	1.70	42.77	37.50	43.75	27.87	14.91	41.80	36.53	74.00	54.00	32.20	17.47	
2466.0	V	1.50	39.92	31.78	43.75	27.87	14.91	38.95	30.81	74.00	54.00	35.05	23.19	
2506.0	H	1.29	43.03	37.88	43.77	28.00	14.96	42.22	37.07	74.00	54.00	31.78	16.93	
2506.0	V	1.47	39.26	32.28	43.77	28.00	14.96	38.45	31.47	74.00	54.00	35.55	22.53	
2544.0	H	1.67	43.41	38.03	43.80	28.06	14.99	42.66	37.28	74.00	54.00	31.34	16.72	
2544.0	V	1.52	40.15	31.79	43.80	28.06	14.99	39.40	31.04	74.00	54.00	34.60	22.96	
4804.4	H	1.50	60.19	53.50	44.56	31.68	7.48	54.79	48.10	74.00	54.00	19.21	5.90	
4804.4	V	1.44	56.45	49.40	44.56	31.68	7.48	51.05	44.00	74.00	54.00	22.95	10.00	
4884.4	H	1.47	58.98	52.51	44.65	31.84	7.56	53.73	47.26	74.00	54.00	20.27	6.74	
4884.4	V	1.43	54.12	46.70	44.65	31.84	7.56	48.87	41.45	74.00	54.00	25.13	12.55	
4960.5	H	1.46	56.45	49.08	44.73	32.00	7.63	51.35	43.98	74.00	54.00	22.65	10.02	
4960.5	V	1.46	52.35	44.98	44.73	32.00	7.63	47.25	39.88	74.00	54.00	26.75	14.12	
Y-axis														
2466.0	H	1.37	43.28	37.89	43.75	27.87	14.91	42.31	36.92	74.00	54.00	31.69	17.08	
2466.0	V	1.37	41.52	35.47	43.75	27.87	14.91	40.55	34.50	74.00	54.00	33.45	19.50	
2506.0	H	1.26	43.50	38.34	43.77	28.00	14.96	42.69	37.53	74.00	54.00	31.31	16.47	
2506.0	V	1.41	41.80	36.10	43.77	28.00	14.96	40.99	35.29	74.00	54.00	33.01	18.71	
2544.0	H	1.40	43.02	37.66	43.80	28.06	14.99	42.27	36.91	74.00	54.00	31.73	17.09	
2544.0	V	1.33	42.29	36.23	43.80	28.06	14.99	41.54	35.48	74.00	54.00	32.46	18.52	
4804.4	H	1.47	58.98	52.61	44.56	31.68	7.48	53.58	47.21	74.00	54.00	20.42	6.79	
4804.4	V	1.43	56.07	49.02	44.56	31.68	7.48	50.67	43.62	74.00	54.00	23.33	10.38	
4884.4	H	1.06	57.03	50.36	44.65	31.84	7.56	51.78	45.11	74.00	54.00	22.22	8.89	
4884.4	V	1.53	53.63	46.21	44.65	31.84	7.56	48.38	40.96	74.00	54.00	25.62	13.04	
4960.5	H	1.42	56.70	49.40	44.73	32.00	7.63	51.60	44.30	74.00	54.00	22.40	9.70	
4960.5	V	1.45	51.56	43.04	44.73	32.00	7.63	46.46	37.94	74.00	54.00	27.54	16.06	
Z-axis														
2466.0	H	1.01	42.39	36.48	43.75	27.87	14.91	41.42	35.51	74.00	54.00	32.58	18.49	
2466.0	V	1.50	42.24	36.30	43.75	27.87	14.91	41.27	35.33	74.00	54.00	32.73	18.67	
2506.0	H	1.00	42.39	36.91	43.77	28.00	14.96	41.58	36.10	74.00	54.00	32.42	17.90	
2506.0	V	1.37	41.77	35.80	43.77	28.00	14.96	40.96	34.99	74.00	54.00	33.04	19.01	
2544.0	H	1.00	42.39	36.67	43.80	28.06	14.99	41.64	35.92	74.00	54.00	32.36	18.08	
2544.0	V	1.13	42.13	36.36	43.80	28.06	14.99	41.38	35.61	74.00	54.00	32.62	18.39	
4804.4	H	1.44	56.83	50.24	44.56	31.68	7.48	51.43	44.84	74.00	54.00	22.57	9.16	
4804.4	V	1.41	59.21	52.83	44.56	31.68	7.48	53.81	47.43	74.00	54.00	20.19	6.57	
4884.4	H	1.25	55.01	47.84	44.65	31.84	7.56	49.76	42.59	74.00	54.00	24.24	11.41	
4884.4	V	1.39	57.55	50.90	44.65	31.84	7.56	52.30	45.65	74.00	54.00	21.70	8.35	
4960.5	H	1.45	55.01	47.29	44.73	32.00	7.63	49.91	42.19	74.00	54.00	24.09	11.81	
4960.5	V	1.46	55.40	47.95	44.73	32.00	7.63	50.30	42.85	74.00	54.00	23.70	11.15	

Note: 1) V/H: Vertical / Horizontal polarization

2) PK/AV: Peak / Average values

2) AMP, AF and CL: pre-amplifier gain, antenna factor and cable loss including an attenuator/filter if used

4) Actual = Reading - AMP + AF + CL

5) Margin = Limit - Actual



Figure 3. Plot of the Band Edge (Conducted)

Lowest Channel (2402 MHz)



Highest Channel (2480 MHz)


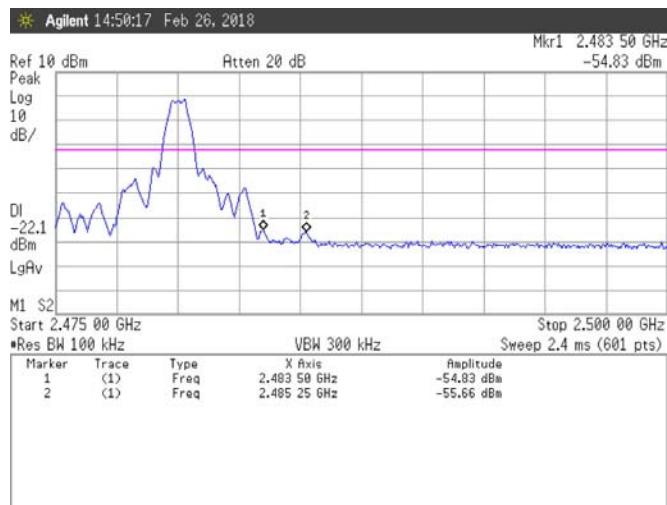





Figure 4. Plot of the Band Edge (Radiated)

Lowest Channel (2402 MHz)

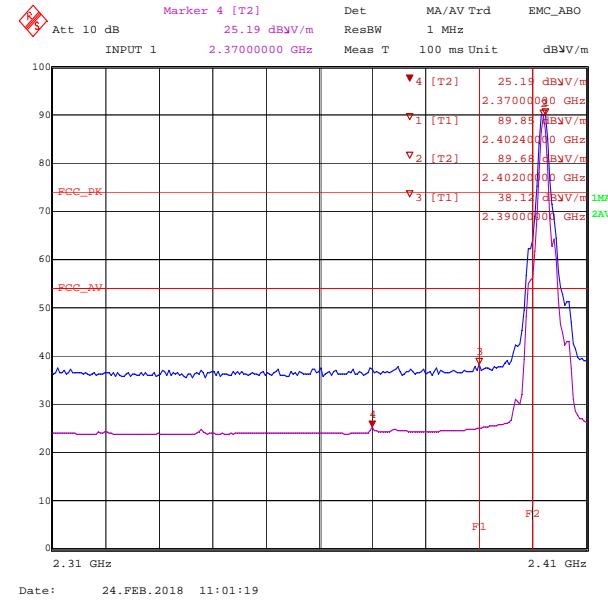Horizontal




Vertical

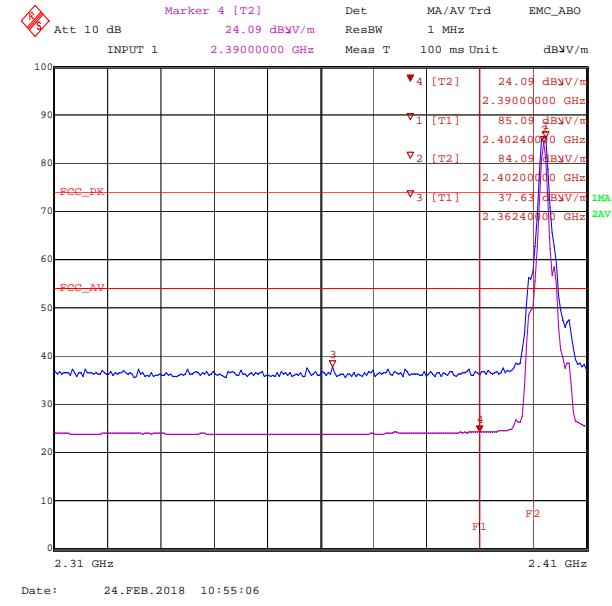

Highest Channel (2480 MHz)

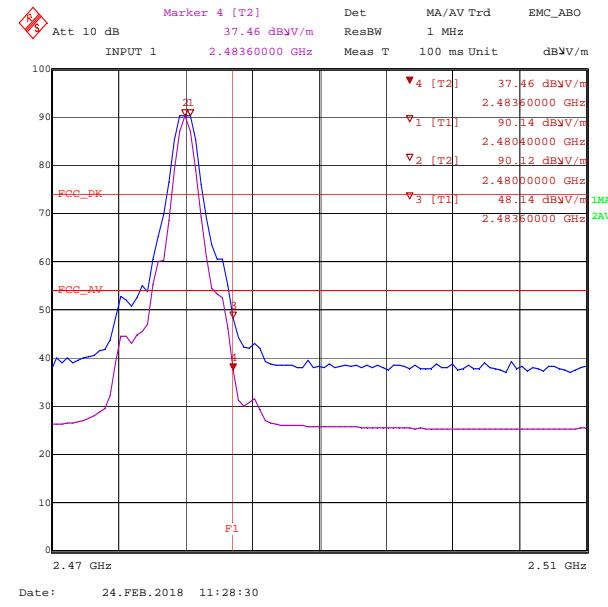Horizontal



Vertical

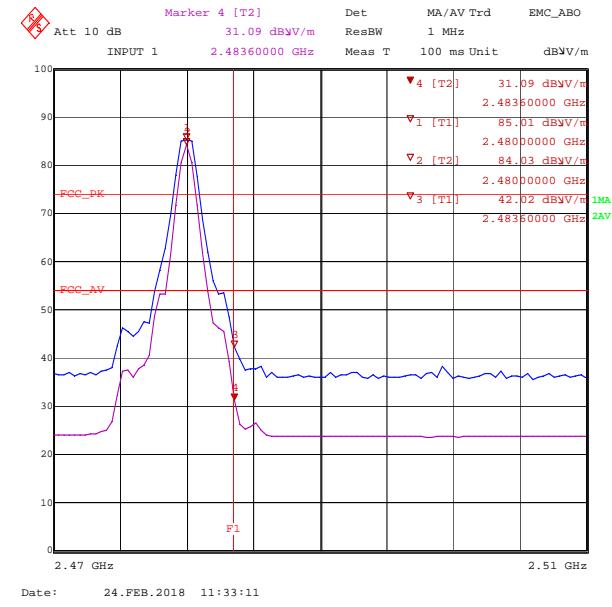
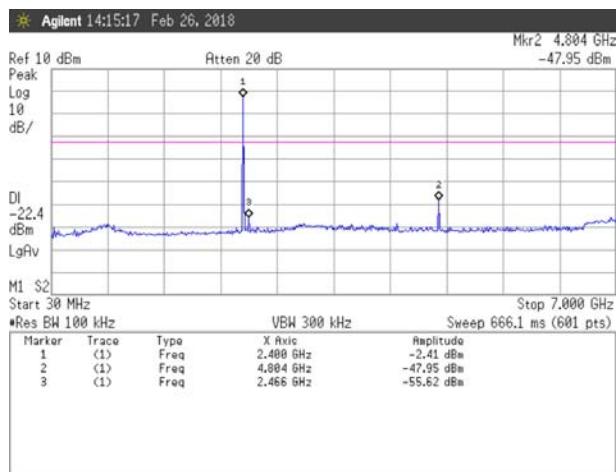


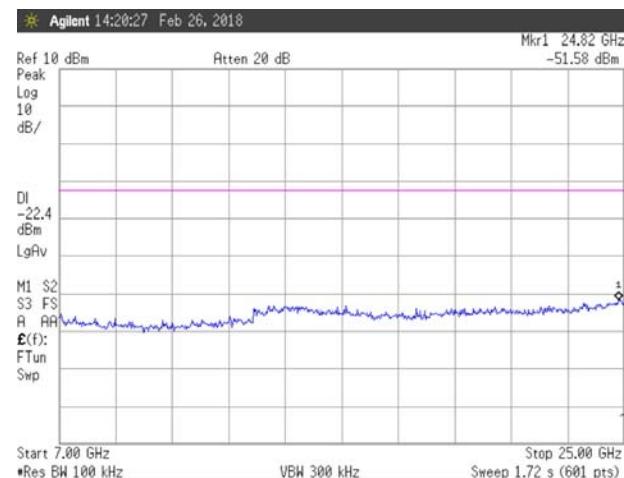


Figure 5. Spurious RF conducted emissions

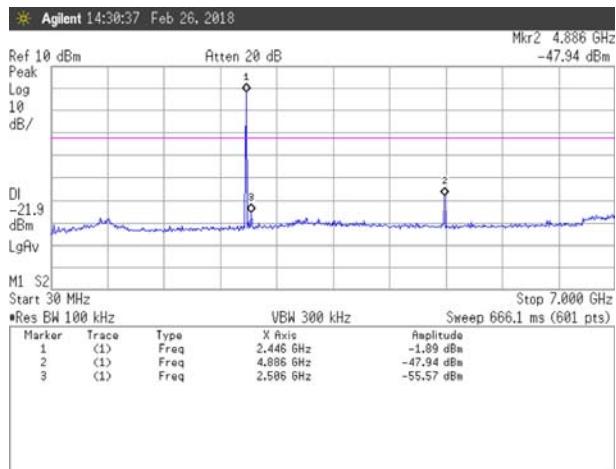
Lowest Channel (2402 MHz): 30 MHz ~ 7 GHz




Lowest Channel (2402 MHz): 7 GHz ~ 25 GHz




Middle Channel (2442 MHz): 30 MHz ~ 7 GHz



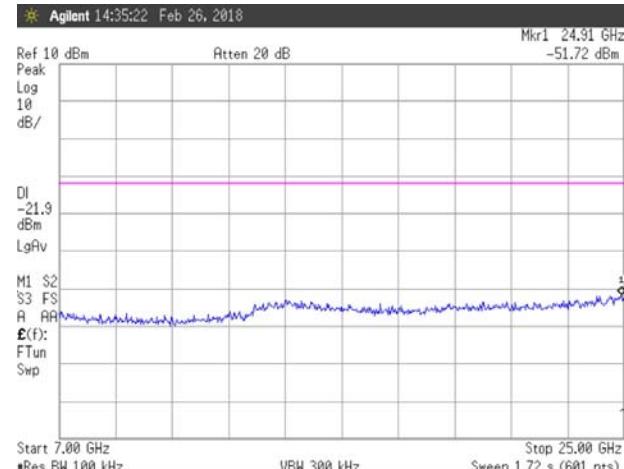Middle Channel (2442 MHz): 7 GHz ~ 25 GHz



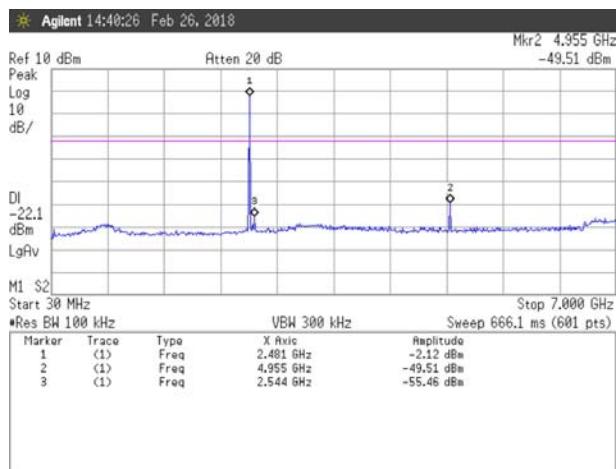Highest Channel (2480 MHz): 30 MHz ~ 7 GHz



Highest Channel (2480 MHz): 7 GHz ~ 25 GHz

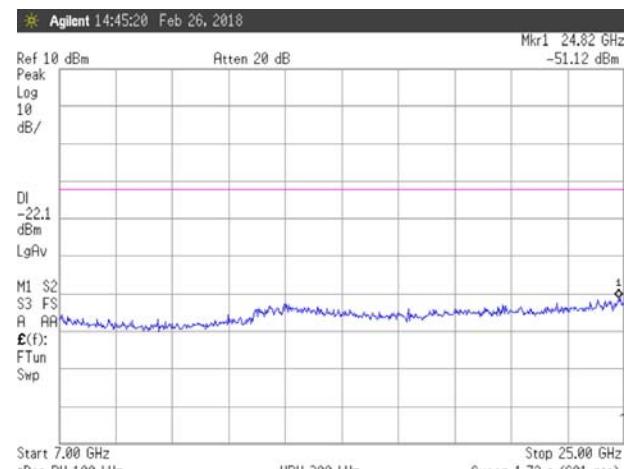
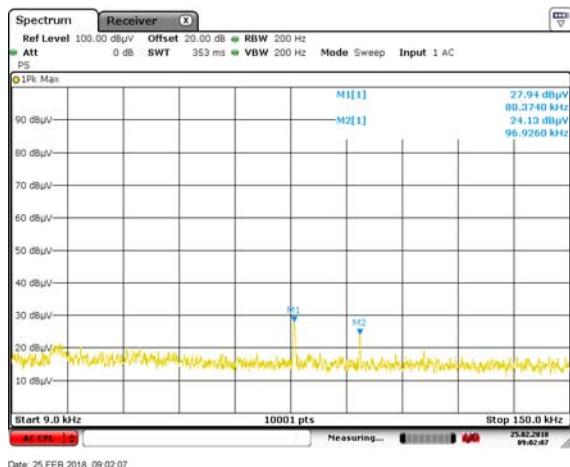


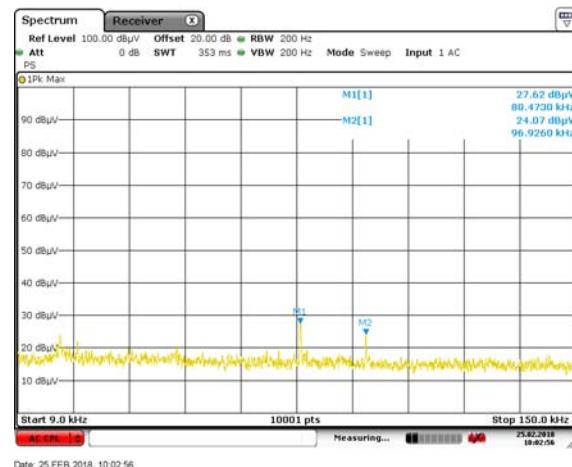


Figure 6. Emission plot for the preliminary radiated measurements

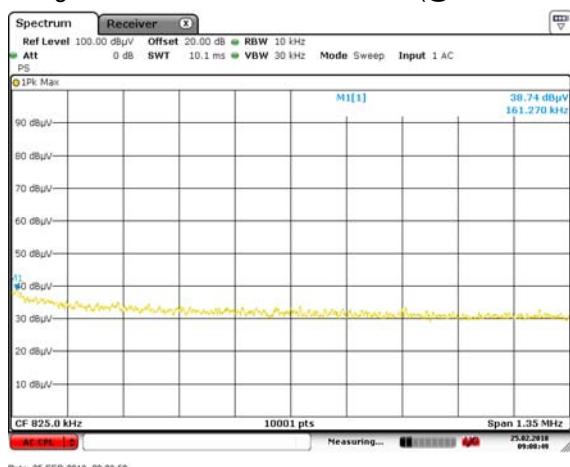
Operating at 2402 MHz: 9 kHz ~ 150 kHz (@ 3-m distance)




Operating at 2480 MHz: 9 kHz ~ 150 kHz (@ 3-m distance)




Operating at 2402 MHz: 150 kHz ~ 1.5 MHz (@ 3-m distance)



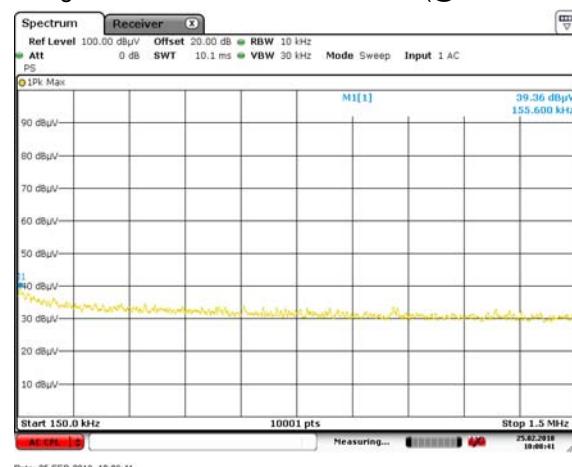
Operating at 2480 MHz: 150 kHz ~ 1.5 MHz (@ 3-m distance)



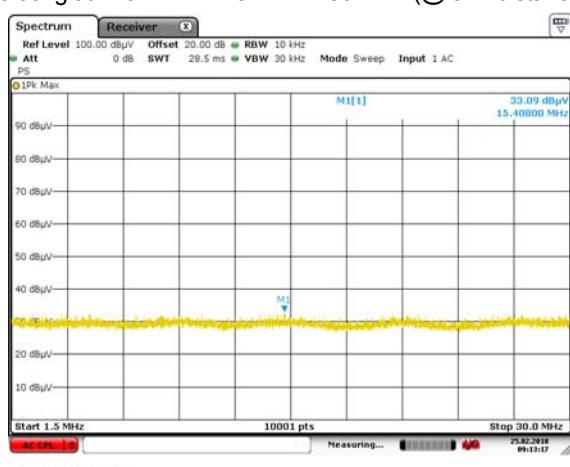Operating at 2402 MHz: 1.5 MHz ~ 30 MHz (@ 3-m distance)



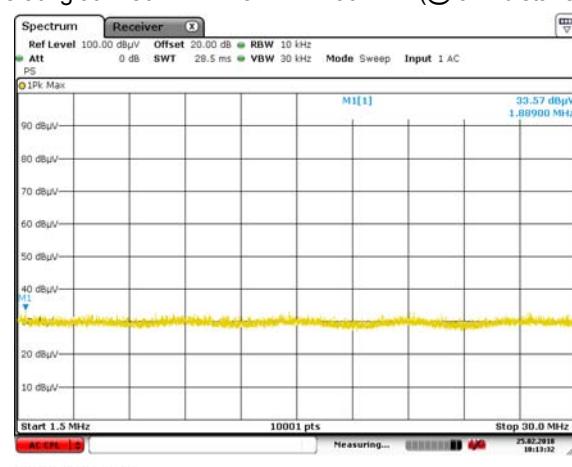Operating at 2480 MHz: 1.5 MHz ~ 30 MHz (@ 3-m distance)





Remark: The antenna factor and cable loss were added as the Offset 20.00 dB during the preliminary measurements.





Emission plot for the preliminary radiated measurements (continued)

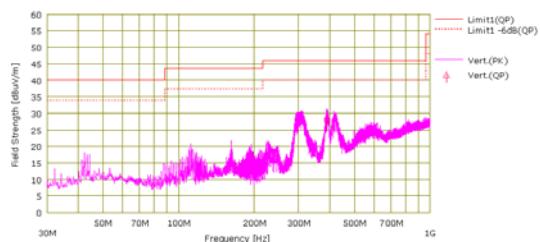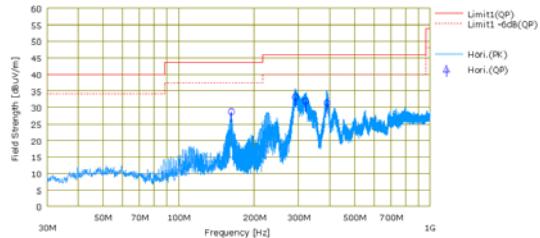
Operating at 2402 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)



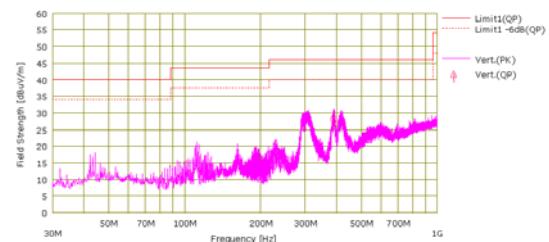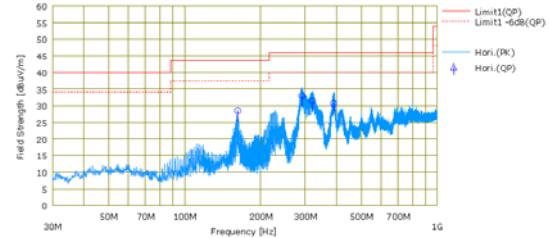
Operating at 2480 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)



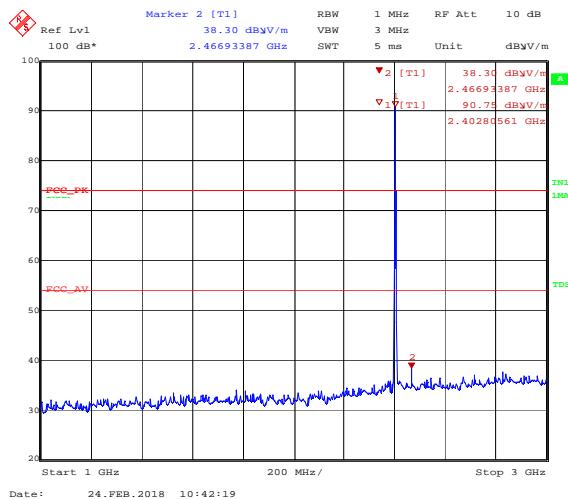
Operating at 2402 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)



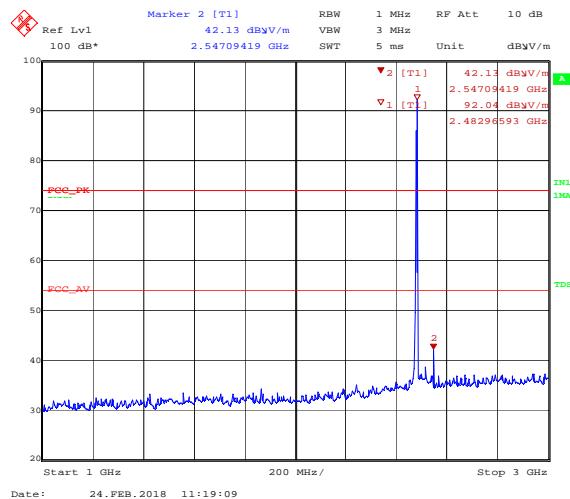
Operating at 2480 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)



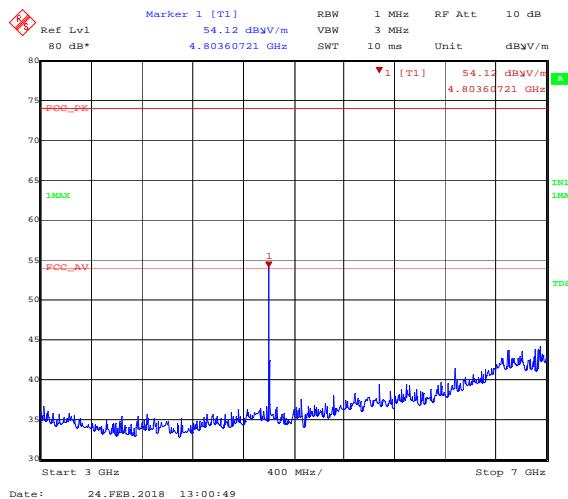Operating at 2402 MHz: 3 GHz ~ 7 GHz (@ 3-m distance)



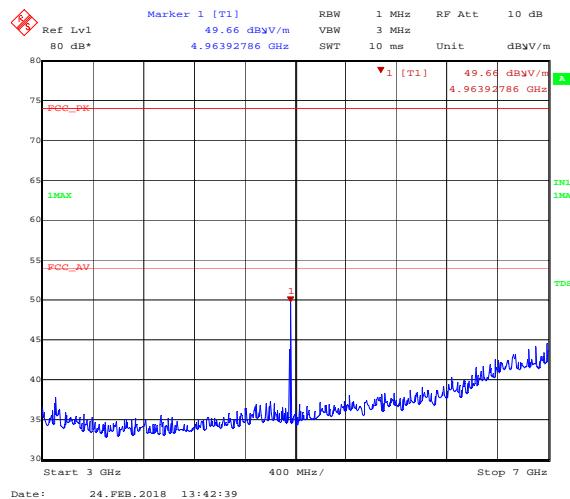
Operating at 2480 MHz: 3 GHz ~ 7 GHz (@ 3-m distance)






Emission plot for the preliminary radiated measurements (continued)

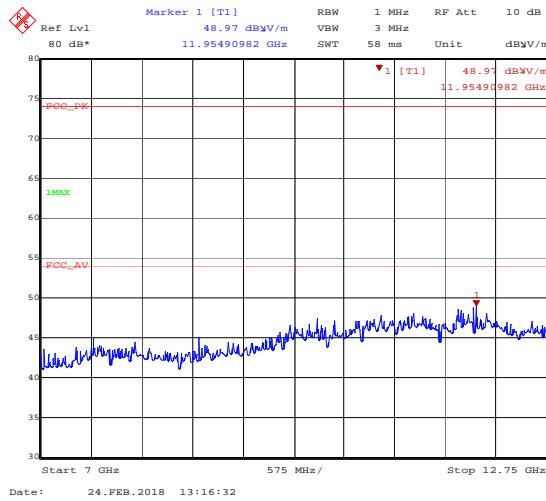
Operating at 2402 MHz: 7 GHz ~ 12.75 GHz (@ 3-m distance)



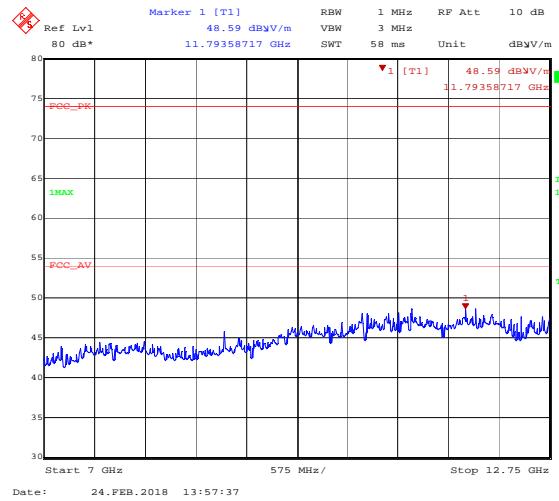
Operating at 2480 MHz: 7 GHz ~ 12.75 GHz (@ 3-m distance)



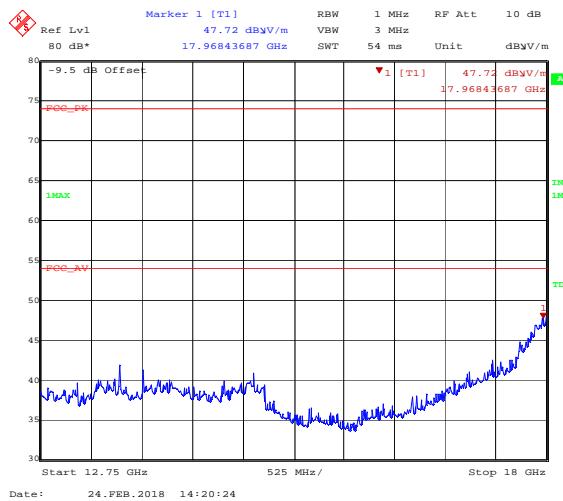
Operating at 2402 MHz: 12.75 GHz ~ 18 GHz (@ 1-m distance)



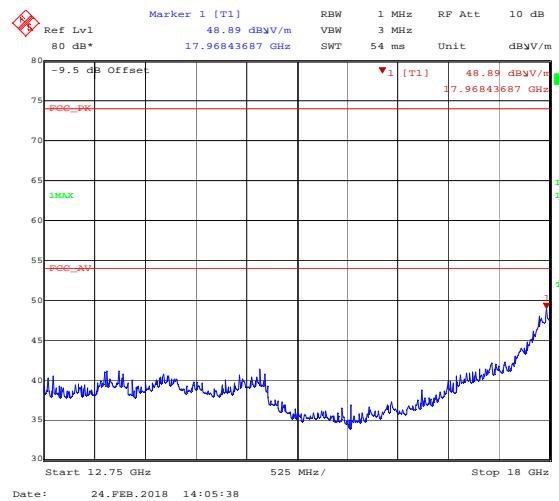
Operating at 2480 MHz: 12.75 GHz ~ 18 GHz (@ 1-m distance)



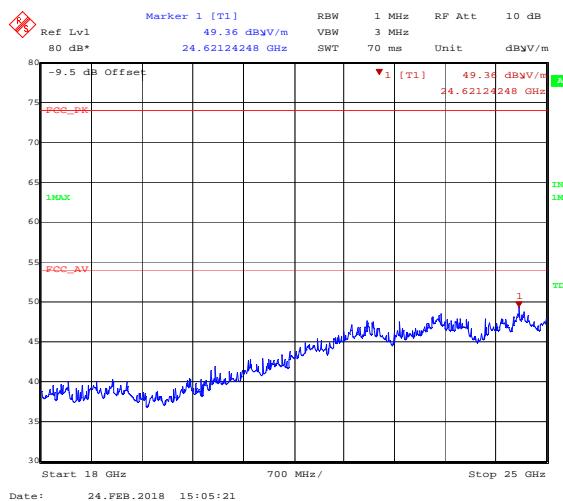Operating at 2402 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)



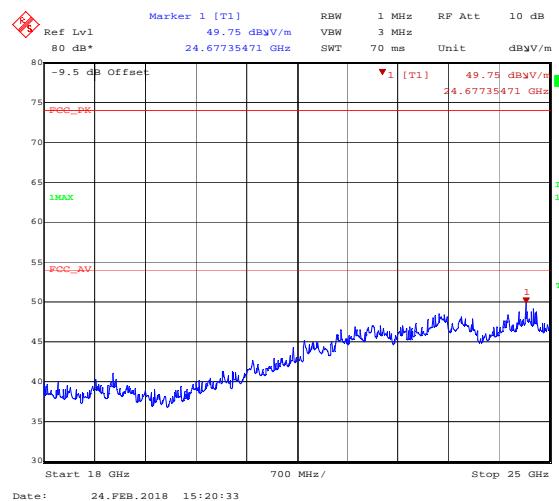Operating at 2480 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)





5.5. Peak power spectral density

5.5.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.5.2 Test Procedure(peak PSD)

Set the spectrum analyzer as follows:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to $1.5 \times$ DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.5.3 Test Results:

PASS

Table 4: Measured values of the Peak Power Spectral Density


Modulation	Operating frequency	PSD/3 kHz (dBm)	Limit (dBm)
GFSK	2402 MHz	-12.22	8
	2442 MHz	-12.01	8
	2480 MHz	-12.46	8

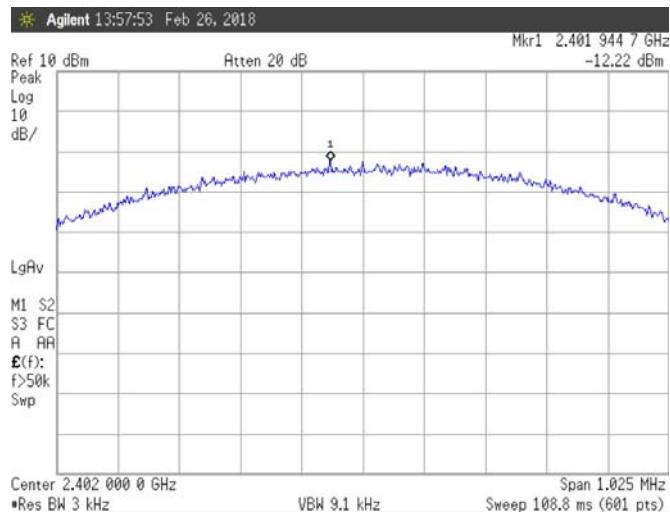Note: We took the insertion loss of the cable loss into consideration within the measuring instrument.

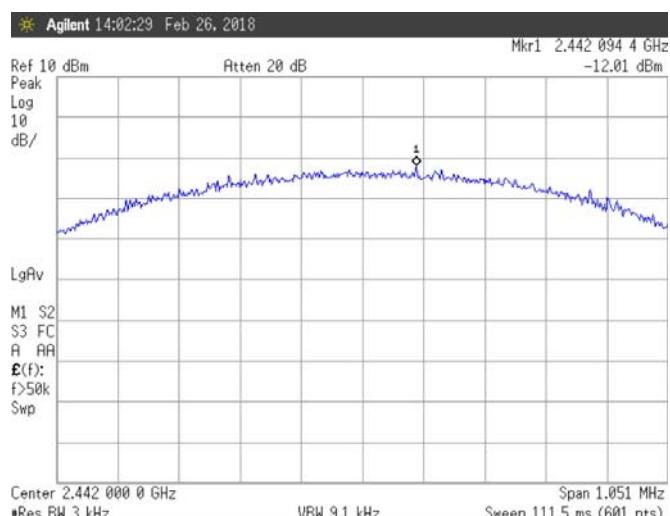


Figure 7. Plot of the Peak Power Spectral Density

Lowest Channel (2402 MHz)



Middle Channel (2442 MHz)



Highest Channel (2480 MHz)

