

Test Report

Report No. : FCC2024-00005

Company : OSANG Healthcare Co., Ltd.

Representative : Hong Seung Eok

Address : 132, Anyangcheondong-ro, Dongan-gu, Anyang-si, Gyeonggi-do, South Korea

1. Product Name : GluNEO Pet

-Model Name: OG-SH02-PEM

2. FCC ID : WSX-OG-SH02-PEM

3. Date of Receipt : 2024-03-20

4. Date of test : 2024-03-20 ~ 2024-04-12

5. Test Method : 47CFR Part15 Subpart C §15.247

6. Test Result : PASS

Tested by : Sang Wook, Lee

Approved by : Sung Ryul, Kim

SANGWOOK, LEE

Sung Ryul, Kim

1. This result of the above report are unrelated to KS Q ISO/IEC 17025 and KOLAS recognition and the result of testing with samples and sample names suggested by the client does not guarantee the quality of entire products
2. This report should not be used for advertising, lawsuit, etc. without any official permission of KTC.
It is only used for the purpose of the quality test.
3. The authenticity of the report is available on the website (www.ktc.re.kr)

2024. 04. 19.



Korea Testing Certification institute

www.ktc.re.kr [15809] 22 Heungan-daero 27beon-gil, Gunpo-si, Gyeonggi-Do, Korea

TEL : +82-1899-7654, FAX : +82-31-428-2926 TEL : +82-1899-7654, FAX : +82-31-428-3736

Test Report

Report No. : FCC2024-00005

Contents

1. GENERAL INFORMATION	3
2. ANTENNA REQUIREMENT	11
3. SPURIOUS EMISSIONS, RESTRICED BAND EDGES.....	12
4. 6 dB CHANNEL BANDWIDTH & 99% BANDWIDTH.....	35
5. MAXIMUM PEAK OUTPUT POWER	39
6. POWER SPECTRAL DENSITY.....	41

Test Report

Report No. : FCC2024-00005

1. General Information

1.1. Summary

Testing Laboratory	Korea Testing Certification
Testing location / address	22 Heungan-daero 27 beon-gil, Gunpo-si, Gyeonggi-Do, 15809, Republic of Korea
Applicant	OSANG Healthcare Co., Ltd.
Address of Applicant	132, Anyangcheondong-ro, Dongan-gu, Anyang-si, Gyeonggi-do, South Korea
Contact Person of Applicant	Su-Chul, Park
Phone Number of Applicant	+82-31-460-0425
Manufacturer	OSANG Healthcare Co., Ltd.
Address of Manufacture	132, Anyangcheondong-ro, Dongan-gu, Anyang-si, Gyeonggi-do, South Korea
Product Name	GluNEO Pet
Model Name	OG-SH02-PEM
Variants Model	-
Power Supply	DC 3.0 V
Frequency Range	2 402 MHz ~ 2 480 MHz (BLE PHY 1M)
Modulation	GFSK
Number of Channels	40 channels
Operation Temperature	0 °C ~ 40 °C
Antenna Type / Antenna Gain	Internal PCB antenna / -0.72 dBi
Hardware Version	Ver 1.00
Software Version	Ver 1.00

Test Report

Report No. : FCC2024-00005

1.2. Test Information

1.2.1 Supporting Equipment Used During Test

Use	Manufacturer	Model	Comments
EUT	OSANG Healthcare Co., Ltd.	TPD-AH2	-
AE	Samsung Electronics Vietnam Co., Ltd.	NT950XDB	Laptop
JIG BOARD	SILICON LAB	CP2104-MINIEK	-

Supplementary information
EUT = Equipment Under Test, AE = Auxiliary / Associated Equipment, SIM = Simulator (Not Subjected to Test)

1.2.2 Report revision History

Issue date	Report No.	Reason for issue
2024-04-19	FCC2024-00005	First issued.

Test Report

 Report No. : FCC2024-00005

1.3. Result Summary

Standard Section	Requirement – Test Standard : FCC Part 15 Subpart C	Result / Comments
15.205(a) 15.209 15.247(d)	Transmitter Radiated Spurious Emissions and Conducted Spurious Emission	Complied with requirement
15.247(a)(2)	6 dB Bandwidth	Complied with requirement
15.247(b)(3)	Maximum Peak Conducted Output Power	Complied with requirement
15.247(e)	Peak Power Spectral Density	Complied with requirement
15.207	AC Power Line Conducted Emission	N/A ¹⁾

Note;

1) Please refer to FCC 15.207 which states, "Measurements to demonstrate compliance with the conducted limits are not required for devices employ Battery for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines". Therefore, for this device, AC Power Line Conducted Emissions investigation is not required.

- All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and KDB 558074 D01 15.247 Meas Guidance V05r02.

Test Report

Report No. : FCC2024-00005

1.4. List of Test Equipment

Test Equipment Used					
Equipment	Model	Manufacturer	Serial Number	Last Cal. Date	Cal. Due Date
EMI Test Receiver	N9030A	Agilent	MY54170518	24/05/2023	24/05/2024
Turn Table	DT3000-3t	Innco Systems	-	-	-
Antenna Mast	MA4640-XP-ET-0800	Innco Systems	-	-	-
Loop Antenna	HFH2-Z2E	ROHDE & SCHWARZ	100982	18/07/2022	18/07/2024
Bilog Antenna	VULB9168	Schwarzbeck	01044	14/07/2022	14/07/2024
Horn Antenna	HF907	ROHDE & SCHWARZ	102641	21/03/2024	21/03/2025
Horn Antenna	QSH-SL-18-26-s-20	STEATITE ANTENNA	17871	22/03/2024	22/03/2025
Pre Amplifier	310	SONOMA	340215	26/12/2023	26/12/2024
Pre Amplifier	SCU-18F	ROHDE & SCHWARZ	180041	20/03/2024	20/03/2025
Pre Amplifier	SCU-26D	ROHDE & SCHWARZ	2030827	20/03/2024	20/03/2025
P-Series dual channel power meter	N1912A	Keysight	MY45100764	26/12/2023	26/12/2024
power sensor	N1921A	Keysight	MA45241181	26/12/2023	26/12/2024
Spectrum Analyzer	FSV30	ROHDE & SCHWARZ	103924	28/04/2023	28/04/2024

Test Report

Report No. : FCC2024-00005

1.5. Measurement uncertainty

Parameter	Uncertainty	
RF Output Power	± 0.39 dB	
Power Spectral Density	± 0.41 dB	
Conducted Spurious Emission	± 1.16 dB	
Radiated Emission, 9 kHz to 30 MHz	H	± 3.58 dB
	V	± 3.58 dB
Radiated Emission, below 1 GHz	H	± 3.94 dB
	V	± 3.72 dB
Radiated Emission, above 1 GHz	H	± 4.78 dB
	V	± 4.72 dB

Note;
-This uncertainty represents an expanded uncertainty expressed at approximately 95% confidence level using a coverage factor of k=2.

Test Report

Report No. : FCC2024-00005

1.6. Channel Lists – Bluetooth low energy

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2 402	20	2 442
1	2 404	21	2 444
2	2 406	22	2 446
3	2 408	23	2 448
4	2 410	24	2 450
5	2 412	25	2 452
6	2 414	26	2 454
7	2 416	27	2 456
8	2 418	28	2 458
9	2 420	29	2 460
10	2 422	30	2 462
11	2 424	31	2 464
12	2 426	32	2 466
13	2 428	33	2 468
14	2 430	34	2 470
15	2 432	35	2 472
16	2 434	36	2 474
17	2 436	37	2 476
18	2 438	38	2 478
19	2 440	39	2 480

Test Report

Report No. : FCC2024-00005

1.7. Duty cycle

Referred to KDB 558074 D01 15.247 Meas Guidance v05r02.

Set RBW \geq OBW if possible; otherwise, set RBW to the largest available value.


Set detector = peak or average

The zero-span measurement method shall not be used unless both RBW and VBW are $>50/T$ and the number of sweep points across duration T exceeds 100.

Ambient Temp.	$(23 \pm 1) ^\circ\text{C}$
Relative Humidity	$(43 \pm 5) \% \text{ R.H.}$
Test Result	PASS (Refer to below)

Test Mode	Frequency (MHz)	On time (ms)	Period (ms)	Duty cycle (%)	Duty Cycle Factor (dB)
1M PHY	2 402	2.124	2.492	85.23	0.69
	2 440	2.128	2.496	85.26	0.69
	2 480	2.128	2.496	85.26	0.69

Duty cycle (%) : $(\text{TX on time} / (\text{TX on} + \text{Tx off}) \text{ time}) \times 100$
 Duty cycle factor(dB) : $10 \log(1/ \text{Duty cycle})$

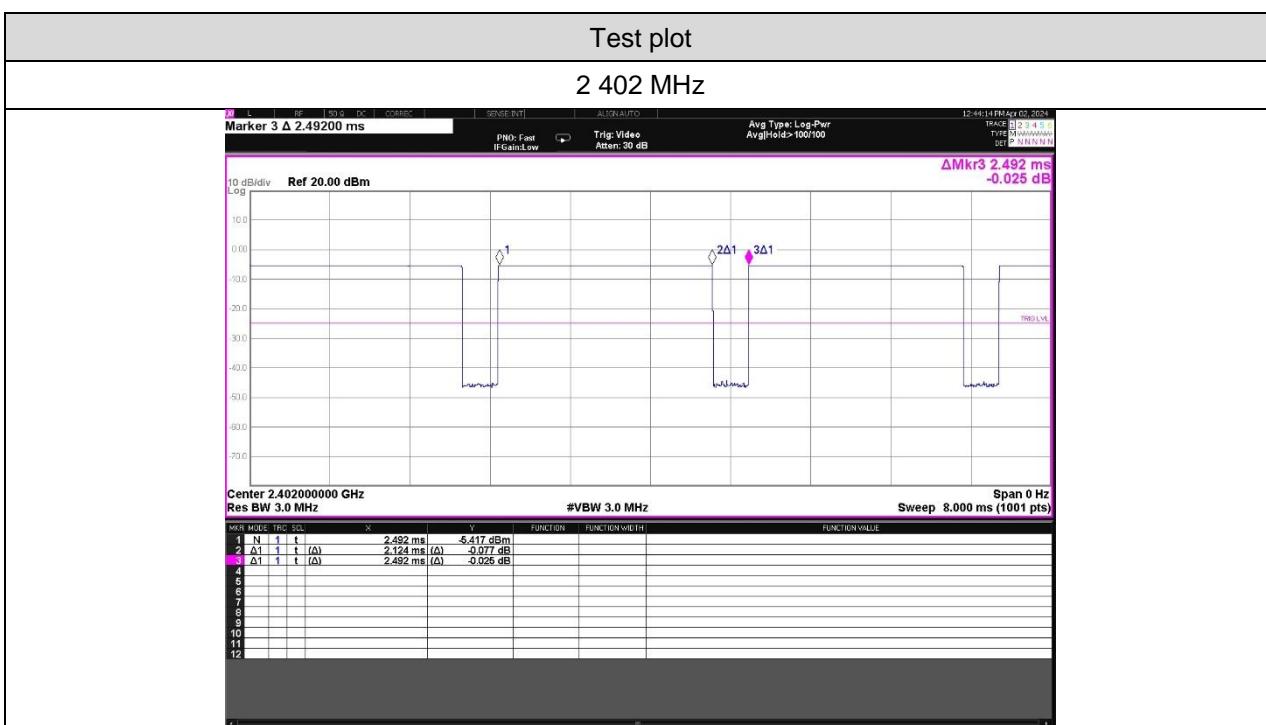

Test Report

Report No. : FCC2024-00005



Test Report

Report No. : FCC2024-00005

2. Antenna Requirement

47 CFR § 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Antenna of EUT

Antenna used in this product is Chip Antenna. Gain = -0.72 dBi

Test Report

 Report No. : FCC2024-00005

3. Spurious Emissions, Restricted Band Edges

3.1. Limit

47 CFR Part 15																								
<p>Section § 15.247(d)</p> <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).</p> <p>Section § 15.209(a)</p> <p>Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center; padding: 5px;">Frequency (MHz)</th> <th style="text-align: center; padding: 5px;">Field Strength (microvolts/meter)</th> <th style="text-align: center; padding: 5px;">Measurement Distance (Meters)</th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 5px;">0.009-0.490</td> <td style="text-align: center; padding: 5px;">2 400/F(kHz)</td> <td style="text-align: center; padding: 5px;">300</td> </tr> <tr> <td style="text-align: center; padding: 5px;">0.490-1.705</td> <td style="text-align: center; padding: 5px;">24 000/F(kHz)</td> <td style="text-align: center; padding: 5px;">30</td> </tr> <tr> <td style="text-align: center; padding: 5px;">1.705-30.0</td> <td style="text-align: center; padding: 5px;">30</td> <td style="text-align: center; padding: 5px;">30</td> </tr> <tr> <td style="text-align: center; padding: 5px;">30-88</td> <td style="text-align: center; padding: 5px;">100**</td> <td style="text-align: center; padding: 5px;">3</td> </tr> <tr> <td style="text-align: center; padding: 5px;">88-216</td> <td style="text-align: center; padding: 5px;">150**</td> <td style="text-align: center; padding: 5px;">3</td> </tr> <tr> <td style="text-align: center; padding: 5px;">216-960</td> <td style="text-align: center; padding: 5px;">200**</td> <td style="text-align: center; padding: 5px;">3</td> </tr> <tr> <td style="text-align: center; padding: 5px;">Above 960</td> <td style="text-align: center; padding: 5px;">500</td> <td style="text-align: center; padding: 5px;">3</td> </tr> </tbody> </table> <p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.</p>	Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (Meters)	0.009-0.490	2 400/F(kHz)	300	0.490-1.705	24 000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (Meters)																						
0.009-0.490	2 400/F(kHz)	300																						
0.490-1.705	24 000/F(kHz)	30																						
1.705-30.0	30	30																						
30-88	100**	3																						
88-216	150**	3																						
216-960	200**	3																						
Above 960	500	3																						

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (Meters)
0.009-0.490	2 400/F(kHz)	300
0.490-1.705	24 000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

Test Report


Report No. : FCC2024-00005

3.2. Test Configuration

Test Setup for radiated test (Below 30 MHz)

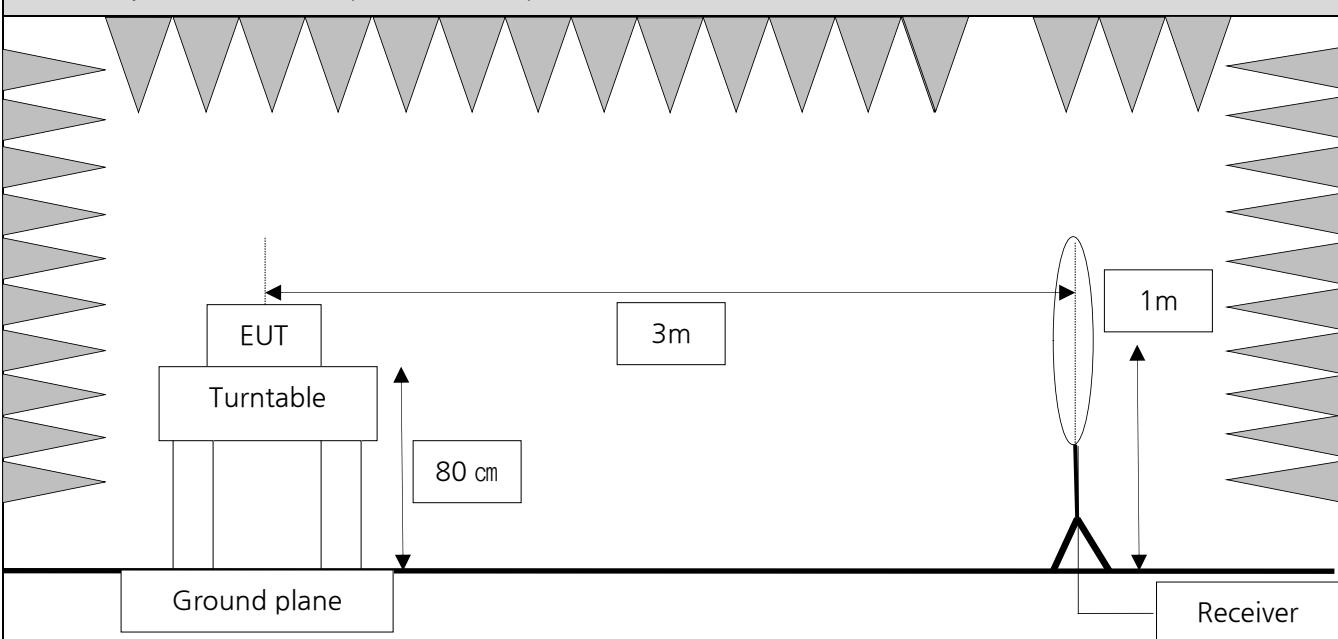


Test Setup for radiated test (30 MHz to 1 GHz)

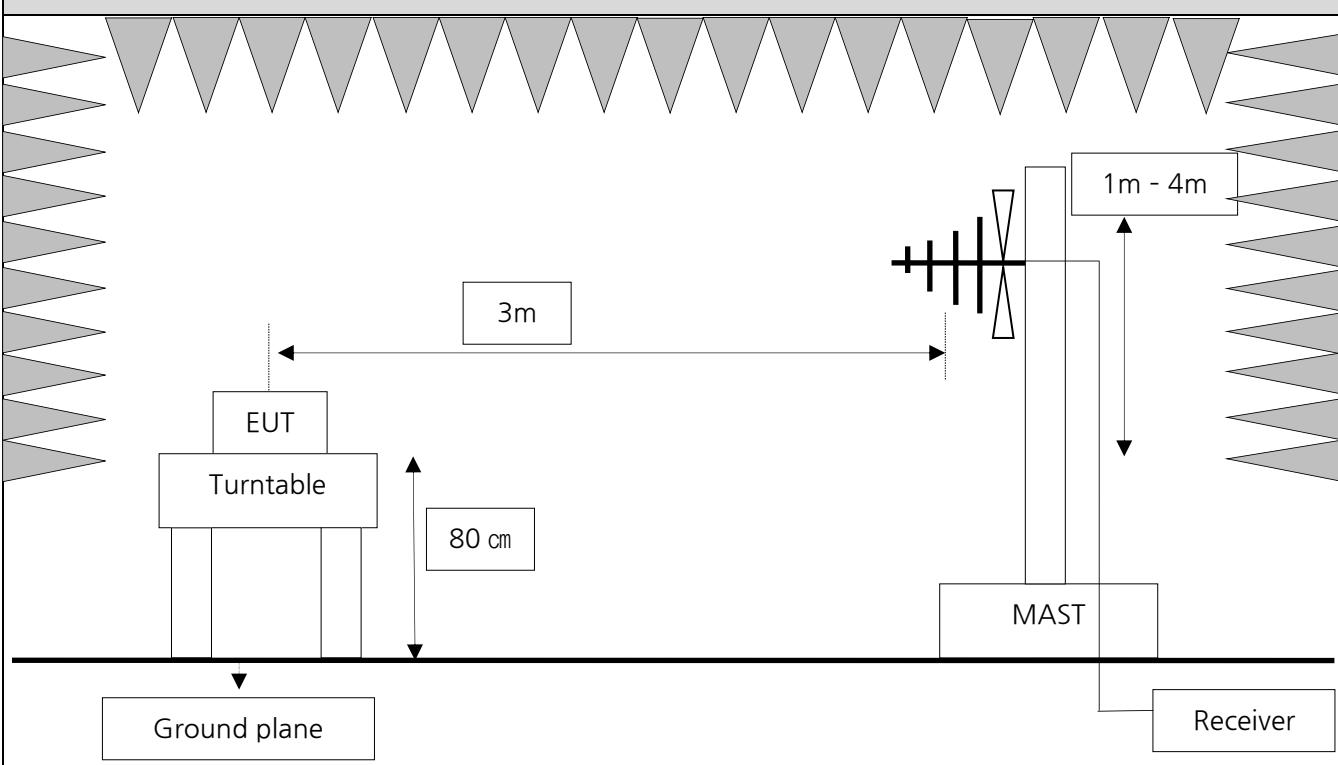

Test Report

Report No. : FCC2024-00005

Test Setup for radiated test (Above 1 GHz)

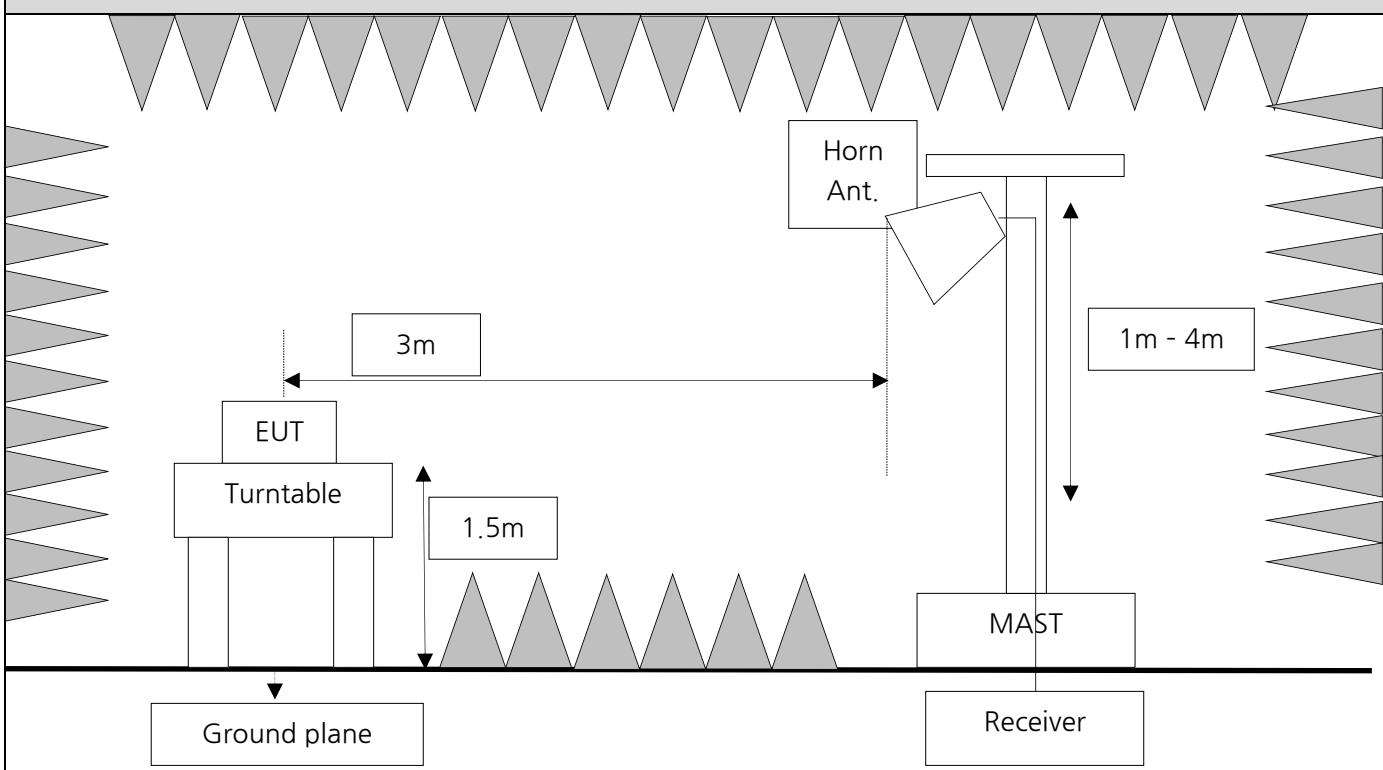

Test Setup for Conducted test



Test Report

Report No. : FCC2024-00005

3.3. Test Procedure

Radiated emissions from the EUT were measured according to the dictates in section 11.11 & 11.12 of ANSI C63.10-2013.

Test Procedure of Radiated emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive rotating table 0.8 meters above the ground at semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT.
3. The loop antenna is fixed at 1 meter above the ground.
4. Find Worst condition on the X-axis, Y-axis, and Z-axis of EUT.
5. Both horizontal and vertical polarization of the antenna are set to make the measurement.
6. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- . Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW \geq 3 x RBW
 - Allow sweeps to continue until the trace stabilizes.

Correction Factor for measurement distance at 3m($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Correction Factor for measurement distance at 3m ($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Actual value = Measured Value + Antenna Factor + Cable Loss + Correction Factor(Distance Factor)

Test Procedure of Radiated emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive rotating table 0.8 meters above the ground at semi-anechoic chamber.
2. Find Worst condition on the X-axis, Y-axis, and Z-axis of EUT.
3. There is a bi-log antenna and a horn antenna, its height are varied from 1m to 4m to determine the maximum value of the field strength.
4. Both horizontal and vertical polarization of the antenna are set to make the measurement.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

Actual value = Measured Value + Antenna Factor + Cable Loss

Test Report

Report No. : FCC2024-00005

Test Procedure of Radiated emissions(Above 1 GHz)

1. The EUT was placed on a non-conductive rotating table 1.5 meters above the ground at semi-anechoic chamber.
2. Find Worst condition on the X-axis, Y-axis, and Z-axis of EUT.
3. There is a horn antenna, its height is varied from 1m to 4m to determine the maximum value of the field strength.
4. Both horizontal and vertical polarization of the antenna are set to make the measurement.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Allow sweeps to continue until the trace stabilizes.

(2) Measurement Type(Average):

- Duty cycle < 98 %, duty cycle variations are less than ± 2 %

- Measured Frequency Range : 1 GHz – 25 GHz

- Detector = RMS
- Averaging type = power (i.e., RMS)

- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.

- Trace mode = perform a trace average of at least 100 traces.

- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

6. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

Actual value(Peak) = Measured Value + Antenna Factor + Cable Loss + distance extrapolation factor

Actual value(Average) = Measured Value + Antenna Factor + Cable Loss + distance extrapolation factor + duty cycle factor

Note:

If the peak detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Test Report

Report No. : FCC2024-00005

Test Procedure for Radiated Restricted Band Edge

1. The EUT was placed on a non-conductive rotating table 1.5 meters above the ground at semi-anechoic chamber.
2. Find Worst condition on the X-axis, Y-axis, and Z-axis of EUT.
3. There is a horn antenna, its height is varied from 1m to 4m to determine the maximum value of the field strength.
4. Both horizontal and vertical polarization of the antenna are set to make the measurement.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Max hold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average):

- Duty cycle < 98 %, duty cycle variations are less than ± 2 %
- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (i.e., RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = perform a trace average of at least 100 traces.
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

6. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

Actual value(Peak) = Measured Value + Antenna Factor + Cable Loss + distance extrapolation factor

Actual value(Average) = Measured Value + Antenna Factor + Cable Loss + distance extrapolation factor + duty cycle factor

Note:

If the peak detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Test Report

Report No. : FCC2024-00005

Test Procedure of Conducted emissions

1. Conducted Emissions at Band Edge

Set the center frequency and span to encompass frequency range to be measured.

- RBW = 100 kHz
- VBW \geq 3 x RBW
- Detector = Peak
- Sweep time = auto
- Trace mode = Max hold
- Allow sweeps to continue until the trace stabilizes.

2. Conducted Spurious Emissions

Start frequency was set to 9 kHz and stop frequency was set to 25 GHz.

- RBW = 1 MHz
- VBW \geq 3 x RBW
- Detector = Peak
- Sweep time = auto
- Trace = Max hold
- Allow sweeps to continue until the trace stabilizes.

3. TDF function

- measure to conducted emissions from 9 kHz to 25 GHz.
- path loss of frequency range was compensated to spectrum analyzer as TDF function.

Test Report

Report No. : FCC2024-00005

3.4. Test Results

Ambient Temp.	(22 ± 1) °C
Relative Humidity	(43 ± 5) % R.H.
Test Result	PASS (Refer to below)

Note;

- Actual Value(dBuV/m) = Measured Value(dBuV) + Correction Factors(dB/m).
- The Actual Value using the peak detector does not include the duty factor.
- The measured of emissions are not reporting much lower than the limits by over 20 dB.
- Margin Value = Emission level – Limit Value.

Frequency Range : 9 kHz ~ 30 MHz

- 1M PHY

Radiated Emission results								
Measured Frequency (MHz)	Measured Value (dBuV)	Antenna Polarization (H/V)	Antenna Factor (dB)	(Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
9 kHz ~ 30 MHz have been tested and test data more than 20 dB margin. No Radiated Spurious Emissions Found								
Note; - The results of the emissions at frequencies(2 402 MHz, 2 440 MHz, 2 480 MHz) were almost the same.								

Test Report

 Report No. : FCC2024-00005

Frequency Range : 30 MHz ~ 1 GHz

- 1M PHY – Worst Data

Radiated Emission results									
Measured Frequency (MHz)	Measured Value (dBuV)	Detector	Antenna Polarization (H/V)	(Antenna Factor + Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)	
79.955	41.4	Peak	V	-11.5	-	29.9	40	10.1	
92.08	46	Peak	H	-12.4	-	33.6	43.5	9.9	
146.521	32.8	Peak	V	-6.4	-	26.4	43.5	17.1	
189.929	40.4	Peak	H	-8.7	-	31.7	43.5	11.8	
275.774	41.6	Peak	V	-5.9	-	35.7	46	10.3	
785.145	34.7	Peak	H	7.1	-	41.8	46	4.2	

Note;

- The results of the emissions at frequencies(2 402 MHz, 2 440 MHz, 2 480 MHz) were almost the same.
- Among other frequencies, the worst results were reported (**1M PHY, 2402 MHz**).

Frequency Range : 1 GHz ~ 25 GHz

- 1M PHY – 2 402 MHz (0 ch)

Radiated restricted band edge results									
Measured Frequency (MHz)	Measured Value (dBuV)	Detector	Antenna Polarization (H/V)	Antenna Factor (dB)	(Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2380.57	41.91	Peak	H	31.54	-24.60	-	48.85	74.00	25.15
2366.22	30.94	Average	H	31.48	-24.63	0.69	38.48	54.00	15.52

Test Report

Report No. : FCC2024-00005

Radiated Emission results									
Measured Frequency (MHz)	Measured Value (dBuV)	Detector	Antenna Polarization (H/V)	Antenna Factor (dB)	(Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4803.48	40.81	Peak	H	37.23	-19.39	-	58.65	74.00	15.35
4804.04	32.32	Average	H	37.24	-19.39	0.69	50.86	54.00	3.14

- 1M PHY – 2 440 MHz (19 ch)

Radiated Emission results									
Measured Frequency (MHz)	Measured Value (dBuV)	Detector	Antenna Polarization (H/V)	Antenna Factor (dB)	(Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4879.45	41.16	Peak	H	37.48	-19.28	-	59.36	74.00	14.64
4879.95	32.04	Average	H	37.48	-19.28	0.69	50.93	54.00	3.07

- 1M PHY – 2 480 MHz (39 ch)

Radiated restricted band edge results									
Measured Frequency (MHz)	Measured Value (dBuV)	Detector	Antenna Polarization (H/V)	Antenna Factor (dB)	(Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.56	42.08	Peak	H	32.02	-24.34	-	49.76	74.00	24.24
2483.89	31.11	Average	H	32.02	-24.34	0.69	39.48	54.00	14.52

Radiated Emission results									
Measured Frequency (MHz)	Measured Value (dBuV)	Detector	Antenna Polarization (H/V)	Antenna Factor (dB)	(Amp + Cable Loss) (dB)	Duty Factor (dB)	Actual Value (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4959.44	40.41	Peak	H	37.62	-19.14	-	58.89	74.00	15.11
4960.03	31.29	Average	H	37.62	-19.14	0.69	50.46	54.00	3.54


Test Report

Report No. : FCC2024-00005


Plots of Radiated Emission

- Test Plot for 1M PHY

Radiated restricted band edge plot - 2 402 MHz (Peak)

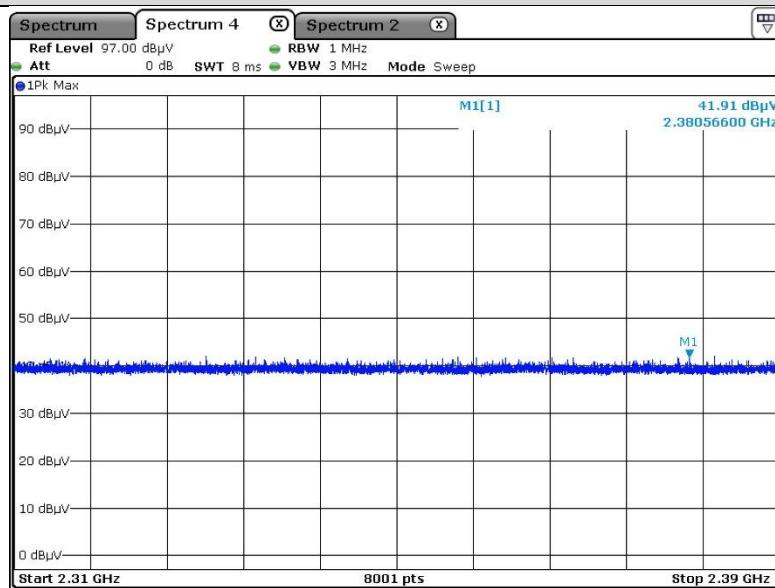


Radiated restricted band edge plot - 2 402 MHz (Average)

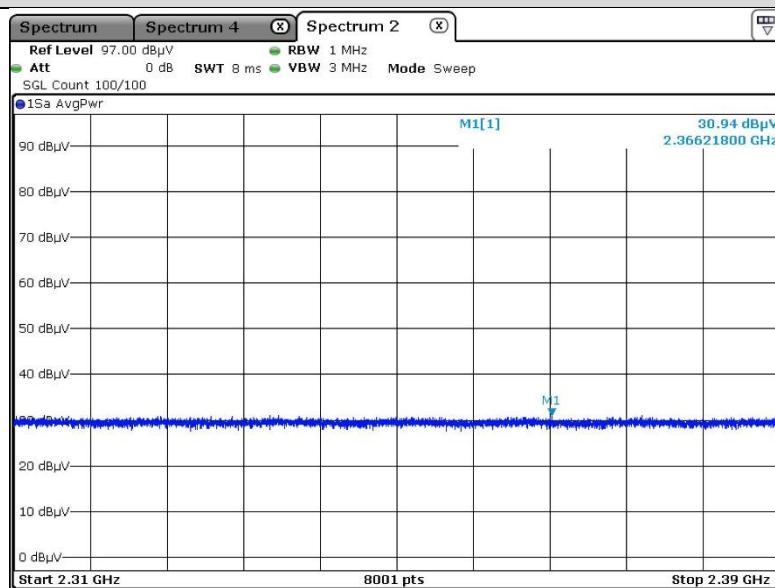


Test Report

Report No. : FCC2024-00005

Radiated Emissions 1 GHz - 3 GHz - 2 402 MHz

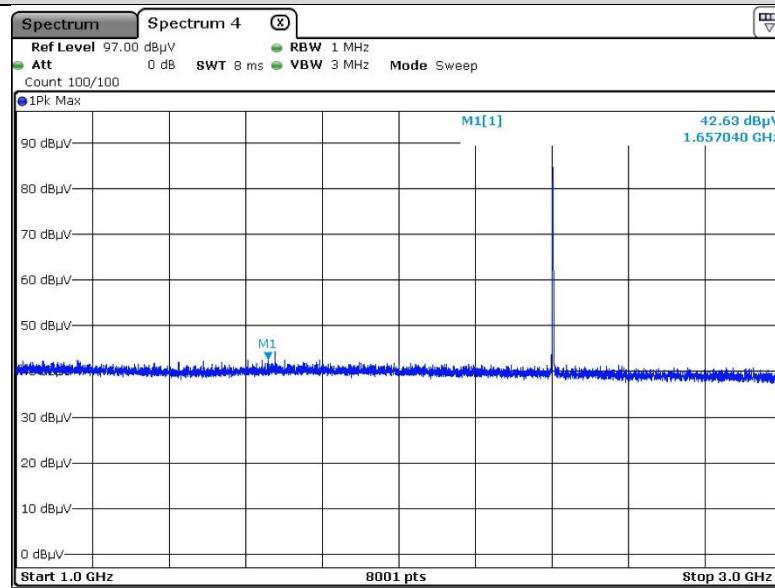


Radiated Emissions 3 GHz - 18 GHz - 2 402 MHz

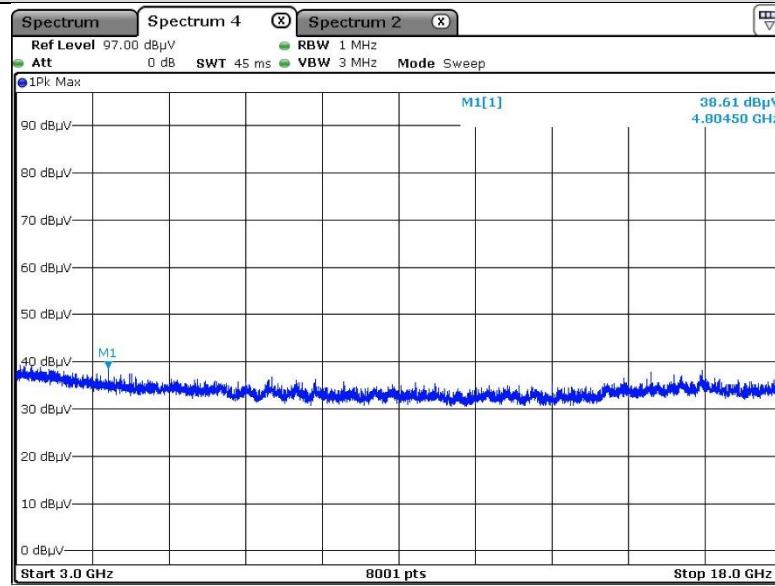


Test Report

Report No. : FCC2024-00005

Radiated Emissions - 2 402 MHz (2nd Harmonic) (Peak)

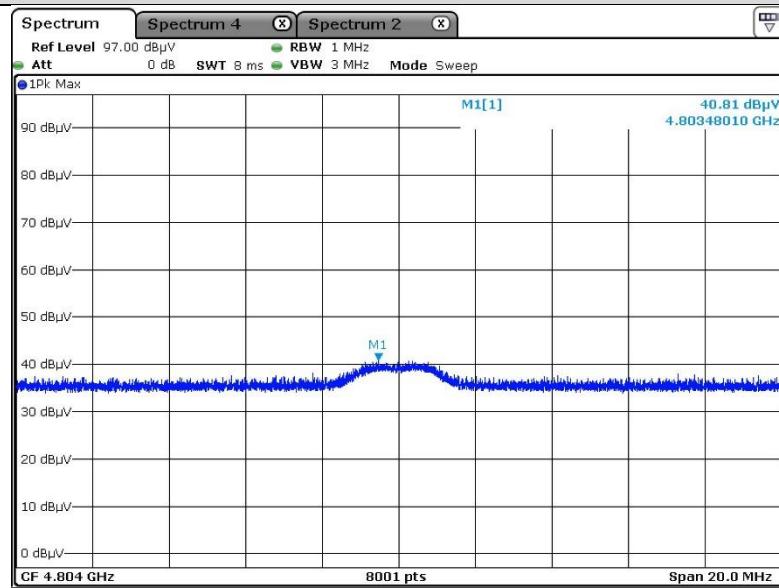


Radiated Emissions - 2 402 MHz (2nd Harmonic) (Average)

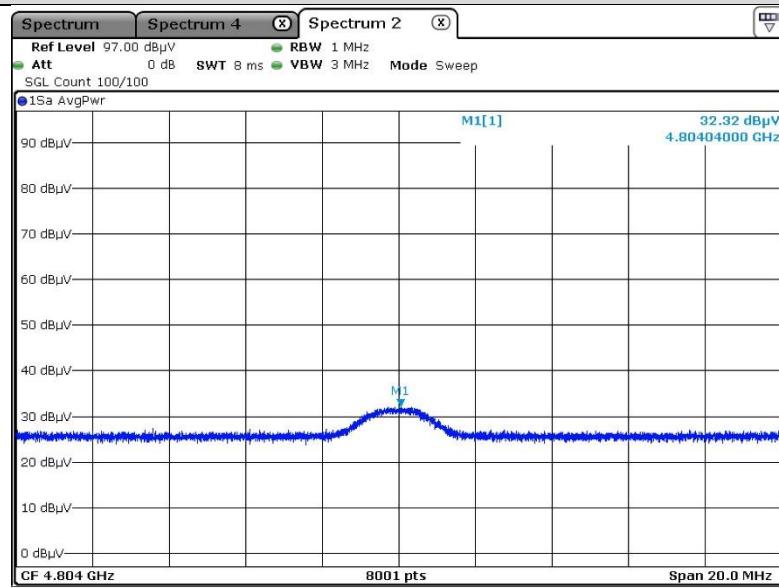


Test Report

Report No. : FCC2024-00005

Radiated Emissions 1 GHz - 3 GHz - 2 440 MHz

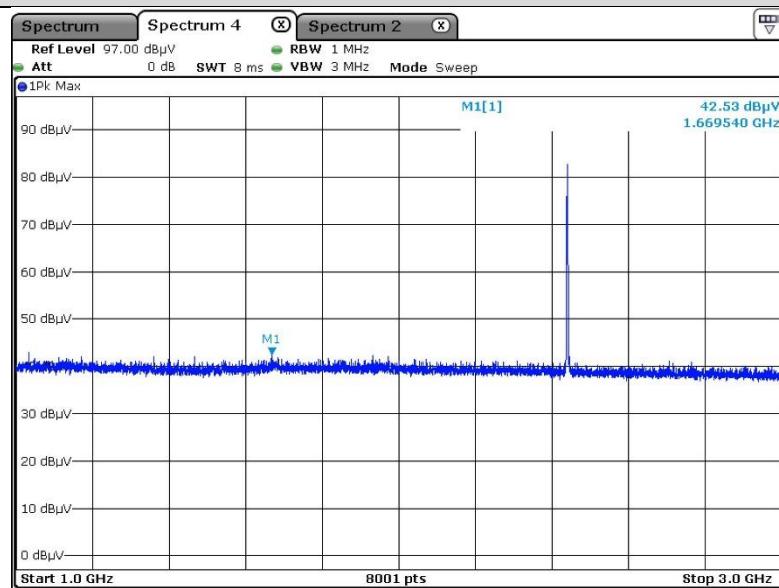


Radiated Emissions 3 GHz - 18 GHz - 2 440 MHz

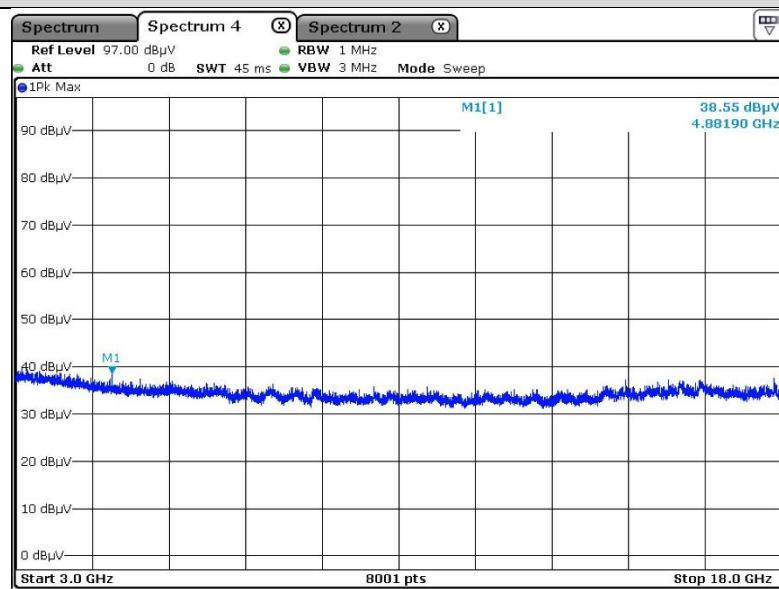


Test Report

Report No. : FCC2024-00005

Radiated Emissions - 2 440 MHz (2nd Harmonic) (Peak)

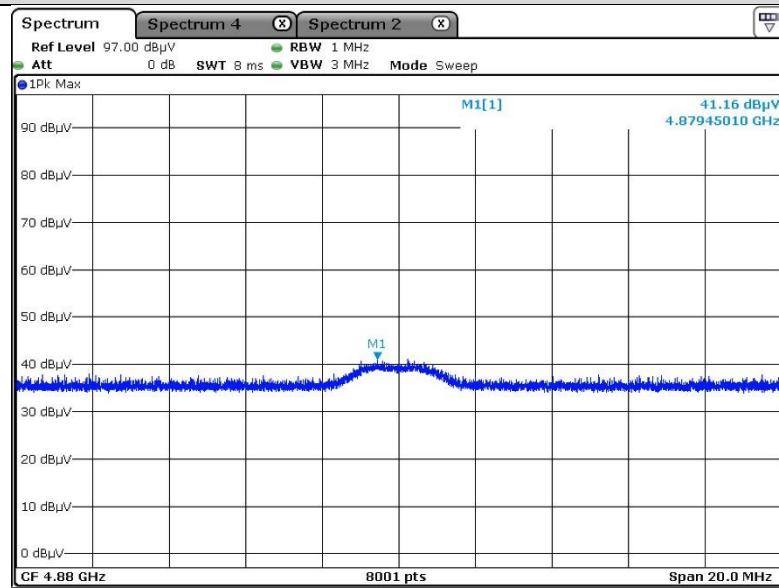


Radiated Emissions - 2 440 MHz (2nd Harmonic) (Average)

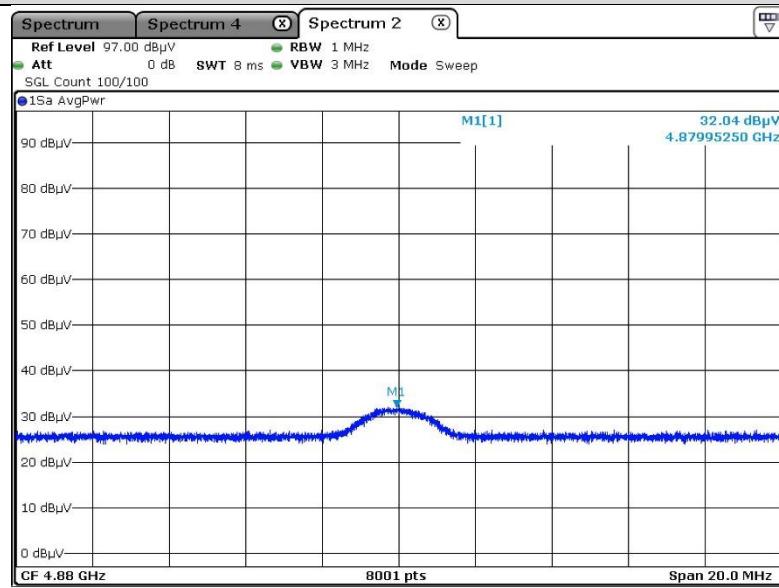


Test Report

Report No. : FCC2024-00005

Radiated restricted band edge plot - 2 480 MHz (Peak)

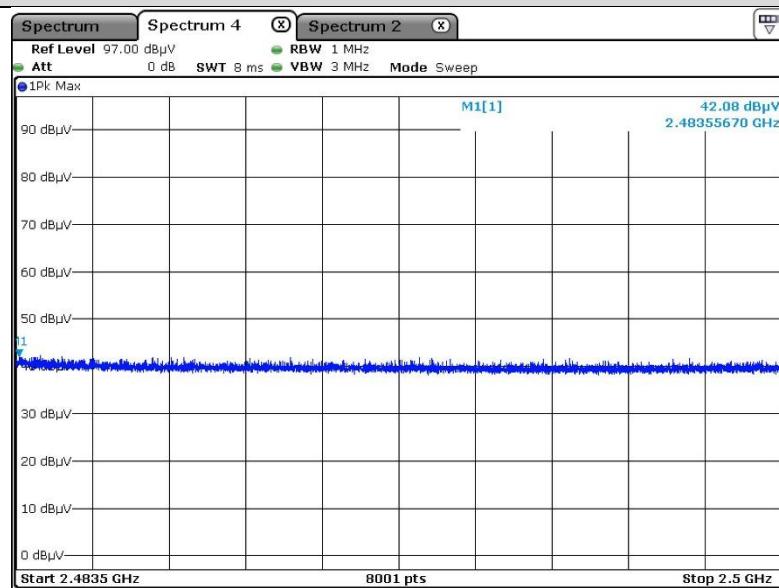


Radiated restricted band edge plot - 2 480 MHz (Average)

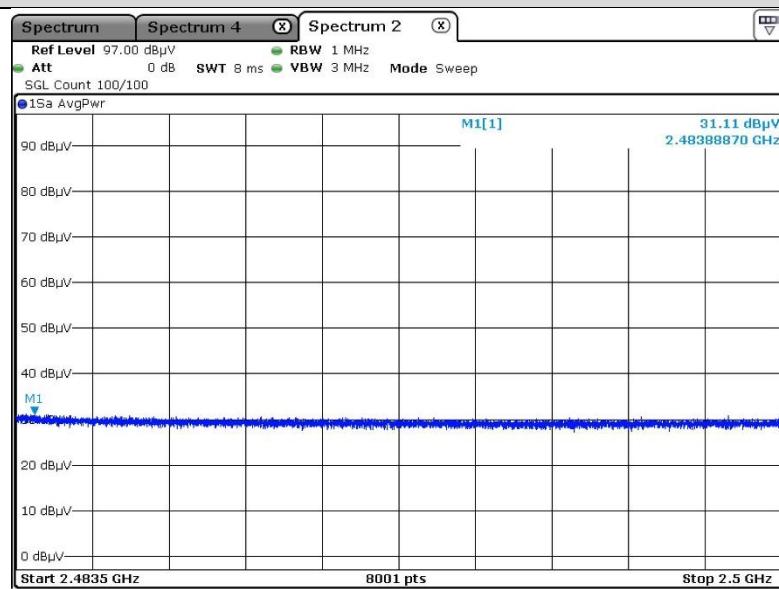


Test Report

Report No. : FCC2024-00005

Radiated Emissions 1 GHz - 3 GHz - 2 480 MHz

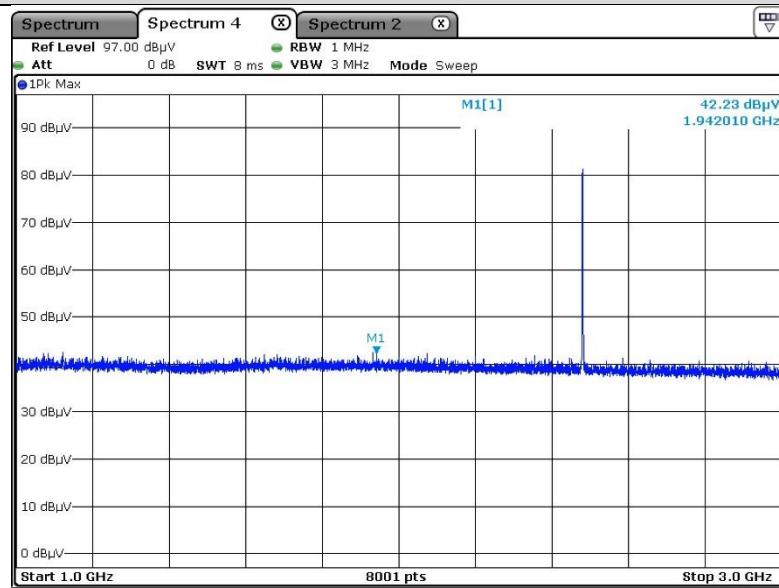


Radiated Emissions 3 GHz - 18 GHz - 2 480 MHz

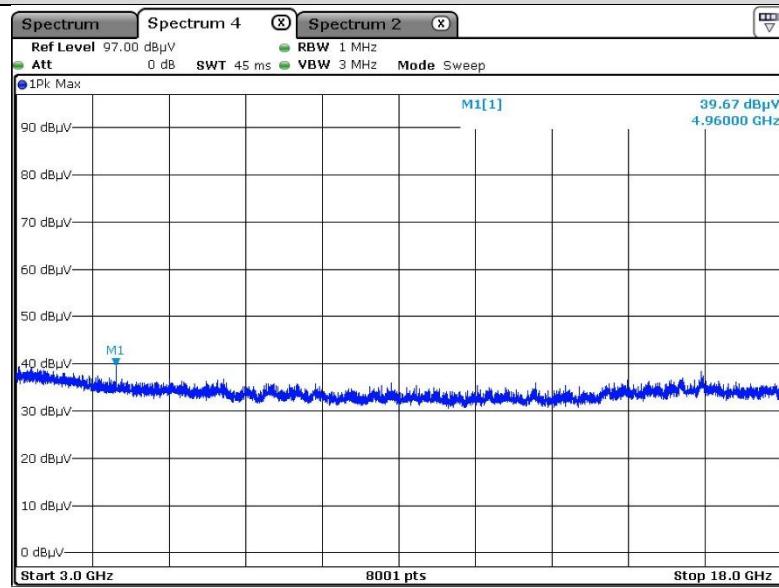


Test Report

Report No. : FCC2024-00005

Radiated Emissions - 2 480 MHz (2nd Harmonic) (Peak)

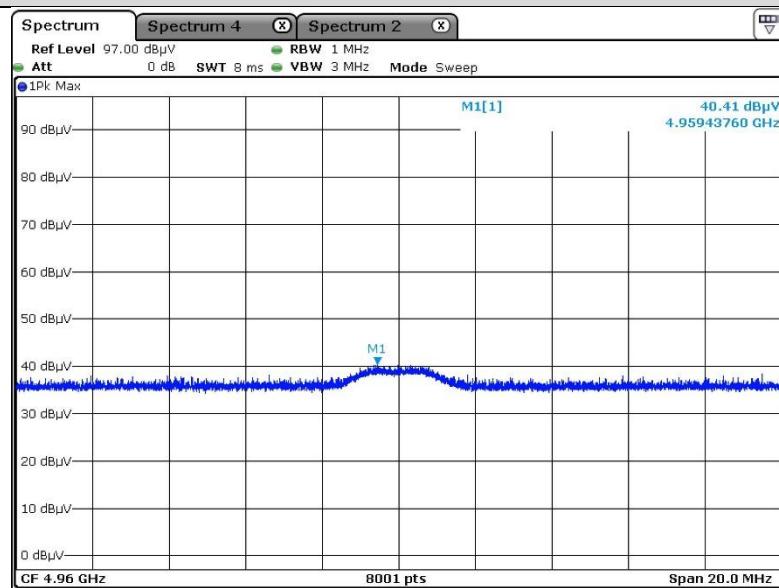


Radiated Emissions - 2 480 MHz (2nd Harmonic) (Average)

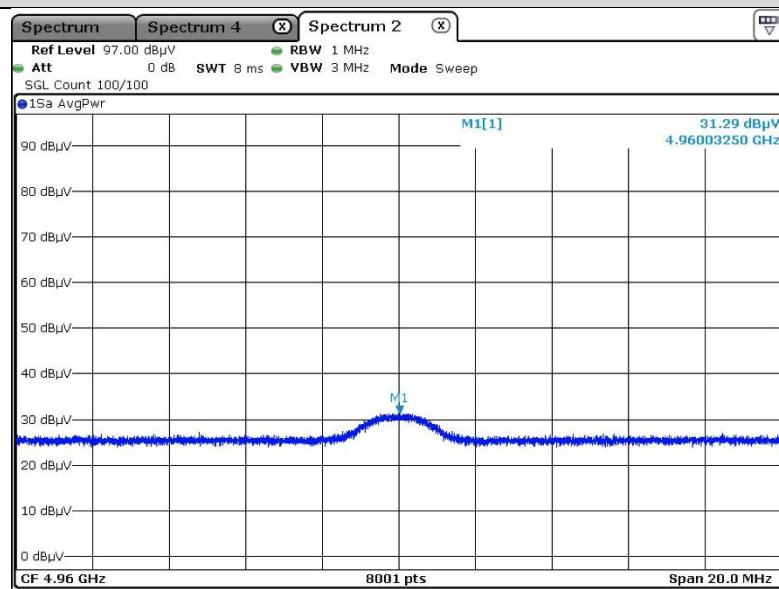

Test Report

Report No. : FCC2024-00005

Radiated Emissions 18 GHz - 25 GHz

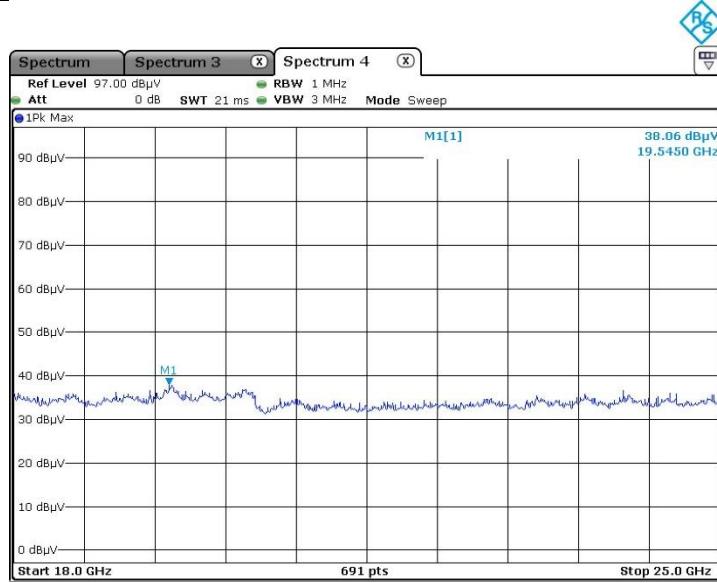



- The results of the emissions at frequencies(2 402 MHz, 2 440 MHz, 2 480 MHz) were almost the same.
- The worst plot for attached above. (1M PHY, 2480 MHz).

Test Report

Report No. : FCC2024-00005

Plots of Conducted Emission


-1M PHY

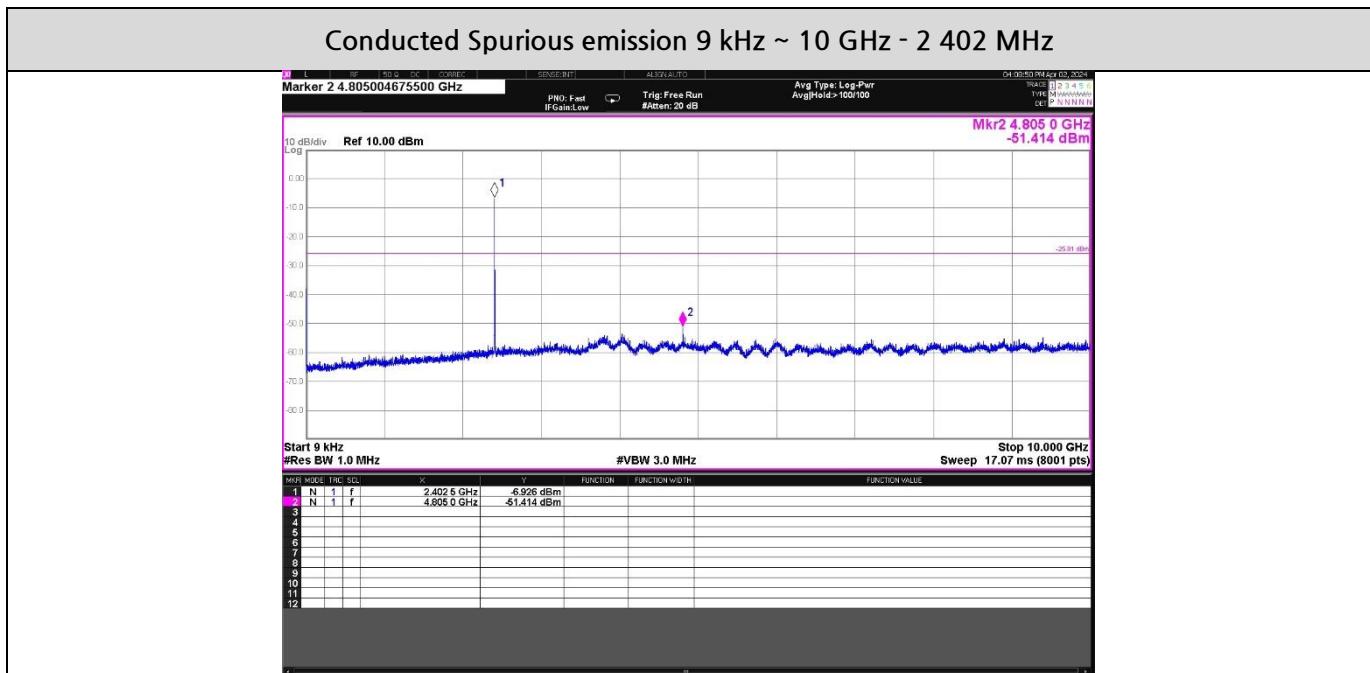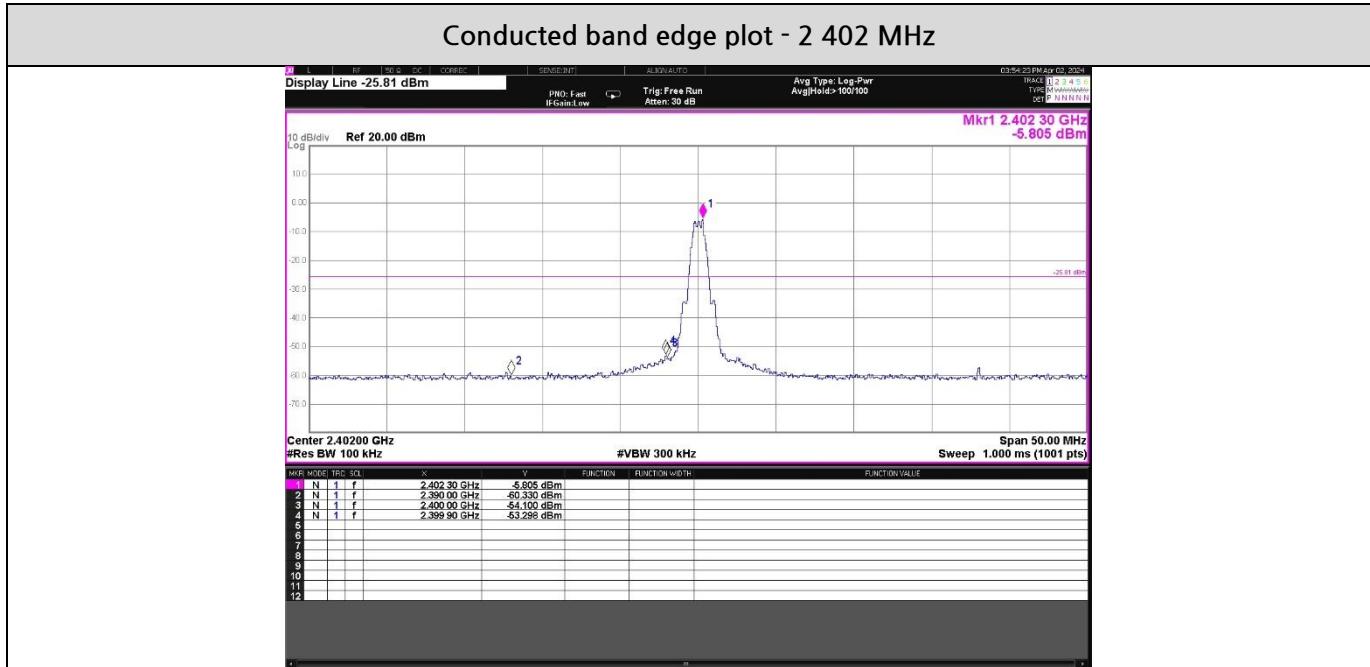


Test Report

Report No. : FCC2024-00005

Conducted Spurious emission 10 GHz ~ 25 GHz - 2 402 MHz

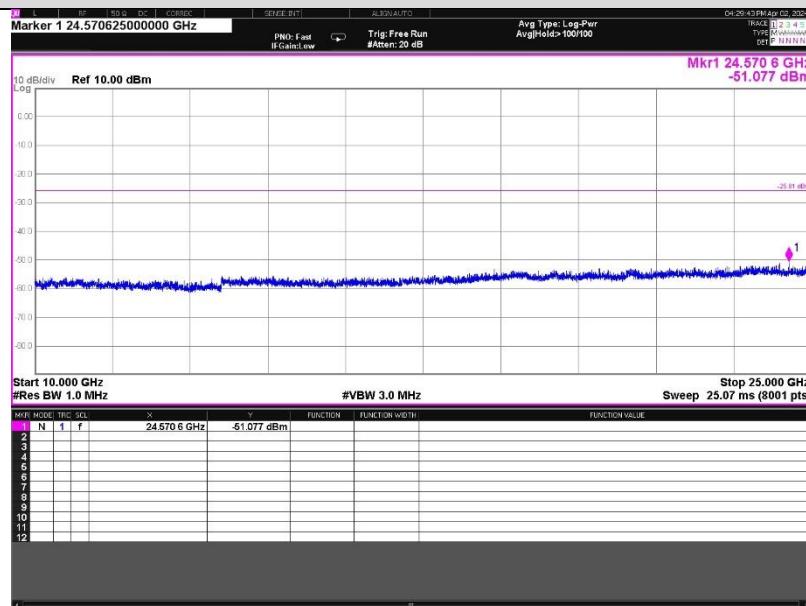


Conducted Spurious emission 9 kHz ~ 10 GHz - 2 440 MHz

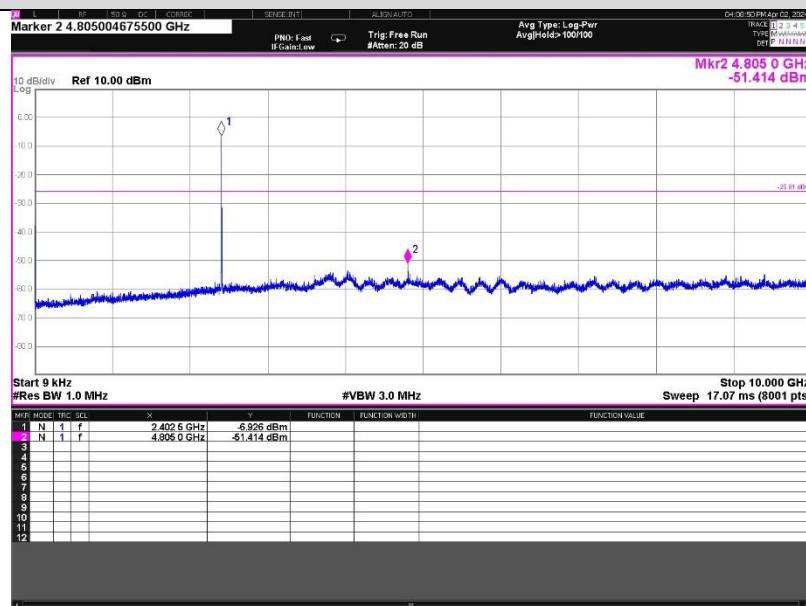


Test Report

Report No. : FCC2024-00005

Conducted Spurious emission 10 GHz ~ 25 GHz - 2 440 MHz

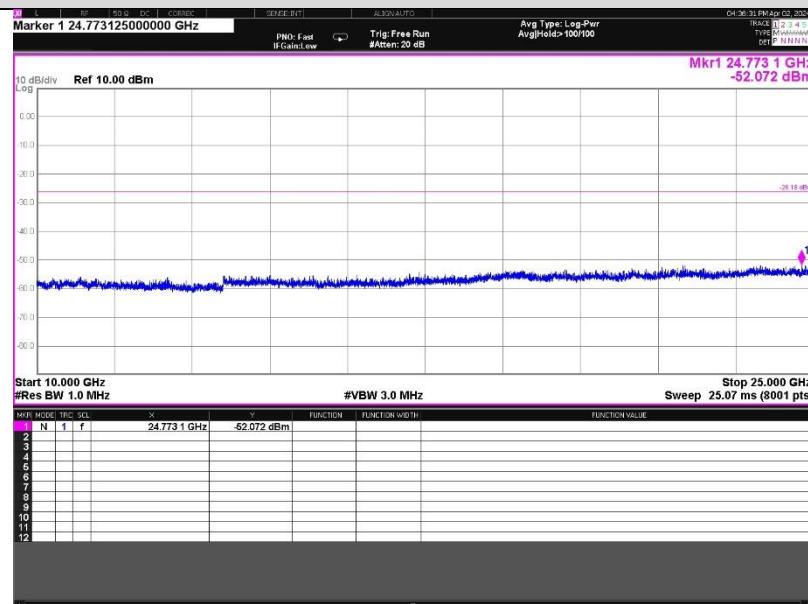


Conducted band edge plot - 2 480 MHz

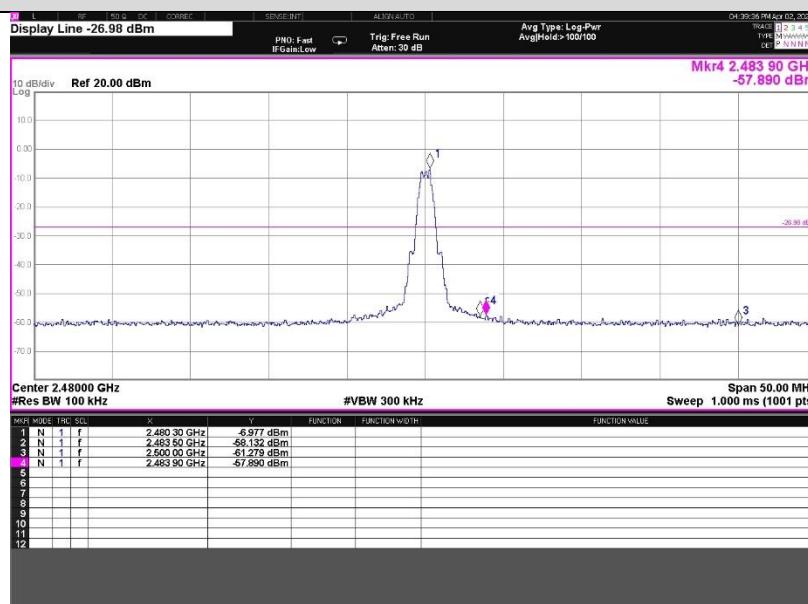


Test Report

Report No. : FCC2024-00005

Conducted Spurious emission 9 kHz ~ 10 GHz - 2 480 MHz

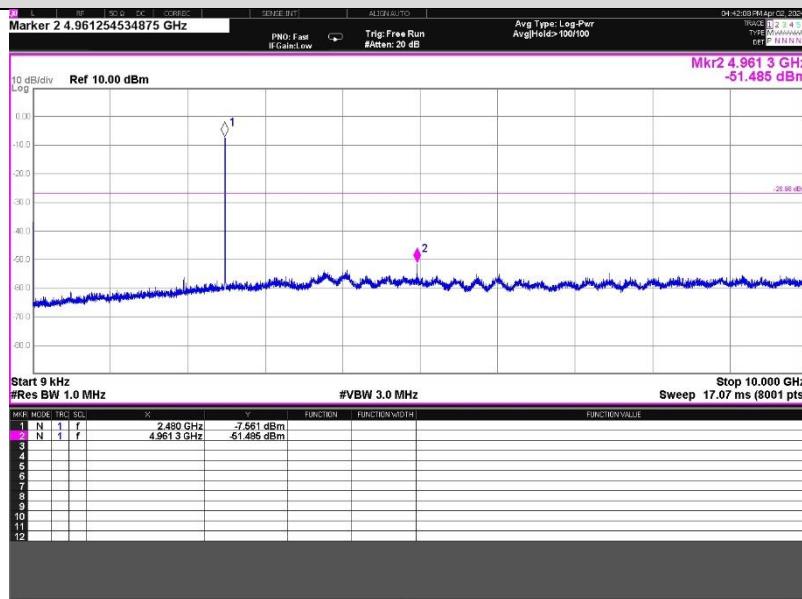

Conducted Spurious emission 10 GHz ~ 25 GHz - 2 480 MHz

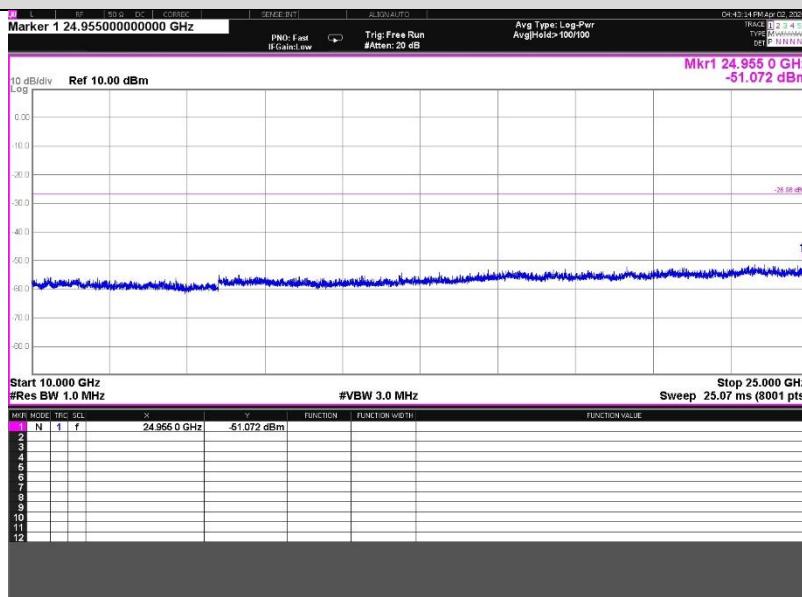

Test Report

Report No. : FCC2024-00005

4. 6 dB Channel Bandwidth & 99% Bandwidth

4.1. Limit

47 CFR Part 15

Section § 15.247(a)

systems using digital modulation techniques may operate in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.2. Test Configuration

Test Setup for Conducted test



4.3. Test procedure

11.8 of ANSI C63.10-2013

The test performed refer to section 11.8.1 Option 1.

Option 1

- 1) Set RBW = 100 kHz.
- 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Sweep = auto couple.
- 6) Allow the trace to stabilize.
- 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

Test Report

Report No. : FCC2024-00005

99 % Bandwidth

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

The transmitter shall be operated at its maximum carrier power measured under normal test condition.

The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.

The detector of the spectrum analyzer shall be set to "Sample". However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or "Max Hold") may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.

The resolution bandwidth (RBW) shall be in the range of 1 % to 5 % of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99 % emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99 % emission bandwidth).

Test Report

 Report No. : FCC2024-00005

4.4. Test Result

Ambient Temp.	(23 ± 1) °C
Relative Humidity	(43 ± 5) % R.H.
Test Result	PASS (Refer to below)

-Bluetooth Low Energy 1M PHY


-6 dB Bandwidth

Channel	Frequency (MHz)	1M PHY (kHz)	Limit (kHz)
0	2.402	725.3	> 500
19	2.440	721.8	
39	2.480	726.1	

-99% Bandwidth

Channel	Frequency (MHz)	1M PHY (MHz)
0	2.402	1.1080
19	2.440	1.1061
39	2.480	1.1094


- Test Plot for 1M PHY

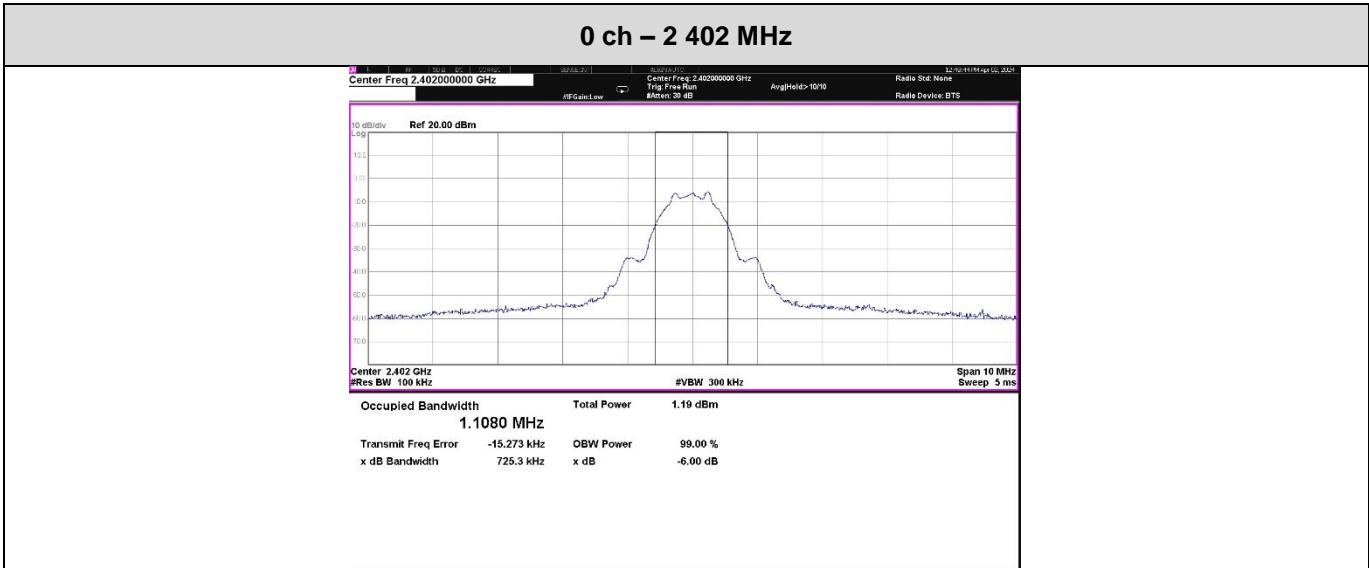


Test Report

Report No. : FCC2024-00005

19 ch – 2 440 MHz

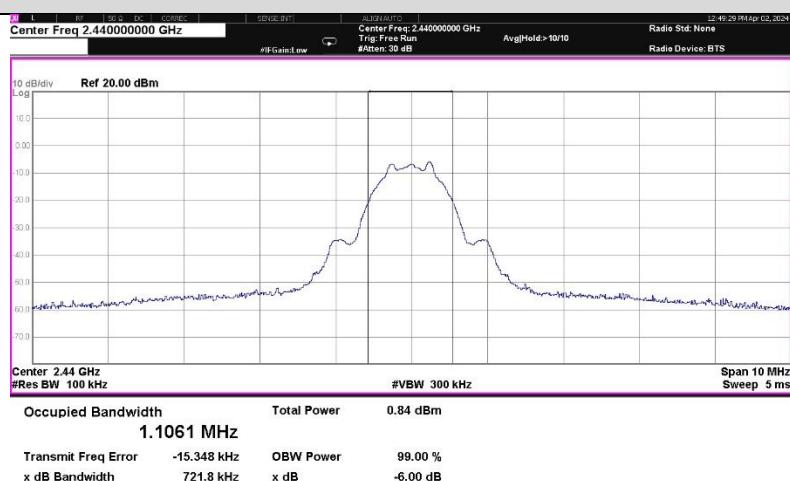

39 ch – 2 480 MHz

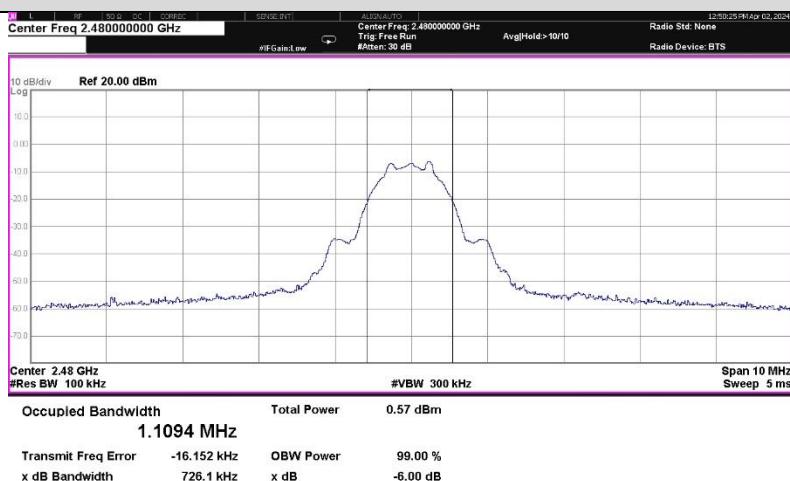

Test Report

Report No. : FCC2024-00005

5. Maximum Peak Output Power

5.1. Limit

47 CFR Part 15

Section § 15.247(b)(3)

for systems using digital modulation in the 902-928 MHz, 2 400-2 483.5 MHz, and 5 725-5 850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Section§ 15.247(b)(4)

the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2. Test configuration

Test Setup for Conducted test



Test Report

Report No. : FCC2024-00005

5.3. Test procedure

11.9 of ANSI C63.10-2013

The test performed refer to section 11.9.1.3.

PKPM1 Peak power meter method

- The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The test performed refer to section 11.9.2.3.2

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Method AVGPM-G is a measurement using a gated RF average power meter. Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

5.4. Test Results

Ambient Temp.	(23 ± 1) °C
Relative Humidity	(43 ± 5) % R.H.
Test Result	PASS (Refer to below)

-Bluetooth Low Energy 1M PHY

Channel	Frequency (MHz)	Peak Power Result (dBm)	Average Power Result (dBm)	Limit (dBm)
		1M PHY	1M PHY	
0	2 402	-4.31	-4.48	30
19	2 440	-4.61	-4.78	
39	2 480	-4.90	-5.06	

Test Report

Report No. : FCC2024-00005

6. Power Spectral Density

6.1. Limit

47 CFR Part 15

Section § 15.247(e)

for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

6.2. Test Configuration

Test Setup for Conducted test



6.3. Test Procedure

11.10 of ANSI C63.10-2013

- This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

Test Report

Report No. : FCC2024-00005


6.4. Test Results

Ambient Temp.	(23 ± 1) °C
Relative Humidity	(43 ± 5) % R.H.
Test Result	PASS (Refer to below)

-Bluetooth Low Energy 1M PHY

Channel	Frequency (MHz)	Peak Power Result (dBm)	Limit (dBm / 3 kHz)
		1M PHY	
0	2 402	-22.283	8
19	2 440	-22.615	
39	2 480	-23.116	


- Test Plot for 1M PHY

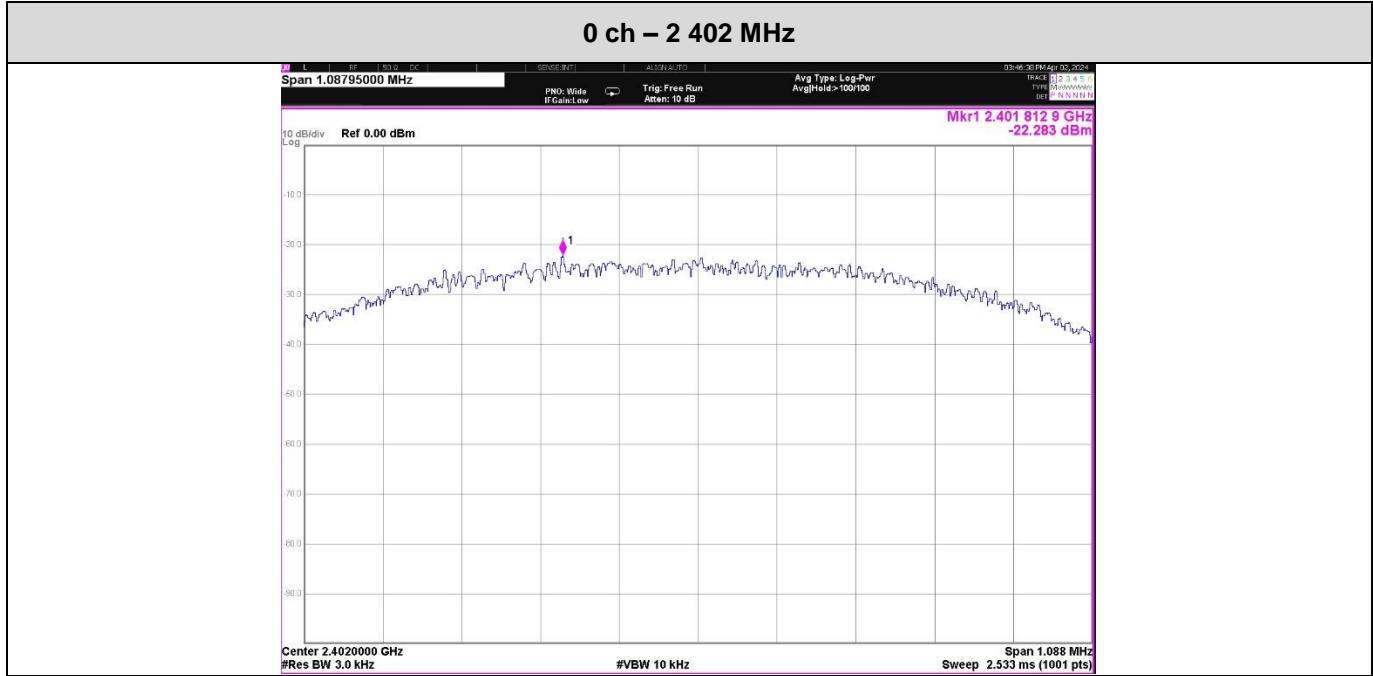


Test Report

Report No. : FCC2024-00005

19 ch – 2 440 MHz

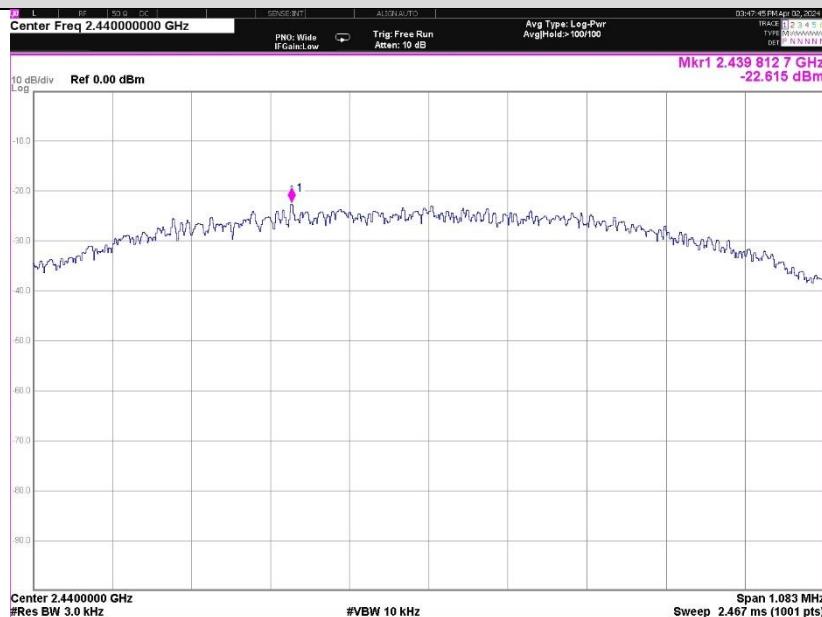

39 ch – 2 480 MHz

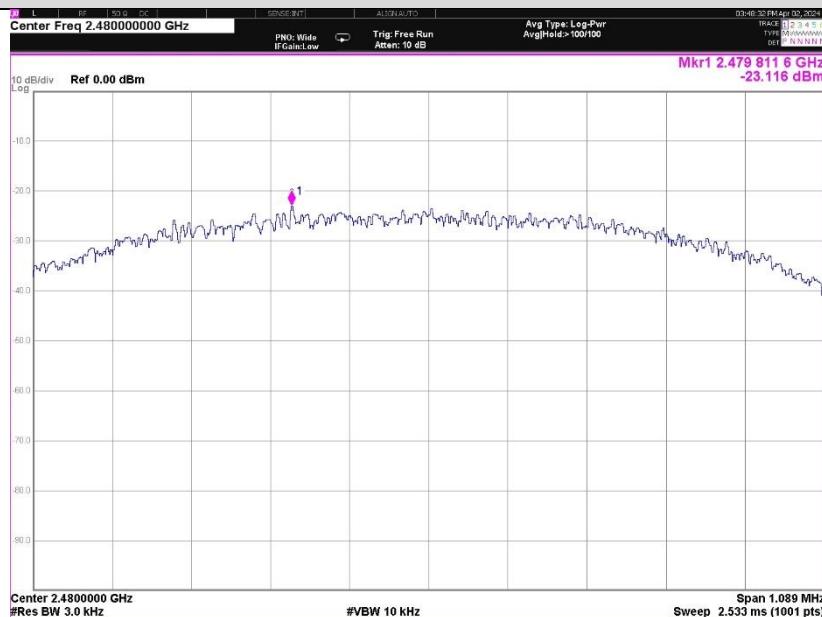

- End of the Test Report -