



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Issue Date  
March 17, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## SAR TEST REPORT (FCC/IC)

### RF EXPOSURE EVALUATION

### SPECIFIC ABSORPTION RATE

APPLICANT / MANUFACTURER	TELTRONIC S.A.U.				
DEVICE UNDER TEST (DUT)	PORTABLE UHF DIGITAL RADIO TRANSCEIVER with PTT				
DEVICE MODEL(S)	HTT-500				
DEVICE MODES OF OPERATION	TDMA (1/4 Time Slots)				
MANUF. RATED OUTPUT POWER	2 Watts (Conducted)				
FREQUENCY RANGE(S) TESTED	FCC/IC	409.0 - 470.0 MHz			
DEVICE IDENTIFIER(S)	FCC ID:	WT7PTRKTHHT500410			
	IC:	8624A-PTRKT410			
APPLICATION TYPE	FCC/IC Certification				
STANDARD(S) APPLIED	FCC 47 CFR §2.1093				
	Health Canada Safety Code 6				
PROCEDURE(S) APPLIED	FCC OET Bulletin 65, Supp. C (01-01)				
	FCC KDB 447498 D01v04				
	FCC KDB Inquiry Tracking No. 368103				
	IC RSS-102 Issue 3				
	IEEE 1528-2003				
	IEC 62209-1:2005				
	IEC 62209-2 (Draft)				
FCC DEVICE CLASSIFICATION	Licensed Non-Broadcast Transmitter Held to Face (TNF)				
IC DEVICE CLASSIFICATION	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)				
RF EXPOSURE CATEGORY	Occupational / Controlled				
RF EXPOSURE EVALUATION(S)	Held-to-Ear		Face-held		
DATE(S) OF EVALUATION	March 04-05, 08, 2010				
TEST REPORT SERIAL NO.	020510WT7-T1003-S90U				
TEST REPORT REVISION NO.	Revision 1.0		Initial Release		
TEST REPORT SIGNATORIES	Testing Performed By		Test Report Prepared By		
	Sean Johnston - Celltech Labs		Jon Hughes - Celltech Labs		
TEST LAB AND LOCATION	Celltech Compliance Testing and Engineering Laboratory				
	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada				
TEST LAB CONTACT INFO.	Tel.: 250-765-7650		Fax: 250-765-7645		
	info@celltechlabs.com		www.celltechlabs.com		
TEST LAB ACCREDITATION(S)	ISO/IEC 17025:2005 (A2LA Test Lab Certificate No. 2470.01)				

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 1 of 75



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
March 17, 2010

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION							
Test Lab Information		Name	CELLTECH LABS INC.				
		Address	21-364 Lougheed Road, Kelowna, B.C. V1X 7R8 Canada				
Applicant Information		Name	TELTRONIC S.A.U.				
		Address	Polígono Malpica, C/F Oeste 50057 Zaragoza, Spain				
Standard(s) Applied		FCC	47 CFR §2.1093				
		IC	Health Canada Safety Code 6				
Procedure(s) Applied		FCC	OET Bulletin 65, Supp. C (01-01)			FCC	KDB 447498 D01v04
		FCC	KDB Inquiry Tracking Number 368103			IC	RSS-102 Issue 3
		IEEE	1528-2003	IEC	62209-1:2005	IEC	62209-2 (Draft)
Device Classification(s)		FCC	Licensed Non-Broadcast Transmitter Held to Ear (TNE)			Part 90	
		IC	Land Mobile Radio Transmitter/Receiver (27.41-960 MHz)			RSS-119	
Device Identifier(s)		FCC ID:	WT7PTRKTHTT500410				
		IC:	8624A-PTRKT410				
Device Model(s)		HTT-500					
Test Sample Serial No.		D378Y21N1 (Identical Prototype)					
Device Description		Portable UHF TDMA Digital Radio Transceiver with PTT					
Frequency Range(s) Tested		409.0 - 470.0 MHz					
Manufacturer Rated Output Power		2 Watts (Conducted)					
Max. No. of Transmit Time Slots		1/4 (25% Source-Based Time-Averaged Duty Factor)			Modulation	Digital π/4-DQPSK	
Duplexing Modes of Operation		Full-Duplex (Non-PTT), Half-Duplex (PTT)					
RF Output Power Level(s) Tested		33.1 dBm	2.04 Watts	409.00 MHz	Test Ch. 1	N <sub>c</sub> = 5 per FCC KDB 447498 D01v04 Sect. 6(c)	Av. Conducted
		32.9 dBm	1.95 Watts	424.25 MHz	Test Ch. 2		Av. Conducted
		33.0 dBm	2.00 Watts	439.50 MHz	Test Ch. 3		Av. Conducted
		33.2 dBm	2.09 Watts	454.75 MHz	Test Ch. 4		Av. Conducted
		33.0 dBm	2.00 Watts	470.00 MHz	Test Ch. 5		Av. Conducted
Antenna Type(s) Tested		External Detachable		Quarter-wave	Length: 155 mm		P/N: D03732Y
Battery Type(s) Tested		Lithium Polymer		7.4 V	1800 mAh		P/N: D037101
Body-worn Accessories Tested		Nylon Case & Belt-Clip		Contains Metal Components			P/N: D037401
Audio Accessories Tested		Evolution Speaker-Microphone					P/N: D037600
Max. SAR Level(s) Evaluated		Held-to-Ear	1.39 W/kg	1g	Full-Duplex Mode	Occupational / Controlled Exp.	
		Face-held	0.669 W/kg	1g	Full-Duplex Mode	Occupational / Controlled Exp.	
		Body-worn	0.689 W/kg	1g	Full-Duplex Mode	Occupational / Controlled Exp.	
FCC/IC Spatial Peak SAR Limit		Head/Body	8.0 W/kg	1g	Occupational / Controlled Exposure Environment		
<p>Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6 for the Occupational / Controlled Exposure environment. The device was tested in accordance with the measurement procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01), Industry Canada RSS-102 Issue 3, IEEE Standard 1528-2003, IEC International Standard 62209-1:2005 and IEC International Draft Standard 62209-2 (106-62209-2-CDV_090323). All measurements were performed in accordance with the SAR system manufacturer recommendations.</p> <p>I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.</p> <p>The results and statements contained in this report pertain only to the device(s) evaluated. This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc.</p>							
Test Report Approved By				Sean Johnston	Celltech Labs Inc.		

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHTT500410		IC:	8624A-PTRKT410	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 2 of 75	

## TABLE OF CONTENTS

1.0 INTRODUCTION	4
2.0 SAR MEASUREMENT SYSTEM	4
3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS	4
4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ( $f < 0.5$ GHz)	5
5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES	5
6.0 SAR MEASUREMENT SUMMARY	6
7.0 MEASURED FLUID DIELECTRIC PARAMETERS	7
8.0 DETAILS OF SAR EVALUATION	8
DETAILS OF SAR EVALUATION (CONT.)	9
9.0 SAR EVALUATION PROCEDURES	9
10.0 SYSTEM PERFORMANCE CHECK	10
11.0 SIMULATED EQUIVALENT TISSUES	11
12.0 SAR LIMITS	11
13.0 ROBOT SYSTEM SPECIFICATIONS	12
14.0 PROBE SPECIFICATION (ET3DV6)	13
15.0 SAM TWIN PHANTOM V4.0C	13
16.0 PLANAR PHANTOM	13
17.0 DEVICE HOLDER	13
18.0 TEST EQUIPMENT LIST	14
19.0 MEASUREMENT UNCERTAINTIES	15
20.0 REFERENCES	16
APPENDIX A - SAR MEASUREMENT DATA	17
APPENDIX B - SYSTEM PERFORMANCE CHECK	47
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	55
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	59
APPENDIX E - DIPOLE CALIBRATION	72
APPENDIX F - PROBE CALIBRATION	73
APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY	74
APPENDIX H - PLANAR PHANTOM CERTIFICATE OF CONFORMITY	75

 <b>Celltech</b> <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 1.0 INTRODUCTION

This measurement report demonstrates that the Teltronic Model: HTT-500 Portable UHF TDMA Digital Radio Transceiver complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]) and Health Canada's Safety Code 6 (see reference [2]) for the Occupational / Controlled Exposure environment. The measurement procedures described in FCC OET Bulletin 65, Supplement C 01-01 (see reference [3]), IC RSS-102 Issue 3 (see reference [4]), IEEE Standard 1528-2003 (see reference [5]), IEC International Standard 62209-1:2005 (see reference [6]) and IEC International Draft Standard 62209-2 (see reference [7]) were employed. A description of the device, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used and the various provisions of the rules are included within this test report.

## 2.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for head and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses a controller with a built in VME-bus computer.

## 3.0 RF CONDUCTED OUTPUT POWER MEASUREMENTS

MEASURED RF CONDUCTED OUTPUT POWER LEVELS						
N <sub>c</sub> <sup>1</sup>	Test Frequency	Output Power Level		Duty Factor	Source-Based Time-Averaged Output Power	
		MHz	dBm		dBm	Watts
5	409.00	33.1	2.04	25%	27.1	0.510
	424.25	32.9	1.95	25%	26.9	0.488
	439.50	33.0	2.00	25%	27.0	0.499
	454.75	33.2	2.09	25%	27.2	0.522
	470.00	33.0	2.00	25%	27.0	0.499

**Notes**

1. The test channels were selected in accordance with the procedures specified in FCC KDB 447498 Section 6) c).
2. The RF conducted output power levels of the DUT were measured by Celltech prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter at the external antenna connector.

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHTT500410	IC:	8624A-PTRKT410	 teltronic <small>Portable UHF TDMA Radios</small>
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 4 of 75



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
March 17, 2010

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 4.0 FCC POWER THRESHOLDS FOR PTT DEVICES ( $f \leq 0.5$ GHz)

The output power thresholds for PTT devices as stated in FCC KDB 447498 D01v04 Section 5 (see reference [8]) were not applied to this device based on the fact that the device supports full-duplex mode of operation without the PTT depressed and the device was evaluated for SAR in full-duplex mode of operation. The half-duplex mode of operation is applied to the DUT when the PTT button is depressed; however the worst-case maximum source-based time-averaged conducted output power is in full-duplex mode of operation.

## 5.0 SAR PROBE CALIBRATION & MEASUREMENT FREQUENCIES

The following procedures are recommended for measurements at 150 MHz - 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. In general, SAR measurements below 300 MHz should be within  $\pm 50$  MHz of the probe calibration frequency. At 300 MHz to 3 GHz, measurements should be within  $\pm 100$  MHz of the probe calibration frequency. Measurements exceeding 50% of these intervals,  $\pm 25$  MHz  $<$  300 MHz and  $\pm 50$  MHz  $\geq$  300 MHz, require additional steps (per FCC KDB 450824 D01 v01r01, SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz - see reference [9]).

Probe Calibration Freq.	Device Measurement Freq.	Frequency Interval	$\pm 50$ MHz ( $\geq 300$ MHz)
450 MHz	409.00 MHz	41 MHz	< 50 MHz <sup>1</sup>
	424.25 MHz	25.75 MHz	< 50 MHz <sup>1</sup>
	439.50 MHz	10.5 MHz	< 50 MHz <sup>1</sup>
	454.75 MHz	4.75 MHz	< 50 MHz <sup>1</sup>
	470.00 MHz	20 MHz	< 50 MHz <sup>1</sup>

Note: 1. Probe calibration and measurement frequency interval is < 50 MHz; therefore the additional steps were not required.

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 5 of 75



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)



Test Report Issue Date  
March 17, 2010

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)

## 6.0 SAR MEASUREMENT SUMMARY

### FACE-HELD & BODY-WORN SAR EVALUATION RESULTS

Test Date	Test Type	Freq.	Test Mode	Time Slots	Duty Factor	Accessory Type(s)		Device Distance to Planar Phantom		Cond. Power Before Test	Measured SAR 1g (W/kg)	SAR Drift During Test	Scaled SAR with droop 1g (W/kg)
						Body	Audio	DUT	ANT.				
Mar 8	FACE	409.00	TDMA	1/4	25%	n/a	n/a	2.5 cm	4.0 cm	33.1	0.604	-0.497	0.677
Mar 8		424.25				n/a	n/a			32.9	0.441	0.256	-
Mar 8		439.50				n/a	n/a			33.0	0.599	-0.067	0.608
Mar 8		454.75				n/a	n/a			33.2	0.596	-0.499	0.669
Mar 8		470.00				n/a	n/a			33.0	0.526	0.306	-
Mar 4		409.00				Nylon Case with Metal Belt-Clip	Speaker Mic	1.5 cm	2.7 cm	33.1	0.683	-0.037	0.689
Mar 4		424.25								32.9	0.630	0.007	-
Mar 4		439.50								33.0	0.521	-0.167	0.541
Mar 4		454.75								33.2	0.546	-0.393	0.598
Mar 4		470.00								33.0	0.553	-0.425	0.610

### HEAD SAR EVALUATION RESULTS

Test Date	Test Type	Freq.	Test Mode	Time Slots	Duty Factor	Antenna Position	Phantom Section	Test Position	Cond. Power Before Test	Measured SAR 1g (W/kg)	SAR Drift During Test	Scaled SAR with droop 1g (W/kg)				
Mar 5	HEAD	424.25 <sup>1</sup>	TDMA	1/4	25%	Fixed	Left Head	Cheek-Touch	32.9	0.916	-0.494	1.03				
Mar 5								Ear-Tilt	32.9	0.963	0.114	-				
Mar 5							Right Head	Cheek-Touch	32.9	0.741	0.205	-				
Mar 5								Ear-Tilt	32.9	0.872	-0.102	0.893				
Mar 5							Left Head	Cheek-Touch	33.2	0.997	-0.114	1.02				
Mar 5								Ear-Tilt	33.2	1.26	-0.415	1.39				
Mar 5		454.75 <sup>1</sup>					Right Head	Cheek-Touch	33.2	0.776	-0.397	0.850				
Mar 5								Ear-Tilt	33.2	1.06	0.341	-				
Mar 5							Left Head	Ear-Tilt	33.1	1.19	-0.516	1.34				
Mar 5									33.0	1.24	0.364	-				
Mar 5							Right Head	Ear-Tilt	33.0	1.17	-0.515	1.32				
Mar 5									33.1	0.916	0.130	-				
Mar 5							Left Head	Ear-Tilt w/ nylon case	33.0	1.05	-0.207	1.10				
Mar 5									33.0	1.04	0.021	-				
Mar 5							Left Head		33.2	0.936	0.411	-				

### SAR LIMIT(S)

HEAD / FACE / BODY

SPATIAL PEAK

RF EXPOSURE CATEGORY

FCC 47 CFR 2.1093	Health Canada Safety Code 6	8.0 W/kg	averaged over 1 gram	Occupational / Controlled
-------------------	-----------------------------	----------	----------------------	---------------------------

NOTES	1. Highest SAR Search Procedure.
	2. Remaining Test Channel Reduction.
	3. SAR evaluation repeated in worst-case configuration with DUT placed inside nylon case accessory to report the comparison SAR level.

Test Date	Fluid Type	Ambient Temp.	Fluid Temp.	Fluid Depth	Atmospheric Pressure	Relative Humidity	$\rho$ (Kg/m <sup>3</sup> )
March 04	450 Body	23.8 °C	22.8 °C	≥ 15 cm	101.1 kPa	35%	1000
March 05	450 Head	23.8 °C	22.5 °C	≥ 15 cm	101.1 kPa	35%	1000
March 08	450 Head	24.2 °C	22.9 °C	≥ 15 cm	101.1 kPa	35%	1000

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHTT500410	IC:	8624A-PTRKT410	teltronic TELECOMMUNICATIONS
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 6 of 75



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
March 17, 2010

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01


## 7.0 MEASURED FLUID DIELECTRIC PARAMETERS

410 MHz Body - Mar. 4, 2010			420 MHz Body - Mar. 4, 2010			440 MHz Body - Mar. 4, 2010			450 MHz Body - Mar. 4, 2010		
Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$		
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.
56.7	$\pm 5\%$	58.4	3.0%	56.7	$\pm 5\%$	58.1	+2.5%	56.7	$\pm 5\%$	57.9	+2.1%
Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)		
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.
0.94	$\pm 5\%$	0.89	-5.0%	0.94	$\pm 5\%$	0.90	-4.3%	0.94	$\pm 5\%$	0.93	-1.1%
470 MHz Body - Mar. 4, 2010			410 MHz Head - Mar. 5, 2010			420 MHz Head - Mar. 5, 2010			440 MHz Head - Mar. 5, 2010		
Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$		
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.
56.7	$\pm 5\%$	57.6	+1.6%	43.5	$\pm 5\%$	44.6	+2.5%	43.5	$\pm 5\%$	45.0	+3.4%
Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)		
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.
0.94	$\pm 5\%$	0.95	+1.1%	0.87	$\pm 5\%$	0.83	-4.6%	0.87	$\pm 5\%$	0.83	-4.6%
450 MHz Head - Mar. 5, 2010			470 MHz Head - Mar. 5, 2010			410 MHz Head - Mar. 8, 2010			420 MHz Head - Mar. 8, 2010		
Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$		
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.
43.5	$\pm 5\%$	44.2	+1.6%	43.5	$\pm 5\%$	42.8	-1.6%	43.5	$\pm 5\%$	43.6	+0.2%
Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)		
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.
0.87	$\pm 5\%$	0.86	-1.1%	0.87	$\pm 5\%$	0.87	0.0%	0.87	$\pm 5\%$	0.84	-3.5%
440 MHz Head - Mar. 8, 2010			450 MHz Head - Mar. 8, 2010			470 MHz Head - Mar. 8, 2010					
Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$			Dielectric Constant $\epsilon_r$					
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.			
43.5	$\pm 5\%$	42.9	-1.4%	43.5	$\pm 5\%$	43.2	-0.7%	43.5	$\pm 5\%$	42.6	-2.1%
Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)			Conductivity $\sigma$ (mho/m)					
450 Target	Meas.	Dev.	450 Target	Meas.	Dev.	450 Target	Meas.	Dev.			
0.87	$\pm 5\%$	0.87	0.0%	0.87	$\pm 5\%$	0.87	0.0%	0.87	$\pm 5\%$	0.87	0.0%

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHTT500410	IC:	8624A-PTRKT410	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 75	


## 8.0 DETAILS OF SAR EVALUATION

1. The number of test frequencies and the test channels evaluated for SAR were selected in accordance with the procedures described in FCC KDB 447498 Section 6(c).
2. The DUT was evaluated for SAR in the held-to-ear configuration with applied test reduction procedures pre-approved by the FCC per KDB Inquiry Tracking Number 368103.
3. The held-to-ear SAR evaluations were performed without any accessories. The worst-case maximum SAR level configuration was re-evaluated with the DUT placed inside the nylon case accessory to report the SAR comparison.
4. The DUT was tested in a held-to-ear configuration at the left and right head sections of the SAM phantom as follows:
  - a) The handset was placed in the device holder in a normal operating position with the test device reference point located along the vertical centerline on the front of the device aligned to the ear reference point, with the center of the earpiece touching the center of the ear spacer of the SAM phantom.
  - b) With the handset positioned parallel to the cheek, the test device reference point was aligned to the ear reference point on the head phantom, and the vertical centerline was aligned to the phantom reference plane (initial ear position).
  - c) While maintaining the three alignments, the body of the handset was gradually adjusted to each of the following test positions:
    - Cheek/Touch Position: the handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

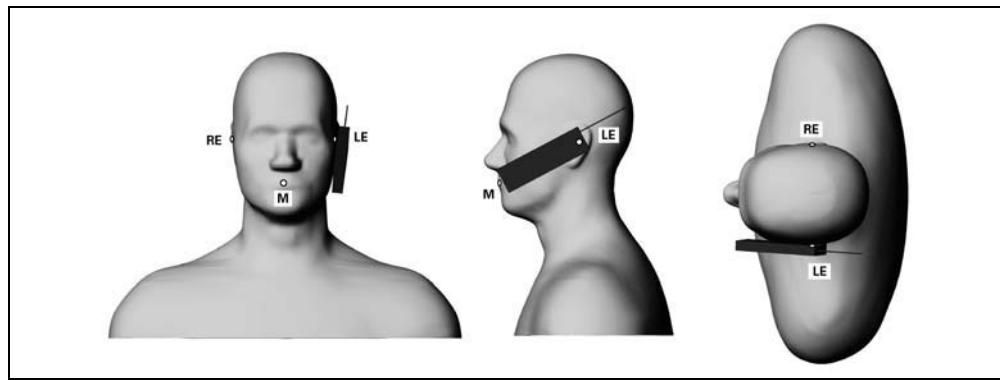

**Figure 1. Position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for device positioning, are indicated (Shoulders are shown for illustration only).**

- Ear/Tilt Position: With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

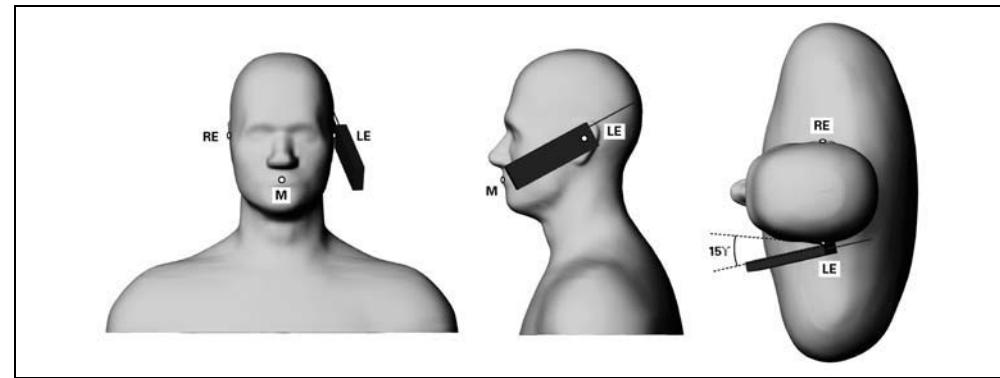

**Figure 2. Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning, are indicated (Shoulders are shown for illustration only).**

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	teltronic TELECOMMUNICATIONS	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 8 of 75						

 <b>Celltech</b> <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <b>IAC-MRA</b>  <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## DETAILS OF SAR EVALUATION (Cont.)

5. The face-held SAR evaluations were performed with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm spacing was maintained between the front side of the DUT and the outer surface of the planar phantom.
6. The body-worn SAR evaluations were performed with the back of the radio facing the outer surface of the planar phantom and the DUT placed inside the nylon case and belt-clip accessory which was touching the planar phantom. The nylon case and belt-clip accessory provided a 1.5 cm spacing from the back of the DUT to the planar phantom.
7. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
8. A SAR-versus-Time power droop evaluation was performed and is shown in Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
9. The fluid temperature was measured prior to and after the SAR evaluations to ensure the temperature remained within +/-2°C of the fluid temperature reported during the dielectric parameter measurements.
10. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).
11. The DUT was placed in test mode via PC serial connection using the manufacturer's proprietary software to establish the appropriate maximum output power level setting and TDMA modulation utilizing full duplex mode of operation.
12. The DUT was tested in modulated TDMA transmit operation (1 out of 4 transmit time slots with 25% source-based time-averaged duty factor) in full duplex mode without the PTT key depressed.
13. The conducted output power levels of the DUT referenced in this report were measured by Celltech Labs Inc. prior to the SAR evaluations at the antenna connector of the DUT using a Gigatronics 8652A Universal Power Meter in accordance with FCC 47 CFR §2.1046 and IC RSS-Gen.

## 9.0 SAR EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.  
 (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.  
 An area scan was determined as follows:
- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.  
 A 1g and 10g spatial peak SAR was determined as follows:
- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.


<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHTT500410</b>	<b>IC:</b>	<b>8624A-PTRKT410</b>	 <b>Teltronic</b> <small>TELETRONIC S.A.U.</small>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>	<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 9 of 75

## 10.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluations, daily system checks were performed using a planar phantom and 450 MHz SPEAG dipole (see Appendix B for system performance check test plots) in accordance with the procedures described in IEEE Standard 1528-2003 (see reference [5]). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C for measured fluid dielectric parameters). A forward power of 398 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  from the SAR system manufacturer's dipole calibration target SAR value (see Appendix E for system manufacturer's dipole calibration procedures).

### SYSTEM PERFORMANCE CHECK EVALUATIONS

Test Date	Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant $\epsilon_r$			Conductivity $\sigma$ (mho/m)			$\rho$ (Kg/m <sup>3</sup> )	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		Freq. (MHz)	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.	SPEAG Target	Meas.	Dev.					
Mar 4	Body 450	1.78 $\pm 10\%$	1.71	-3.9%	56.7 $\pm 5\%$	57.6	+1.6%	0.94 $\pm 5\%$	0.91	-3.2%	1000	23.8	22.6	$\geq 15$	35	101.1
Mar 5	Head 450	1.87 $\pm 10\%$	1.85	-1.1%	43.5 $\pm 5\%$	44.2	+1.6%	0.87 $\pm 5\%$	0.86	-1.1%	1000	23.8	22.5	$\geq 15$	35	101.1
Mar 8	Head 450	1.87 $\pm 10\%$	1.85	-1.1%	43.5 $\pm 5\%$	43.2	-0.7%	0.87 $\pm 5\%$	0.87	0.0%	1000	23.5	22.0	$\geq 15$	35	101.1
Notes	1.	The target SAR values are the measured values from the SAR system manufacturer's dipole calibration (see Appendix E).														
	2.	The target dielectric parameters are the nominal values from the SAR system manufacturer's dipole calibration (see Appendix E).														
	3.	The fluid temperature was measured prior to and after the system performance check to ensure the temperature remained within $+/- 2^{\circ}\text{C}$ of the fluid temperature reported during the dielectric parameter measurements.														
	4.	The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer (see Appendix C).														

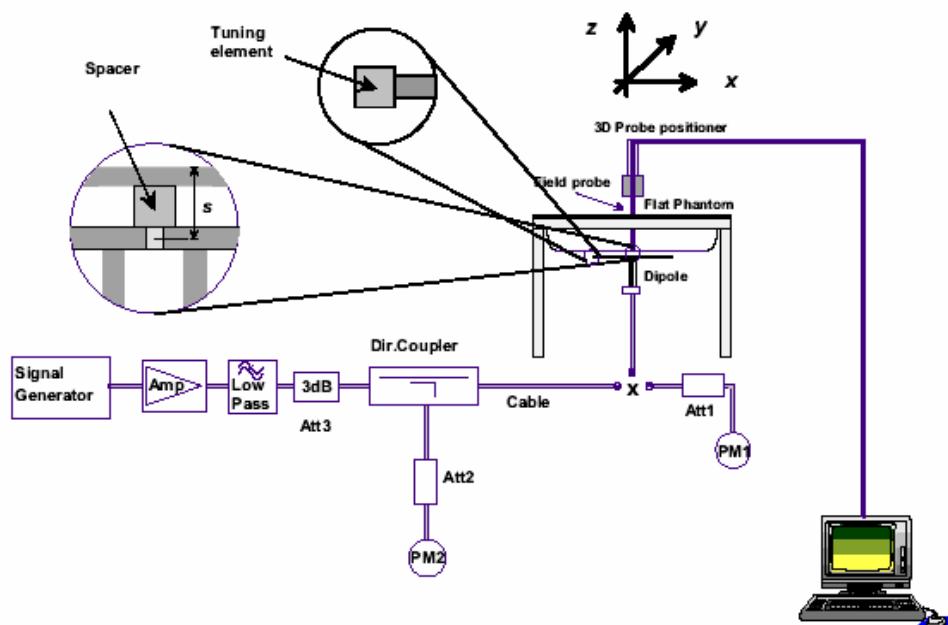

System Performance Check Measurement Setup (IEEE Standard 1528-2003)

450 MHz Validation Dipole Setup

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHTT500410	IC:	8624A-PTRKT410	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 10 of 75



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
March 17, 2010

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 11.0 SIMULATED EQUIVALENT TISSUES

The simulated equivalent tissue recipes in the table below are derived from the SAR system manufacturer's suggested recipes in the DASY4 manual (see references [10] and [11]) in accordance with the procedures and requirements specified in IEEE Standard 1528-2003 (see reference [5]) and IEC Standard 62209-1:2005 (see reference [6]). The ingredient percentage may have been adjusted minimally in order to achieve the appropriate target dielectric parameters within the specified tolerance.

SIMULATED TISSUE MIXTURES		
INGREDIENT	450 MHz Head	450 MHz Body
Water	38.56 %	52.00 %
Sugar	56.32 %	45.65 %
Salt	3.95 %	1.75 %
HEC	0.98 %	0.50 %
Bactericide	0.19 %	0.10 %

## 12.0 SAR LIMITS

SAR RF EXPOSURE LIMITS		
FCC 47 CFR 2.1093	General Population	Occupational
<b>Spatial Average (averaged over the whole body)</b>	0.08 W/kg	0.4 W/kg
<b>Spatial Peak (averaged over any 1 g of tissue)</b>	1.6 W/kg	<b>8.0 W/kg</b>
<b>Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)</b>	4.0 W/kg	20.0 W/kg
The Spatial Average value of the SAR averaged over the whole body.		
The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.		
Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.		
Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.		

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410		
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 11 of 75						

## 13.0 ROBOT SYSTEM SPECIFICATIONS

<u>Specifications</u>	
Positioner	Stäubli Unimation Corp. Robot Model: RX60L
Repeatability	0.02 mm
No. of axis	6
<u>Data Acquisition Electronic (DAE) System</u>	
<u>Cell Controller</u>	
Processor	AMD Athlon XP 2400+
Clock Speed	2.0 GHz
Operating System	Windows XP Professional
<u>Data Converter</u>	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY4, V4.7 Build 44 Postprocessing Software: SEMCAD, V1.8 Build 171
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
<u>DASY4 Measurement Server</u>	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
<u>E-Field Probe</u>	
Model	ET3DV6
Serial No.	1590
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	$\pm 0.2$ dB (30 MHz to 3 GHz)
<u>Phantom 1</u>	
Type	SAM V4.0C
Shell Material	Fiberglass
Thickness	$2.0 \pm 0.1$ mm
Volume	Approx. 25 liters
<u>Phantom 2</u>	
Type	Planar Phantom
Shell Material	Fiberglass
Thickness	$2.0 \pm 0.1$ mm
Volume	Approx. 70 liters

## 14.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges
Calibration:	PEEK enclosure material (resistant to organic solvents, glycol) In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm$ 8%)
Frequency:	10 MHz to > 6 GHz; Linearity: $\pm$ 0.2 dB (30 MHz to 3 GHz)
Directivity:	$\pm$ 0.2 dB in head tissue (rotation around probe axis) $\pm$ 0.4 dB in head tissue (rotation normal to probe axis)
Dynamic Range:	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm$ 0.2 dB
Surface Detect:	$\pm$ 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone



ET3DV6 E-Field Probe

## 15.0 SAM TWIN PHANTOM V4.0C

The SAM Twin Phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix G for specifications of the SAM phantom V4.0C).



SAM Twin Phantom V4.0C

## 16.0 PLANAR PHANTOM

The planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table (see Appendix H for dimensions and specifications of the planar phantom). The planar phantom is used for test device SAR evaluations and daily system performance check evaluations.



Planar Phantom

## 17.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. For evaluation of devices with a larger footprint (e.g. Laptop PC, Tablet PC), or to avoid perturbation due to device holder clamps for devices with a smaller footprint, a Plexiglas platform is attached to the device holder.



Device Holder

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic Your mobile communication
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.						Page 13 of 75

 Celltech Testing and Engineering Services Ltd	Date(s) of Evaluation March 04-05, 08, 2010	Test Report Serial No. 020510WT7-T1003-S90U	Test Report Revision No. Rev. 1.0 (Initial Release)	 IAC-MRA ACCREDITED
	Test Report Issue Date March 17, 2010	Description of Test(s) Specific Absorption Rate	RF Exposure Category Occupational (Controlled)	

## 18.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE DATE
USED	DESCRIPTION				
x	Schmid & Partner DASY4 System	-	-	-	-
x	-DASY4 Measurement Server	00158	1078	CNR	CNR
x	-Robot	00046	599396-01	CNR	CNR
x	-DAE4	00019	353	28Apr09	28Apr10
x	-ET3DV6 E-Field Probe	00017	1590	16Jul09	16Jul10
x	-SPEAG D450V3 Validation Dipole	000217	1068	18Jan10	18Jan11
x	-SAM Phantom V4.0C	00154	1033	CNR	CNR
x	-Barski Planar Phantom	00155	03-01	CNR	CNR
x	HP 85070C Dielectric Probe Kit	00033	US39240170	CNR	CNR
x	HP E4408B Spectrum Analyzer	00015	US39240170	23Apr08	28Apr10
x	Gigatronics 8652A Power Meter	00007	1835272	23Apr08	28Apr10
x	Gigatronics 80701A Power Sensor	00014	1833699	23Apr08	28Apr10
x	HP 8753ET Network Analyzer	00134	US39170292	28Apr08	28Apr10
x	Rohde & Schwarz SMR20 Signal Generator	00006	100104	CNR	CNR
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Abbr.	CNR = Calibration Not Required				

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic TELETRONIC COMMUNICATIONS
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 14 of 75



Date(s) of Evaluation  
March 04-05, 08, 2010

Test Report Serial No.  
020510WT7-T1003-S90U

Test Report Revision No.  
Rev. 1.0 (Initial Release)

Test Report Issue Date  
March 17, 2010

Description of Test(s)  
Specific Absorption Rate

RF Exposure Category  
Occupational (Controlled)



Test Lab Certificate No. 2470.01

## 19.0 MEASUREMENT UNCERTAINTIES

### UNCERTAINTY BUDGET FOR DEVICE EVALUATION

Uncertainty Component	IEEE 1528 Section	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	ci 10g	Uncertainty Value ±% (1g)	Uncertainty Value ±% (10g)	Vi or V <sub>eff</sub>
<b>Measurement System</b>									
Probe Calibration (450 MHz)	E.2.1	6.65	Normal	1	1	1	6.65	6.65	∞
Axial Isotropy	E.2.2	4.7	Rectangular	1.732050808	0.7	0.7	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	Rectangular	1.732050808	0.7	0.7	3.9	3.9	∞
Boundary Effect	E.2.3	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	Rectangular	1.732050808	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	0.3	Normal	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	Rectangular	1.732050808	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	Rectangular	1.732050808	1	1	1.5	1.5	∞
RF Ambient Conditions	E.6.1	3	Rectangular	1.732050808	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	Rectangular	1.732050808	1	1	0.2	0.2	∞
Probe Positioning wrt Phantom Shell	E.6.3	2.9	Rectangular	1.732050808	1	1	1.7	1.7	∞
Extrapolation, interpolation & integration algorithms for max. SAR evaluation	E.5	1	Rectangular	1.732050808	1	1	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	2.9	Normal	1	1	1	2.9	2.9	12
Device Holder Uncertainty	E.4.1	3.6	Normal	1	1	1	3.6	3.6	8
SAR Drift Measurement	6.6.2	5	Rectangular	1.732050808	1	1	2.9	2.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty	E.3.1	4	Rectangular	1.732050808	1	1	2.3	2.3	∞
Liquid Conductivity (target)	E.3.2	5	Rectangular	1.732050808	0.64	0.43	1.8	1.2	∞
Liquid Conductivity (measured)	E.3.3	5	Normal	1	0.64	0.43	3.2	2.2	∞
Liquid Permittivity (target)	E.3.2	5	Rectangular	1.732050808	0.6	0.49	1.7	1.4	∞
Liquid Permittivity (measured)	E.3.3	3.4	Normal	1	0.6	0.49	2.0	1.7	∞
<b>Combined Standard Uncertainty</b>				<b>RSS</b>				<b>11.64</b>	<b>11.21</b>
<b>Expanded Uncertainty (95% Confidence Interval)</b>				<b>k=2</b>				<b>23.28</b>	<b>22.42</b>
<b>Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003</b>									

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHTT500410	IC:	8624A-PTRKT410	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 15 of 75

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA ACCREDITED Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 20.0 REFERENCES

- [1] Federal Communications Commission - "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093.
- [2] Health Canada - "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission - "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada - "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 3: June 2009.
- [5] IEEE Standard 1528-2003 - "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] IEC International Standard 62209-1:2005 - "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures."
- [7] International Standard IEC 62209-2 Draft (106-62209-2-CDV\_090323) - "Human exposure to radio frequency fields from hand-held & body-mounted wireless comm. devices - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (30 MHz to 6 GHz)".
- [8] Federal Communications Commission, Office of Engineering and Technology - "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies"; KDB 447498 D01v04: November 2009.
- [9] Federal Communications Commission, Office of Engineering and Technology - "Application Note: SAR Probe Calibration and System Verification Considerations for Measurements at 150 MHz - 3 GHz"; KDB 450824 D01 v01r01: January 2007.
- [10] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 16 Application Note, Head Tissue Recipe: Sept. 2005.
- [11] Schmid & Partner Engineering AG - DASY4 Manual V4.6, Chapter 17 Application Note, Body Tissue Recipe: Sept. 2005.
- [12] ISO/IEC 17025 - "General requirements for the competence of testing and calibration laboratories (ISO/IEC 17025:2005)."

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHHT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	 teltronic TELETRONIC COMMUNICATIONS
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>	<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 16 of 75	

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)




Test Lab Certificate No. 2470.01

## APPENDIX B - SYSTEM PERFORMANCE CHECK

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHTT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>	<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 47 of 75

## SYSTEM PERFORMANCE CHECK MEASUREMENT SETUP

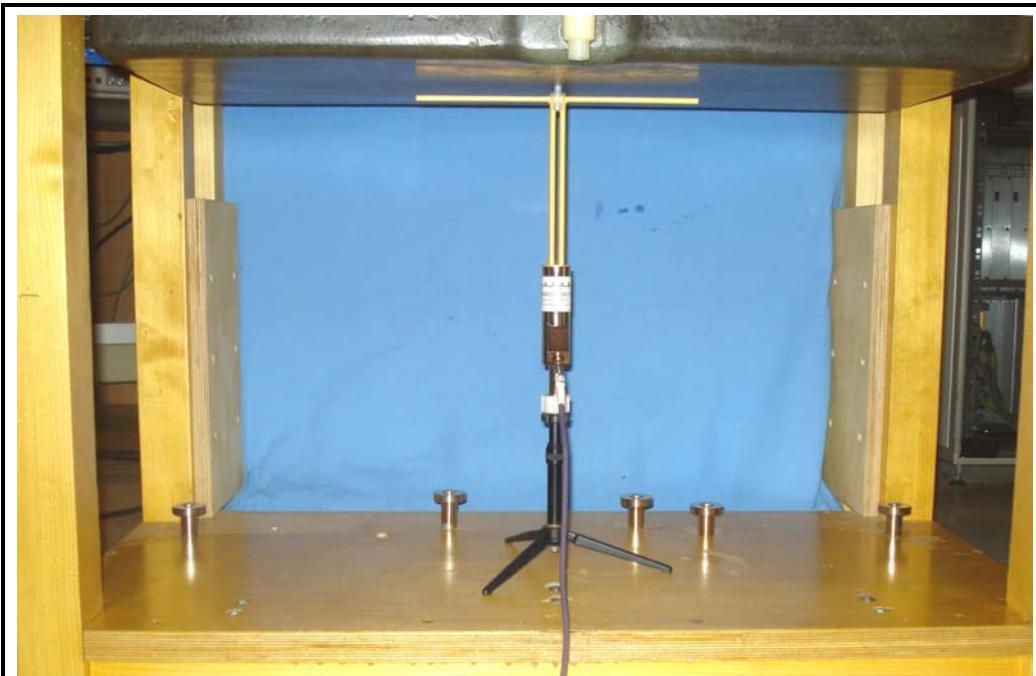

SPEAG 450 MHz Validation Dipole Setup with Fiberglas Validation Phantom



SPEAG 450 MHz Validation Dipole

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410		
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 48 of 75						

 <b>Celltech</b> Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA <b>ACCREDITED</b>
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 03/04/2010

## System Performance Check - 450 MHz Dipole - MSL

**DUT: Dipole D450V3; Asset: 000217; Serial: 1068; Calibration: 01/18/2010**

Ambient Temp: 23.8°C; Fluid Temp: 22.6°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: M450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 57.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### System Performance Check - 450 MHz Dipole

**Body d=15mm Pin=398mW/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.78 mW/g


**Body d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 44.5 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 2.67 W/kg

**SAR(1 g) = 1.71 mW/g; SAR(10 g) = 1.15 mW/g**


Maximum value of SAR (measured) = 1.82 mW/g

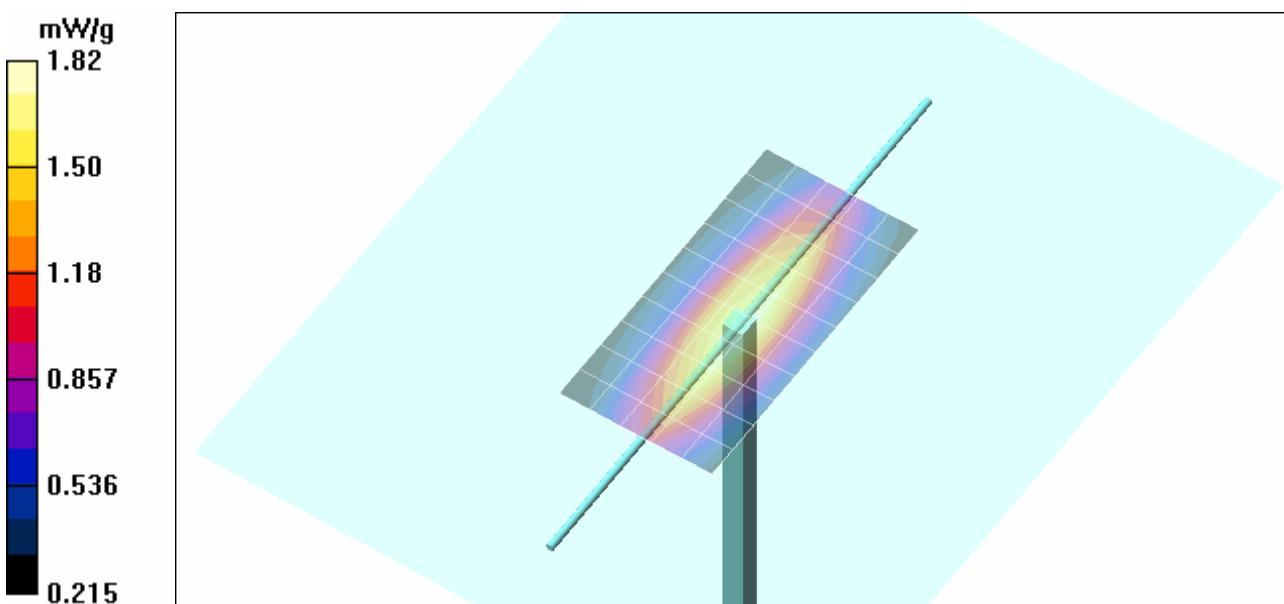

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHHT500410</b>	<b>IC:</b>	<b>8624A-PTRKT410</b>	 Teltronic Portable Solutions
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>	<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA  ACCREDITED
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## Z-Axis Scan

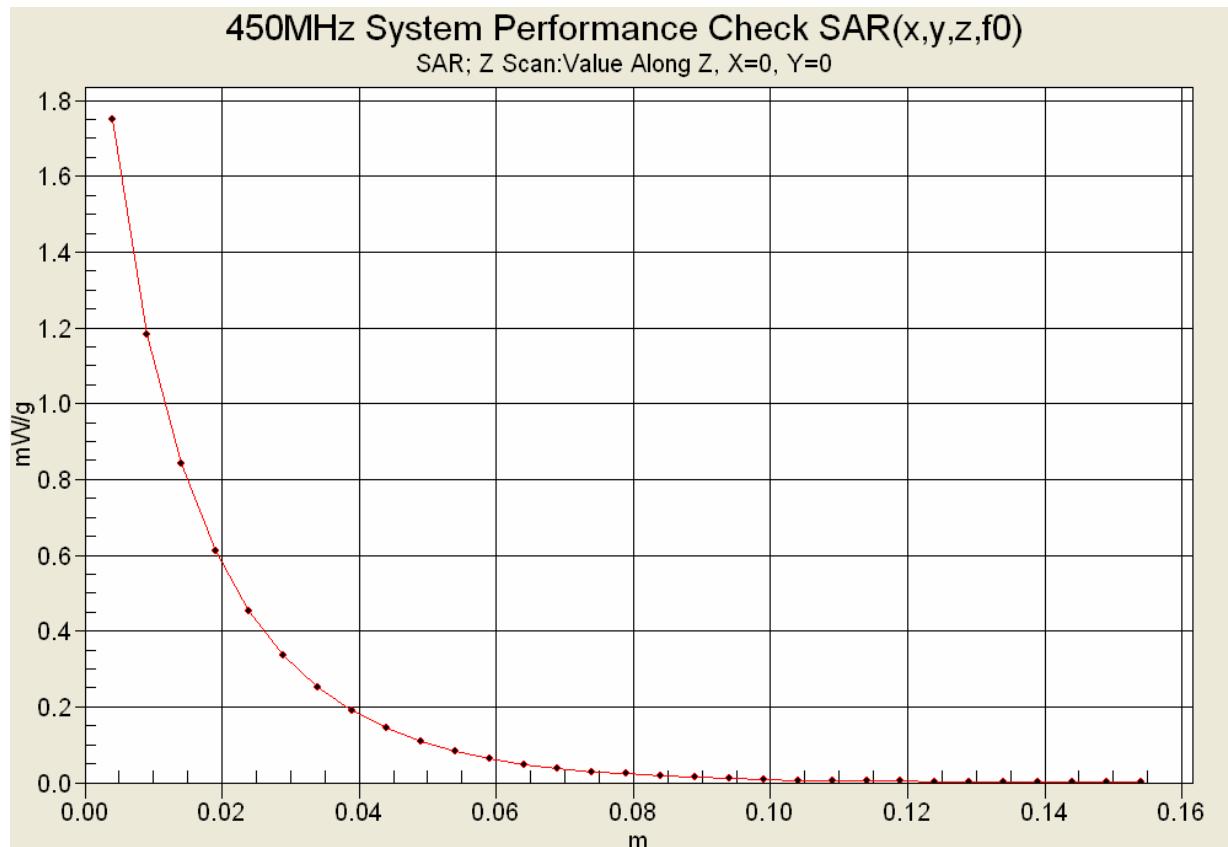

<b>Applicant:</b>	Teltronic S.A.U.	<b>FCC ID:</b>	WT7PTRKTHHT500410	<b>IC:</b>	8624A-PTRKT410	 Teltronic <small>TELETRONIC COMMUNICATIONS</small>	
<b>DUT Type:</b>	Portable UHF TDMA Radio Transceiver	<b>Model:</b>	HTT-500	<b>Tx Freq.:</b>	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 50 of 75						

 <b>Celltech</b> <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 03/05/2010

## System Performance Check - 450 MHz Dipole - HSL

**DUT: Dipole D450V3; Asset: 000217; Serial: 1068; Calibration: 01/18/2010**

Ambient Temp: 23.8°C; Fluid Temp: 22.5°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 44.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### System Performance Check - 450 MHz Dipole

**Head d=15mm Pin=398mW/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.94 mW/g


**Head d=15mm Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 48.4 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 2.91 W/kg

**SAR(1 g) = 1.85 mW/g; SAR(10 g) = 1.23 mW/g**

Maximum value of SAR (measured) = 1.96 mW/g

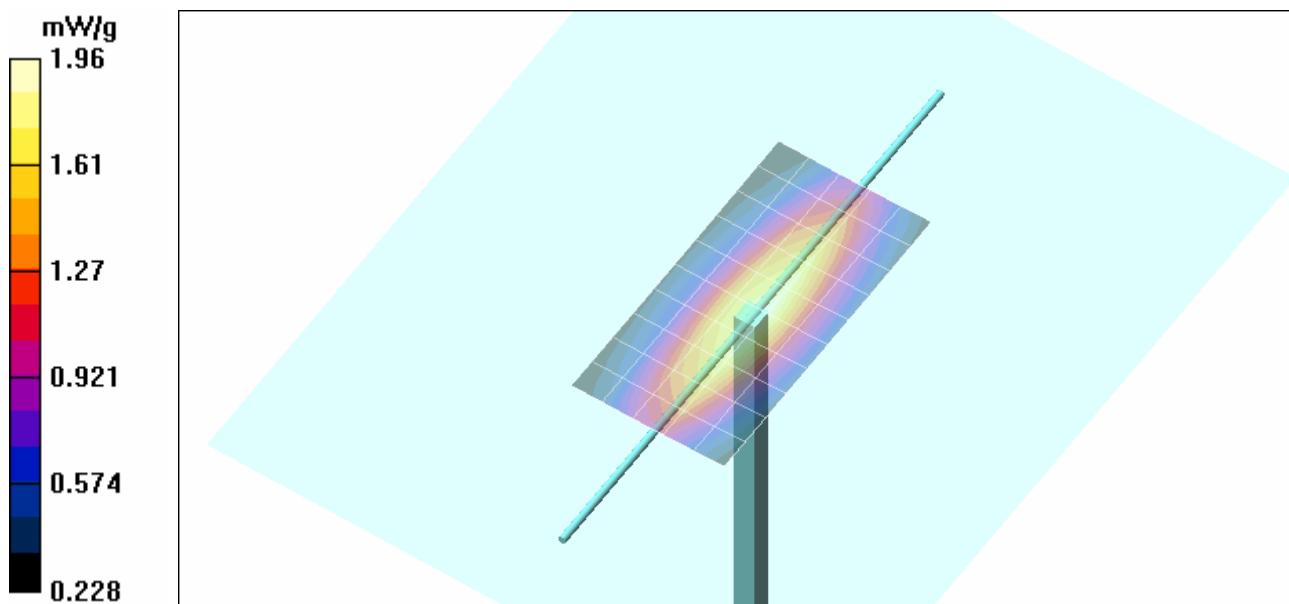


<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHHT500410</b>	<b>IC:</b>	<b>8624A-PTRKT410</b>	 Teltronic	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>	<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 51 of 75

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

## Z-Axis Scan

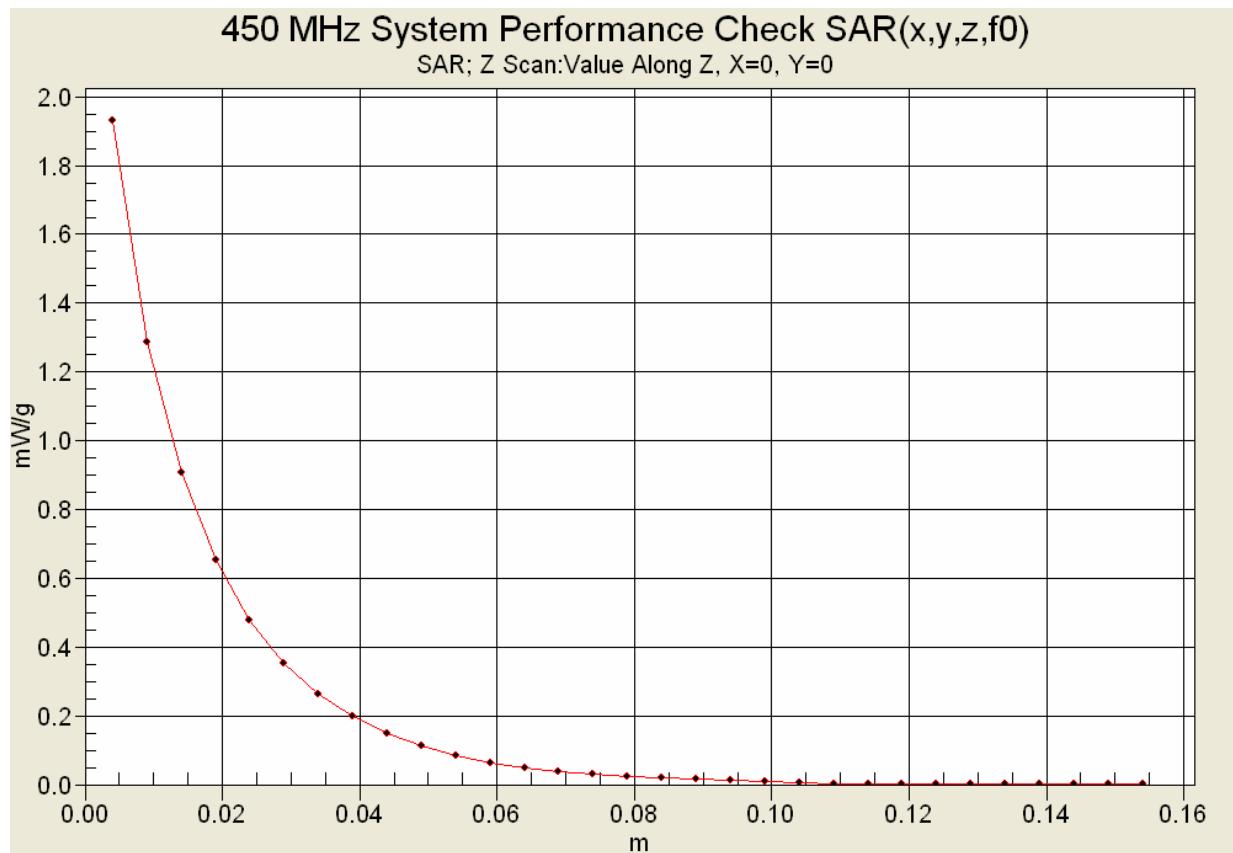

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 52 of 75						

 Celltech <small>Testing and Engineering Services Ltd</small>	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <small>IAC-MRA</small> <small>ACCREDITED</small>
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Date Tested: 03/08/2010

## System Performance Check - 450 MHz Dipole - HSL

**DUT: Dipole D450V3; Asset: 000217; Serial: 1068; Calibration: 01/18/2010**

Ambient Temp: 23.5°C; Fluid Temp: 22.0°C; Barometric Pressure: 101.1 kPa; Humidity: 35%

Communication System: CW

Forward Conducted Power: 398 mW

Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450 Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.87$  mho/m;  $\epsilon_r = 43.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

- Probe: ET3DV6 - SN1590; ConvF(7.34, 7.34, 7.34); Calibrated: 16/07/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 28/04/2009
- Phantom: Barski Industries; Type: Fiberglas Planar; Serial: 03-01
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

### System Performance Check - 450 MHz Dipole

**Head d=15mm Pin=398mW/Area Scan (6x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.89 mW/g


**Head d=15mm Pin=398mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 48.2 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 2.88 W/kg

**SAR(1 g) = 1.85 mW/g; SAR(10 g) = 1.24 mW/g**

Maximum value of SAR (measured) = 1.98 mW/g

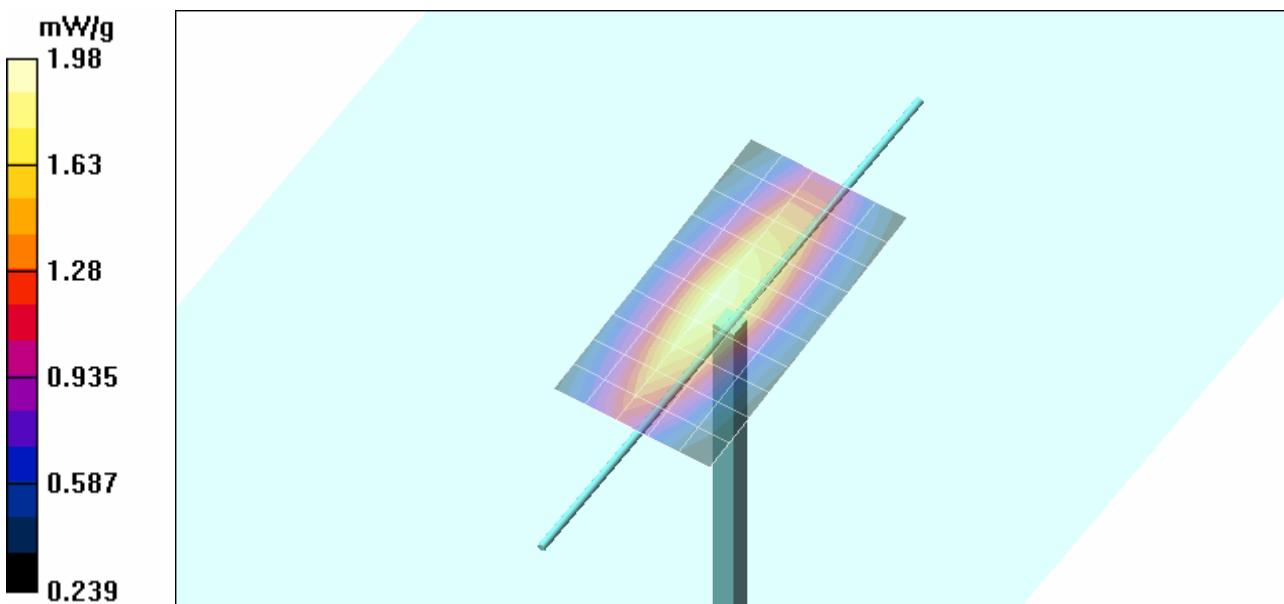


<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHHT500410</b>	<b>IC:</b>	<b>8624A-PTRKT410</b>	 <small>teltronic</small> <small>TELECOMUNICATIONS</small>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>			<b>Model:</b>	<b>HTT-500</b>		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

## Z-Axis Scan

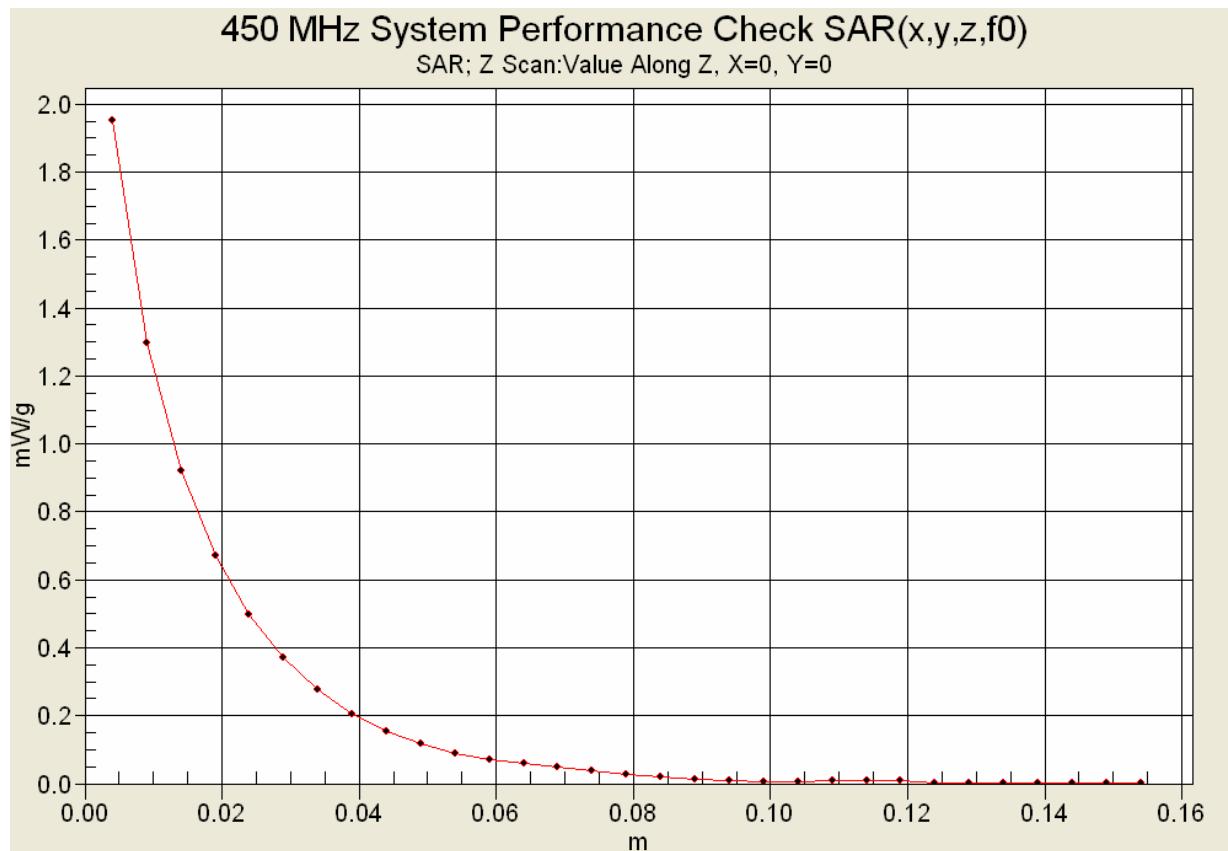

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic	
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz		
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						
	Page 54 of 75						

 <b>Celltech</b> <small>Testing and Engineering Services Ltd.</small>	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 <b>ilac-MRA</b>  <b>ACREDITED</b>
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>	<b>FCC ID:</b>	<b>WT7PTRKTHTT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>	<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 55 of 75	

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA   ACCREDITED  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## System Performance Check & DUT Evaluation (Body)

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

04/Mar/2010

Frequency (GHz)

FCC\_eH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma

FCC\_eB FCC Limits for Body Epsilon

FCC\_sB FCC Limits for Body Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.3500	57.70	0.93	59.45	0.86
0.3600	57.60	0.93	59.07	0.86
0.3700	57.50	0.93	58.58	0.86
0.3800	57.40	0.93	59.27	0.87
0.3900	57.30	0.93	59.24	0.87
0.4000	57.20	0.93	59.00	0.88
0.4100	57.10	0.93	58.40	0.89
0.4200	57.00	0.94	58.14	0.90
0.4300	56.90	0.94	58.24	0.92
0.4400	56.80	0.94	57.88	0.93
0.4500	56.70	0.94	57.64	0.91
0.4600	56.66	0.94	57.84	0.93
0.4700	56.62	0.94	57.58	0.95
0.4800	56.58	0.94	57.83	0.96
0.4900	56.54	0.94	57.11	0.96
0.5000	56.51	0.94	56.52	0.97
0.5100	56.47	0.94	57.06	0.97
0.5200	56.43	0.95	56.98	0.98
0.5300	56.39	0.95	57.14	0.98
0.5400	56.35	0.95	56.19	1.00
0.5500	56.31	0.95	56.58	1.01

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic Your mobile communication
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 56 of 75

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA   ACCREDITED  Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## System Performance Check & DUT Evaluation (Head)

---

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

05/Mar/2010

Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

---

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	45.44	0.77
0.3600	44.58	0.87	45.78	0.79
0.3700	44.46	0.87	45.30	0.78
0.3800	44.34	0.87	45.52	0.80
0.3900	44.22	0.87	44.87	0.80
0.4000	44.10	0.87	44.76	0.83
0.4100	43.98	0.87	44.59	0.83
0.4200	43.86	0.87	44.98	0.83
0.4300	43.74	0.87	44.43	0.82
0.4400	43.62	0.87	43.80	0.86
0.4500	43.50	0.87	44.19	0.86
0.4600	43.45	0.87	43.53	0.86
0.4700	43.40	0.87	42.79	0.87
0.4800	43.34	0.87	42.97	0.89
0.4900	43.29	0.87	43.47	0.89
0.5000	43.24	0.87	42.75	0.90
0.5100	43.19	0.87	42.93	0.91
0.5200	43.14	0.88	42.32	0.92
0.5300	43.08	0.88	42.34	0.93
0.5400	43.03	0.88	42.10	0.92
0.5500	42.98	0.88	41.58	0.95

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic TELECOMUNICACIONES
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 57 of 75

 Testing and Engineering Services Ltd.	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 Test Lab Certificate No. 2470.01
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

## 450 MHz System Performance Check & DUT Evaluation (Face)

---

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

08/Mar/2010

Frequency (GHz)

FCC\_eH FCC OET 65 Supplement C (June 2001) Limits for Head Epsilon  
 FCC\_sH FCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

---

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.3500	44.70	0.87	44.43	0.77
0.3600	44.58	0.87	44.73	0.79
0.3700	44.46	0.87	44.35	0.79
0.3800	44.34	0.87	44.57	0.82
0.3900	44.22	0.87	44.86	0.81
0.4000	44.10	0.87	43.75	0.83
0.4100	43.98	0.87	43.56	0.84
0.4200	43.86	0.87	43.97	0.85
0.4300	43.74	0.87	43.37	0.85
0.4400	43.62	0.87	42.87	0.87
0.4500	43.50	0.87	43.15	0.87
0.4600	43.45	0.87	42.57	0.88
0.4700	43.40	0.87	42.59	0.87
0.4800	43.34	0.87	41.77	0.89
0.4900	43.29	0.87	42.57	0.89
0.5000	43.24	0.87	42.65	0.90
0.5100	43.19	0.87	42.73	0.91
0.5200	43.14	0.88	41.32	0.93
0.5300	43.08	0.88	41.54	0.93
0.5400	43.03	0.88	41.70	0.92
0.5500	42.98	0.88	41.55	0.95

Applicant:	Teltronic S.A.U.	FCC ID:	WT7PTRKTHHT500410	IC:	8624A-PTRKT410	 teltronic
DUT Type:	Portable UHF TDMA Radio Transceiver	Model:	HTT-500	Tx Freq.:	409.0 - 470.0 MHz	
2010 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 58 of 75

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX E - DIPOLE CALIBRATION

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>		<b>FCC ID:</b>	<b>WT7PTRKTHTT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>		<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 72 of 75



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **D450V3-1068\_Jan10**

## CALIBRATION CERTIFICATE

Object **D450V3 - SN: 1068**

Calibration procedure(s) **QA CAL-15.v5**  
**Calibration Procedure for dipole validation kits below 800 MHz**

Calibration date: **January 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

### Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Type-N mismatch combination	SN: 5047.2 / 06327	31-Mar-09 (No. 217-01029)	Mar-10
Reference Probe ET3DV6 (LF)	SN: 1507	03-Jul-09 (No. ET3-1507_Jul09)	Jul-10
DAE4	SN: 654	04-May-09 (No. DAE4-654_May09)	May-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	04-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

*i.V. Udo*

Approved by: **Katja Pokovic** **Technical Manager**

*K. Pokovic*

Issued: January 20, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

### Glossary:

TSL	tissue simulating liquid
ConF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V5.2
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	ELI4 Flat Phantom	Shell thickness: $2 \pm 0.2$ mm
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Area Scan Resolution</b>	$dx, dy = 15$ mm	
<b>Zoom Scan Resolution</b>	$dx, dy, dz = 5$ mm	
<b>Frequency</b>	$450$ MHz $\pm 1$ MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Head TSL parameters</b>	22.0 °C	43.5	0.87 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	44.2 $\pm$ 6 %	0.86 mho/m $\pm$ 6 %
<b>Head TSL temperature during test</b>	(22.0 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	1.87 mW / g
SAR normalized	normalized to 1W	4.70 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>4.76 mW / g <math>\pm</math> 18.1 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	398 mW input power	1.25 mW / g
SAR normalized	normalized to 1W	3.14 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>3.17 mW / g <math>\pm</math> 17.6 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
<b>Nominal Body TSL parameters</b>	22.0 °C	56.7	0.94 mho/m
<b>Measured Body TSL parameters</b>	(22.0 ± 0.2) °C	54.1 ± 6 %	0.90 mho/m ± 6 %
<b>Body TSL temperature during test</b>	(22.0 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	398 mW input power	1.78 mW / g
SAR normalized	normalized to 1W	4.47 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>4.58 mW / g ± 18.1 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	398 mW input power	1.19 mW / g
SAR normalized	normalized to 1W	2.99 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>3.06 mW / g ± 17.6 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.5 $\Omega$ - 5.9 $j\Omega$
Return Loss	- 21.0 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	54.8 $\Omega$ - 9.3 $j\Omega$
Return Loss	- 20.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.350 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 16, 2009

# DASY5 Validation Report for Head TSL

Date/Time: 1/18/2010 10:59:37 AM

## DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: HSL450

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.86$  mho/m;  $\epsilon_r = 44.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(6.66, 6.66, 6.66); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Head/d=15mm, Pin=398mW/Area Scan (41x111x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.99 mW/g


**Head/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 50.2 V/m; Power Drift = -0.020 dB


Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 1.87 mW/g; SAR(10 g) = 1.25 mW/g**

Maximum value of SAR (measured) = 2 mW/g

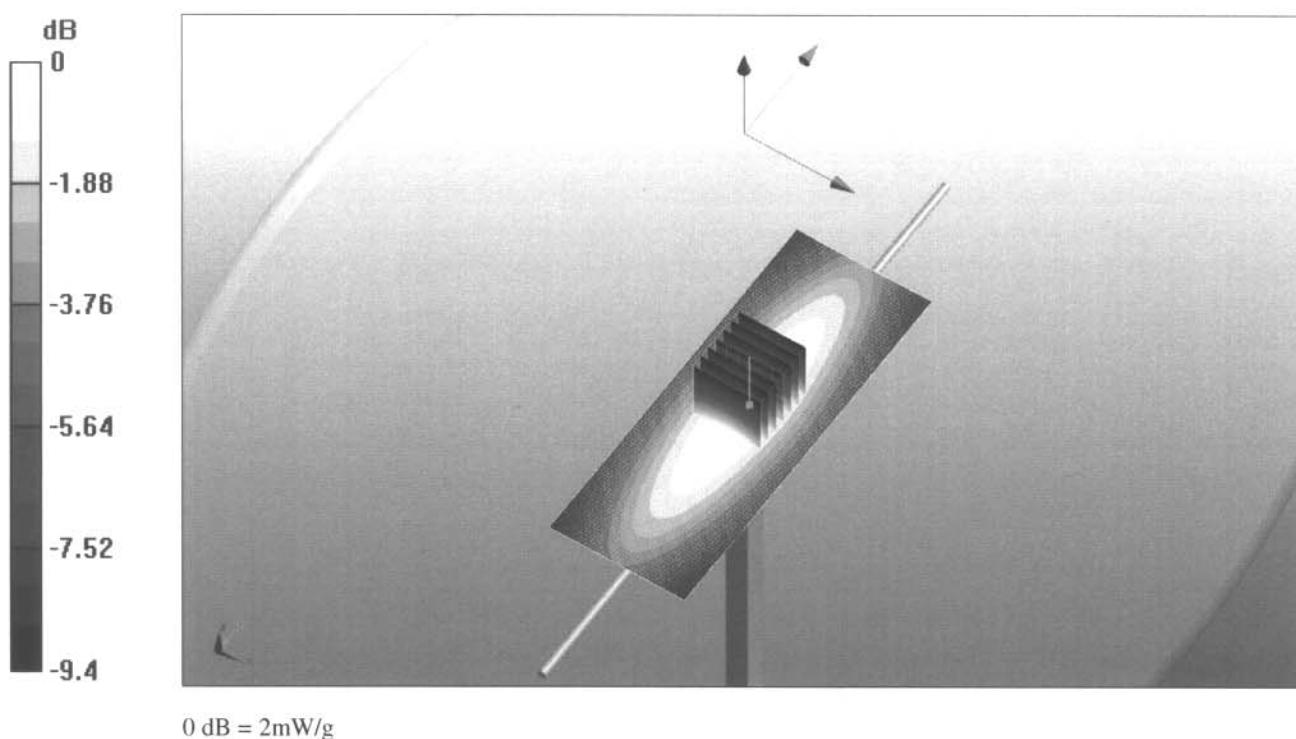

# Impedance Measurement Plot for Head TSL

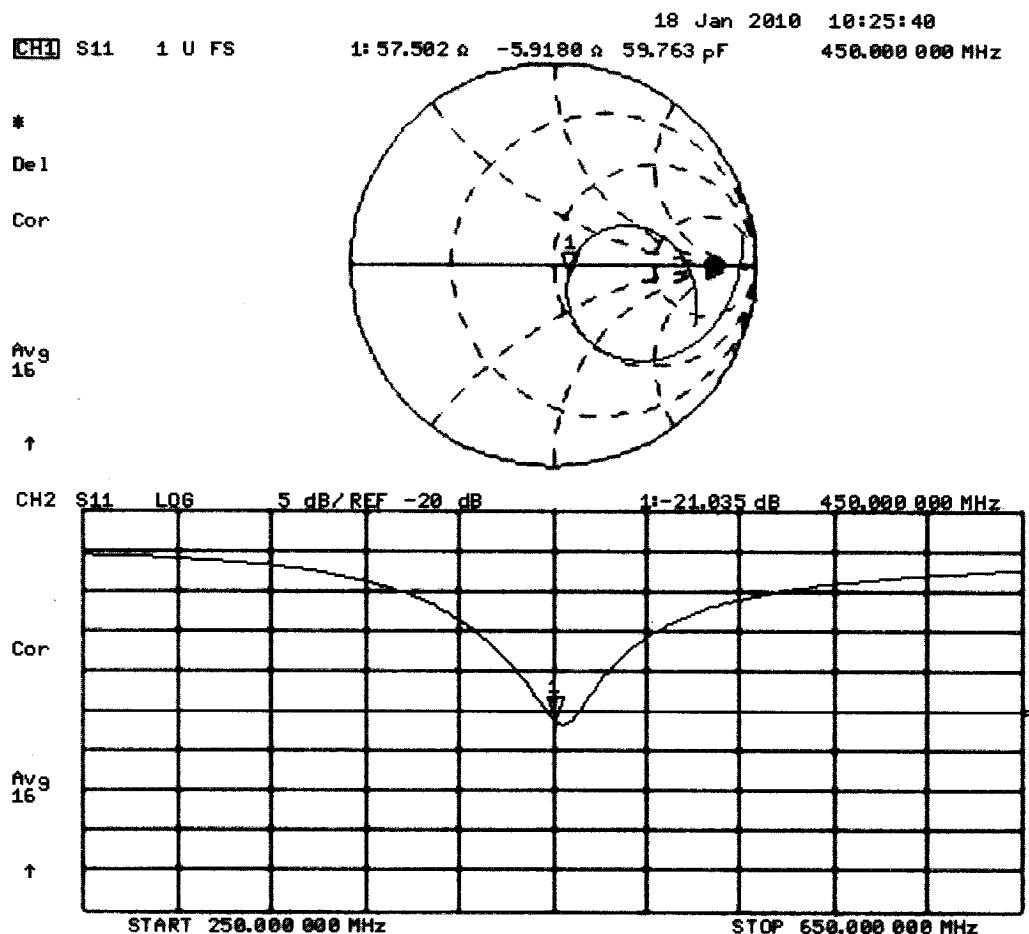

## DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1068

Communication System: CW; Frequency: 450 MHz; Duty Cycle: 1:1

Medium: MSL450

Medium parameters used:  $f = 450$  MHz;  $\sigma = 0.9$  mho/m;  $\epsilon_r = 54.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:

- Probe: ET3DV6 - SN1507 (LF); ConvF(7.11, 7.11, 7.11); Calibrated: 7/3/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 5/4/2009
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1003
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

**Body/d=15mm, Pin=398mW/Area Scan (61x201x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.9 mW/g


**Body/d=15mm, Pin=398mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.4 V/m; Power Drift = -0.034 dB


Peak SAR (extrapolated) = 2.71 W/kg

**SAR(1 g) = 1.78 mW/g; SAR(10 g) = 1.19 mW/g**

Maximum value of SAR (measured) = 1.9 mW/g

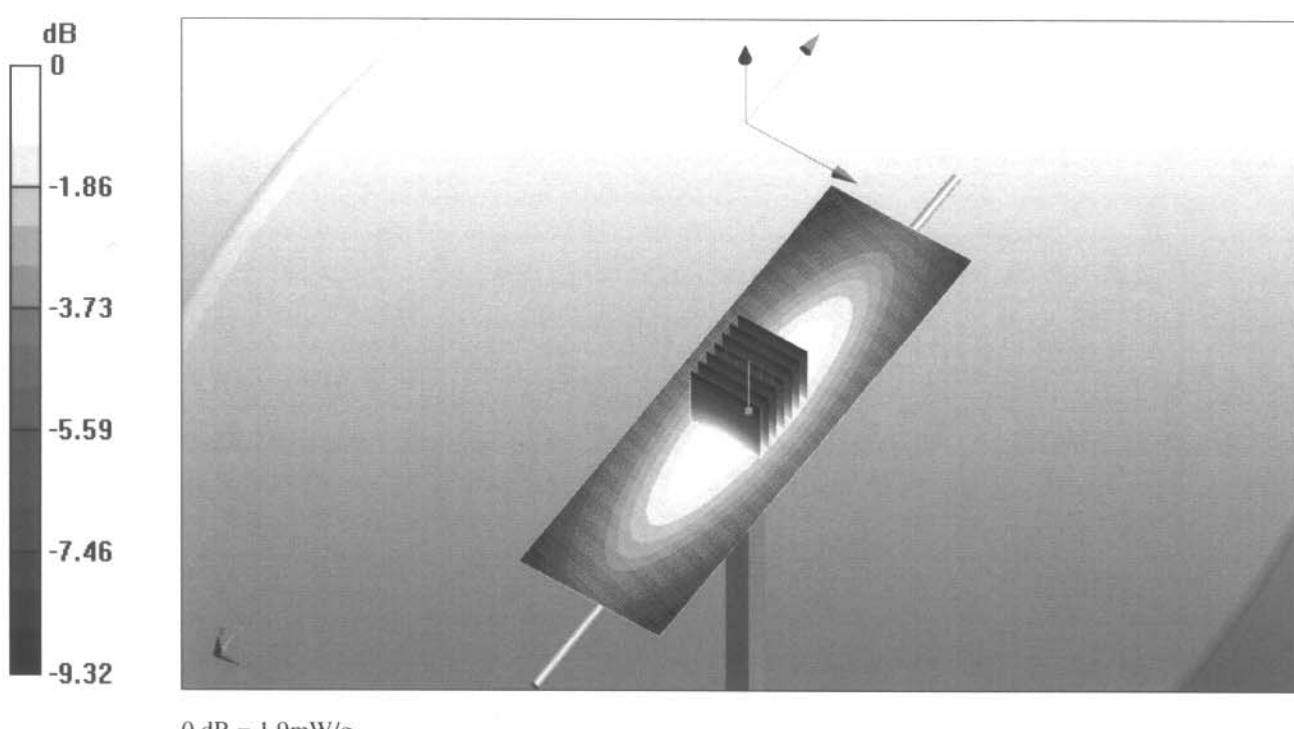

# Impedance Measurement Plot for Body TSL

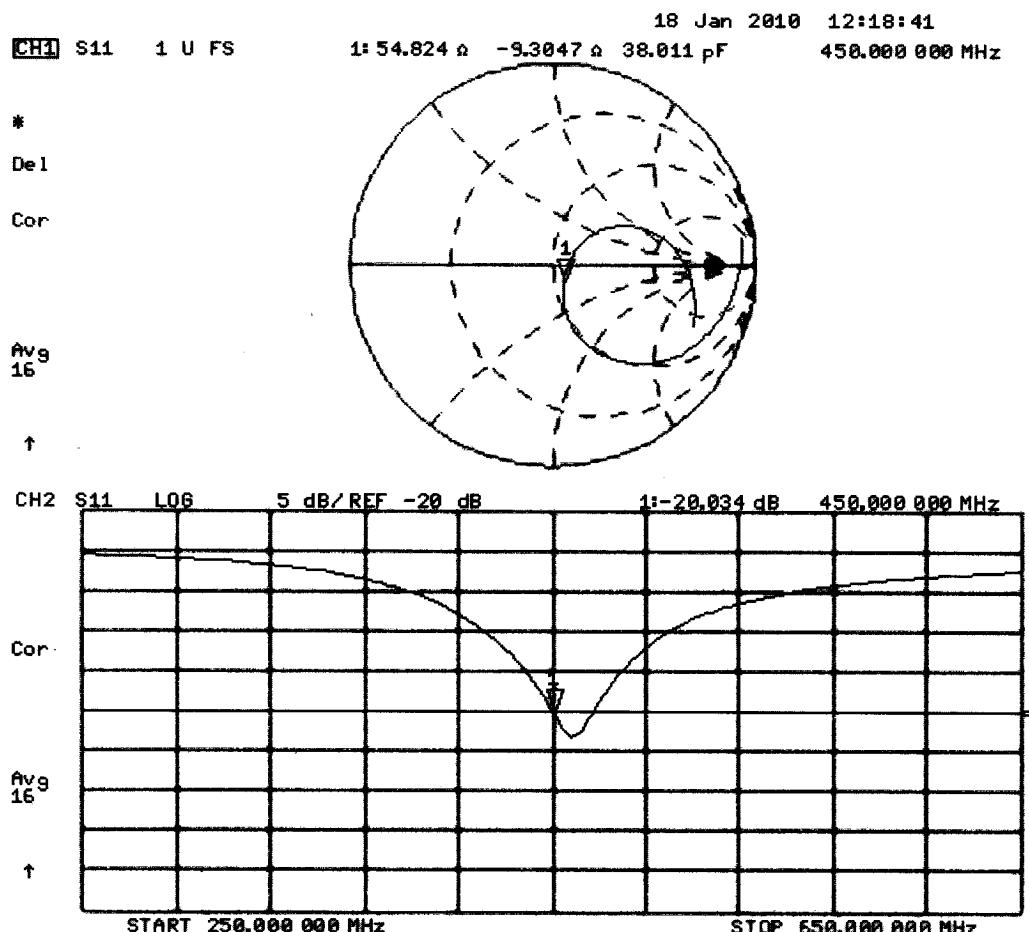

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX F - PROBE CALIBRATION

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>		<b>FCC ID:</b>	<b>WT7PTRKTHTT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>		<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 73 of 75

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **Celltech**

Certificate No: **ET3-1590\_Jul09**

## CALIBRATION CERTIFICATE

Object **ET3DV6 - SN:1590**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-12.v5, QA CAL-23.v3 and QA CAL-25.v2**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **July 16, 2009**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	2-Jan-09 (No. ES3-3013_Jan09)	Jan-10
DAE4	SN: 660	9-Sep-08 (No. DAE4-660_Sep08)	Sep-09
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-08)	In house check: Oct-09

Calibrated by: Name **Marcel Fehr** Function **Laboratory Technician**

Signature

Approved by: Name **Katja Pokovic** Function **Technical Manager**

Signature

Issued: July 16, 2009

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### **Glossary:**

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

### **Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### **Methods Applied and Interpretation of Parameters:**

- $NORMx,y,z$ : Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).  $NORMx,y,z$  are only intermediate values, i.e., the uncertainties of  $NORMx,y,z$  does not effect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCPx,y,z*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to  $NORMx,y,z * ConvF$  whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

SN:1590

Manufactured:	March 19, 2001
Last calibrated:	July 21, 2008
Recalibrated:	July 16, 2009

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

# DASY - Parameters of Probe: ET3DV6 SN:1590

Sensitivity in Free Space <sup>A</sup>			Diode Compression <sup>B</sup>		
NormX	<b>1.83</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	<b>90</b> mV	
NormY	<b>2.02</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	<b>95</b> mV	
NormZ	<b>1.73</b> $\pm$ 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	<b>85</b> mV	

## Sensitivity in Tissue Simulating Liquid (Conversion Factors)

**Please see Page 8.**

## Boundary Effect

**TSL**      **835 MHz**      **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
SAR <sub>be</sub> [%]	Without Correction Algorithm	9.9	6.3
SAR <sub>be</sub> [%]	With Correction Algorithm	0.9	0.6

## Sensor Offset

Probe Tip to Sensor Center **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).



<sup>B</sup> Numerical linearization parameter: uncertainty not required.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

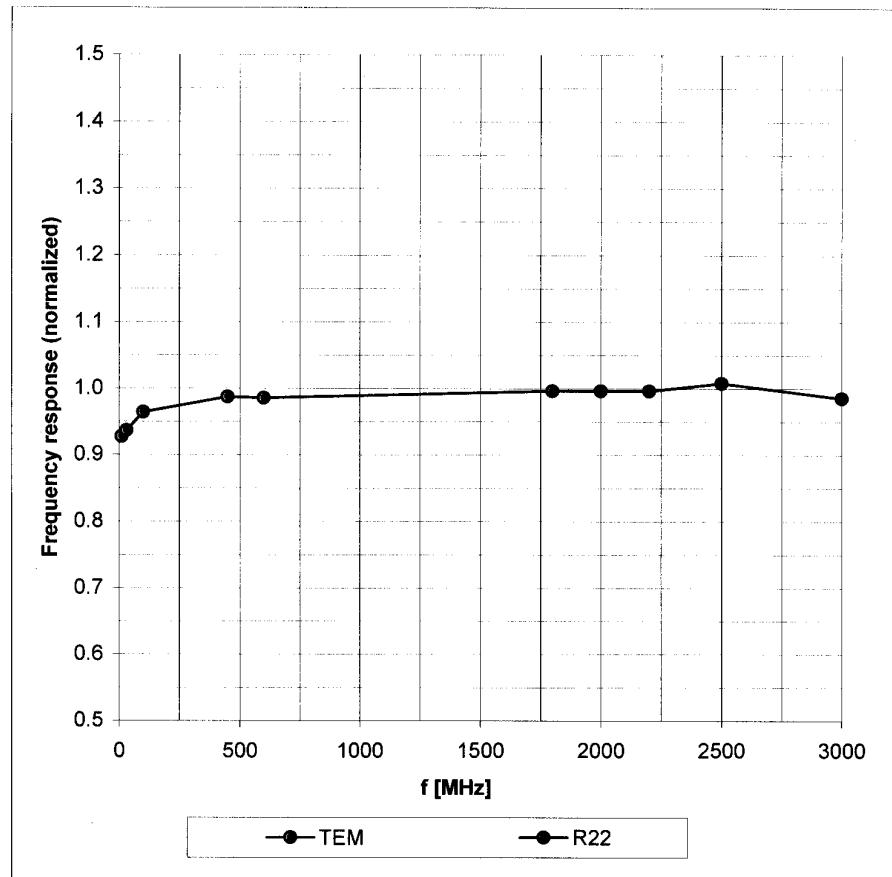

Uncertainty of Frequency Response of E-field:  $\pm 6.3\% (k=2)$

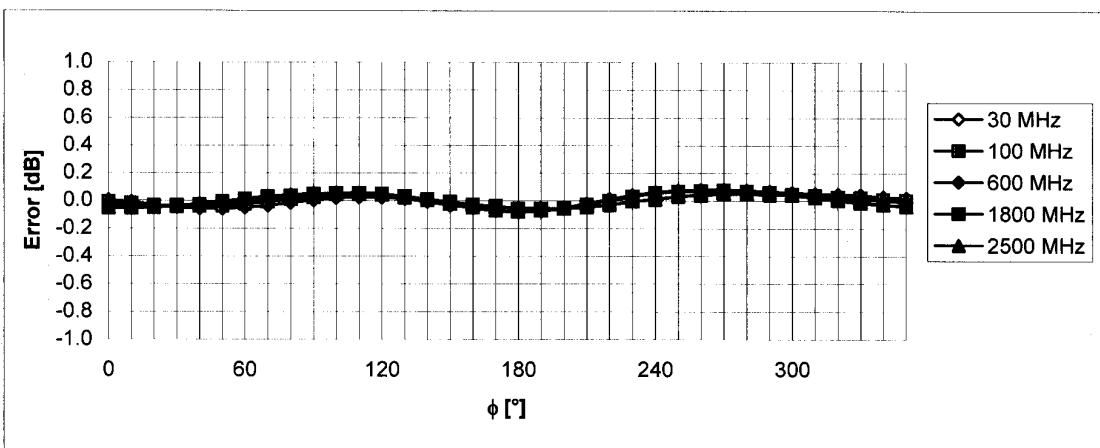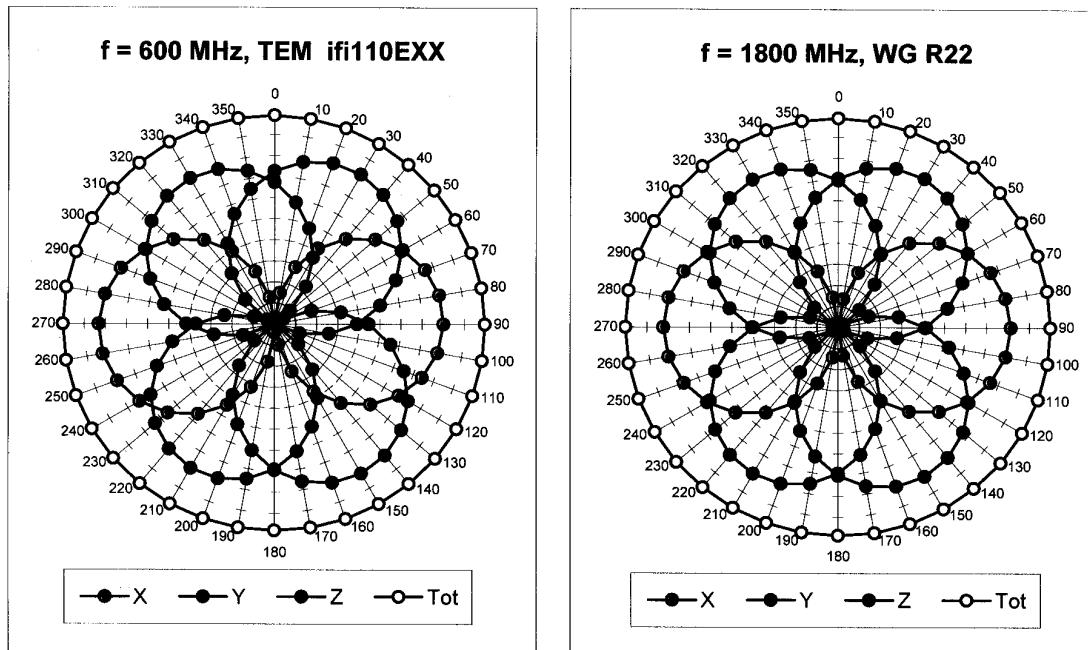
Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$ Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

**Dynamic Range  $f(\text{SAR}_{\text{head}})$**   
(Waveguide R22,  $f = 1800 \text{ MHz}$ )

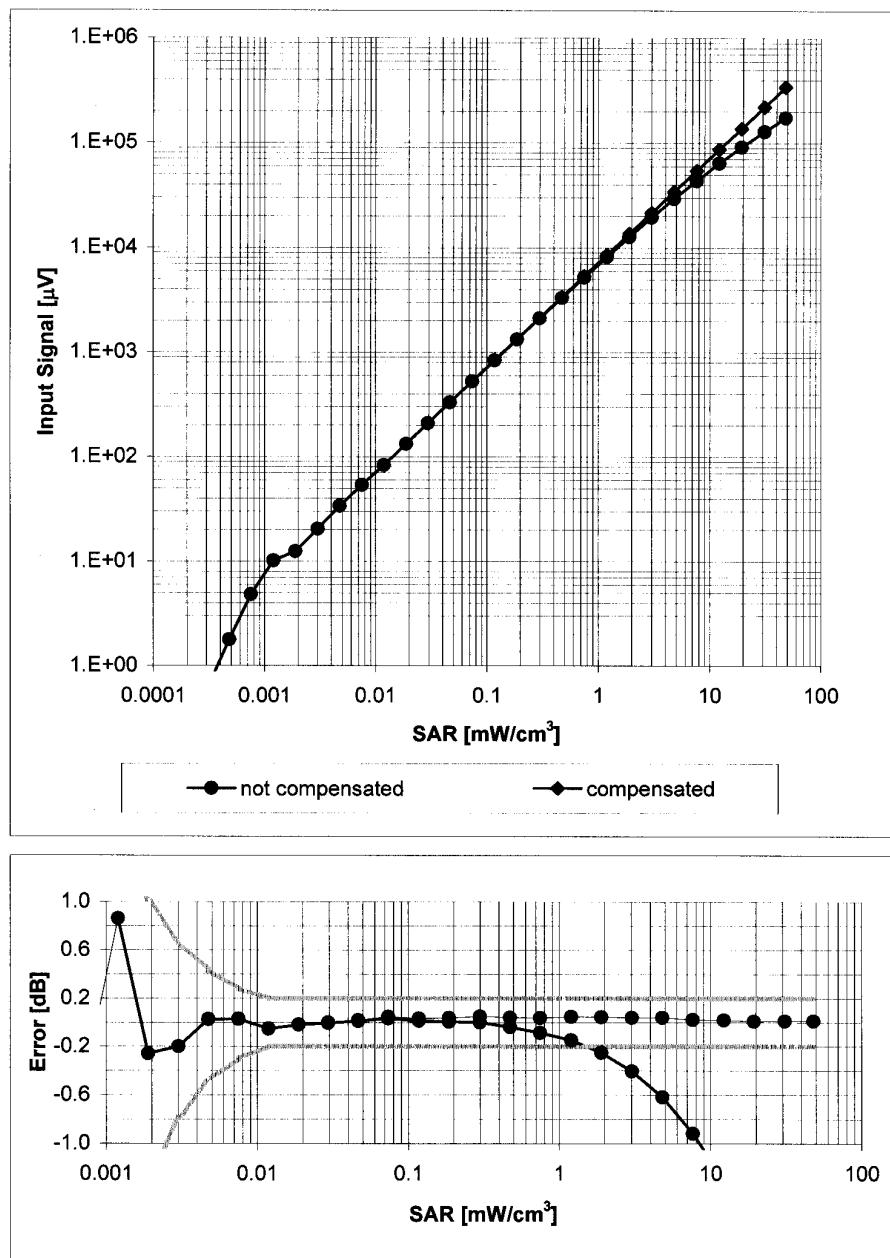

**Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )**

## Conversion Factor Assessment

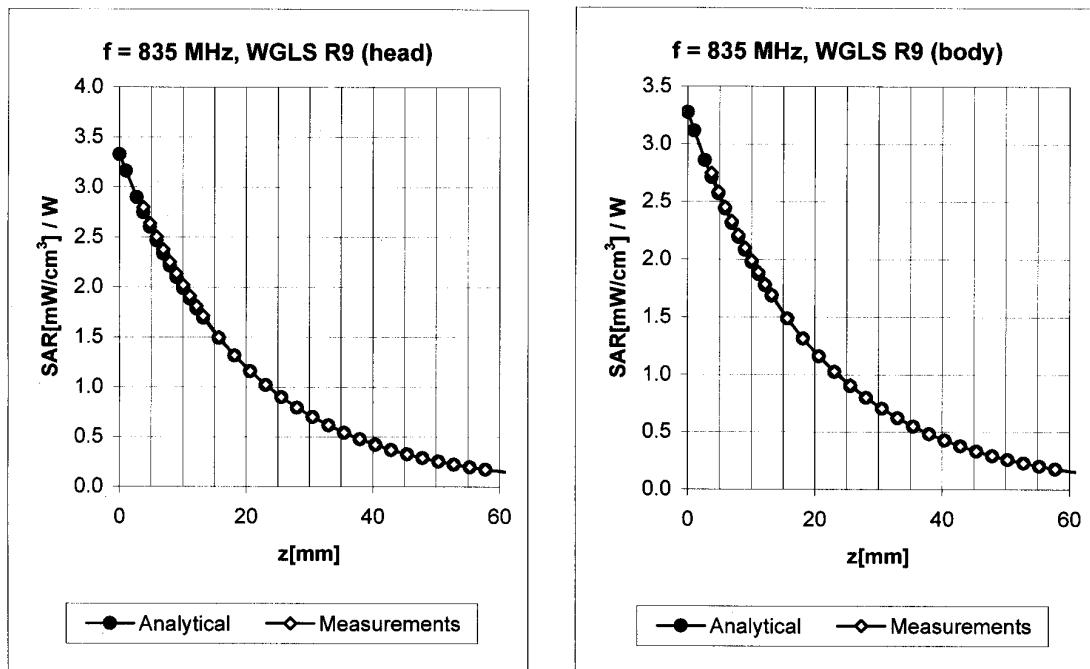


f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF	Uncertainty
450	$\pm 50 / \pm 100$	Head	$43.5 \pm 5\%$	$0.87 \pm 5\%$	0.29	1.90	7.34	$\pm 13.3\% \text{ (k=2)}$
835	$\pm 50 / \pm 100$	Head	$41.5 \pm 5\%$	$0.90 \pm 5\%$	0.37	2.32	6.59	$\pm 11.0\% \text{ (k=2)}$
450	$\pm 50 / \pm 100$	Body	$56.7 \pm 5\%$	$0.94 \pm 5\%$	0.22	1.91	7.34	$\pm 13.3\% \text{ (k=2)}$
835	$\pm 50 / \pm 100$	Body	$55.2 \pm 5\%$	$0.97 \pm 5\%$	0.30	2.77	6.34	$\pm 11.0\% \text{ (k=2)}$

<sup>c</sup> The validity of  $\pm 100$  MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ),  $f = 900$  MHz

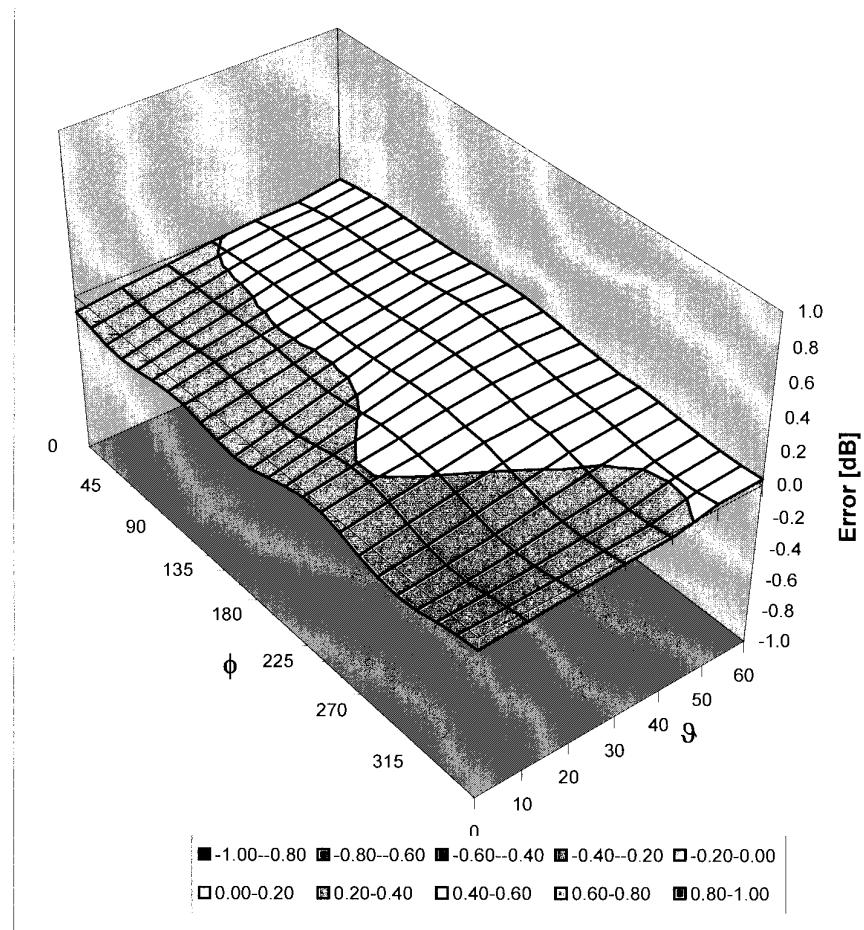

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)



Test Lab Certificate No. 2470.01

## APPENDIX G - SAM PHANTOM CERTIFICATE OF CONFORMITY

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>		<b>FCC ID:</b>	<b>WT7PTRKTHTT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>		<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 74 of 75

# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 BA
Series No	TP-1002 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

### Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

### Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9

(\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

18.11.2001

Signature / Stamp

Schmid & Partner  
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

 Celltech Testing and Engineering Services Ltd	<u>Date(s) of Evaluation</u> March 04-05, 08, 2010	<u>Test Report Serial No.</u> 020510WT7-T1003-S90U	<u>Test Report Revision No.</u> Rev. 1.0 (Initial Release)	 IAC-MRA ACCREDITED
	<u>Test Report Issue Date</u> March 17, 2010	<u>Description of Test(s)</u> Specific Absorption Rate	<u>RF Exposure Category</u> Occupational (Controlled)	

Test Lab Certificate No. 2470.01

## APPENDIX H - PLANAR PHANTOM CERTIFICATE OF CONFORMITY

<b>Applicant:</b>	<b>Teltronic S.A.U.</b>		<b>FCC ID:</b>	<b>WT7PTRKTHHT500410</b>		<b>IC:</b>	<b>8624A-PTRKT410</b>	 teltronic TELETRONIC COMMUNICATIONS
<b>DUT Type:</b>	<b>Portable UHF TDMA Radio Transceiver</b>		<b>Model:</b>	<b>HTT-500</b>		<b>Tx Freq.:</b>	<b>409.0 - 470.0 MHz</b>	
2010 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.						Page 75 of 75

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01

Date: June 16, 2003

Manufacturer: Barski Industries (1985 Ltd)

Test	Requirement	Details
Shape	Compliance to geometry according to drawing	Supplied CAD drawing
Material Thickness	Compliant with the requirements	2mm +/- 0.2mm in measurement area
Material Parameters	Dielectric parameters for required frequencies Based on Dow Chemical technical data	100 MHz-5 GHz Relative permittivity < 5 Loss Tangent < 0.05

### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailler



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

## Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

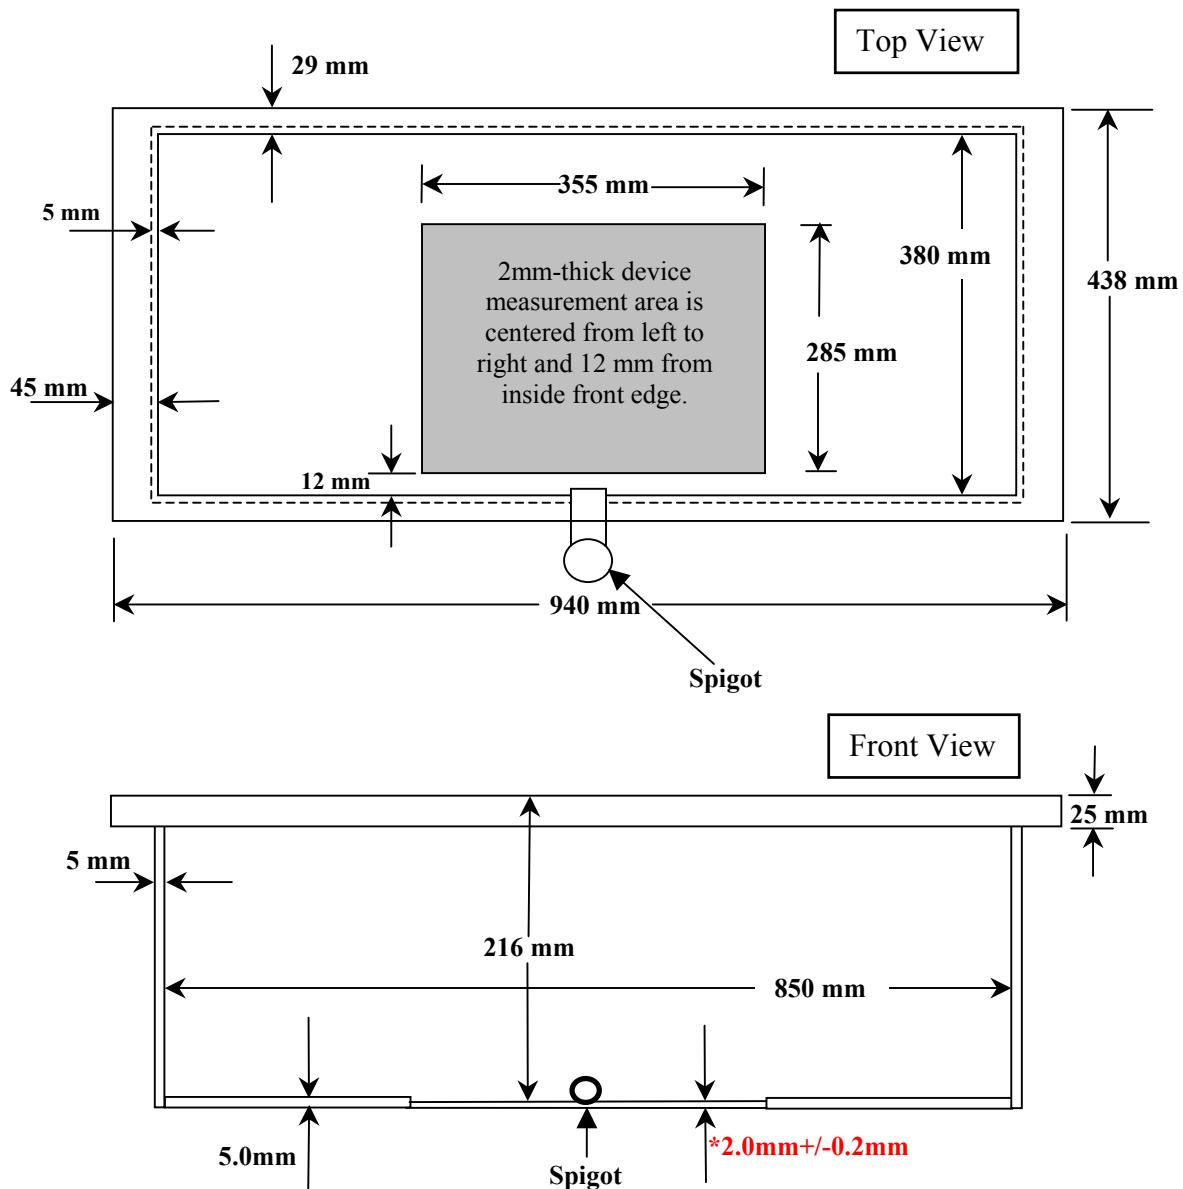

**Note:** Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.