

849 NW STATE ROAD 45

NEWBERRY, FL 32669 USA

PH: 888.472.2424 OR 352.472.5500

FAX: 352.472.2030

EMAIL: <a href="mailto:linfo@timcoengr.com">linfo@timcoengr.com</a>
HTTP://WWW.TIMCOENGR.COM

# TEST REPORT PER FCC PART 90

APPLICANT	TELTRONIC, S.A.U		
	Poligono Malpica Calie F		
	Parceia 12 ZARAGOZA 50057 Spain		
FCC ID	WT7PTRUNK25RF800		
PRODUCT DESCRIPTION	RF Unit Base Station Radio/Repeater		
DATE SAMPLE RECEIVED	10/13/2008		
DATE TESTED	10/23/2008		
TESTED BY	Nam Nguyen		
APPROVED BY	Mario de Aranzeta		
TIMCO REPORT NO.	2139AUT8TestReport.pdf		
TEST RESULTS	PASS  FAIL		

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.





### TABLE OF CONTENTS

ATTESTATIONS	3
DUT SPECIFICATION	4
TEST ENVIRONMENT AND TEST SETUP	5
EMC EQUIPMENT LIST	6
TEST PROCEDURES	7
TEST RESULT	10
RF Power Output	10
Modulation Characteristics	11
Voice Modulated Communication Equipment	11
Other Modulation Characteristics	12
Occupied Bandwidth	13
Spurious Emissions At Antenna Terminals Conducted)	17
Field Strength Of Spurious Emissions	18
Frequency Stability	20
Transient Frequency Behavior	21

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### **ATTESTATIONS**

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669

#### **Authorized Signatory Name:**

Mario de Aranzeta C.E.T. Compliance Engineer/ Lab. Supervisor

**Date:** October 30, 2008

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### **DUT SPECIFICATION**

DUT Description	RF Unit Base Station Radio/Repeater
FCC ID	WT7PTRUNK25RF800
Serial Number	N/A
Operating Frequency	851.01 –868.99 MHZ
Test Frequencies	Tx: 851.01 -868.99 MHZ
Type of Emission	FM, Digital
Modulation	F1D
	F2D
	☐ 110-120Vac/50- 60Hz
DUT Power Source	☑ DC Power, 28V
	☐ Battery Operated Exclusively
	☐ Prototype
Test Item	☑ Pre-Production
	☐ Production
	⊠ Fixed
Type of Equipment	Mobile
	Portable

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### TEST ENVIRONMENT AND TEST SETUP

Test Facility	All tests were conducted by Timco Engineering Inc. located at 849 NW State Road 45, Newberry, FL 32669 USA
Laboratory Test Condition	
Deviation from the standards	No deviation
Modification to the DUT	No modification was made.
Test Exercise (software etc.)	The DUT was placed in continuous transmitting mode of operation.
System Setup	Stand alone device.

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800

 $Report: \qquad T \backslash TELTRONIC \ S.A.U \backslash 2139 AUT8 \backslash 2139 AUT8 TestReport. doc$ 



# EMC EQUIPMENT LIST

Device	Manufacture r	Model	Serial Number	Cal/Char Date	Due Date
Analyzer Tan Tower Spectrum Analyzer	НР	8566B Opt 462	3138A07786 3144A20661	CAL 12/7/07	12/7/09
Analyzer Tan Tower RF Preselector	НР	85685A	3221A01400	CAL 12/7/07	12/7/09
Analyzer Tan Tower Quasi-Peak Adapter	НР	85650A	3303A01690	CAL 12/8/07	12/8/09
Analyzer Tan Tower Preamplifier	НР	8449B- H02	3008A00372	CAL 12/8/07	12/8/09
Antenna: Biconnical	Electro- Metrics	BIA-25	1171	CAL 4/29/07	4/29/09
Antenna: Double- Ridged Horn	Electro- Metrics	RGA- 180	2319	CAL 12/29/06	12/29/08
Termaline Wattmeter	Bird Electronic Corporation	611	16405	CAL 7/16/07	7/16/09


Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800




#### TEST PROCEDURES

**Power Line Conducted Interference:** The procedure used was ANSI/TIA 603-C:2004 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**Bandwidth 20 dB**: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

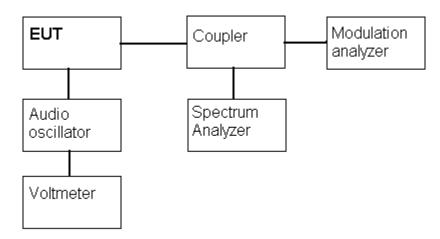


**Power Output:** The RF power output was measured at the antenna feed point using a peak power meter.



Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



**Antenna Conducted Emissions:** The RBW = 100 kHz, VBW = 300 kHz and the span set to 10.0 MHz and the spectrum was scanned from 30 MHz to the  $10^{\text{th}}$  harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

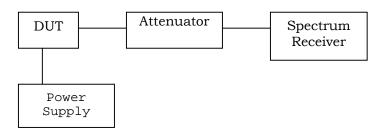

**Radiation Interference:** The test procedure used was ANSI/TIA 603-C:2004 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a micro volt at the output of the antenna.

#### Frequency Stability

The frequency stability was measured per ANSI/TIA 603-C: 2004.

#### **Modulation Characteristic**

#### Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004.

#### **Audio Low Pass Filter**

The audio low pass filter for voice-modulated equipment was measured in accordance with ANSI/TIA 603-C: 2004.

#### Audio Input versus modulation


The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. Curves are provided for audio input frequencies of 300, 1000, and 3000 Hz.

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### Field Strength of Spurious Emissions


The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C: 2004 using the substitution method.

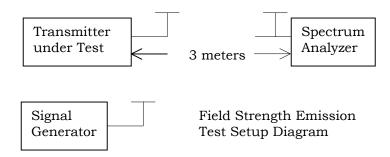

#### **Transient Frequency Behavior**

The test procedure was ANSI/TIA 603-C: 2004 Para 2.2.19.

- Using the variable attenuator. The transmitter level was set to 40 dB below the test receivers maximum input level,
- Then the transmitter was turned off.
- With the transmitter off the signal generator was set 20dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
- Reduce the attenuation between the transmitter and the RF detector by 30 dB.
- With the levels set as above the transient frequency behavior was observed & recorded.

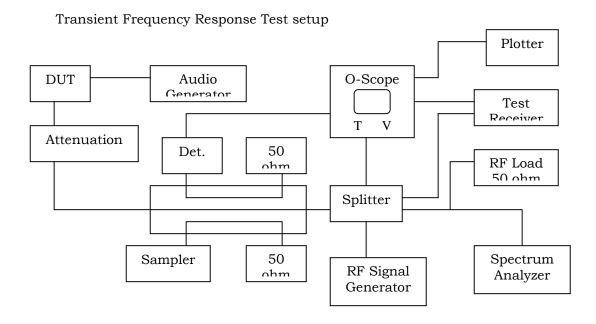

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



# TEST RESULT RF Power Output

**Rule Part No.:** FCC Part 2.1046(a), IC RSS-119 4.1 and 5.4, RSS-GEN 4.8

**Requirements:** Pt 2.1046

**Test Data:** Highest Output Power: 100.0 Watts

Lowest Output Power: 100.0 Watts

Part 2.1033 (C)(8) DC Input Into The Final Amplifier

FOR POWER SETTING INPUT POWER: (26.4V)(20.0A) = 528.0Watts

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800

 $Report: \qquad T \backslash TELTRONIC \ S.A.U \backslash 2139 AUT8 \backslash 2139 AUT8 TestReport. doc$ 



#### **Modulation Characteristics**

**Rule Part No.:** Part 2.1047(a)(b)

**Test Requirements:** 

#### **Method of Measurement:**

Audio frequency response

The audio frequency response was measured in accordance with ANSI/TIA 603-C:2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

#### Voice Modulated Communication Equipment

**Part 2.1047(a):** For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

#### AUDIO INPUT VERSUS MODULATION

**Rule Part No.:** Part 2.1047(b) & 90

#### **Test Requirements:**

**Method of Measurement:** Modulation cannot exceed 100%, The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C: 2004. The audio input curves versus modulation are shown below. Curves are provided for several audio input frequencies.

**Test data:** Please see other files associated with the report

File Name	Description
Curve DEVvsFREQ 12.5KHz.pdf Curve DEVvsFREQ 25KHz.pdf Curve DEVvsLVL 12.5KHz.pdf Curve DEVvsLVL 25KHz.pdf	12.5 kHz audio response test data and plot 25 kHz audio response test data and plot 12.5 kHz modulation test data and plot 25 kHz modulation test data and plot
	<del>-</del>

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### **Other Modulation Characteristics**

```
Part 2.1033(c)
Part 2.1033(c) (4) Type of Emission: 11K0F1D
Part 90.209
Part 90.207 Bn = 2M + 2DK
            M = B/2 = 9600/2 = 4800
            D = 700
            K=1
Bn = 2(4800) + 2(700) = 11.0k
Part 2.1033(c)
Part 2.1033(c) (4) Type of Emission: 8K1F1W
Part 90.209
Part 90.207 Bn = 2M + 2DK
            M = B/2 = 4800/2 = 2400
            D = 700
            K=1
Bn = 2(2400) + 2(1650) = 8.1k
Part 2.1033(c) (4) Type of Emission: 11K0F3E
Part 90.209
Part 90.207 Bn = 2M + 2DK
            M = 3000
            D = 2500
            K=1
Bn = 2(3000) + 2(2500) = 11.0k
Part 2.1033(c) (4) Type of Emission: 16K0F3E
Part 90.209
Part 90.207 Bn = 2M + 2DK
            M = 3000
            D = 5000
            K=1
Bn = 2(3000) + 2(5000) = 16.0k
```

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### Occupied Bandwidth

**Rule Part No.:** FCC Part 2.1049(c), RSS-GEN 4.6, ANSI/TIA-603-C:2004 para 2.2.11.

#### Requirements:

#### FCC Part 90.210(b) RSS-119 4.2 25kHz Channel Spacing

Data in the plots show that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35 dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth: At least 43 + 10log(P)dB.

Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10 kHz: At least 83 log (fd/5) dB; (2) ON any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least 29 log(fd2/11)dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least 43+10 log(Po)dB.

#### Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 5.625 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least 7.27 (fd 2.88 kHz) dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least 50 + 10log(P) dB or 70 dB, whichever is the lesser attenuation.

#### Part 90.210(e) Emission Mask E – 6.25 kHz channel BW equipment

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f0 to 3.0 kHz removed from f0: Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least 30 + 16.67(fd 3.0 kHz) or 55 + 10 Log(P) or 65, whichever us the lesser attenuation.

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



(3) On any frequency removed from the center of the authorized bandwidth by more than 4.6kHz: At least 55 + 10log(P) dB or 65 dB, whichever is the lesser attenuation.

#### Part 90.210(g) Emission Mask G

For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 10 kHz, but no more than 250 percent of the authorized bandwidth: At least 116 log (fd/6.1) dB, or 50 + 10 log (P) dB, or 70 dB, whichever is the lesser attenuation;
- (2) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least 43 + 10 log (P) dB.

#### Part 90.210(h) Emission Mask H

For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of 4 kHz or less: Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 4kHz, but no more than 8.5 kHz: At least 107 log (fd/4) dB;
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 8.5 kHz, but no more than 15 kHz: At least 40.5 log (fd/1.16) dB;
- (4) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fdin kHz) of more than 15 kHz, but no more than 25 kHz: At least 116 log (fd/6.1) dB;
- (5) On any frequency removed from the center of the authorized bandwidth by more than 25 kHz: At least 43 + log (P) dB.

**Test Data:** See the plots below


Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### NOTES:

TELTRONIC, S.A.U - Product description: RF Unit Base Station Radio/Repeater OCCUPIED BANDWIDTH PLOT

#### FCC 90.210 Mask H

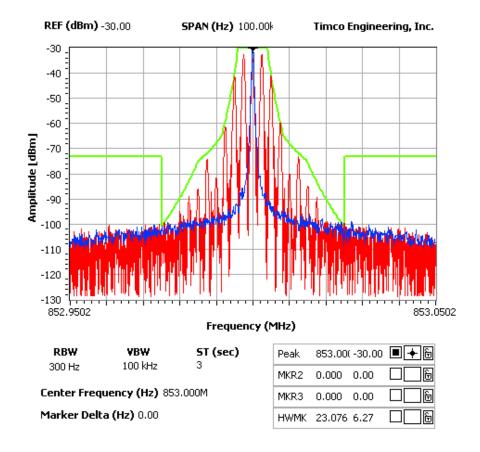


Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### NOTES:

TELTRONIC, S.A.U - Product description: RF Unit Base Station Radio/Repeater OCCUPIED BANDWIDTH PLOT

#### FCC 90.210 Mask G

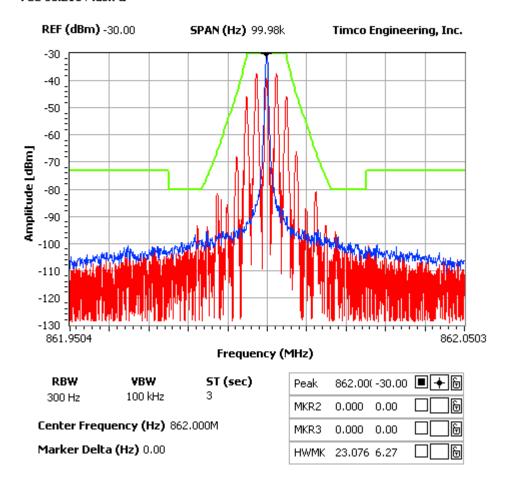

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800

 $Report: \qquad T \backslash TELTRONIC \ S.A.U \backslash 2139 AUT8 \backslash 2139 AUT8 TestReport. doc$ 



#### **Spurious Emissions At Antenna Terminals Conducted)**

Rule Part No.: FCC Part 2.1051(a), RSS-GEN 7.1.4, ANSI/TIA 603-C:2004

**Requirements:** 25kHz Channel Spacing

 $43 + 10\log(p) = 43 + 10\log(100) = 63 \, dBc$ 

12.5kHz Spacing

 $50 + 10\log(p) = 50 + 10\log(100) = 70 \, dBc$ 

6.25kHz Channel Spacing = N/A

#### **Test Data:**

TF	EF	dB below carrier	TF	EF	dB below carrier	TF	EF	dB below carrier
851.013	1702.03	86	860.000	1720.00	85	868.994	1737.99	87
	2553.04	91		2580.00	86		2606.98	86
	3404.05	90		3440.00	89		3475.98	89
	4255.06	NF		4300.00	NF		4344.97	NF
	5106.08	NF		5160.00	NF		5213.96	NF
	5957.09	NF		6020.00	NF		6082.96	NF
	6808.10	NF		6880.00	NF		6951.95	NF
	7659.11	NF		7740.00	NF		7820.94	NF
	8510.13	NF		8600.00	NF		8689.94	NF

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800

 $Report: \qquad T \backslash TELTRONIC \ S.A.U \backslash 2139AUT8 \backslash 2139AUT8 TestReport. doc$ 



#### **Field Strength Of Spurious Emissions**

**Rule Parts. No.:** FCC Part 2.1053, RSS-GEN 4.9, ANSI/TIA 603-C:2004

**Requirements:** The FCC limits for radiated emissions are the same as previously stated for the conducted emissions.

#### **Test Data:**

WE.	DD	Ant	dB below
TF	EF	Polarity	carrier
851.01	1702.03	V	79
	2553.04	V	93
	3404.05	V	77
	4255.06	V	95
	5106.08	V	85
	5957.09	V	96
	6808.10	V	98
	7659.11	H/V	NF
	8510.13	H/V	NF

TF	EF	Ant Polarity	dB below carrier
860.00	1720.00	V	81
	2580.00	V	90
	3440.00	V	81
	4300.00	V	95
	5160.00	V	94
	6020.00	V	93
	6880.00	V	95
	7740.00	H/V	NF
	8600.00	H/V	NF

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



		Ant	dB below
TF	EF	Polarity	carrier
868.99	1737.99	V	82
	2606.98	V	90
	3475.98	V	85
	4344.97	V	98
	5213.96	V	96
	6082.96	V	93
	6951.95	V	98
	7820.94	H/V	NF
	8689.94	H/V	NF

Applicant: TELTRONIC, S.A.U WT7PTRUNK25RF800



## **Frequency Stability**

**Rule Parts. No.:** FCC Part 2.1055, Part 90.213, RSS-119 5.3, RSS-GEN 7.2.4,

ANSI/TIA 603-C: 2004

**Requirements:** Temperature range requirements: -30 to +50° C.

Voltage Variation +, -15%

±1.5 PPM

#### **Test Data:**

Assigned Frequency (	Ref. Frequency) (MHz)	860.000065
Temperature	Frequency	Frequency Stability
(°C)	(MHz)	(PPM)
-30	860.000042	-0.03
-20	860.000045	-0.02
-10	860.000048	-0.02
0	860.000049	-0.02
+10	860.000052	-0.02
+20	860.000061	0.00
+30	860.000055	-0.01
+40	860.000048	-0.02
+50	860.000047	-0.02

Assigned Frequency (	860.000065	
% Battery (%)	Frequency (MHz)	Frequency Stability (PPM)
-15%	860.000049	-0.02
	860.000065	0
+15%	860.000054	-0.01

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800



#### **Transient Frequency Behavior**

**Rule Part No.:** FCC Part 2.1055(a)(1), FCC Part 90.214, IC RSS-119 5.8

**Requirements:** Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time Intervals	Maximum frequency difference	All Equipment	
		150-174 MHz	421-512 MHz

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

$t_1^4$	±25.0 kHz	5.0 ms	10.0 ms
$t_2$	$\pm 12.5~\mathrm{kHz}$	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±25.0 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

	) = =		
t <sub>1</sub> <sup>4</sup>	$\pm 12.5~\mathrm{kHz}$	5.0 ms	10.0 ms
$t_2$	$\pm 6.25~\mathrm{kHz}$	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup>	±12.5 kHz	5.0 ms	10.0 ms

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

 Traditore requierre	y zenavier ier zelapinene zeelsnea ee eperace en evze iniz enamiere		
$t_1{}^4$	$\pm 6.25~\mathrm{kHz}$	5.0 ms	10.0 ms
$t_2$	±3.125 kHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup>	±6.25 kHz	5.0 ms	10.0 ms

**Test Data:** Not Applicable.

Applicant: TELTRONIC, S.A.U FCC ID: WT7PTRUNK25RF800