

Supplemental “Transmit Simultaneously” Test Report

Report No.: RFBAOZ-WTW-P20090314-3

FCC ID: WT8DNWAP840E

Test Model: AP840E

Received Date: Sep. 16, 2020

Test Date: Oct. 12 to Nov. 05, 2020

Issued Date: Jan. 22, 2021

Applicant: Datto, Inc.

Address: 101 Merritt 7, Norwalk, CT 06851 USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information.....	6
3.1 General Description of EUT	6
3.1.1 Test Mode Applicability and Tested Channel Detail.....	8
3.2 Description of Support Units	10
3.2.1 Configuration of System under Test	11
4 Test Types and Results	13
4.1 Radiated Emission and Bandedge Measurement.....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement	13
4.1.2 Test Instruments	14
4.1.3 Test Procedures.....	16
4.1.4 Deviation from Test Standard	16
4.1.5 Test Setup.....	17
4.1.6 EUT Operating Conditions.....	18
4.1.7 Test Results (Mode 1).....	19
4.1.8 Test Results (Mode 2).....	22
4.2 Conducted Emission Measurement.....	25
4.2.1 Limits of Conducted Emission Measurement.....	25
4.2.2 Test Instruments	25
4.2.3 Test Procedures.....	26
4.2.4 Deviation from Test Standard	26
4.2.5 Test Setup.....	26
4.2.6 EUT Operating Conditions.....	26
4.2.7 Test Results (Mode 1).....	27
4.2.8 Test Results (Mode 2).....	29
4.3 Conducted Out of Band Emission Measurement.....	31
4.3.1 Limits of Conducted Out of Band Emission Measurement	31
4.3.2 Test Setup.....	31
4.3.3 Test Instruments	31
4.3.4 Test Procedures.....	31
4.3.5 Deviation from Test Standard	31
4.3.6 EUT Operating Conditions.....	31
4.3.7 Test Results (Mode 1).....	32
4.3.8 Test Results (Mode 2).....	33
5 Pictures of Test Arrangements.....	34
Appendix – Information of the Testing Laboratories	35

Release Control Record

Issue No.	Description	Date Issued
RFBAOZ-WTW-P20090314-3	Original release.	Jan. 22, 2021

1 Certificate of Conformity

Product: WiFi6 outdoor-indoor (IP55) Access Point

Brand: datto

Test Model: AP840E

Sample Status: Engineering sample

Applicant: Datto, Inc.

Test Date: Oct. 12 to Nov. 05, 2020

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang, **Date:** Jan. 22, 2021

Phoenix Huang / Specialist

Approved by : Clark Lin, **Date:** Jan. 22, 2021

Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C, E (SECTION 15.247, 15.407)			
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -4.67 dB at 0.37656 MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -7.8 dB at 4874.00 MHz.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Conducted emissions	-	2.5 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	5.1 dB
	18GHz ~ 40GHz	5.3 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	WiFi6 outdoor-indoor (IP55) Access Point
Brand	datto
Test Model	AP840E
Status of EUT	Engineering sample
Power Supply Rating	48-54 Vdc / 0.5 A from POE
Modulation Type	WLAN: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT (20/40) mode in 2.4GHz 1024QAM for OFDMA in 11ax HE mode BT-LE: GFSK
Modulation Technology	WLAN: DSSS, OFDM, OFDMA BT-LE: DTS
Transfer Rate	WLAN: 802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 600 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps BT-LE: Up to 1 Mbps
Operating Frequency	WLAN: 2.4GHz: 2.412 ~ 2.462 GHz 5GHz: 5.18 ~ 5.24 GHz, 5.745 ~ 5.825 GHz BT-LE: 2.402 ~ 2.480 GHz
Number of Channel	WLAN: 2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 9 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 4 802.11ac (VHT80), 802.11ax (HE80): 2 BT-LE: 40
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	NA

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2	Radio 3	Radio 4
WLAN 2.4GHz	WLAN 5GHz	Bluetooth	2.4G/5G Background Scanning (Rx only)

2. Simultaneously transmission condition.

Condition	Technology		
1	WLAN (2.4GHz)	WLAN (5GHz)	Bluetooth

3. The antennas provided to the EUT, please refer to the following table:

Ant. Set No.	RF Chain No.	Brand	Model No.	Ant. Net Gain (dBi)	Freq. Range (GHz)	Ant. Type	Connector Type	Cable Length
1	Chain 0 Chain 1 Chain 2 Chain 3	Nienyi	NYS4436	3.5 6.5	2.4~2.4835 5.15~5.85	Dipole	R-SMA	200 mm
2	Chain 0 Chain 1 Chain 2 Chain 3	TerraWave	M6060060M P1D43620	6 6	2.4~2.4835 5.15~5.85	Patch	R-SMA	914.4 mm (36" w/ connector)
3 (Background Ant)	-	Hong Lin	290-20458	6.45 4.5	2.4~2.4835 5.15~5.85	PIFA	i-pex(MHF)	140 mm
4 (BT Ant)	-	Hong Lin	290-20458	3.79	2.4~2.4835	PIFA	i-pex(MHF)	130 mm

4. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
VHT20	4TX	4RX
VHT40	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note: All of modulation mode support beamforming function except 802.11a/b/g modulation mode.

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
- The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.1.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE \geq 1G	RE $<$ 1G	PLC	OB	
1	✓	✓	✓	✓	Dipole Antenna
2	✓	✓	✓	✓	Patch Antenna

Where **RE \geq 1G:** Radiated Emission above 1GHz & Bandedge Measurement
RE $<$ 1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
OB: Conducted Out-Band Emission Measurement

Radiated Emission Test (Above 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11g + 802.11a + BT-LE	1 to 11	6	OFDM	BPSK
		36 to 48 149 to 165	149	OFDM	BPSK
		0 to 39	39	DTS	GFSK
2	802.11g + 802.11ax (HE40) + BT-LE	1 to 11	6	OFDM	BPSK
		38 to 46 151 to 159	159	OFDMA	BPSK
		0 to 39	39	DTS	GFSK

Radiated Emission Test (Below 1GHz):

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11g + 802.11a + BT-LE	1 to 11	6	OFDM	BPSK
		36 to 48 149 to 165	149	OFDM	BPSK
		0 to 39	39	DTS	GFSK
2	802.11g + 802.11ax (HE40) + BT-LE	1 to 11	6	OFDM	BPSK
		38 to 46 151 to 159	159	OFDMA	BPSK
		0 to 39	39	DTS	GFSK

Power Line Conducted Emission Test:

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11g + 802.11a + BT-LE	1 to 11	6	OFDM	BPSK
		36 to 48 149 to 165	149	OFDM	BPSK
		0 to 39	39	DTS	GFSK
2	802.11g + 802.11ax (HE40) + BT-LE	1 to 11	6	OFDM	BPSK
		38 to 46 151 to 159	159	OFDMA	BPSK
		0 to 39	39	DTS	GFSK

Conducted Out-Band Emission Measurement:

- The tested configurations represent the worst-case mode from all possible combinations by the maximum power.
- Following channel(s) was (were) selected for the final test as listed below.

Configure Mode	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
1	802.11g + 802.11a	1 to 11	6	OFDM	BPSK
		36 to 48 149 to 165	149	OFDM	BPSK
2	802.11g + 802.11ax (HE40)	1 to 11	6	OFDM	BPSK
		38 to 46 151 to 159	159	OFDMA	BPSK

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER (System)	TESTED BY
RE \geq 1G	25deg. C, 75%RH	120Vac, 60Hz	Eric Peng
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Cater Lin
PLC	25deg. C, 64%RH	120Vac, 60Hz	Sampson Chen
OB	25deg. C, 60%RH	120Vac, 60Hz	Jyunchun Lin

3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab
B.	POE	PHIHONG	POE29U-560	NA	NA	Supplied by client
C.	Laptop	DELL	E5430	GM1SKV1	FCC DoC	Provided by Lab


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	1	No	0	Provided by Lab
4.	GND Cable	1	3	No	0	Provided by Lab

3.2.1 Configuration of System under Test

AC Power Conducted Emissions test

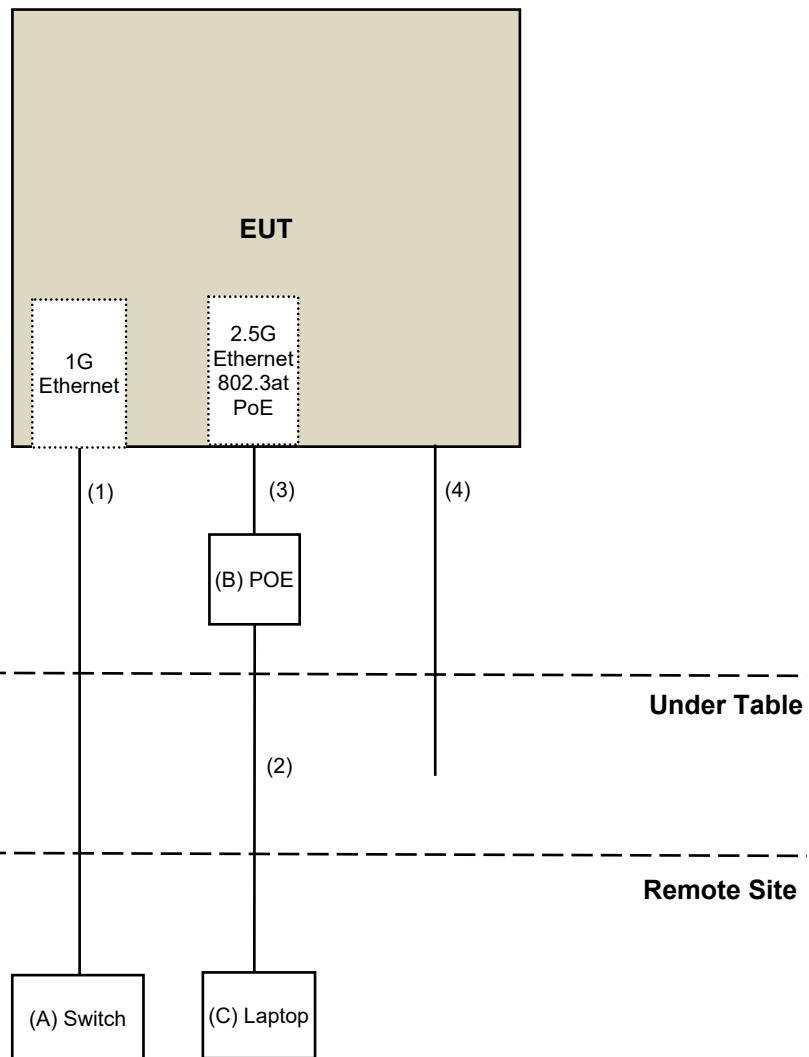

Radiated Emissions test:

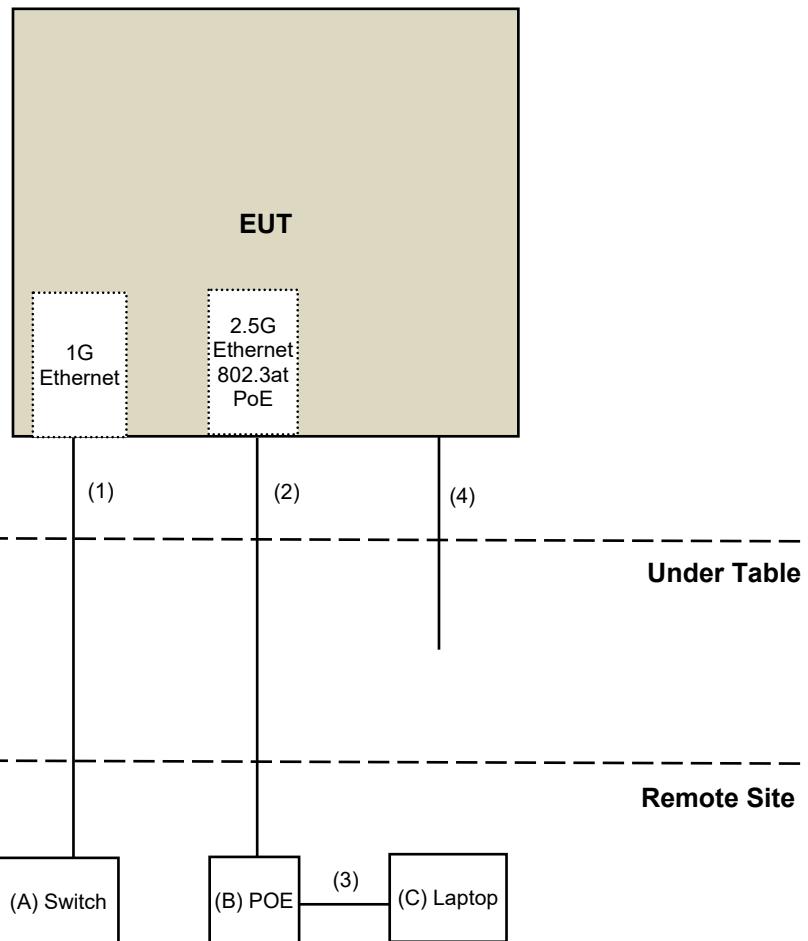

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:74 (dB _u V/m)	AV:54 (dB _u V/m)
5250~5350 MHz	15.407(b)(2)	PK:-27 (dBm/MHz)	PK:68.2(dB _u V/m)
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dB _u V/m) ^{*1} PK: 105.2 (dB _u V/m) ^{*2} PK: 110.8(dB _u V/m) ^{*3} PK: 122.2 (dB _u V/m) ^{*4}
5725~5850 MHz	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dB _u V/m) ^{*1} PK: 105.2 (dB _u V/m) ^{*2} PK: 110.8(dB _u V/m) ^{*3} PK: 122.2 (dB _u V/m) ^{*4}

^{*1} beyond 75 MHz or more above of the band edge.

^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.

^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.

^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

For Radiated emission (below 1GHz) test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 13, 2019	Dec. 12, 2020
Pre-Amplifier EMCI	EMC001340	980142	May 25, 2020	May 24, 2021
Loop Antenna Electro-Metrics	EM-6879	264	Feb. 18, 2020	Feb. 17, 2021
RF Cable	NA	LOOPCAB-001	Jan. 08, 2020	Jan. 07, 2021
RF Cable	NA	LOOPCAB-002	Jan. 08, 2020	Jan. 07, 2021
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 23, 2019	Oct. 22, 2020
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 11, 2019	Nov. 10, 2020
RF Cable	8D	966-4-1	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-2	Mar. 18, 2020	Mar. 17, 2021
RF Cable	8D	966-4-3	Mar. 18, 2020	Mar. 17, 2021
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 24, 2020	Sep. 23, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Oct. 15, 2020

For Radiated emission (Above 1GHz) test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY51210202	Dec. 13, 2019	Dec. 12, 2020
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 24, 2019	Nov. 23, 2020
Pre-Amplifier EMCI	EMC 12630 SE	980638	Apr. 08, 2020	Apr. 07, 2021
RF Cable	EMC104-SM-SM-1200	160923	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC104-SM-SM-2000	180502	Apr. 29, 2020	Apr. 28, 2021
RF Cable	EMC104-SM-SM-6000	180418	Apr. 29, 2020	Apr. 28, 2021
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 15, 2020	Jan. 14, 2021
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 24, 2019	Nov. 23, 2020
RF Cable	EMC102-KM-KM-1200	160924	Jan. 15, 2020	Jan. 14, 2021
RF Cable	EMC-KM-KM-4000	200214	Mar. 11, 2020	Mar. 10, 2021
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: Nov. 05, 2020

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	May 29, 2020	May 28, 2021
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 14, 2020	Apr. 13, 2021
Software	ADT_RF Test Software V6.6.5.4	NA	NA	NA

- NOTE:**
1. The test was performed in Oven room 2.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Nov. 03, 2020

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

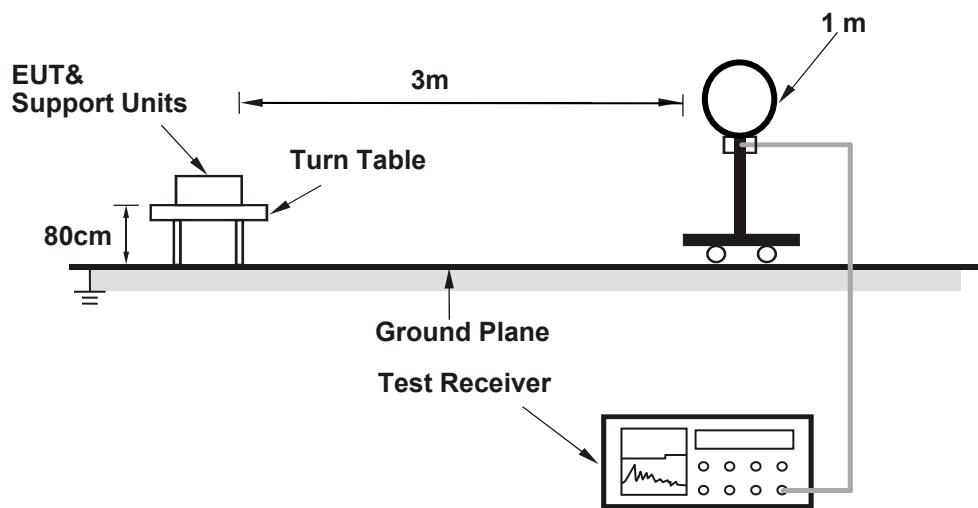

For Radiated emission 30MHz to 1GHz

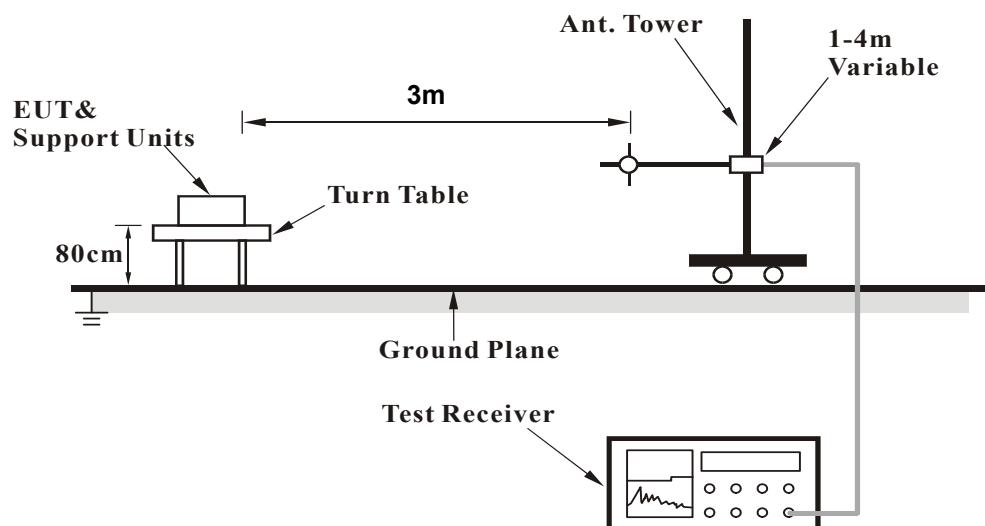

For Radiated emission above 1GHz

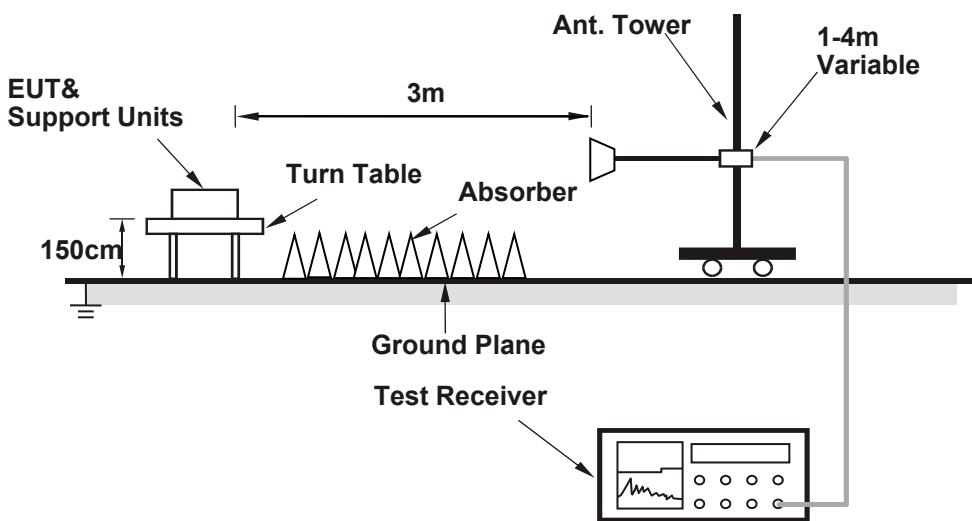

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on a remote site.
- Controlling software (WLAN: QRCT_V 4.0.00156.0, Bluetooth: telnet paste BT for Test command) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results (Mode 1)

Above 1GHz Data:

Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
-----------------	--------------	-------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
.1	4874.00	49.5 PK	74.0	-24.5	3.12 H	327	49.4	0.1
2	4874.00	37.3 AV	54.0	-16.7	3.12 H	327	37.2	0.1
3	4960.00	37.5 PK	74.0	-36.5	2.13 H	16	37.1	0.4
4	4960.00	27.5 AV	54.0	-26.5	2.13 H	16	27.1	0.4
5	7311.00	44.8 PK	74.0	-29.2	3.29 H	296	38.2	6.6
6	7311.00	32.4 AV	54.0	-21.6	3.29 H	296	25.8	6.6
7	7440.00	46.9 PK	74.0	-27.1	1.41 H	360	40.2	6.7
8	7440.00	37.6 AV	54.0	-16.4	1.41 H	360	30.9	6.7
9	11490.00	50.5 PK	74.0	-23.5	1.92 H	192	38.7	11.8
10	11490.00	43.3 AV	54.0	-10.7	1.92 H	192	31.5	11.8
11	#17235.00	48.6 PK	68.2	-19.6	1.73 H	194	33.2	15.4

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	40.9 PK	74.0	-33.1	2.23 V	71	40.8	0.1
2	4874.00	28.2 AV	54.0	-25.8	2.23 V	71	28.1	0.1
3	4960.00	36.3 PK	74.0	-37.7	1.29 V	232	35.9	0.4
4	4960.00	26.0 AV	54.0	-28.0	1.29 V	232	25.6	0.4
5	7311.00	42.2 PK	74.0	-31.8	3.14 V	267	35.6	6.6
6	7311.00	30.3 AV	54.0	-23.7	3.14 V	267	23.7	6.6
7	7440.00	44.2 PK	74.0	-29.8	1.50 V	316	37.5	6.7
8	7440.00	34.9 AV	54.0	-19.1	1.50 V	316	28.2	6.7
9	11490.00	50.0 PK	74.0	-24.0	3.88 V	270	38.2	11.8
10	11490.00	43.5 AV	54.0	-10.5	3.88 V	270	31.7	11.8
11	#17235.00	47.9 PK	68.2	-20.3	3.57 V	196	32.5	15.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	103.74	26.9 QP	43.5	-16.6	3.00 H	264	38.2	-11.3
2	149.16	25.2 QP	43.5	-18.3	4.00 H	316	32.8	-7.6
3	189.18	20.8 QP	43.5	-22.7	1.00 H	224	31.1	-10.3
4	355.24	25.6 QP	46.0	-20.4	1.00 H	300	30.7	-5.1
5	444.68	28.0 QP	46.0	-18.0	3.00 H	360	30.4	-2.4
6	489.10	29.8 QP	46.0	-16.2	4.00 H	0	31.3	-1.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

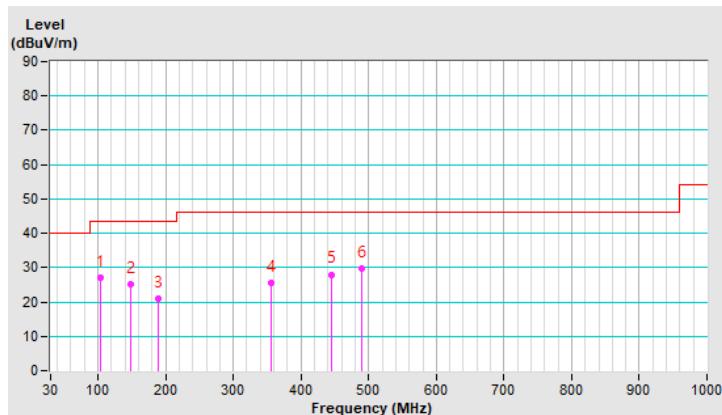


Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	85.92	25.8 QP	40.0	-14.2	2.00 V	26	39.4	-13.6
2	137.09	28.3 QP	43.5	-15.2	2.00 V	268	36.5	-8.2
3	194.71	21.1 QP	43.5	-22.4	3.00 V	143	31.7	-10.6
4	318.99	25.1 QP	46.0	-20.9	3.00 V	68	30.9	-5.8
5	462.77	29.2 QP	46.0	-16.8	1.00 V	58	31.1	-1.9
6	843.30	35.6 QP	46.0	-10.4	2.00 V	360	29.9	5.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

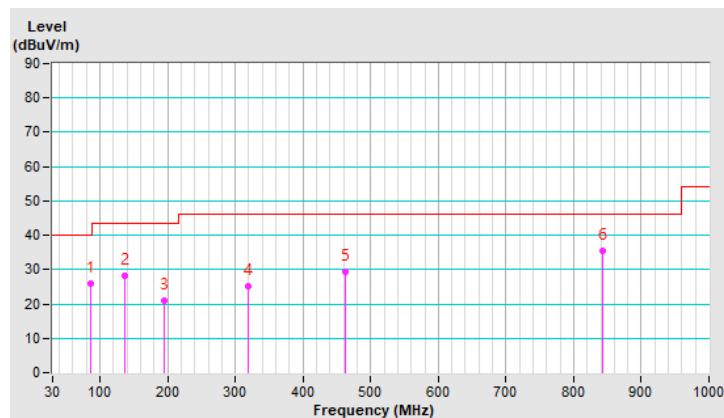

4.1.8 Test Results (Mode 2)

Above 1GHz Data:

Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)
-----------------	--------------	-------------------	---------------------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	44.8 PK	74.0	-29.2	2.98 H	205	44.7	0.1
2	4874.00	43.0 AV	54.0	-11.0	2.98 H	205	42.9	0.1
3	4960.00	36.3 PK	74.0	-37.7	1.88 H	209	35.9	0.4
4	4960.00	27.2 AV	54.0	-26.8	1.88 H	209	26.8	0.4
5	7311.00	40.0 PK	74.0	-34.0	1.83 H	203	33.4	6.6
6	7311.00	36.3 AV	54.0	-17.7	1.83 H	203	29.7	6.6
7	7440.00	44.9 PK	74.0	-29.1	3.23 H	298	38.2	6.7
8	7440.00	36.5 AV	54.0	-17.5	3.23 H	298	29.8	6.7
9	11590.00	44.4 PK	74.0	-29.6	2.73 H	360	32.9	11.5
10	11590.00	33.1 AV	54.0	-20.9	2.73 H	360	21.6	11.5
11	#17385.00	45.8 PK	68.2	-22.4	3.04 H	350	28.8	17.0
12	#17385.00	34.6 AV	54.0	-19.4	3.04 H	350	17.6	17.0

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	4874.00	47.4 PK	74.0	-26.6	3.46 V	272	47.3	0.1
2	4874.00	46.2 AV	54.0	-7.8	3.46 V	272	46.1	0.1
3	4960.00	37.4 PK	74.0	-36.6	1.62 V	61	37.0	0.4
4	4960.00	26.9 AV	54.0	-27.1	1.62 V	61	26.5	0.4
5	7311.00	41.8 PK	74.0	-32.2	3.39 V	307	35.2	6.6
6	7311.00	38.5 AV	54.0	-15.5	3.39 V	307	31.9	6.6
7	7440.00	46.9 PK	74.0	-27.1	2.05 V	292	40.2	6.7
8	7440.00	38.8 AV	54.0	-15.2	2.05 V	292	32.1	6.7
9	11590.00	44.2 PK	74.0	-29.8	2.55 V	7	32.7	11.5
10	11590.00	33.8 AV	54.0	-20.2	2.55 V	7	22.3	11.5
11	#17385.00	46.3 PK	68.2	-21.9	2.70 V	318	29.3	17.0
12	#17385.00	35.4 AV	54.0	-18.6	2.70 V	318	18.4	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.


Below 1GHz Data:

Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.50	26.9 QP	40.0	-13.1	2.00 H	273	34.7	-7.8
2	85.94	23.5 QP	40.0	-16.5	2.00 H	47	37.2	-13.7
3	103.74	26.9 QP	43.5	-16.6	3.00 H	264	38.2	-11.3
4	341.03	25.1 QP	46.0	-20.9	3.00 H	308	30.6	-5.5
5	543.83	29.5 QP	46.0	-16.5	4.00 H	0	29.8	-0.3
6	823.31	35.6 QP	46.0	-10.4	2.00 H	205	30.1	5.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

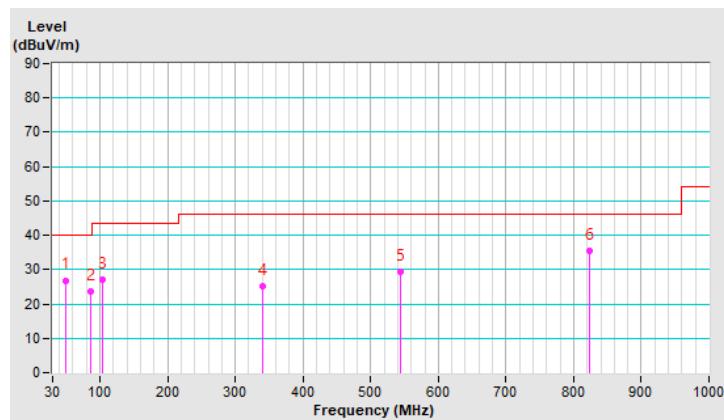


Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
------------------------	-------------	--------------------------	-----------------

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	49.50	26.9 QP	40.0	-13.1	2.00 V	273	34.7	-7.8
2	103.74	26.9 QP	43.5	-16.6	3.00 V	264	38.2	-11.3
3	173.46	22.8 QP	43.5	-20.7	1.00 V	7	31.3	-8.5
4	214.03	20.8 QP	43.5	-22.7	3.00 V	94	31.6	-10.8
5	492.79	29.3 QP	46.0	-16.7	2.00 V	295	30.7	-1.4
6	886.66	36.6 QP	46.0	-9.4	3.00 V	336	30.4	6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

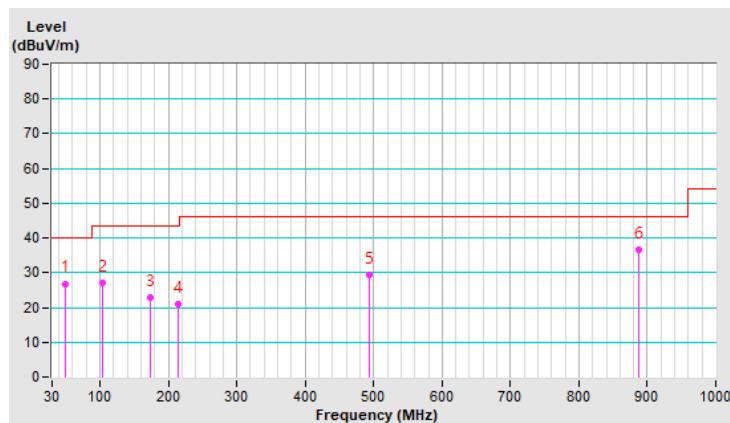

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 23, 2019	Oct. 22, 2020
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 19, 2020	Mar. 18, 2021
50 ohms Terminator	50	3	Oct. 23, 2019	Oct. 22, 2020
RF Cable	5D-FB	COCCAB-001	Sep. 26, 2020	Sep. 25, 2021
Fixed attenuator EMCI	STI02-2200-10	005	Aug. 29, 2020	Aug. 28, 2021
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Oct. 12, 2020

4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

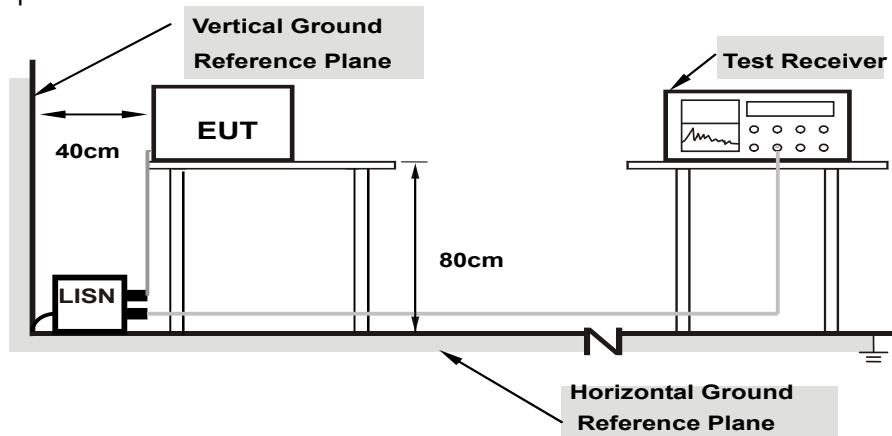

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.91	44.85	28.99	54.76	38.90	65.79	55.79	-11.03	-16.89
2	0.17734	9.92	41.04	25.16	50.96	35.08	64.61	54.61	-13.65	-19.53
3	0.35313	9.95	33.61	31.32	43.56	41.27	58.89	48.89	-15.33	-7.62
4	0.37656	9.95	34.81	33.61	44.76	43.56	58.35	48.35	-13.59	-4.79
5	2.82031	10.07	21.63	16.80	31.70	26.87	56.00	46.00	-24.30	-19.13
6	5.80078	10.22	25.00	20.52	35.22	30.74	60.00	50.00	-24.78	-19.26

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

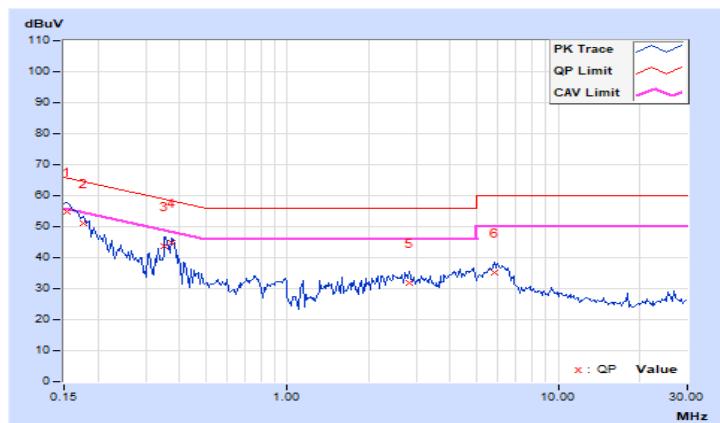


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.91	45.15	28.99	55.06	38.90	65.79	55.79	-10.73	-16.89
2	0.18906	9.93	38.70	22.34	48.63	32.27	64.08	54.08	-15.45	-21.81
3	0.37656	9.95	34.75	33.73	44.70	43.68	58.35	48.35	-13.65	-4.67
4	2.19141	10.03	21.39	16.16	31.42	26.19	56.00	46.00	-24.58	-19.81
5	4.46875	10.12	22.73	18.45	32.85	28.57	56.00	46.00	-23.15	-17.43
6	6.10156	10.19	24.61	20.38	34.80	30.57	60.00	50.00	-25.20	-19.43

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

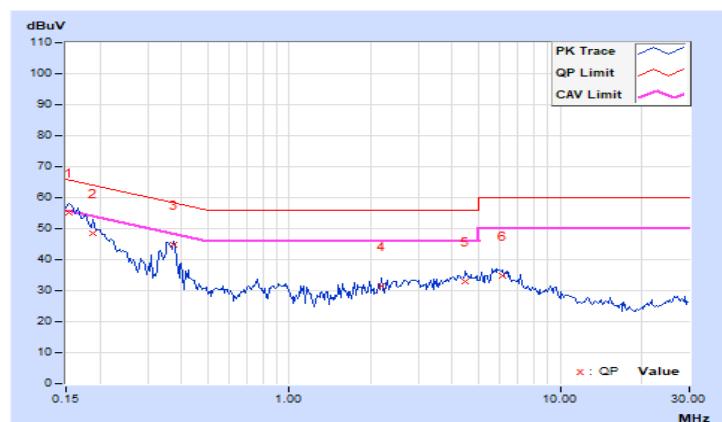

4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.91	45.41	29.97	55.32	39.88	65.79	55.79	-10.47	-15.91
2	0.18906	9.93	38.40	22.60	48.33	32.53	64.08	54.08	-15.75	-21.55
3	0.28281	9.94	26.66	15.36	36.60	25.30	60.73	50.73	-24.13	-25.43
4	0.37266	9.95	34.56	31.00	44.51	40.95	58.44	48.44	-13.93	-7.49
5	2.73047	10.06	21.84	17.01	31.90	27.07	56.00	46.00	-24.10	-18.93
6	5.99609	10.23	25.24	20.98	35.47	31.21	60.00	50.00	-24.53	-18.79

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value




Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	-----------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.91	44.95	28.79	54.86	38.70	65.79	55.79	-10.93	-17.09
2	0.16562	9.92	42.67	25.83	52.59	35.75	65.18	55.18	-12.59	-19.43
3	0.22422	9.93	32.00	19.40	41.93	29.33	62.66	52.66	-20.73	-23.33
4	0.35703	9.95	34.40	30.92	44.35	40.87	58.80	48.80	-14.45	-7.93
5	2.14844	10.03	21.11	16.25	31.14	26.28	56.00	46.00	-24.86	-19.72
6	6.14063	10.19	24.64	20.25	34.83	30.44	60.00	50.00	-25.17	-19.56

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

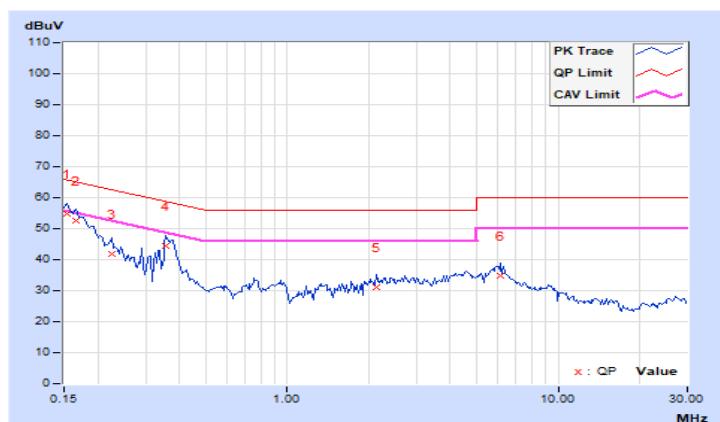


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup

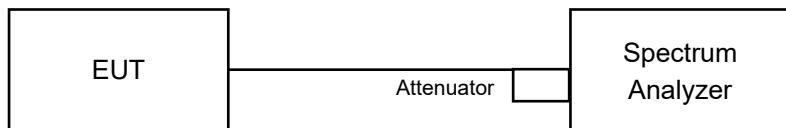

4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedures

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard

No deviation.


4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results (Mode 1)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


2.4GHz_802.11g CH6 +5GHz_802.11a CH149

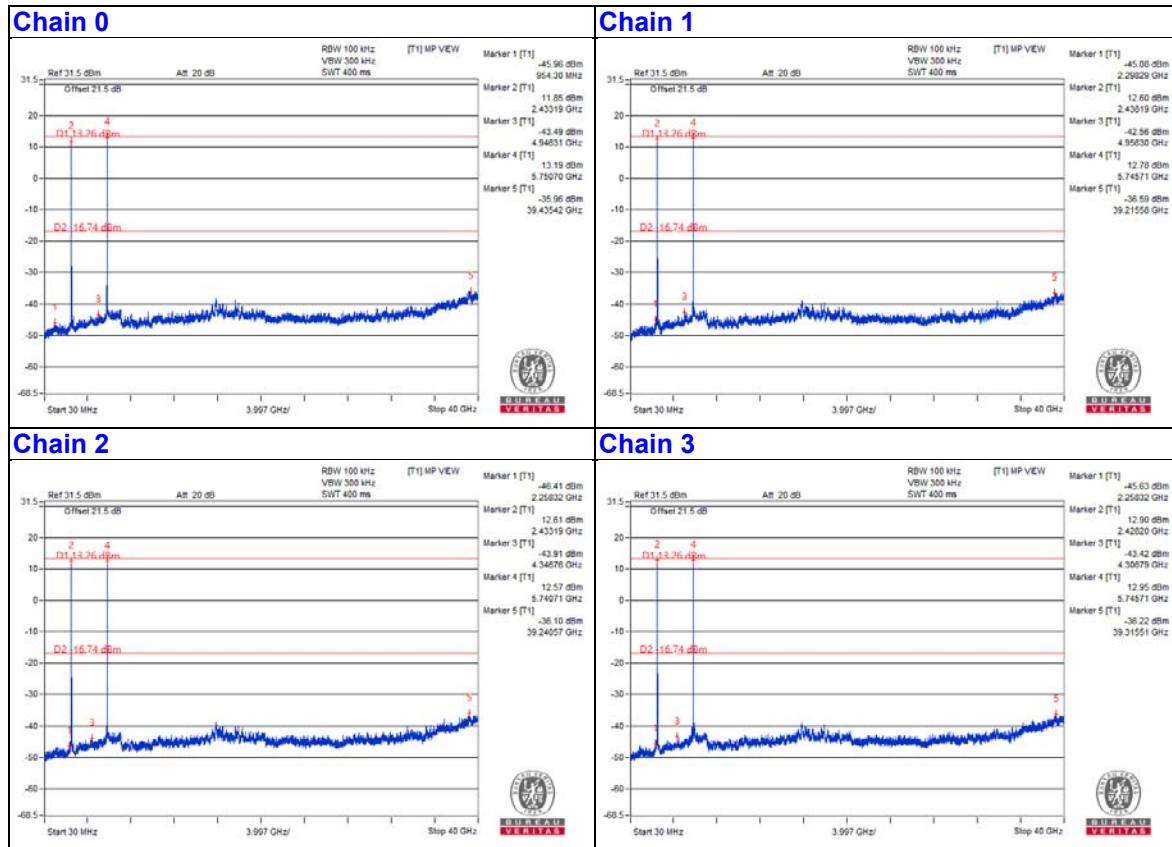

4.3.8 Test Results (Mode 2)

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

2.4GHz_802.11b CH6 +5GHz_802.11ax (HE40) CH159

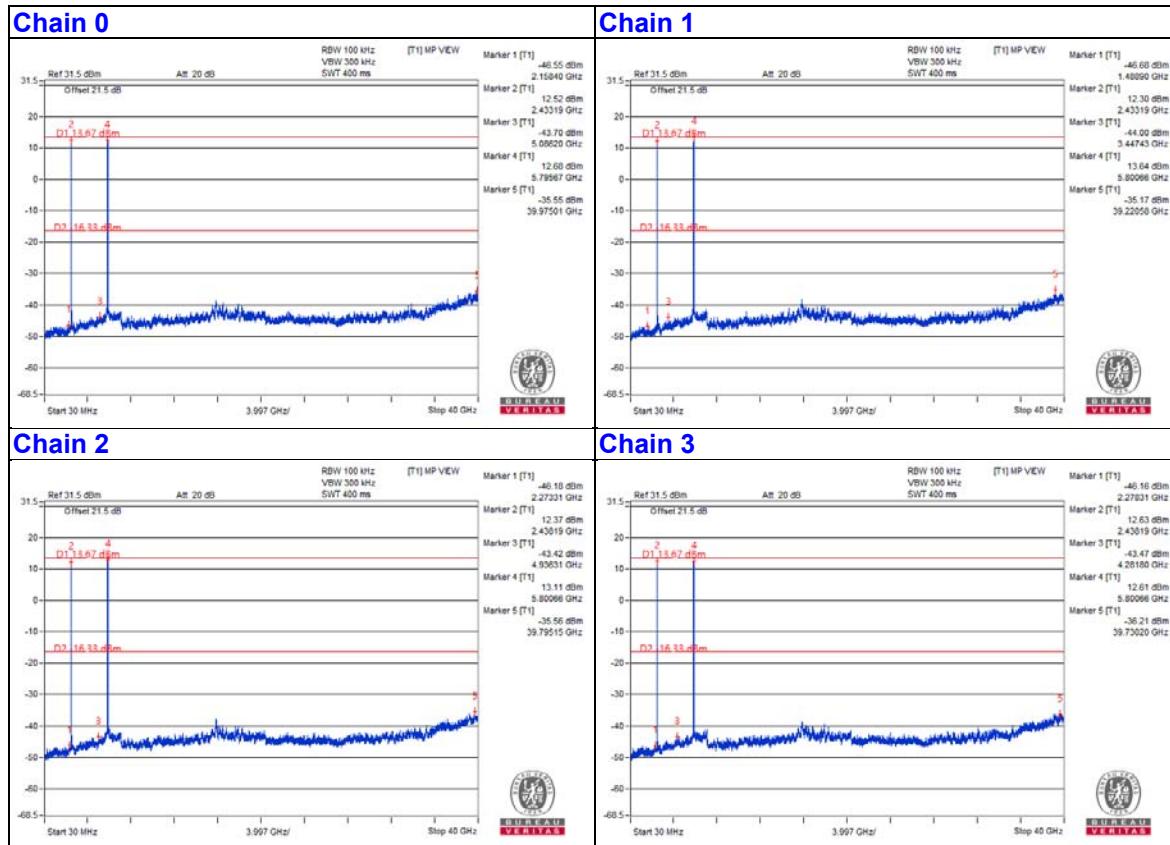

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---