

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER


**Test Report No.** : E08OR-076  
**AGR No** : A08OA-110  
**Applicant** : SHIMWOO ELECTRONICS CO., LTD.  
**Address** : 5F, Yongjin Bldg., 402-1, Yangjae2-dong, Seocho-gu, Seoul, Korea  
**Manufacturer** : SHIMWOO ELECTRONICS CO., LTD.  
**Address** : 5F, Yongjin Bldg., 402-1, Yangjae2-dong, Seocho-gu, Seoul, Korea  
**Type of Equipment** : Single Frequency Remote Control  
**FCC ID.** : WT9SC33TT  
**Model Name** : SC33TT  
**Serial number** : None  
**Total page of Report** : 16 pages (including this page)  
**Date of Incoming** : October 23, 2008  
**Date of issue** : October 30, 2008

## SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.231**.

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:   
Young-Min, Choi / Asst. Chief Engineer  
EMC Div.  
ONETECH Corp.

Reviewed by:   
Y. K. Kwon / Managing Director  
EMC Div.  
ONETECH Corp.

## CONTENTS

### PAGE

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>3</b>
<b>2. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2.1 PRODUCT DESCRIPTION.....</b>	<b>4</b>
<b>2.2 MODEL DIFFERENCES.....</b>	<b>4</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>4</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>4</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>4</b>
<b>2.6 TEST FACILITY.....</b>	<b>4</b>
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>5</b>
<b>3.1 JUSTIFICATION .....</b>	<b>5</b>
<b>3.2 PERIPHERAL EQUIPMENT.....</b>	<b>5</b>
<b>3.3 MODE OF OPERATION DURING THE TEST.....</b>	<b>5</b>
<b>3.4. EUT MODIFICATIONS .....</b>	<b>5</b>
<b>3.5 CONFIGURATION OF TEST SYSTEM .....</b>	<b>5</b>
<b>3.6 ANTENNA REQUIREMENT .....</b>	<b>6</b>
<b>4. PRELIMINARY TEST .....</b>	<b>6</b>
<b>4.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....</b>	<b>6</b>
<b>4.2 GENERAL RADIATED EMISSIONS TESTS.....</b>	<b>6</b>
<b>5. FINAL RESULT OF MEASURMENT .....</b>	<b>7</b>
<b>5.1 FIELD STRENGTH OF THE CARRIER TEST .....</b>	<b>7</b>
<b>5.2 MAXIMUM MODULATION PERCENTAGE (MMP).....</b>	<b>8</b>
<b>5.3 TRANSMITTER TRANSMISSION DURATION.....</b>	<b>11</b>
<b>5.4 SPURIOUS EMISSION TEST .....</b>	<b>12</b>
<b>5.5 BANDWIDTH OF THE OPERATING FREQUENCY .....</b>	<b>13</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>15</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>16</b>

## 1. VERIFICATION OF COMPLIANCE

APPLICANT : SHIMWOO ELECTRONICS CO., LTD.  
ADDRESS : 5F, Yongjin Bldg., 402-1, Yangjae2-dong, Seocho-gu, Seoul, Korea  
CONTACT PERSON : Mr. Jung-Hwo, Kim / Chief Engineer  
TELEPHONE NO : +82-2-579-8512  
FCC ID : WT9SC33TT  
MODEL NAME : SC33TT  
BRAND NAME : N/A  
SERIAL NUMBER : N/A  
DATE : October 30, 2008

EQUIPMENT CLASS	<b>DSC - Part 15, Security/Remote Control Transmitter</b>
KIND OF EQUIPMENT	Single Frequency Remote Control
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4: 2003
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.231
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER(S) OPEN AREA TEST SITE

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. GENERAL INFORMATION

### 2.1 Product Description

The SHIMWOO ELECTRONICS CO., LTD., Model: SC33TT (referred to as the EUT in this report) is a Single Frequency Remote Control that transmits a 433.92 MHz single for jukeboxes. The associated receiver was Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
RF FREQUENCY	433.92 MHz
MODULATION	ASK
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1 MHz)	433.92 MHz, 4 MHz
ANTENNA TYPE	Inserted into the main board (Pattern Antenna)
TRANSMISSION TIME	Not longer than 5 s
RATED SUPPLY VOLTAGE	DC 3 V from a battery
NUMBER OF LAYERS	2 Layers

### 2.2 Model Differences

- None

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 15.231.

### 2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.4: 2003 at a distance of 3 meters from EUT to the antenna.

### 2.6 Test Facility

The Electromagnetic compatibility measurement facilities are located on at 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862, Korea. Description details of test facilities were submitted to the Federal Communications Commission on August 21, 2008 (Registration Number: 340658), accredited by KOLAS (Korea Laboratory Accreditation Scheme, No: 85) and approved by TUV, DNV and MIC (Ministry of Information and Communications in Korea) according to the requirement of ISO 17025.

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

**HEAD OFFICE** : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)

### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	SHIMWOO ELECTRONICS CO., LTD.	S-359G RF Single Touch Tunes	N/A

#### 3.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

#### 3.3 Mode of operation during the test

To get a maximum radiated emission from the EUT, the button on the EUT was continuously pressed to transmit the signal.  
To activate continuous transmission, place a small plastic block between rubber band and the push button on the EUT.  
To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

#### 3.4. EUT MODIFICATIONS

- None

#### 3.5 Configuration of Test System

**Line Conducted Test:** It is not need to test this requirement, because the EUT shall be operated by DC battery.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.4: 2003 8.3.1.1 and 13.1.4.1 to determine the worse operating conditions. Final radiated emission tests were conducted at 3meter open area test site.  
The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

#### Occupied Bandwidth Measurement:

This measurement is performed with the antenna located close enough to give a full-scale deflection of the modulated carrier on the spectrum analyzer. The plot is taken at 20 kHz/division frequency span, 10 kHz resolution bandwidth and 5 dB/division logarithmic display from the spectrum analyzer.

### 3.6 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### Antenna Construction:

The antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

## 4. PRELIMINARY TEST

### 4.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied from a DC battery.	

### 4.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

## 5. FINAL RESULT OF MEASURMENT

### 5.1 Field Strength of the Carrier Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.


Humidity Level	: <u>53 %R.H.</u>	Temperature: <u>24 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -22.96 dB under peak mode</u>	

EUT	: Single Frequency Remote Control	Date: October 28, 2008
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Carrier Freq. (MHz)	Amplitude (dB $\mu$ V)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
433.92	51.20	Peak	H	18.20	4.20	-15.73	57.87	80.83	-22.96
	46.00	Peak	V			-15.73	52.67	80.83	-28.16

\* Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“Q.P.”: Quasi-Peak, “AVE”: Average, “H”: Horizontal Polarization, “V”: Vertical Polarization



Tested by: Ki-Hong, Nam / Project Engineer


## 5.2 Maximum Modulation Percentage (MMP)

In order to determine possible Maximum Modulation Percentage from the EUT, we measured the duty cycle according to the clause H4.(j) in ANSI C63.4: 2003.

The pulse train from the EUT was consisting of long and short pulse. The measured values are as follows.

Long Pulse (LP)	Short Pulse (SP)	Total sum of LP	Total sum of SP	Pulse Width
8.667 ms	0.233 ms	1	33	115.33
Duty Cycle		$((8.667 \times 1) + (0.233 \times 33)) / 100 = 0.163\ 56$		
Maximum Modulation Percentage(MMP)		Duty Cycle x 100 % = 16.356 %		
Average Level Factor		-15.73 dB		


Remark: Please refer to Photo Data for MMP.



---

Tested by: Ki-Hong, Nam / Project Engineer

## Photo Data for MMP

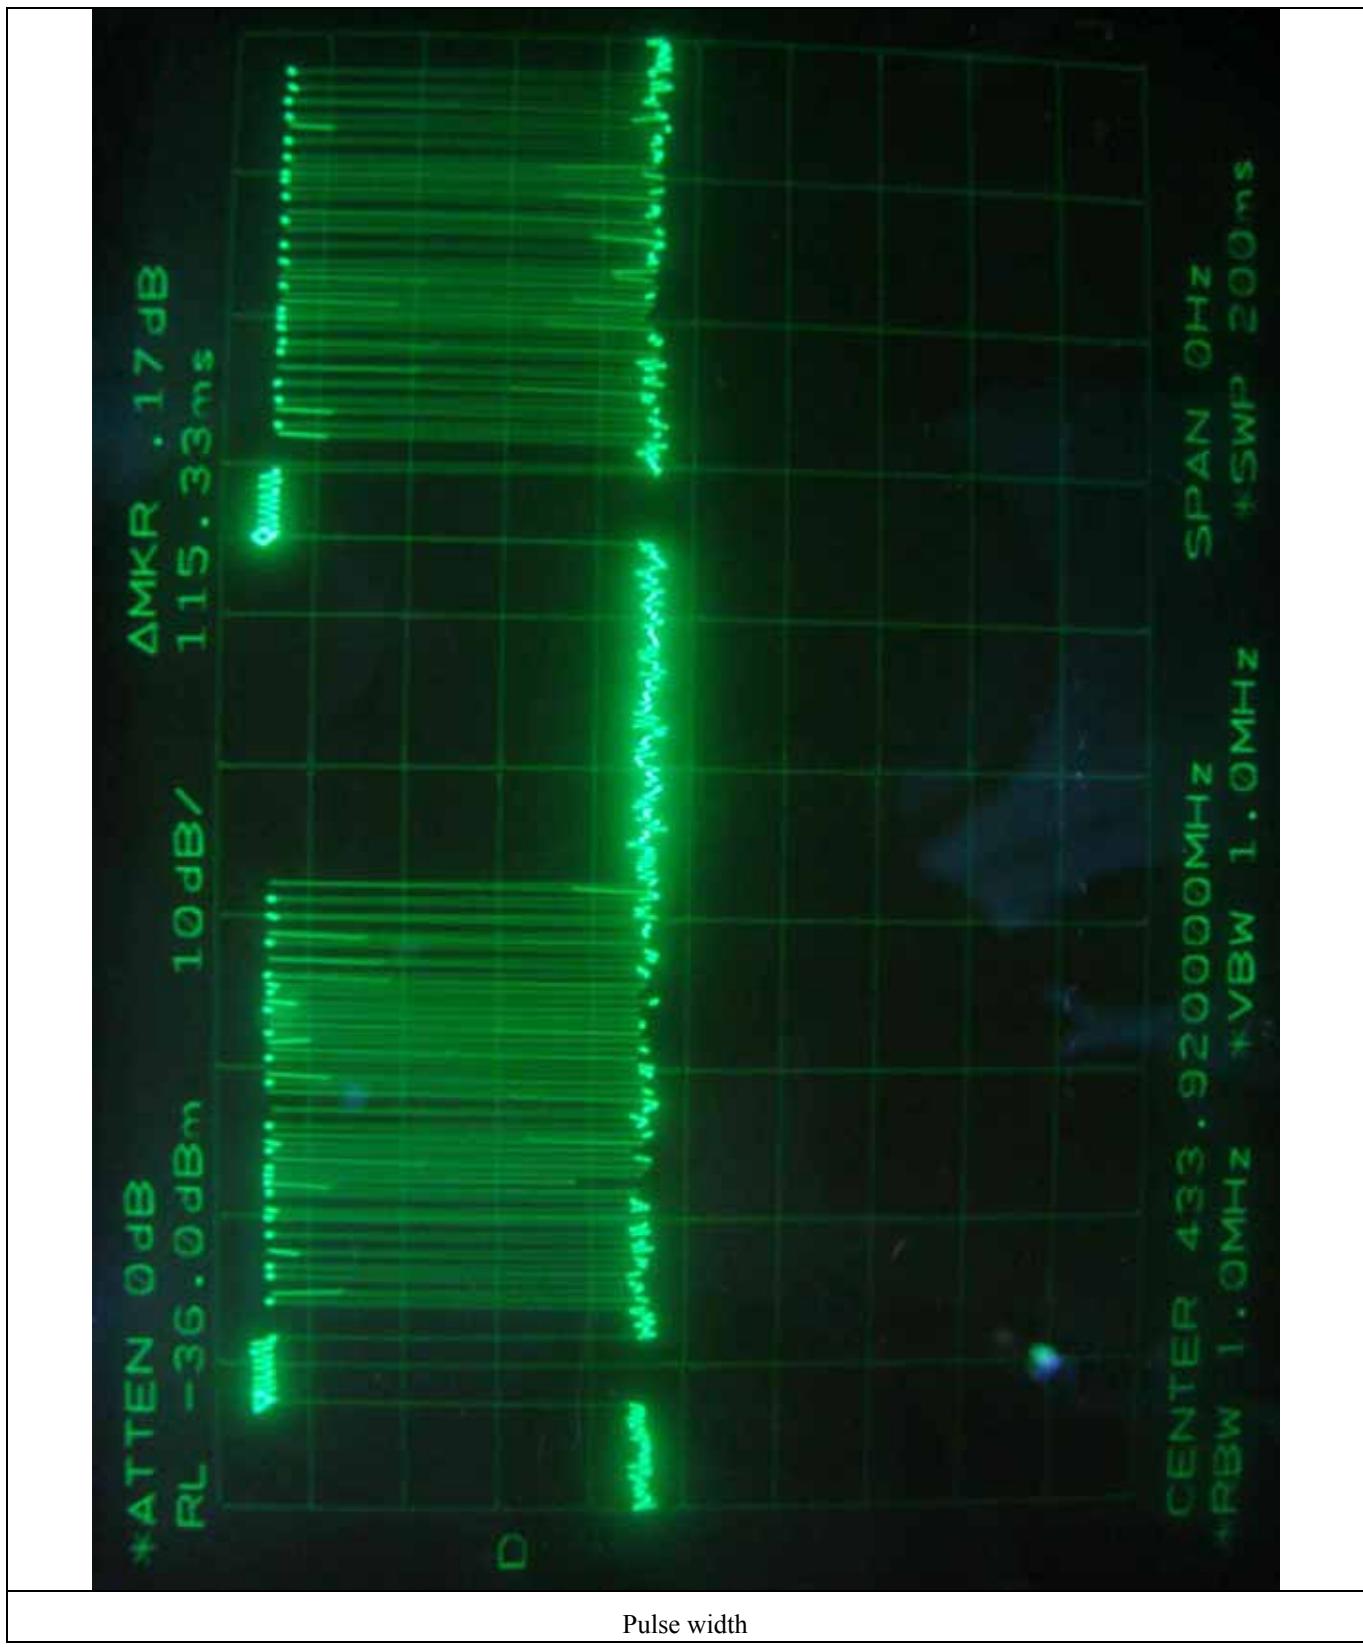



Pulse width

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

**HEAD OFFICE** : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)

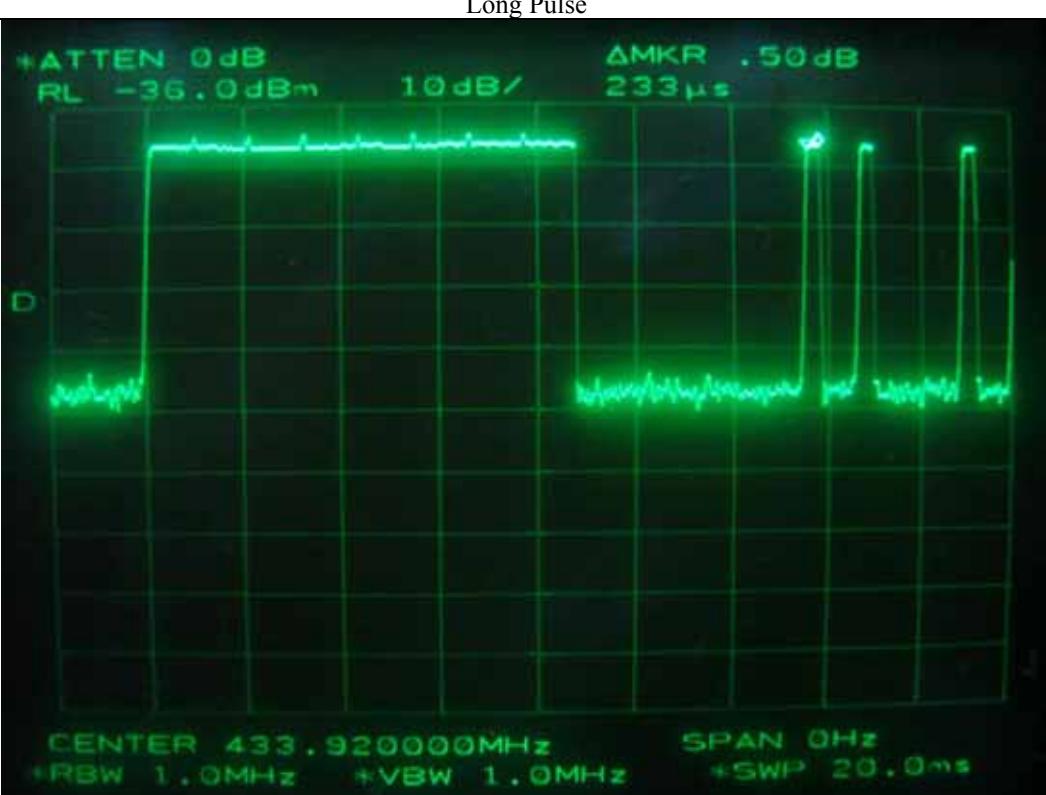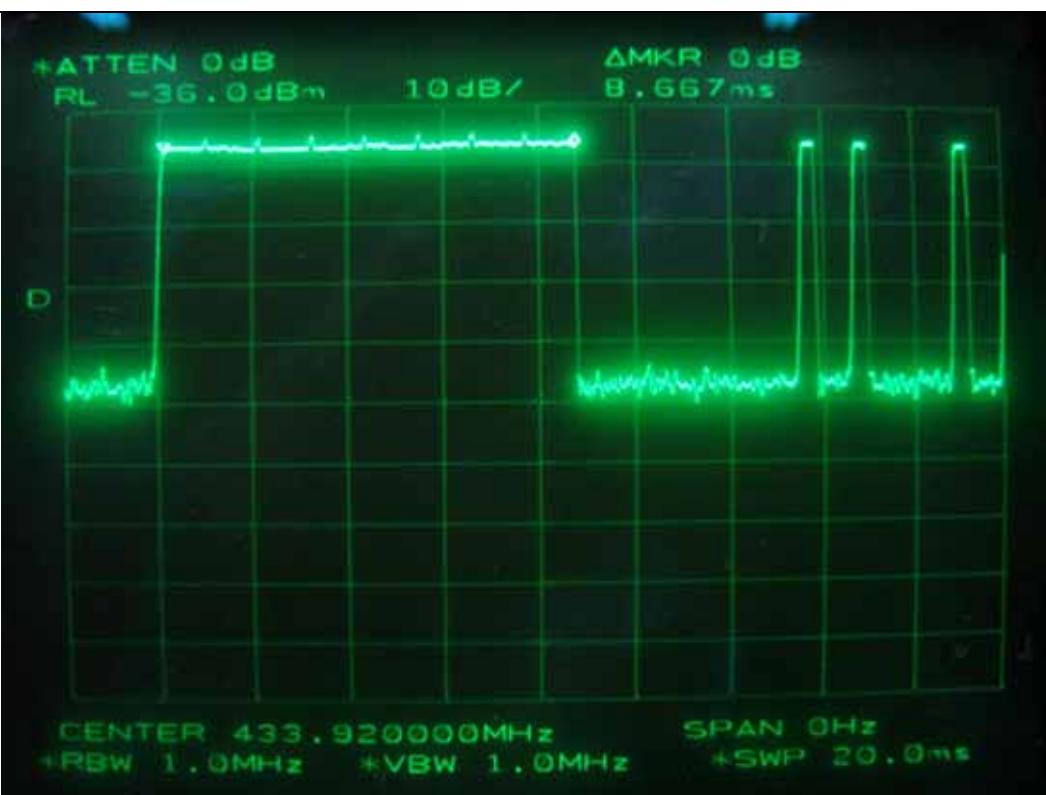

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

**HEAD OFFICE** : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)

### 5.3 Transmitter Transmission Duration

Humidity Level : 51 %R.H. Temperature: 23 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (a)  
Type of Test : INTENTIONAL RADIATOR

EUT : Single Frequency Remote Control Date: October 24, 2008  
Operating Condition : Switch on the EUT was continuously pushed

Manually Activated Duration (s)	Limit (s)	Margin (s)	Result
4.467	5.0	-0.533	Pass



✓ 7/6.

Tested by: Ki-Hong, Nam / Project Engineer

### 5.4 Spurious Emission Test

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>53 %R.H.</u>	Temperature: <u>24 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.231(b)</u>	
Type of Test	: <u>INTENTIONAL RADIATOR</u>	
Result	: <u>PASSED BY -32.01 dB at 867.84 MHz</u>	

EUT	: Single Frequency Remote Control	Date: October 28, 2008
Operating Condition	: TX mode	
Distance	: 3 Meter	

Radiated Emissions			Ant	Correction Factors			Total	FCC	
Freq. (MHz)	Amplitude (dB $\mu$ V)	Detect Mode	Pol.	Antenna (dB/m)	Cable (dB)	Average Level Factor	Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
867.84	15.00	Peak	H	22.71	6.84	-15.73	28.82	60.83	-32.01
867.84	10.00	Peak	V			-15.73	23.82	60.83	-37.01
Other spurious frequencies were not found up to 4 400 MHz.									

\*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

“H”: Horizontal Polarization, “V”: Vertical Polarization

✓ 7/6.

Tested by: Ki-Hong, Nam / Project Engineer

**5.5 Bandwidth of the operating frequency**


Humidity Level : 51 %R.H. Temperature: 23 °C  
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.231 (c)  
Type of Test : INTENTIONAL RADIATOR  
Result : PASSED

---

EUT : Single Frequency Remote Control Date: October 24, 2008  
Operating Condition : TX mode  
Minimum Resolution Bandwidth : 10 kHz

Carrier Freq. (MHz)	Bandwidth of the emission. (kHz)	Limit (kHz)	Remark
433.92	47.30	1 084.80	<u>The point 20 dB down from the modulated carrier</u>

Remark: Please refer to Photo Data for bandwidth for test data.



---

Tested by: **Ki-Hong, Nam / Project Engineer**

**Photo Data for bandwidth**

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

**HEAD OFFICE** : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)

## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dB $\mu$ V)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dB $\mu$ V/meter)

- Specification Limit (dB $\mu$ V/meter)

= dB Relative to Spec (+/- dB)

## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS10	827864/005	DEC/07	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	MAY/08	12MONTH	
3.	Spectrum analyzer	HP	8566B	2516A01677	JUN/08	12MONTH	■
4.	TRILOG Broadband Antenna	Schwarzbeck	VULB9163	VULB9163 202	APR/08	24MONTH	
5.	Biconical antenna	EMCO	3110	9003-1121	JAN/08	12MONTH	
		Schwarzbeck	VHA9103	91031852	FEB/08		■
6.	Log Periodic antenna	Schwarzbeck	9108-A(494)	62281001	FEB/08	12MONTH	■
7.	LISN	EMCO	3825/2	9109-1867	JUN/08	12MONTH	
				9109-1869	JUN/08		
		Schwarzbeck	NSLK 8128	8128-216	JUN/08		
8.	Position Controller	HD GmbH	HD100	N/A	N/A	N/A	■
9.	Turn Table	HD GmbH	DS420S	N/A	N/A	N/A	■
10.	Antenna Master	HD GmbH	MA240	N/A	N/A	N/A	■
11.	RF Amplifier	HP	8447D	2727A04987	JUN/08	12MONTH	■
12.	Horn Antenna	Schwarzbeck	BBHA9120D	BBHA9120D294	JUL/06	48MONTH	■
13.	Spectrum Analyzer	HP	8564E	3650A00756	JUN/08	12MONTH	■
14.	Isolation Transformer	Digitek Power	DPT	DPF-22027	N/A	N/A	■
15.	Isolation Transformer	Digitek Power	DPT	DPF-22028	N/A	N/A	■
16.	Frequency Converter	Digitek Power	VFS/DEFC	N/A	N/A	N/A	■

It should not be reproduced except in full, without the written approval of ONETECH.

EMC-003(Rev.1)

**HEAD OFFICE** : #505 SK Apt. Factory 223-28, Sangdaewon1-dong, Jungwon-gu, Seongnam-si, Gyeonggi-do 462-121 Korea  
(TEL: 82-31-746-8500 FAX: 82-31-746-8700)

**EMC Testing Dept** : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea.(TEL: 82-31-765-8289 FAX: 82-31-766-2904)