



NVLAP LAB CODE 200707-0



FCC PART 15B


MEASUREMENT AND TEST REPORT

For

PAWAS Trading GmbH

Nordstrasse 223, CH-8037 Zurich, Switzerland

FCC ID: WUACCS660110

Report Type: Original Report	Product Type: ITE (Maserati GranCabrio USB Stick)
Test Engineer: <u>Jack Wang</u> 	
Report Number: <u>RSZ10071385</u>	
Report Date: <u>2010-08-06</u>	
Reviewed By: <u>Lisa Zhu</u> 	
Prepared By: <u>EMC Engineer</u>	
Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	9
TEST EQUIPMENT LIST AND DETAILS.....	9
TEST PROCEDURE	9
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.109 - RADIATED EMISSIONS	12
MEASUREMENT UNCERTAINTY	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Pawas Trading GmbH*'s product, FCC ID: *WUACCS660110*, model number: *CCS660110* or the "EUT" as referred to in this report is a Maserati GranCabrio USB Stick, which measures approximately 7.0 cm L x 3.0 cm W x 2.1 cm H. Input voltage: DC 5V from host PC.

** All measurement and test data in this report was gathered from production sample serial number: 1007006 (Assigned by BACL, Shenzhen). The EUT was received on 2010-07-13.*

Objective

This Type approval report is prepared on behalf of *PAWAS Trading GmbH* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15 Class B.

Related Submittal(s)/Grant(s)

N/A.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a manufacturer testing fashion.

EUT Exercise Software

WINTHRAX.EXE

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
SAST	Modem	AEM-2100	0293	Doc
HP	Printer	C394IA	JATVOB2337	Doc
Compaq	Notebook Computer	PP2040	287811163A	Doc


External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable Printer Cable	1.2	Parallel Port/Host	Printer
Shielded Detachable Serial Cable	1.2	Serial Port/Host	Modem

Configuration of Test Setup

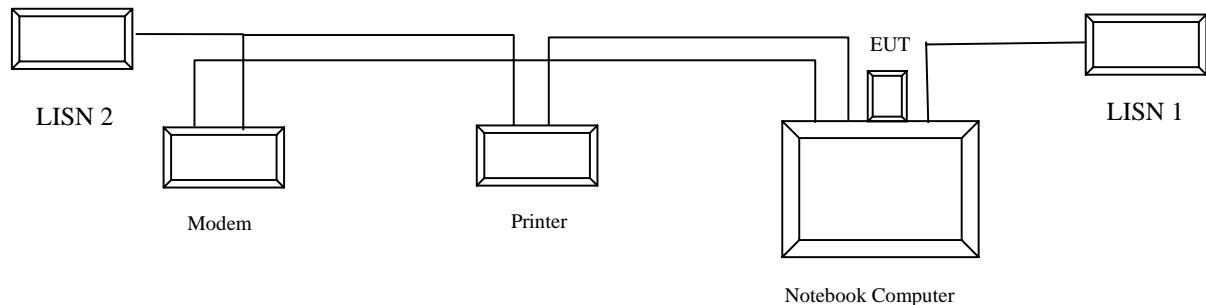

Block Diagram of Test Setup

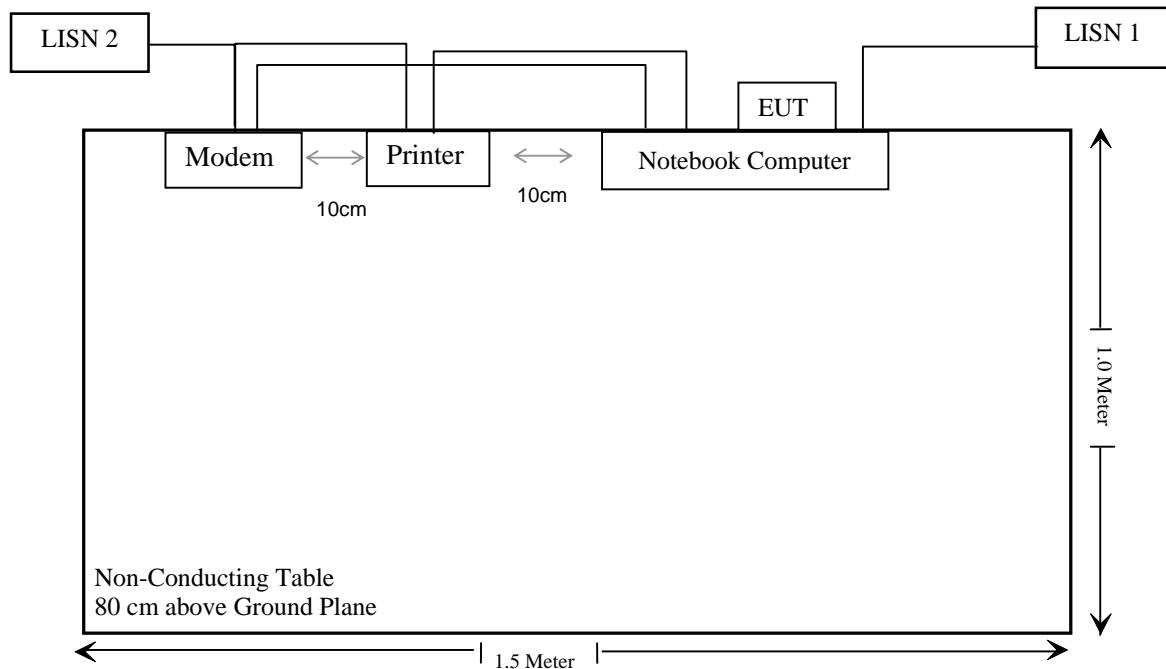

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant


FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

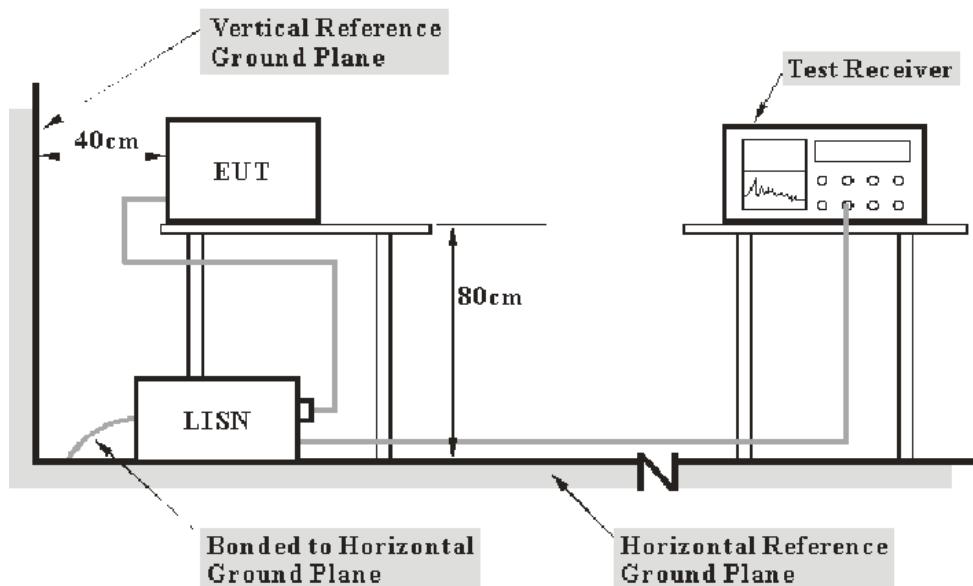

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 limits.

The spacing between the peripherals was 10 cm.

The adprot of notebook computer connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2010-03-03	2010-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2009-03-09	2010-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the notebook computer was connected to the outlet of the first LISN, and other equipment were connected to second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.107](#), with the worst margin reading of:

15.65 dB at 0.220 MHz in the **Line** conductor mode
28.24 dB at 2.210 MHz in the **Neutral** conductor mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa


The testing was performed by Jack Wang on 2010-07-28.

Test Mode: Downloading

120V, 60 Hz Line:

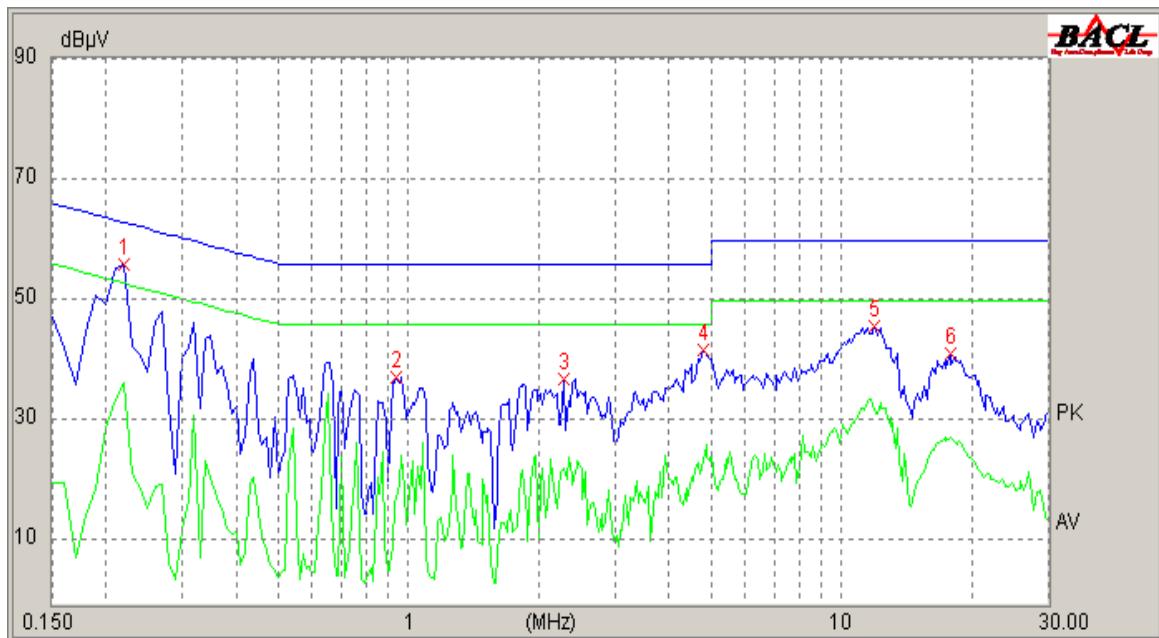

Conducted Emissions			FCC Part 15.107		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave)
0.220	10.10	47.27	62.92	15.65	QP
0.940	10.10	17.15	46.00	28.85	Ave
2.290	10.10	25.52	56.00	30.48	QP
2.290	10.10	22.37	46.00	23.63	Ave
11.970	10.30	37.08	60.00	22.92	QP
17.830	10.30	32.33	60.00	27.67	QP
17.870	10.30	27.35	50.00	22.65	Ave
0.940	10.10	47.27	56.00	8.73	QP
0.220	10.10	36.43	52.92	16.49	Ave
12.000	10.30	31.42	50.00	18.58	Ave
4.800	10.10	23.69	46.00	22.31	Ave
4.810	10.10	32.63	56.00	23.37	QP

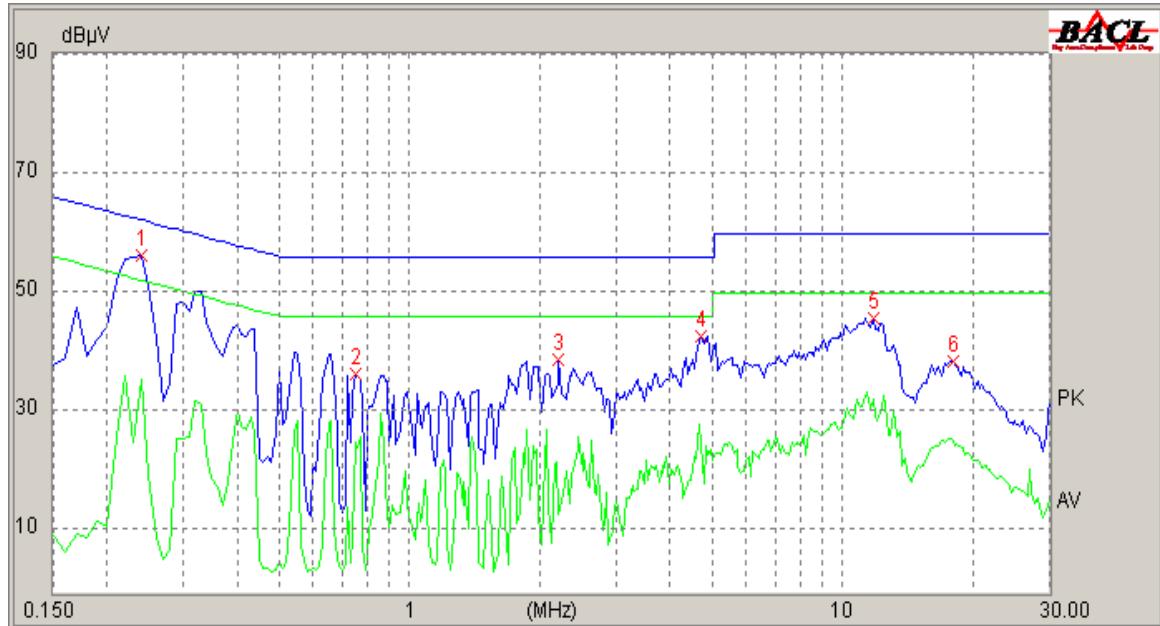120 V/60 Hz, Neutral:

Conducted Emissions			FCC Part 15.107		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBµV)	Limit (dBµV)	Margin (dB)	Remark (PK/QP/Ave)
2.210	10.10	27.76	56.00	28.24	QP
2.210	10.10	13.02	46.00	32.98	Ave
4.720	10.10	36.27	56.00	19.73	QP
11.840	10.30	32.37	50.00	17.63	Ave
18.050	10.30	31.49	60.00	28.51	QP
18.080	10.30	25.24	50.00	24.76	Ave
0.240	10.10	51.59	62.15	10.56	QP
0.240	10.10	35.70	52.15	16.45	Ave
0.750	10.10	24.93	46.00	21.07	Ave
4.700	10.10	24.87	46.00	21.13	Ave
0.750	10.10	34.68	56.00	21.32	QP
11.840	10.30	37.62	60.00	22.38	QP


FCC §15.109 - RADIATED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

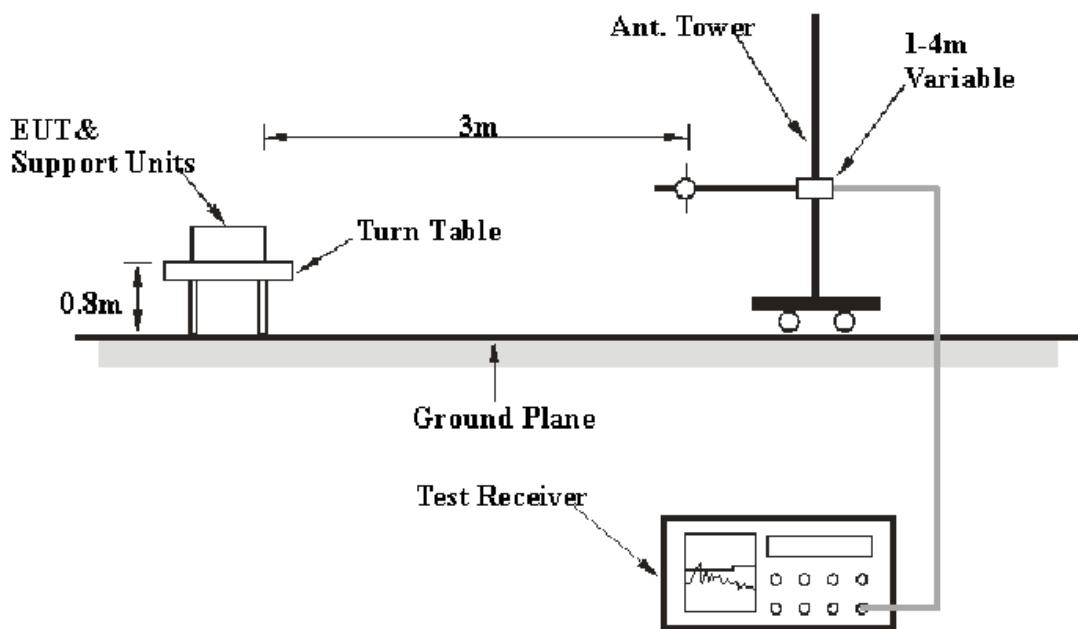

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of notebook computer was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 1 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency	RB/W	VB/W	IF B/W
30 MHz-1 GHz	100 kHz	300 kHz	120 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2010-08-02	2011-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2009-11-24	2010-11-24
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-03-11	2011-03-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the radiated emissions test, the notebook computer and all other support equipment were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak and average detection mode above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15 Class B, with the worst margin reading of:

1.0 dB at 510.029500 MHz in the Vertical polarization for recording mode


Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Jack Wang on 2010-07-28.

Test Mode: Downloading

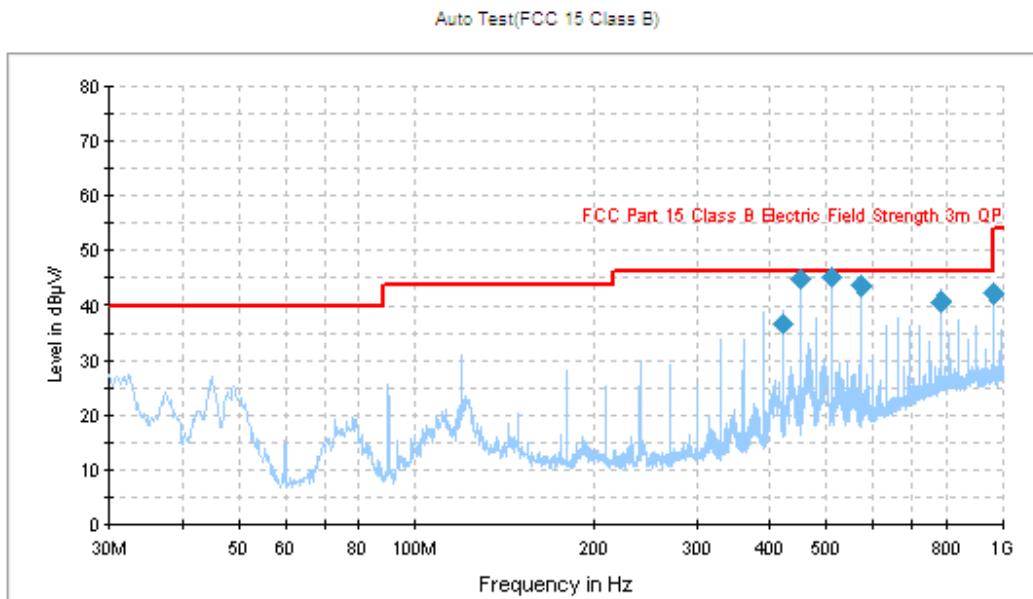

Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Position (Degree)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
510.029500	45.0	164.0	V	314.0	-10.1	46.0	1.0*
450.008250	44.8	209.0	V	0.0	-11.4	46.0	1.2*
570.012000	43.7	273.0	H	38.0	-9.0	46.0	2.3*
960.019750	42.1	204.0	H	104.0	-0.4	46.0	3.9*
780.042500	40.7	210.0	H	1.0	-1.9	46.0	5.3
419.940000	36.7	205.0	H	164.0	-11.9	46.0	9.3

Note: *With measurement uncertainty.

***** END OF REPORT *****