

FCC TEST REPORT

For

Wireless Computer Mouse

MODEL No.: FIAT-WLR

Trademark: N/A

FCC ID: WUAFIAT-WLR

REPORT NO: E0810650F

ISSUE DATE: October 28, 2008

Prepared for
PAWAS Trading GmbH
Nordstrasse 223, CH-8037 Zurich, Switzerland

Prepared by
DONGGUAN EMTEK CO., LTD

**No.281,Guantai Road,Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 Description of Device (EUT).....	4
1.2 Description of Support Device	5
1.3 Test Facility	6
1.4 Measurement Uncertainty	6
2. POWER LINE CONDUCTED MEASUREMENT	7
2.1. Test Equipment.....	7
2.2. Block Diagram of Test Setup.....	7
2.3. Power Line Conducted Emission Measurement Limits.....	8
2.4. Configuration of EUT on Measurement	8
2.5. Operating Condition of EUT	8
2.6. Test Procedure	8
2.7. Power Line Conducted Emission Measurement Results	9
3. RADIATED EMISSION MEASUREMENT	10
3.1. Test Equipment.....	10
3.2. Block Diagram of Test Setup.....	11
3.3. Radiated Emission Limit	11
3.4. EUT Configuration on Measurement	12
3.5. Operating Condition of EUT	12
3.6. Test Procedure	12
3.7. Radiated Emission Noise Measurement Results.....	12
4. PHOTOGRAPH	13
4.1. Photo of Conducted Emission Measurement.....	13
4.2. Photo of Radiated Measurement.....	13

Appendix I (2 Pages)

Appendix II (2 Pages)

TEST REPORT DESCRIPTION

Applicant : PAWAS TRADING GMBH
Manufacturer : PAWAS TRADING GMBH
EUT : Wireless Computer Mouse
FCC ID No. : WUAFIAT-WLR
Input Voltage : DC 5V come from PC
File Number : E0810650F
Date of Test : October 24, 2008 to October 28, 2008

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B Class B July 2008 & FCC / ANSI C63.4-2003

The device described above is tested by Dongguan EMTEK Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Dongguan EMTEK Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Dongguan EMTEK Co., Ltd.

Approved By



David Lee / Q.A. Manager
DONGGUAN EMTEK CO., LTD.

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Wireless Computer Mouse

Model Number : FIAT-WLR

FCC ID Number : WUAFIAT-WLR

Trade Mark : N/A

Power Supply : DC 5V from PC (PC input AC 120V/60Hz)

Applicant : PAWAS TRADING GMBH

Address : Nordstrasse 223, CH-8037 Zurich, Switzerland

Manufacturer : PAWAS TRADING GMBH

Address : Nordstrasse 223, CH-8037 Zurich, Switzerland

Date of sample receiver : October 24, 2008

Date of Test : October 24, 2008 to October 28, 2008

1.2. Description of Support Device

PC (Use in radiated emission place)	: Manufacturer: Lenovo M/N: ThinkCentre 8701 S/N: 8701A53L3BC108 CE, FCC: DOC
LCD Monitor	: Manufacturer: SONY M/N: SDM-S53/B T8UC7 S/N: P-17465811-F CE , FCC:DOC
Mouse	: Manufacturer: Lenovo M/N:MO28UOL S/N:44D2639 CE, FCC: DOC
Keyboard	: Manufacturer: Lenovo M/N:KB-0225 S/N: 41A5039 CE, FCC: DOC
Printer	: Manufacturer: HP M/N: C89520 S/N: CN25S182N6 CE, FCC: DOC
PC (Use in conducted emission place)	: Manufacturer: HEWLETT PACKARD M/N: Vectra VL420 MT S/N: CN15100363 CE , FCC: DOC
Mouse	: Manufacturer: HEWLETT PACKARD M/N: M-S48a S/N: LZE14823966AW CE, FCC: DOC
Keyboard	: Manufacturer: HEWLETT PACKARD M/N: SK-2502C S/N: C0111141546 CE, FCC: DOC
Printer	: Manufacturer: HEWLETT PACKARD M/N: Q5911A S/N: CNCK512065 CE, FCC: DOC

1.3 Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2007.07.27
The certificate is valid until 2012.07.26
The Laboratory has been assessed and proved to be in
compliance with CNAS/CL01:2005
The Certificate Registration Number is L3150

Accredited by TUV Rheinland Shenzhen 2008.5
The certificate is valid until 2009.12
The Laboratory has been assessed according to the
requirements ISO/IEC 17025

Accredited by FCC, January 03, 2006
The Certificate Number is 247565.

Accredited by Industry Canada, January 8, 2003
The Certificate Registration Number. is 46405-4480

Name of Firm : Dongguan EMTEK Co., Ltd.
Site Location : No.281, Guantai Road, Nancheng District, Dongguan,
Guangdong, China.

1.4 Measurement Uncertainty

Conducted Emission Uncertainty : \pm 1.2656dB

Radiated Emission Uncertainty : \pm 1.4118dB

Disturbance Power Uncertainty : \pm 1.6656dB

2. POWER LINE CONDUCTED MEASUREMENT


2.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	100137	May 29, 2008	1 Year
2.	L.I.S.N	Rohde & Schwarz	ESH2-Z6	100253	May 29, 2008	1 Year
3.	Pulse Limiter	Rohde & Schwarz	EMV216	100017	May 29, 2008	1 Year
4.	50ΩCoaxial Switch	Anritsu	MP59B	6100175589	May 29, 2008	1 Year


2.2. Block Diagram of Test Setup

2.2.1 Block diagram of connection between the EUT and simulators

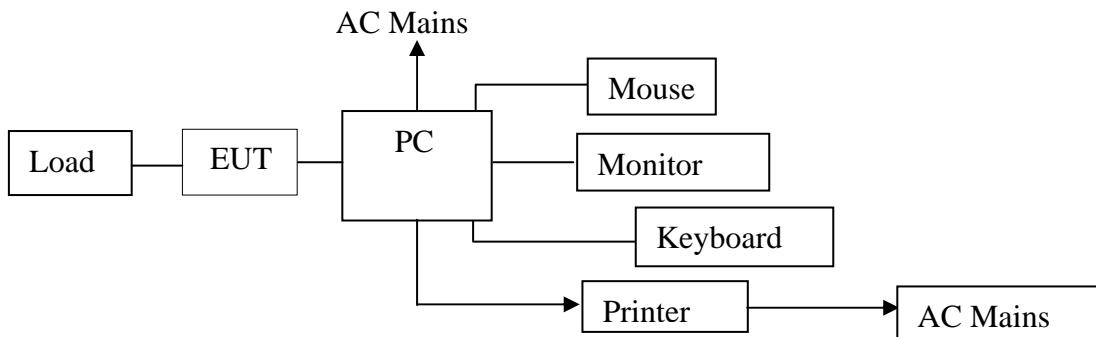

(EUT: Wireless Computer Mouse)

2.2.2 Block diagram of test setup

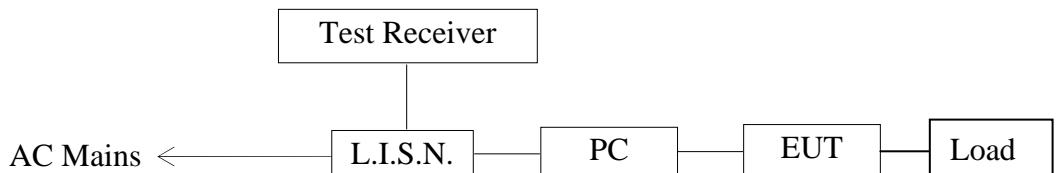

(EUT: Wireless Computer Mouse)

2.3. Power Line Conducted Emission Measurement Limits

According to section 15.107(a) Conducted Emission Limits is as following.

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Wireless Computer Mouse
 Model Number : FIAT-WLR
 Manufacturer : PAWAS TRADING GMBH

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown as Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test model (Connect to PC) and measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R&S ESCI) is set at 9KHz.
The frequency range from 150KHz to 30MHz is checked.

All the scanning waveforms for Conducted Emission Measurement are attached in Appendix I.

2.7. Power Line Conducted Emission Measurement Results

PASS

The frequency range from 150KHz to 30 MHz is investigated.

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	May 29, 2008	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 29, 2008	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	May 29, 2008	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	May 29, 2008	1 Year
5.	Cable	Schwarzbeck	AK9513(1m)	CR RX2	May 29, 2008	1 Year
6.	Cable	Schwarzbeck	AK9513(10m)	AC RX1	May 29, 2008	1 Year
7.	Cable	Rosenberger	N/A(6m)	CR RX1	May 29, 2008	1 Year
8.	Cable	Rosenberger	N/A(10m)	FP2RX2	May 29, 2008	1 Year
9.	DC Power Filter	MPE	23872C	N/A	May 29, 2008	1 Year
10.	Single Phase Power Line Filter	MPE	23332C	N/A	May 29, 2008	1 Year
11.	3 Phase Power Line Filter	MPE	23333C	N/A	May 29, 2008	1 Year
12.	Signal Generator	HP	8648A	3625U00573	May 29, 2008	1 Year


3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

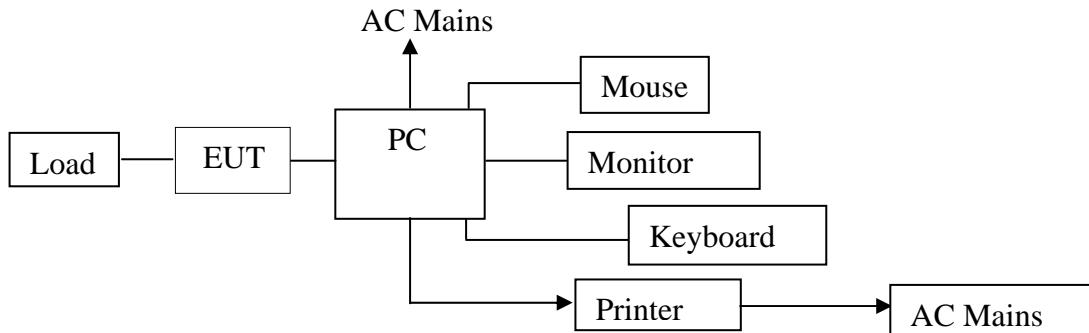

(EUT: Wireless Computer Mouse)

3.2.2. Anechoic Chamber Test Setup Diagram

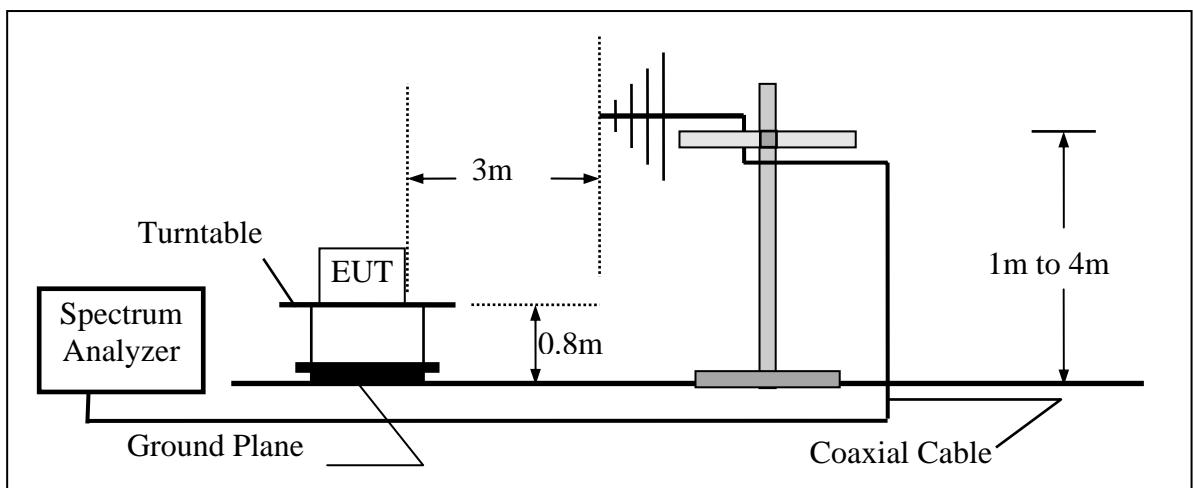

(EUT: Wireless Computer Mouse)

3.3. Radiated Emission Limit

According to section 15.109(a) Radiated Emission Limits is as following.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μ V/m	dB(μ V)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4.EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

Wireless Computer Mouse (EUT)

Model Number	:	FIAT-WLR
Serial Number	:	N/A

3.5.Operating Condition of EUT

3.5.1 Setup the EUT as shown in Section 3.2.

3.5.2 Turn on the power of all equipment.

3.5.3 Let the EUT work in test mode (Connect to PC) and measure it.

3.6.Test Procedure

EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2003 on radiated emission measurement.

The bandwidth of the EMI test receiver (R&S ESCS30) is set at 120KHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (Connect to PC) is tested in chamber and all the scanning waveforms are attached in Appendix II.

3.7.Radiated Emission Noise Measurement Results

PASS.


The frequency range from 30MHz to 1000MHz is investigated.

4. PHOTOGRAPH

4.1.Photo of Conducted Emission Measurement



4.2.Photo of Radiated Measurement

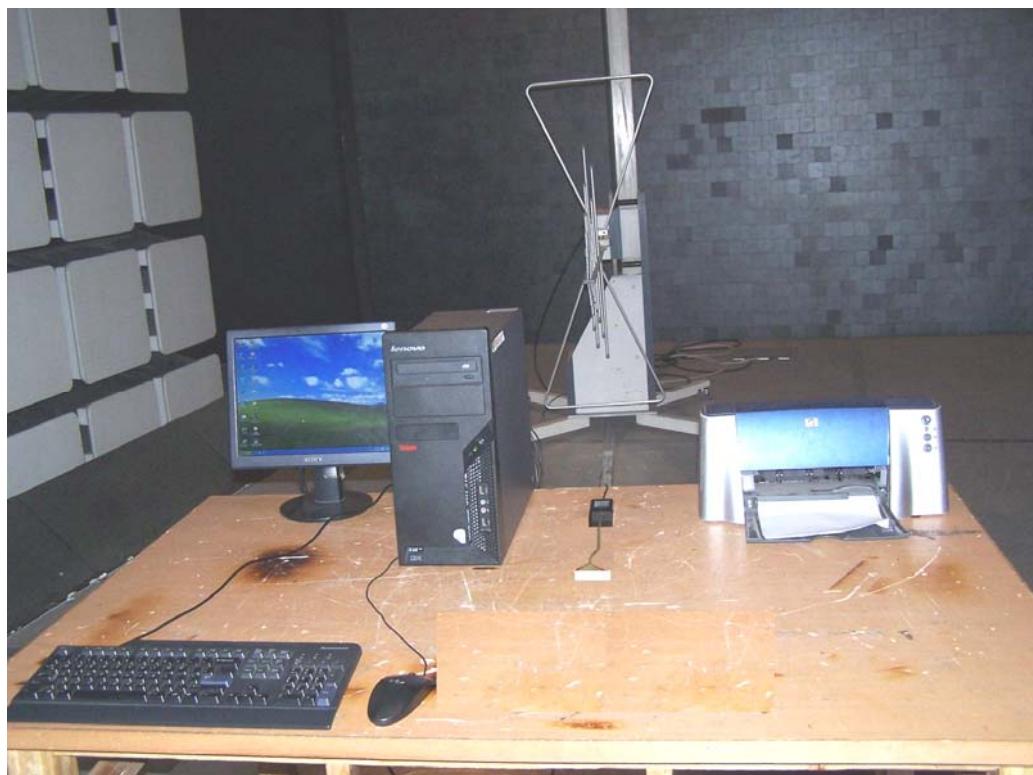

APPENDIX I

Dongguan EMTEK Co.,Ltd.
No.281,Guantai Road, Nancheng District,Dongguan,Guangdong 523077 P.R. China
www.emtek.com.cn Tel:+86-769-2280 7078 Fax:+86-755-2280 7079



Conducted Emission Measurement


File :Fiat-WLR

Data :#1

Date: 08/10/28/

Time: 13:49:24

80.0 dBuV

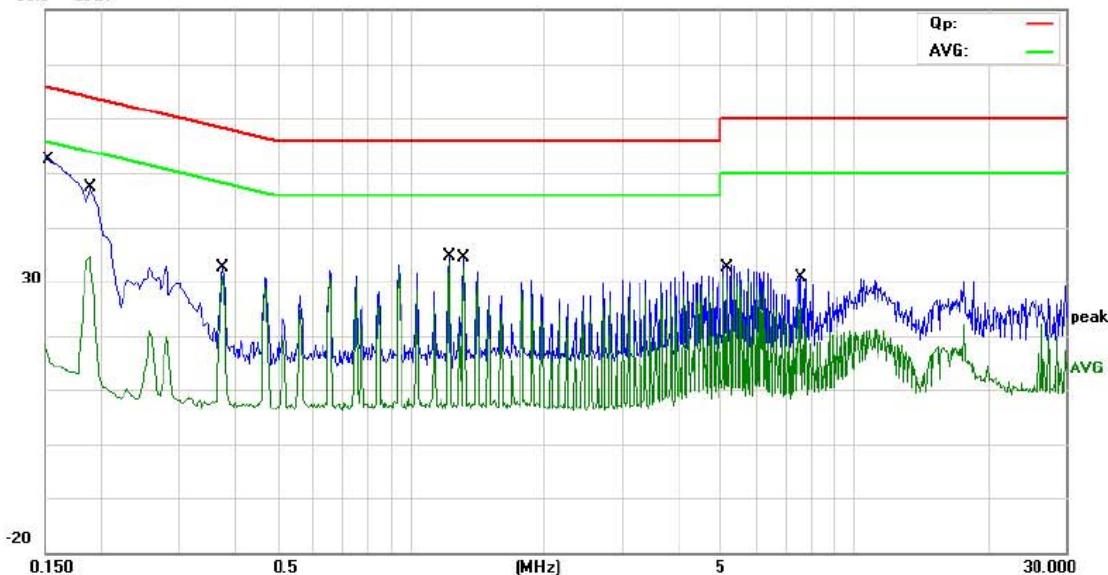

Site: site #1

Phase: L1

Temperature: 25

Limit: (CE)FCC PART 15 class B_QP

Power: DC 5V (PC Input AC 120V/60Hz) Humidity: 60 %

EUT: Wireless Computer Mouse

M/N: FIAT-WLR

Mode: Connect to PC

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1540	44.65	0.00	44.65	65.78	-21.13	QP	
2		0.1540	18.95	0.00	18.95	55.78	-36.83	AVG	
3		0.1900	37.60	0.00	37.60	64.04	-26.44	QP	
4		0.1900	33.20	0.00	33.20	54.04	-20.84	AVG	
5		0.3780	25.67	0.00	25.67	58.32	-32.65	QP	
6		0.3780	24.56	0.00	24.56	48.32	-23.76	AVG	
7		1.2260	29.80	0.00	29.80	56.00	-26.20	QP	
8		1.2260	28.90	0.00	28.90	46.00	-17.10	AVG	
9		1.3180	32.20	0.00	32.20	56.00	-23.80	QP	
10	*	1.3180	31.40	0.00	31.40	46.00	-14.60	AVG	
11		5.1860	29.64	0.00	29.64	60.00	-30.36	QP	
12		5.1860	27.55	0.00	27.55	50.00	-22.45	AVG	
13		7.6340	27.54	0.00	27.54	60.00	-32.46	QP	
14		7.6340	25.60	0.00	25.60	50.00	-24.40	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver.

File :Fiat-WLR\Data :#1

Page: 1

Dongguan EMTEK Co., Ltd.
No.281,Guantai Road, Nancheng District, Dongguan, Guangdong 523077 P.R. China
www.emtek.com.cn Tel:+86-769-2280 7078 Fax:+86-755-2280 7079



Conducted Emission Measurement


File :Fiat-WLR

Data :#2

Date: 08/10/28/

Time: 13:57:49

80.0 dBuV

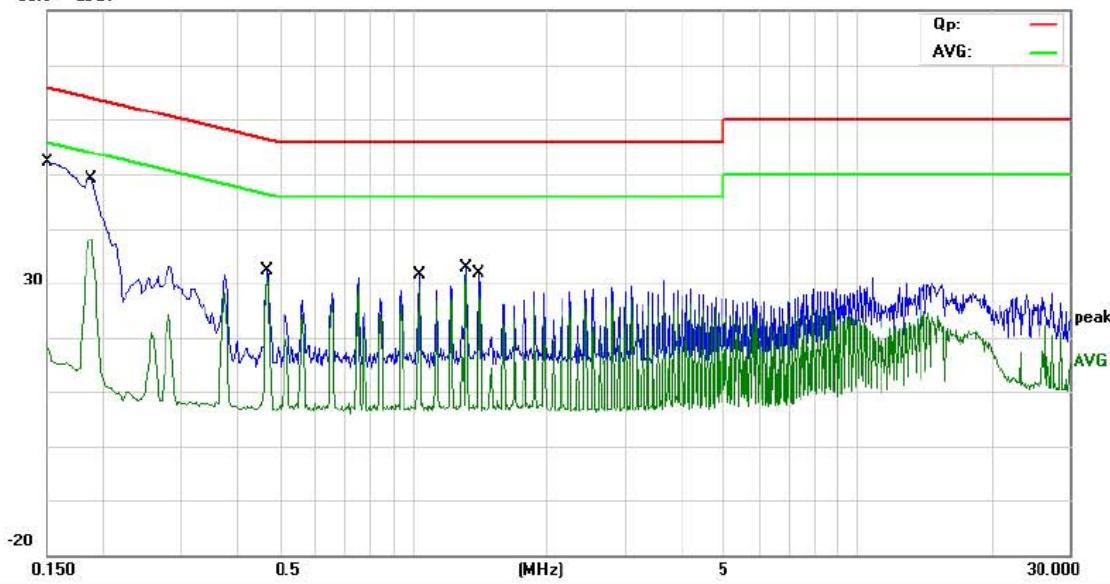

Site: site #1

Phase: **N** Temperature: 25

Limit: (CE)FCC PART 15 class B_QP

Power: DC 5V (PC Input AC 120V/60Hz) Humidity: 60 %

EUT: Wireless Computer Mouse

M/N: FIAT-WLR

Mode: Connect to PC

Note:

No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit dBuV	Over dB	Detector	Comment
			Level dBuV	Factor dB	ment dBuV				
1		0.1510	43.30	0.00	43.30	65.94	-22.64	QP	
2		0.1510	19.40	0.00	19.40	55.94	-36.54	AVG	
3		0.1900	40.50	0.00	40.50	64.04	-23.54	QP	
4		0.1900	38.21	0.00	38.21	54.04	-15.83	AVG	
5		0.4700	32.00	0.00	32.00	56.51	-24.51	QP	
6		0.4700	31.60	0.00	31.60	46.51	-14.91	AVG	
7		1.0340	32.71	0.00	32.71	56.00	-23.29	QP	
8		1.0340	31.64	0.00	31.64	46.00	-14.36	AVG	
9		1.3180	33.90	0.00	33.90	56.00	-22.10	QP	
10 *		1.3180	33.50	0.00	33.50	46.00	-12.50	AVG	
11		1.4100	29.90	0.00	29.90	56.00	-26.10	QP	
12		1.4100	28.60	0.00	28.60	46.00	-17.40	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver.

File :Fiat-WLR\Data :#2

Page: 1

APPENDIX II

Shenzhen EMTEK Co.,Ltd.
Bldg.69,Majialong Industry Zone,Nanshan District,Shenzhen,Guangdong,518052 P.R. China
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Radiated Emission Measurement

File : PAWAS

Data :#1

Date: 08/10/27/

Time: 22/13/49

80.0 dBuV/m



Site site #1

Polarization: **Horizontal**Temperature: 26

Limit: (RE)FCC PART 15 class B 3m

Power: DC 5V (PC Input AC 120V/60Hz) Humidity: 60 %

EUT: Wireless Computer Mouse

M/N: FIAT-WLR

Mode: Connect to PC

Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	Degree
		Freq.	Level	Factor					
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree
1		34.5800	10.41	14.1	24.58	40.00	-15.42	QP	
2		179.8400	14.59	9.8	24.39	43.50	-19.11	QP	
3	*	708.1900	9.69	22.84	32.53	46.00	-13.47	QP	

*:Maximum data x:Over limit !:over margin

Operator:

File :PAWAS\Data .#1

Page: 1

Shenzhen EMTEK Co.,Ltd.
Bldg.69,Majiaolong Industry Zone,Nanshan District,Shenzhen,Guangdong,518052 P.R. China
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Radiated Emission Measurement

File : PAWAS

Data :#2

Date: 08/10/27

Time: 22/15/27

80.0

dBuV/m



Site site #1

Polarization: **Vertical**Temperature: 26

Limit: (RE)FCC PART 15 class B 3m

Power: DC 5V (PC Input AC 120V/60Hz) Humidity: 60 %

EUT: Wireless Computer Mouse

M/N: FIAT-WLR

Mode: Connect to PC

Note:

No.	Mk.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Freq.	Level	Factor				Height	Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	Comment
1	*	36.9500	18.69	14.17	32.86	40.00	-7.14	QP		
2		118.5100	16.92	12.68	29.60	43.50	-13.9	QP		
3		709.5500	10.23	23.74	33.97	46.00	-12.03	QP		

*:Maximum data x:Over limit !:over margin

Operator:

File :PAWAS\Data :#2

Page: 1