



FCC RF Test Report

APPLICANT : Viavi Solutions Inc.
EQUIPMENT : 5G Sub-6 GHz M.2 Module with WCDMA and LTE
BRAND NAME : VIAVI
MODEL NAME : RM520N-GL
FCC ID : WUW-RM520NGL
STANDARD : 47 CFR Part 27D
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Jul. 30, 2024 ~ Nov. 04, 2024

The product was installed into a host (Brand Name: VIAVI, Model Name: NXE-DEVICE-4M) during the test, only Conducted Power, EIRP and RSE test items are tested in this report.

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Maximum EIRP Power.....	7
1.7 Testing Site.....	7
1.8 Test Software.....	7
1.9 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Frequency List of Low/Middle/High Channels	10
3 CONDUCTED TEST ITEMS	11
3.1 Measuring Instruments	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power Measurement	12
3.5 EIRP	13
4 RADIATED TEST ITEMS	14
4.1 Measuring Instruments	14
4.2 Test Setup	14
4.3 Test Result of Radiated Test	15
4.4 Radiated Spurious Emission Measurement	16
5 LIST OF MEASURING EQUIPMENT	17
6 MEASUREMENT UNCERTAINTY	18
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
-	-	Peak-to-Average Ratio	—	Report Only	1
3.5	§27.50 (a)(3)	EIRP	EIRP < 250mW/5MHz	PASS	-
-	§2.1049	Occupied Bandwidth	—	Report Only	1
-	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	Refer standard	PASS	1
-	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	1
-	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	1
4.4	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	Under limit 0.21 dB at 4616.00 MHz

Remark 1: Test results are leveraged from module RF report No “SEWA2204000008RG02”.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Viavi Solutions Inc.

1445 South Spectrum Boulevard, Suite 102, Chandler, Arizona 85286

1.2 Manufacturer

Viavi Solutions Inc.

1445 South Spectrum Boulevard, Suite 102, Chandler, Arizona 85286

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Sub-6 GHz M.2 Module with WCDMA and LTE
Brand Name	VIAVI
Model Name	RM520N-GL
FCC ID	WUW-RM520NGL
EUT Stage	Identical Prototype

Host Product Feature	
Equipment	XEDGE 2.0
Brand Name	VIAVI
Model Name	NXE-DEVICE-4M
IMEI Code	Conducted : IMEI A: 868371051639645 IMEI B: 868371051635213 IMEI C: 868371051635338 IMEI D: 868371051639819 Radiation : IMEI A: 868371051120539 IMEI B: 868371051121032 IMEI C: 868371051143184 IMEI D: 868371051635312
Applicant	Viavi Solutions Inc. 1445 South Spectrum Boulevard, Suite 102, Chandler, Arizona 85286
Manufacturer	Viavi Solutions Inc. 1445 South Spectrum Boulevard, Suite 102, Chandler, Arizona 85286



1.4 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	5G NR n30 : 2305 MHz ~ 2315 MHz
Rx Frequency	5G NR n30 : 2350 MHz ~ 2360 MHz
SCS / Bandwidth	15kHz : 5MHz / 10MHz
Maximum Output Power to Antenna	< Module A > <Ant. 0>:13.14 dBm <Ant. 2>:13.11 dBm < Module B > <Ant. 0>:13.16 dBm <Ant. 2>:13.18 dBm < Module C > <Ant. 0>:13.14 dBm <Ant. 2>:13.12 dBm < Module D > <Ant. 0>:13.17 dBm <Ant. 2>:13.25 dBm
Antenna Gain	< Module A/B/C/D> <Ant. 0/2>:8.5 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)

Note:

1. Only maximum EIRP of Module D Ant.2 is shown in the report.
2. 5G NR n30 support SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power for conducted test items.
3. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
4. The EN-DC mode combination could be referred to the product spec.
5. The four Modules are the same include Power setting, but we still verified the real power, which is within the uncertainty range, so we chose the module of the higher power for testing, each Module has four antennas, only Ant.0/2 supports TX/RX function, the others are RX only.
6. For RSE testing, we choice the module of the higher conducted Power to test, because between four modules do not support MIMO mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Maximum EIRP Power

5G NR n30		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2307.5 ~ 2312.5	0.1469	-	0.1429	-
10	2310.0	0.1496	-	0.1483	-

1.7 Testing Site

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sportun International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sportun Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS TH01-KS	CN1257	314309

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC LTE_Ver2.0 Auto_china_210503	2.0
2.	03CH04-KS	AUDIX	E3	210616



1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR Part 27(D)
- ◆ ANSI C63.26-2015
- ◆ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ◆ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ◆

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode


Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (Y-Plane)

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation					RB #			Test Channel		
		1.4	3	5	10	15	20	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Half	Full	L	M	H
Max. Output Power	n30	-	-	V		-	-		V	V			V			V	V	V
		-	-		V	-	-	V	V	V	V	V	V	V	V	V	V	
E.I.R.P	n30	-	-	V		-	-		V	V			V			V	V	V
		-	-		V	-	-	V	V	V	V	V	V	V	V	V	V	
Radiated Spurious Emission	n30	Worst case														V	V	V
Note		<ol style="list-style-type: none">1. The mark "v" means that this configuration is chosen for testing2. The mark "-" means that this bandwidth is not supported.3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.4. Frequency Stability : Normal Voltage = 24V ; Low Voltage =11V. ; High Voltage =28V																



2.2 Connection Diagram of Test System

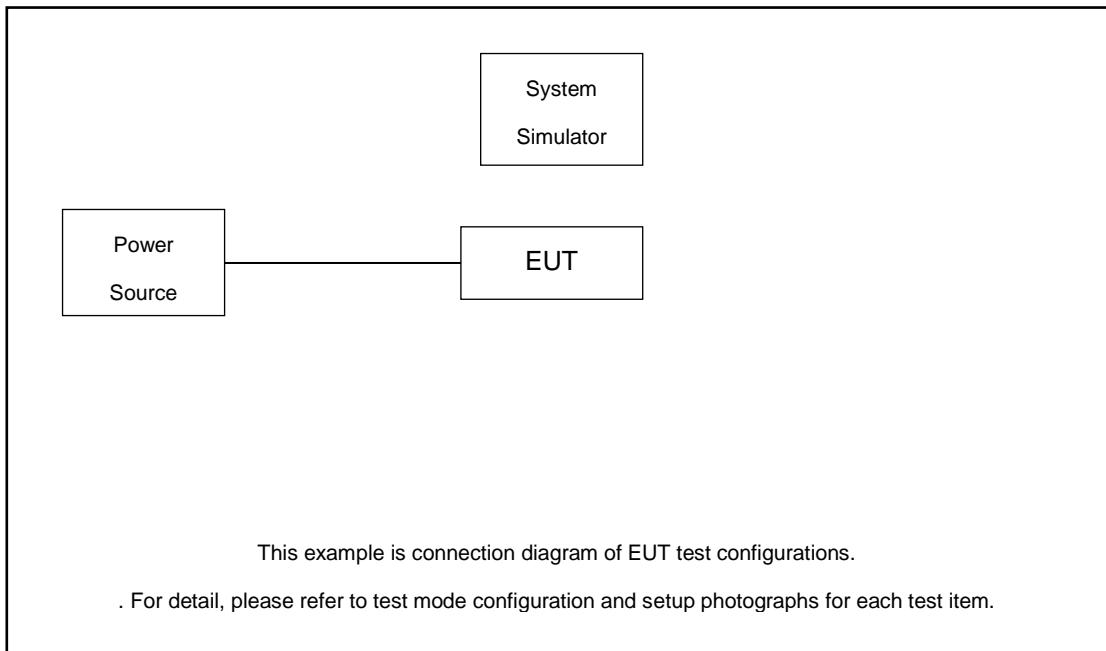

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Frequency List of Low/Middle/High Channels

5G NR n30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	462000	-
	Frequency	-	2310	-
5	Channel	461500	462000	462500
	Frequency	2307.5	2310	2312.5




3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power

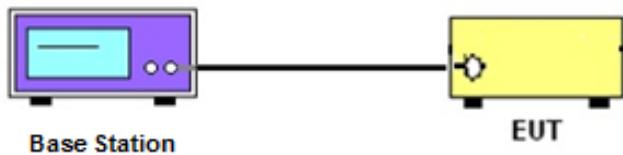

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



3.5 EIRP

3.5.1 Description of EIRP

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.5.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

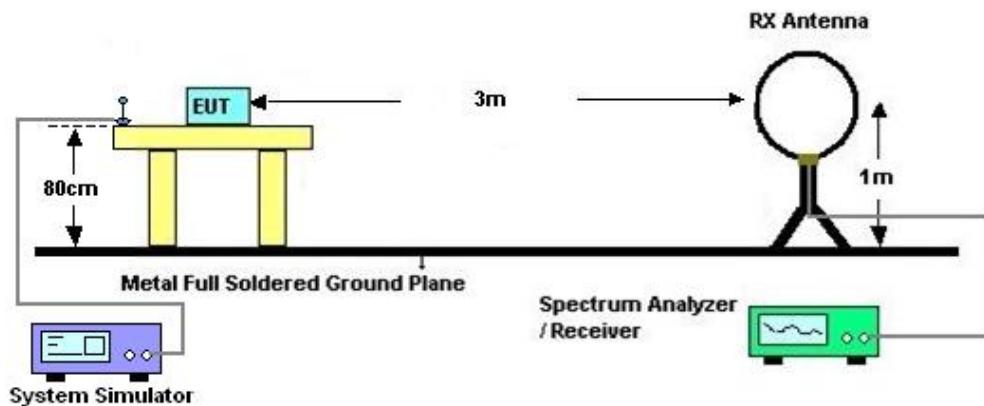

4.2.2 For radiated test from 30MHz to 1GHz

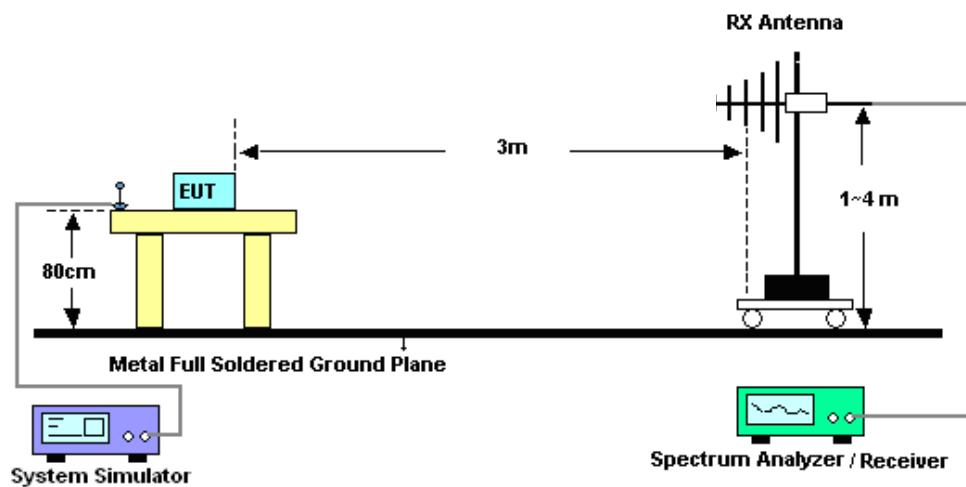

4.2.3 For radiated test above 1GHz

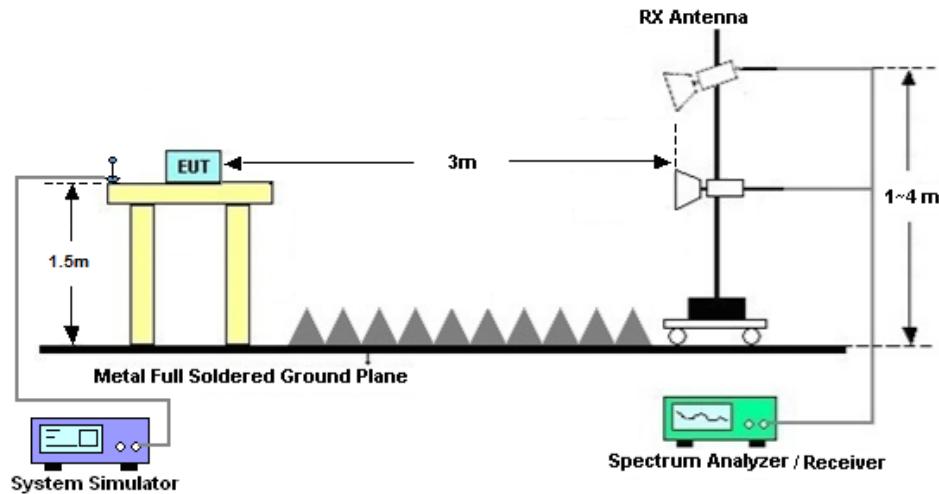

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [70 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$$

$$= -40 \text{ dBm.}$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Oct. 16, 2024~Nov. 04, 2024	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Oct. 16, 2024~Nov. 04, 2024	NCR	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 11, 2023	Jul. 30, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Sep. 09, 2023	Jul. 30, 2024	Sep. 08, 2024	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 06, 2023	Jul. 30, 2024	Dec. 05, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 23, 2023	Jul. 30, 2024	Oct. 22, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 27, 2024	Jul. 30, 2024	Jan. 26, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 03, 2024	Jul. 30, 2024	Jan. 02, 2025	Radiation (03CH04-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 02, 2024	Jul. 30, 2024	Jan. 01, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz-18Ghz	Oct. 11, 2023	Jul. 30, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
Amplifier	EM	EM01G18GA	060892	1Ghz-18Ghz	Oct. 11, 2023	Jul. 30, 2024	Oct. 10, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jul. 30, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jul. 30, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jul. 30, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Power	±0.50 dB
-----------------	----------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.83 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.83 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_{C(y)}$)	2.82 dB
--	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

Conducted Output Power(Average power) and EIRP

5G NR n30_ Module D Ant2:

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	EIRP (W)					
							L	M	H			
Channel				462000								
Frequency (MHz)				2310								
10	PI/2 BPSK	1	1		12.90			0.1380				
10	PI/2 BPSK	1	26		12.95			0.1396				
10	PI/2 BPSK	1	50		12.75			0.1334				
10	PI/2 BPSK	25	0		12.73			0.1327				
10	PI/2 BPSK	25	14		12.68			0.1312				
10	PI/2 BPSK	25	27		12.92			0.1387				
10	PI/2 BPSK	50	0		12.68			0.1312				
10	QPSK	1	1		13.25			0.1496				
10	QPSK	1	26		13.16			0.1466				
10	QPSK	1	50		13.24			0.1493				
10	QPSK	25	0		13.15			0.1462				
10	QPSK	25	14		13.17			0.1469				
10	QPSK	25	27		12.82			0.1355				
10	QPSK	50	0		13.02			0.1419				
10	16QAM	1	1		12.98			0.1406				
10	64QAM	1	1		12.94			0.1393				
10	256QAM	1	1		13.21			0.1483				
Channel				461500	462000	462500	L	M	H			
Frequency (MHz)				2307.5	2310	2312.5						
5	QPSK	1	1	13.10	13.17	13.05	0.1445	0.1469	0.1429			
5	16QAM	1	1	12.99	13.05	12.96	0.1409	0.1429	0.1400			



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Bruce	Temperature :		23~25°C
		Relative Humidity :		41~42%

Note: Pre-scanned harmonic for the different antenna combinations, we choose the worst antenna mode to perform final test.

N30 SA / NR 5MHz / QPSK(ANT0)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4616	-60.97	-40	-20.97	-72.43	2.84	14.30	H
	6912	-64.61	-40	-24.61	-74.55	3.49	13.43	H
	9222	-63.18	-40	-23.18	-73.42	3.85	14.09	H
	4616	-55.48	-40	-15.48	-66.94	2.84	14.30	V
	6912	-64.51	-40	-24.51	-74.45	3.49	13.43	V
	9222	-63.26	-40	-23.26	-73.50	3.85	14.09	V
Middle	4616	-61.46	-40	-21.46	-72.92	2.84	14.30	H
	6926	-63.82	-40	-23.82	-73.76	3.49	13.43	H
	9236	-62.99	-40	-22.99	-73.23	3.85	14.09	H
	4616	-60.27	-40	-20.27	-71.73	2.84	14.30	V
	6926	-64.02	-40	-24.02	-73.96	3.49	13.43	V
	9236	-62.83	-40	-22.83	-73.07	3.85	14.09	V
Highest	4616	-61.70	-40	-21.70	-73.16	2.84	14.30	H
	6926	-64.46	-40	-24.46	-74.40	3.49	13.43	H
	9236	-63.12	-40	-23.12	-73.36	3.85	14.09	H
	4616	-56.54	-40	-16.54	-68.00	2.84	14.30	V
	6926	-64.11	-40	-24.11	-74.05	3.49	13.43	V
	9236	-62.84	-40	-22.84	-73.08	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



N30 SA / NR 10MHz / QPSK(ANT0)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4616	-54.76	-40	-14.76	-66.22	2.84	14.30	H
	6912	-63.24	-40	-23.24	-73.18	3.49	13.43	H
	9222	-62.81	-40	-22.81	-73.05	3.85	14.09	H
	4616	-53.70	-40	-13.70	-65.16	2.84	14.30	V
	6912	-63.53	-40	-23.53	-73.47	3.49	13.43	V
	9222	-63.09	-40	-23.09	-73.33	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

EN-DC_66A_n30A / LTE 10MHz + NR 20MHz / QPSK (ANT2+0)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4616	-45.91	-40	-5.91	-57.37	2.84	14.30	H
	6912	-63.00	-40	-23.00	-72.94	3.49	13.43	H
	9222	-62.60	-40	-22.60	-72.84	3.85	14.09	H
	4616	-41.13	-40	-1.13	-52.59	2.84	14.30	V
	6912	-63.20	-40	-23.20	-73.14	3.49	13.43	V
	9222	-62.55	-40	-22.55	-72.79	3.85	14.09	V
Middle	4616	-44.23	-40	-4.23	-55.69	2.84	14.30	H
	6926	-62.67	-40	-22.67	-72.61	3.49	13.43	H
	9236	-62.66	-40	-22.66	-72.90	3.85	14.09	H
	4616	-40.21	-40	-0.21	-51.67	2.84	14.30	V
	6926	-63.20	-40	-23.20	-73.14	3.49	13.43	V
	9236	-62.17	-40	-22.17	-72.41	3.85	14.09	V
Highest	4616	-49.02	-40	-9.02	-60.48	2.84	14.30	H
	6926	-62.29	-40	-22.29	-72.23	3.49	13.43	H
	9236	-62.67	-40	-22.67	-72.91	3.85	14.09	H
	4616	-42.19	-40	-2.19	-53.65	2.84	14.30	V
	6926	-63.33	-40	-23.33	-73.27	3.49	13.43	V
	9236	-62.62	-40	-22.62	-72.86	3.85	14.09	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.